


13-505

SECRETARY'S POTASH

Form 3160-3
(August 2007)



OCD Artesia

FORM APPROVED
OMB No. 1004-0137
Expires July 31, 2010

5. Lease Serial No.
NMNM 100561; NMNM 0560355

6. If Indian, Allottee or Tribe Name

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		7. If Unit or CA Agreement, Name and No.
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		8. Lease Name and Well No. Strawberry 7 Fed Com 8H 381807
2. Name of Operator Devon Energy Production Company, L. P.		9. API Well No. 30 015-41507
3a. Address 333 W. Sheridan Oklahoma City, OK 73102	3b. Phone No. (include area code) 405-235-3611	10. Field and Pool, or Exploratory Bone Spring; Hackberry N. 970562
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface 2005 FNL & 340 FEL H At proposed prod. zone 1650 FNL & 340 FWL PP: 2210 FNL 913 FEL		11. Sec., T. R. M. or Blk. and Survey or Area Sec 7 T19S R31E
14. Distance in miles and direction from nearest town or post office* Location 14 miles SW of Maljimar, NM.		12. County or Parish Eddy
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) See attached map		13. State NM
16. No. of acres in lease NMNM100561 ac NMNM0560355 ac		17. Spacing Unit dedicated to this well 156.8 ac
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map		20. BLM/BIA Bond No. on file CO-1104; NMB-000801
19. Proposed Depth 12,310' TVD 7935' MD PH: 8170'		21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3479.7' GL
22. Approximate date work will start*		23. Estimated duration 45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature 	Name (Printed/Typed) Judy A. Barnett	Date 02/28/2013
Title Regulatory Specialist		

Approved by: (Signature) /s/ Jesse J. Juen	Name (Printed/Typed) /s/ Jesse J. Juen	Date JUN 20 2013
Title STATE DIRECTOR		
Office NM STATE OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

Capitan Contron Water Basin

Approval Subject to General Requirements
& Special Stipulations Attached

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-41507	² Pool Code 97056	³ Pool Name Hackberry North	Bone Spring
⁴ Property Code 38180	⁵ Property Name STRAWBERRY "7" FED COM		⁶ Well Number 8H
⁷ OGRID No. 6137	⁸ Operator Name DEVON ENERGY PRODUCTION COMPANY, L.P.		⁹ Elevation 3479.7

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	7	19 S	31 E		2005	NORTH	340	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
2	7	19 S	31 E		1650	NORTH	340	WEST	EDDY

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
156.8			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>S89°31'20"W 2526.56 FT</p> <p>NW CORNER SEC. 7 LAT. = 32.6821136°N LONG. = 103.9169203°W NMSP EAST (FT) N = 612135.57 E = 669456.27</p> <p>N Q CORNER SEC. 7 LAT. = 32.6821442°N LONG. = 103.9087087°W NMSP EAST (FT) N = 612156.64 E = 671982.74</p> <p>NE CORNER SEC. 7 LAT. = 32.6821725°N LONG. = 103.9001286°W NMSP EAST (FT) N = 612177.60 E = 674622.57</p>		<p>S89°32'42"W 2639.91 FT</p> <p>W Q CORNER SEC. 7 LAT. = 32.6748584°N LONG. = 103.9169275°W NMSP EAST (FT) N = 609495.94 E = 669464.43</p> <p>SW CORNER SEC. 7 LAT. = 32.6676011°N LONG. = 103.9169329°W NMSP EAST (FT) N = 606855.66 E = 669473.10</p> <p>S Q CORNER SEC. 7 LAT. = 32.6676305°N LONG. = 103.9086586°W NMSP EAST (FT) N = 606876.46 E = 672019.29</p> <p>SE CORNER SEC. 7 LAT. = 32.6676579°N LONG. = 103.9000749°W NMSP EAST (FT) N = 606897.08 E = 674660.66</p>	
<p>340'</p> <p>500'10'38"E</p> <p>500'11'17"E</p> <p>2639.65 FT</p> <p>2640.29 FT</p>		<p>340'</p> <p>500'23'17"W</p> <p>500'25'04"W</p> <p>2639.31 FT</p> <p>2641.34 FT</p>	
<p>STRAWBERRY "7" FED COM #8H</p> <p>ELEV. = 3479.7'</p> <p>LAT. = 32.6766591°N (NAD83)</p> <p>LONG. = 103.9012136°W</p> <p>NMSP EAST (FT) N = 610170.38 E = 674296.90</p> <p>SURFACE LOCATION</p> <p>BOTTOM OF HOLE</p> <p>LAT. = 32.675837°N</p> <p>LONG. = 103.9158200°W</p> <p>NMSP EAST (FT) N = 610488.78 E = 669801.29</p> <p>NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1983 (NAD83) IN DEGREES MINUTES DECIMAL SECONDS FORMAT. BASIS OF BEARING IS NEW MEXICO STATE PLANE EAST (NAD83) COORDINATES MODIFIED TO SURFACE.</p>			
<p>N89°31'56"E 2546.27 FT</p> <p>N89°33'09"E 2641.45 FT</p>			

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or released mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: *Judith A. Barnett* Date: **2-20-13**

Printed Name: Judith A. Barnett, Regulatory Specialist

E-mail Address: Judith.Barnett@dvn.com

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

FEBRUARY 20, 2013

Date of Survey: **FEB 20 2013**

Signature and Seal of Professional Surveyor: *William C. Piamillo*

Certificate Number: **WILLIAM C. PIAMILLO, PLS 12797**

SURVEY NO. 1589A


Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 28 th day of February 2013.

Printed Name: Judy A. Barnett

Signed Name: 

Position Title: Regulatory Specialist

Address: 333 W. Sheridan, OKC OK 73102

Telephone: (405)-228-8699


Field Representative (if not above signatory):

Address (if different from above):

Telephone (if different from above):

SECTION 7, TOWNSHIP 19 SOUTH, RANGE 31 EAST; N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1983 (NAD83) IN DEGREES, MINUTES AND DECIMAL SECONDS FORMAT. BASIS OF BEARING IS NEW MEXICO STATE PLANE EAST (NAD83) COORDINATES MODIFIED TO SURFACE.

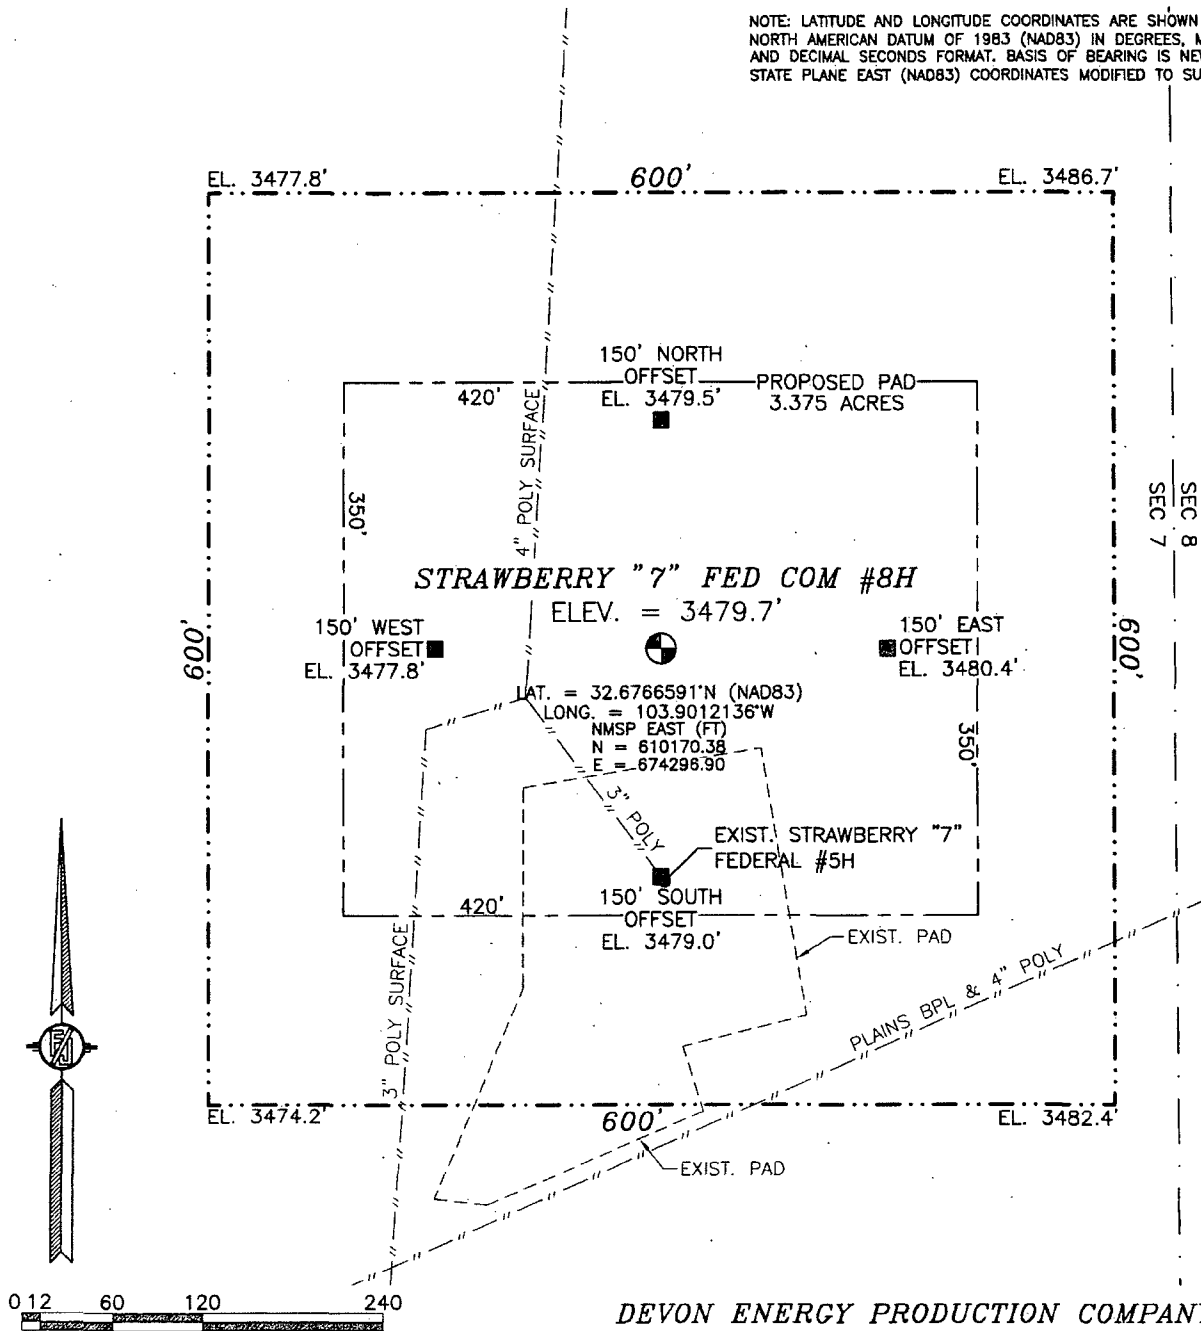

0 12 60 120 240
SCALE 1" = 120'

DIRECTIONS TO LOCATION

FROM CR 222 (SHUGART) AND CR 248 (LUSK PLANT) GO SOUTH-SOUTHWEST ON CR 222 4.6 MILES, TURN RIGHT ON CALICHE ROAD AND GO NORTH 2.0 MILES, TURN LEFT AND GO NORTHWEST 660 FT, BEND RIGHT AND GO NORTH 0.3 MILES, BEND RIGHT AND GO NORTHEAST 0.2 MILES, TURN LEFT AND GO NORTH-NORTHWEST 1.17 MILES, BEND RIGHT AND GO NORTHEAST 730 FT TO EXISTING PAD FOR STRAWBERRY 7" FEDERAL #5H WELL AND LOCATION IS NORTH 150 FT.

DEVON ENERGY PRODUCTION COMPANY, L.P.

STRAWBERRY 7" FED COM #8H

LOCATED 2005 FT. FROM THE NORTH LINE
AND 340 FT. FROM THE EAST LINE OF
SECTION 7, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO


FEBRUARY 13, 2013

SURVEY NO. 1589A

MADRON SURVEYING, INC. 301 SOUTH CANAL
(575) 234-3341

CARLSBAD, NEW MEXICO

SECTION 7, TOWNSHIP 19 SOUTH, RANGE 31 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO
 LOCATION VERIFICATION MAP

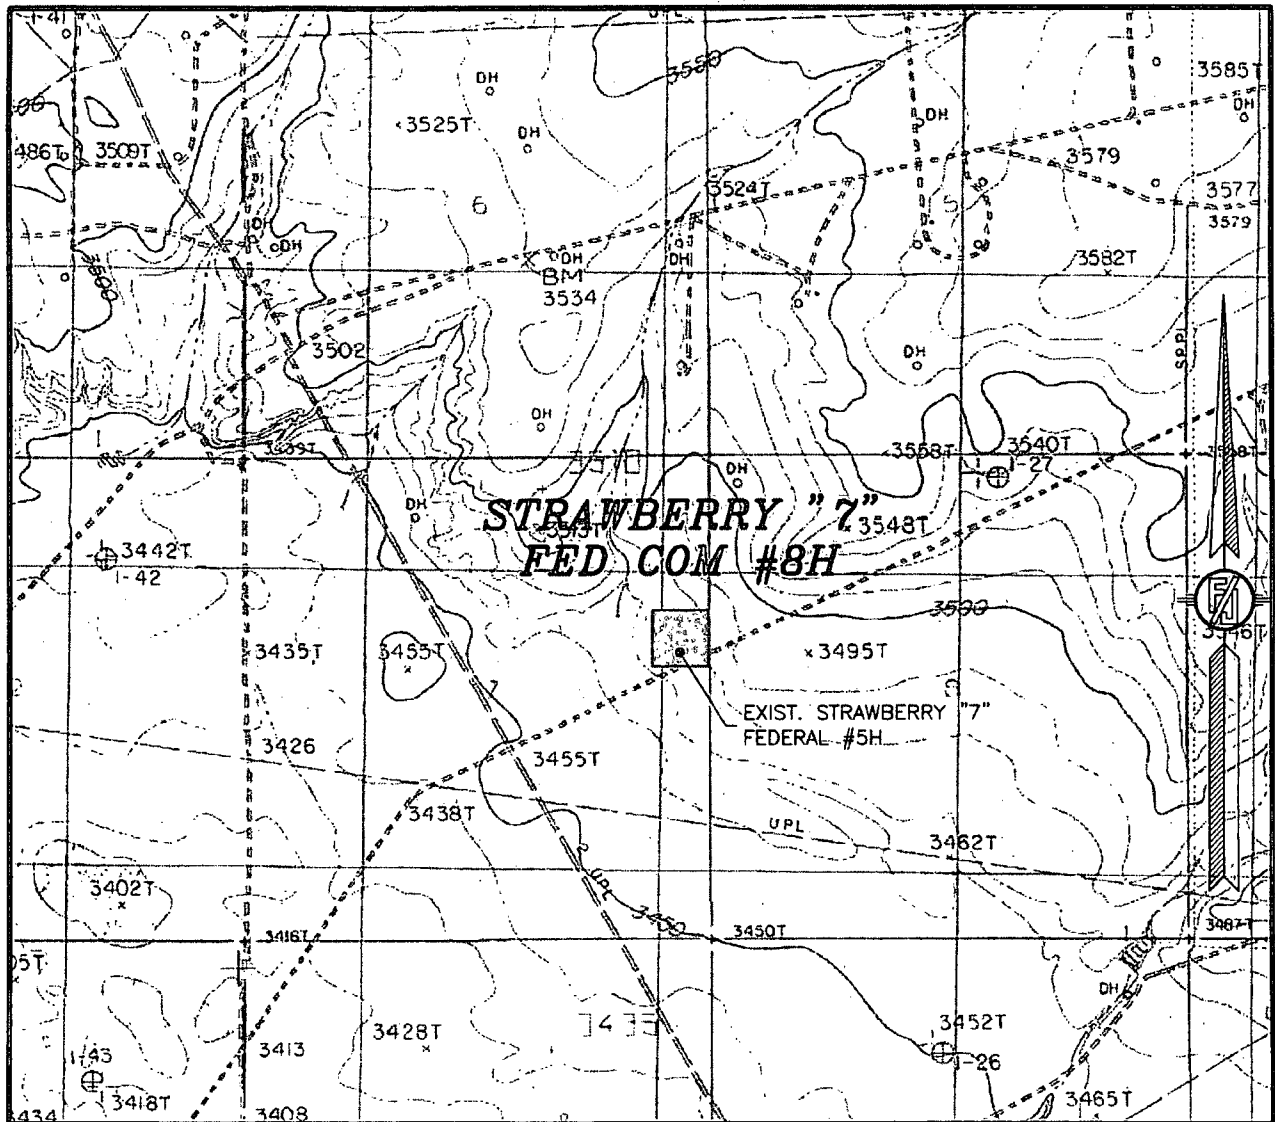

USGS QUAD MAP:
 HACKBERRY LAKE

NOT TO SCALE


DEVON ENERGY PRODUCTION COMPANY, L.P.
STRAWBERRY "7" FED COM #8H
 LOCATED 2005 FT. FROM THE NORTH LINE
 AND 340 FT. FROM THE EAST LINE OF
 SECTION 7, TOWNSHIP 19 SOUTH,
 RANGE 31 EAST, N.M.P.M.
 EDDY COUNTY, STATE OF NEW MEXICO

FEBRUARY 13, 2013

SURVEY NO. 1589A

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

SECTION 7, TOWNSHIP 19 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
VICINITY MAP

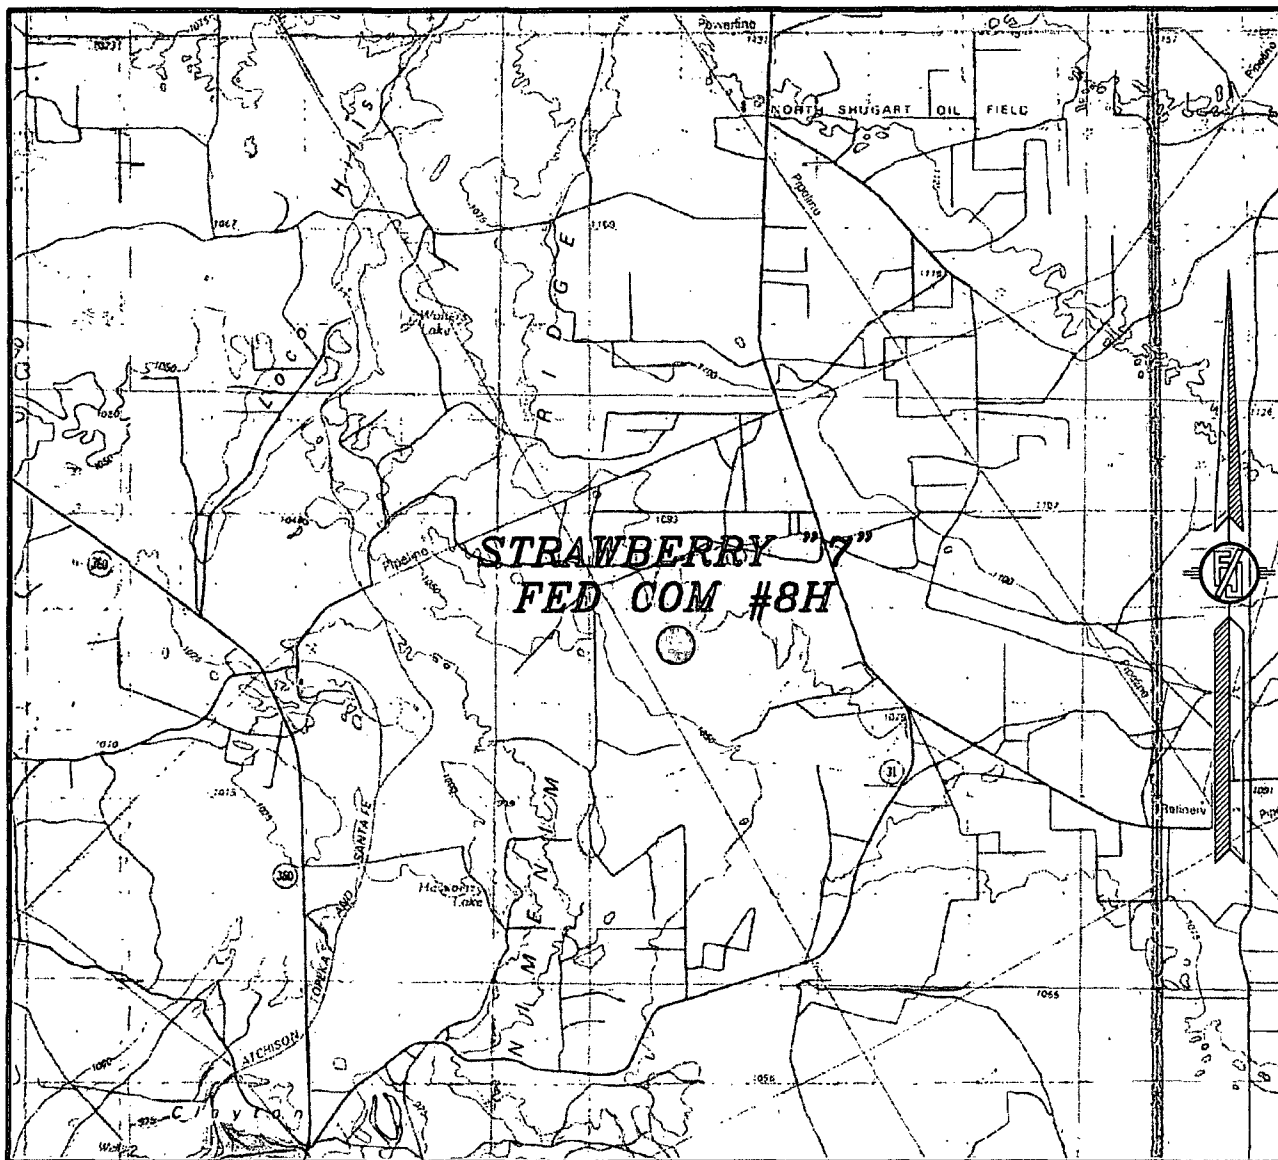

NOT TO SCALE

DEVON ENERGY PRODUCTION COMPANY, L.P.

STRAWBERRY "7" FED COM #8H


LOCATED 2005 FT. FROM THE NORTH LINE
AND 340 FT. FROM THE EAST LINE OF
SECTION 7, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

FEBRUARY 13, 2013

SURVEY NO. 1589A

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO
(575) 234-3341

SECTION 7, TOWNSHIP 19 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
AERIAL PHOTO

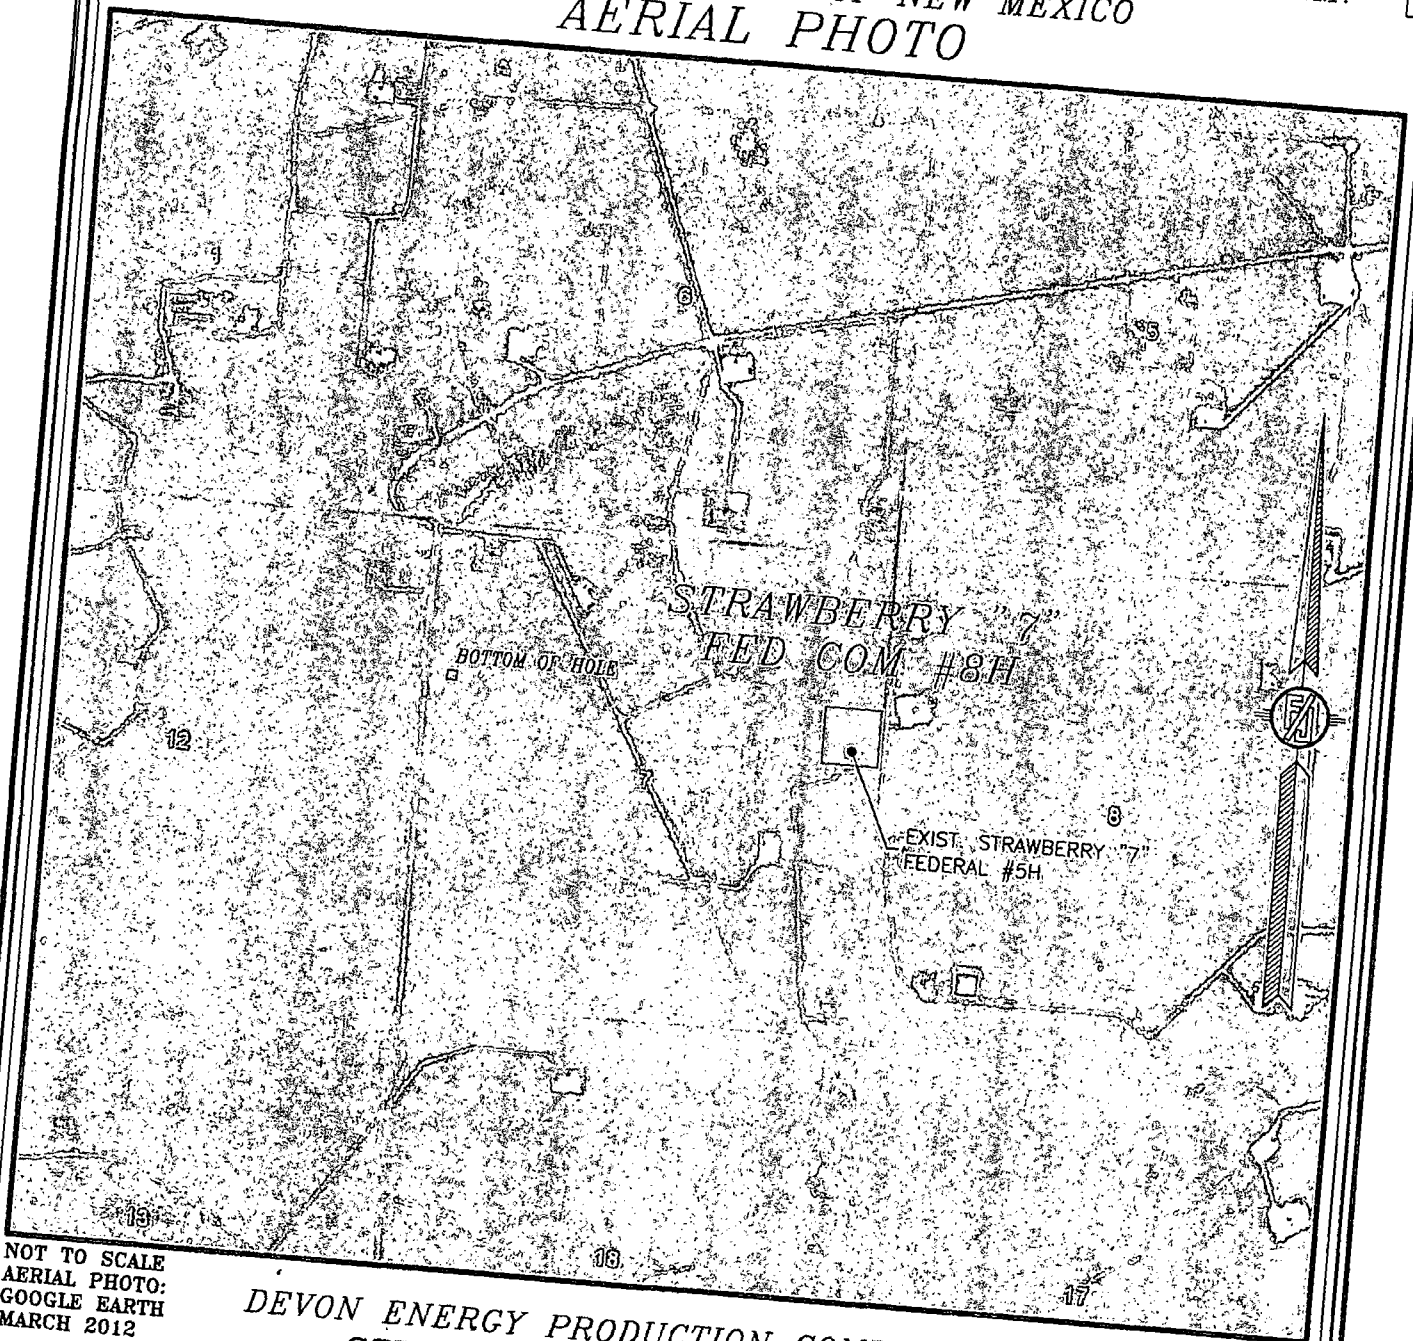


NOT TO SCALE
AERIAL PHOTO:
GOOGLE EARTH
MARCH 2012

DEVON ENERGY PRODUCTION COMPANY, L.P.
STRAWBERRY "7" FED COM #8H
LOCATED 2005 FT. FROM THE NORTH LINE
AND 340 FT. FROM THE EAST LINE OF
SECTION 7, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

FEBRUARY 13, 2013

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO SURVEY NO. 1589A



DRILLING PROGRAM
Devon Energy Production Company, LP
Strawberry 7 Fed Com 8H

Surface Location: 2005' FNL & 340' FEL, Unit H, Sec 7 T19S R31E, Eddy, NM
Bottom Hole Location: 1650' FNL & 340' FWL, Unit E, Sec 7 T19S R31E, Eddy, NM

1. Geologic Name of Surface Formation

a. Quat Alluvium

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

a. Fresh Water	95'	
b. Rustler	460'	Barren
c. Salado	605'	Barren
d. Tansil Dolomite	2185'	Barren
e. Yates	2300'	Barren
f. Seven Rivers	2580'	Barren
g. Queen	3200'	Barren
h. San Andres	3785'	Barren
i. Delaware	4555'	Oil
j. Bone Spring	6390'	Oil
k. 1 st Bone Spring Ss	7815'	Oil
l. 2 nd Bone Spring Lm	8070'	Oil
Total Depth	12,310'	

Casing Program: ~~(all cement volumes based on at least 25% excess)~~

<u>Hole Size</u>	<u>Hole Interval</u>	<u>OD Csg</u>	<u>Casing Interval</u>	<u>Weight</u>	<u>Collar</u>	<u>Grade</u>
17 1/2"	0' - 490' <i>56S</i>	13 3/8"	0' - 490' <i>56S</i>	48#	ST&C	H-40
12 1/4"	490' - 3100'	9 5/8"	0' - 3100'	36#	LT&C	J-55
8 3/4"	3100' - 7300'	5 1/2"	0 - 7300'	17#	LT&C	P-110
8 3/4"	7300' - 12310'	5 1/2"	7300' - 12310'	17#	BT&C	P-110

All casing is new and API approved.

TRD

An 8 3/4" Pilot Hole will be drilled to 8170' ~~MD~~ and cemented back to KOP. The cement plug details and geometry are included below in the cementing program.

Design Parameter Factors:

<u>Casing Size</u>	<u>Collapse Design</u>	<u>Burst Design</u>	<u>Tension Design</u>
	<u>Factor</u>	<u>Factor</u>	<u>Factor</u>
13 3/8"	3.36	7.54	23.00
9 5/8"	1.59	2.45	4.05
5 1/2"	2.51	3.11	2.13
5 1/2"	2.30	2.85	5.22

Cement Program: (cement volumes based on at least 100% excess Surface, 50% on Intermediate and 25% excess on the Production)

3.

- a. 13 3/8" Surface **Lead** w/ 510 Cl C + 2% bwoc Calcium Chloride + 0.125#/sx Poly EF + 63.1% FW, 14.8 ppg. **Yield** 1.35 cf/sx. **TOC @ surface.**
 - b. 9 5/8" Intermediate **Lead** w/ 540 sx 65:35 POZ (Fly Ash): Cl C + 5% bwoc Sodium Chloride + 0.125#/sx Poly EF + 6% bwoc Bentonite + 70.9% FW, 12.9 ppg. **Yield** 1.85 cf/sx. **TOC @ surface. 1000' Tail** w/ 360 sx Cl C + 0.125#/sx Poly EF + 63.5% FW, 14.8 ppg. **Yield** 1.33 cf/sx.
 - c. 5 1/2" Production **1st Stage**
Lead w/ 460 sx 65:35 POZ (Fly Ash) Cl H + 6% bwoc Bentonite + 0.2% bwoc HR-601 + 74.1% FW, 12.5 ppg. **Yield 1.95 cf/sx.**
5000' Tail w/ 1300 sx 50:50 POZ (Fly Ash) Cl H + 1#/sx Sodium Chloride + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.1% bwoc HR-601 + 2% BWOC Bontoite + 58.8% FW, 14.5 ppg. **Yield 1.22 cf/sx.**
DV Tool @ 4500'
2nd Stage
Lead w/ 120 sx Cl C + 3% bwoc Econolite + 0.125#/sx Poly EF + 82.4% FW, 11.4 ppg. **Yield: 2.87 cf/sx.** **TOC @ 2600'.**
Tail w/ 240 sx Cl C + 0.125#/sx Poly EF + 82.4% FW, 14.8 ppg. **Yield: 1.33 cf/sx.**
- 8 3/4" Pilot Hole Plug 7400 – 8170': 400 sx Cl H + .25% CFR-3 + 0.1% HR 601 Retarder 4.3 gal/wtr/sx @ 16.4#/gal Yield 1.06 cf/sx.

The above cement volumes could be revised pending the caliper measurement from the open hole logs. The top of cement is designed to reach approximately 500' above the 9 5/8" casing shoe.

Pressure Control Equipment

The BOP system used to drill the production hole will consist of a 13-5/8" Double Ram and Annular preventer. A 3M system will be installed prior to drilling out the intermediate casing shoe. The BOP system will be tested as per BLM Onshore Oil and Gas Order No. 2.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line); **if an H&P rig drills this well. Otherwise no flex line is needed.** The line will be kept as straight as possible with minimal turns.

Proposed Mud Circulation System

<u>Depth</u>	<u>Mud Wt.</u>	<u>Visc</u>	<u>Fluid Loss</u>	<u>Type System</u>
0' - 490' <i>565</i>	8.4-9.0	30-34	NC	FW
490' - 3100'	9.8-10.0	28-32	NC	Brine
3100' - 12,310'	8.6-9.0	28-32	NC	FW

The necessary mud products for weight addition and fluid loss control will be on location at all times. Visual mud monitoring equipment will be in place to detect volume changes indicating loss or gain of circulating fluid volume. If abnormal pressures are encountered, electronic/mechanical mud monitoring equipment will be installed.

4. Auxiliary Well Control and Monitoring Equipment:

- A Kelly cock will be in the drill string at all times.
- A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.


5. **Logging, Coring, and Testing Program:** *See COA*
- a. Drill stem tests will be based on geological sample shows.
 - b. If a drill stem test is anticipated; a procedure, equipment to be used and safety measures will be provided via sundry notice to the BLM.
 - c. The open hole electrical logging program will be:
 - i. Total Depth to Intermediate Casing Dual Laterolog-Micro Laterolog with SP and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - ii. Total Depth to Surface Compensated Neutron with Gamma Ray
 - iii. No coring program is planned
 - iv. Additional testing will be initiated subsequent to setting the 5 ½" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.
6. **Potential Hazards:**
- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6 No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 3400 psi and Estimated BHT 130°. No H₂S is anticipated to be encountered.
7. **Anticipated Starting Date and Duration of Operations:**
- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 32 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.



Weatherford®

Drilling Services

Proposal



devon

STRAWBERRY 7 FED COM 8H

EDDY COUNTY, NM

WELL FILE: **PLAN 1**

FEBRUARY 21, 2013

Weatherford International, Ltd.

P.O. Box 61028

Midland, TX 79711 USA

+1.432.561.8892 Main

+1.432.561.8895 Fax


www.weatherford.com

devon


Strawberry 7 Fed Com 8H
Eddy Co, NM



KB ELEV: 3500
GL ELEV: 3480

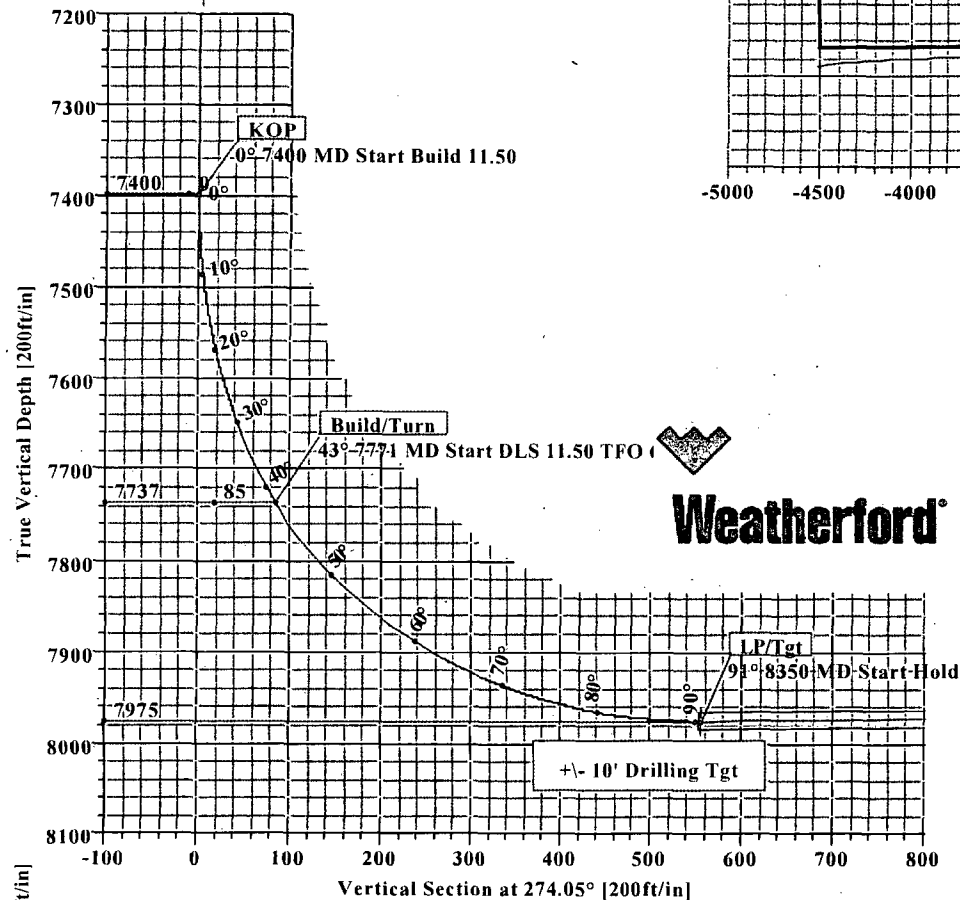

Weatherford®

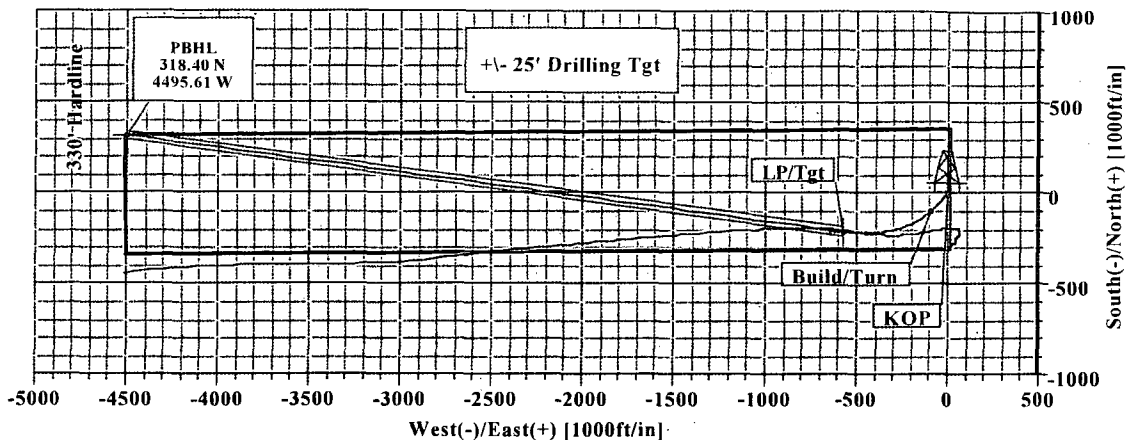

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2	7399.67	0.00	0.00	7399.67	0.00	0.00	0.00	0.00	0.00	
3	7770.57	42.65	224.20	7737.25	-94.49	-91.88	11.50	224.20	84.98	
4	8350.39	90.58	277.67	7975.00	-209.97	-571.53	11.50	61.04	555.27	LP/Tgt
5	12310.09	90.58	277.67	7935.00	318.40	-4495.61	0.00	0.00	4506.87	PBHL

WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
Strawberry 7 Fed Com 8H	0.00	0.00	610170.38	674296.90	32°40'35.961N	103°54'04.385W	N/A

TARGET DETAILS


Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
PBHL	7935.00	318.40	-4495.61	610488.78	669801.29	Rectangle (3960x50)
LP/Tgt	7975.00	-209.97	-571.53	609960.41	673725.37	Point

LEGEND

- Strawberry 7 Fed Com 8H (1)
- Lat
- Plan #1

SITE DETAILS

Strawberry 7 Fed Com 8H
Site Centre Northing: 610170.38
Easting: 674296.90
Ground Level: 3480.00
Positional Uncertainty: 0.00
Convergence: 0.23

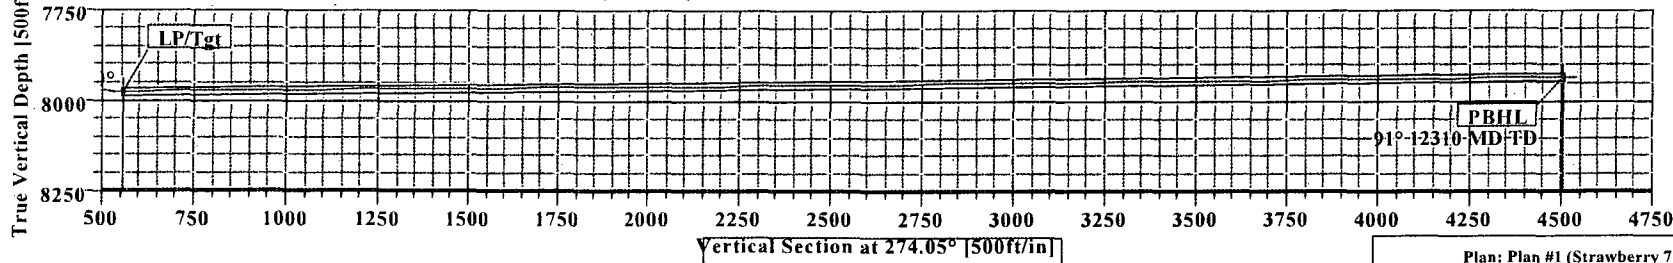

Plan: Plan #1 (Strawberry 7 Fed Com 8H/Lat)

Created By: Russell W. Joyner

Date: 2/21/2013



Weatherford

Wft Plan Report X Y's.

**Weatherford**

Company: Devon Energy Date: 2/21/2013 Time: 13:25:36 Page: 1
Field: Eddy Co., NM (NAD 83) Co-ordinate(NE) Reference: Well: Strawberry 7 Fed Com 8H; Grid Nort
Site: Strawberry 7 Fed Com 8H Vertical (TVD) Reference: SITE 3500.0
Well: Strawberry 7 Fed Com 8H Section (VS) Reference: Well (0.00N,0.00E;274.05Azi)
Wellpath: Lat Survey Calculation Method: Minimum Curvature Db: Sybase

Plan: Plan #1 Date Composed: 2/21/2013
Principal: Yes Version: 1
Tied-to: From Surface

Site: Strawberry 7 Fed Com 8H

Site Position: Northing: 610170.38 ft Latitude: 32 40 35.961 N
From: Map Easting: 674296.90 ft Longitude: 103 54 4.385 W
Position Uncertainty: 0.00 ft North Reference: Grid
Ground Level: 3480.00 ft Grid Convergence: 0.23 deg

Well: Strawberry 7 Fed Com 8H Slot Name:
Well Position: +N/-S 0.00 ft Northing: 610170.38 ft Latitude: 32 40 35.961 N
+E/-W 0.00 ft Easting: 674296.90 ft Longitude: 103 54 4.385 W
Position Uncertainty: 0.00 ft

Wellpath: Lat
Current Datum: SITE Height 3500.00 ft
Magnetic Data: 7/15/2013
Field Strength: 48670 nT
Vertical Section: Depth From (TVD) +N/-S
ft ft
0.00 0.00 0.00 274.05
Drilled From: Pilot
Tie-on Depth: 0.00 ft
Above System Datum: Mean Sea Level
Declination: 7.52 deg
Mag Dip Angle: 60.50 deg
+E/-W Direction
ft deg

Plan Section Information

MD ft	Incl deg	Azim deg	TVD ft	+N/-S ft	+E/-W ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	TFO deg	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7399.67	0.00	0.00	7399.67	0.00	0.00	0.00	0.00	0.00	0.00	
7770.57	42.65	224.20	7737.25	-94.49	-91.88	11.50	11.50	0.00	224.20	
8350.39	90.58	277.67	7975.00	-209.97	-571.53	11.50	8.27	9.22	61.04	LP/Tgt
12310.09	90.58	277.67	7935.00	318.40	-4495.61	0.00	0.00	0.00	0.00	PBHL

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comments
7300.00	0.00	0.00	7300.00	0.00	0.00	0.00	0.00	610170.38	674296.90	
7399.67	0.00	0.00	7399.67	0.00	0.00	0.00	0.00	610170.38	674296.90	KOP
7425.00	2.91	224.20	7424.99	-0.46	-0.45	0.42	11.50	610169.92	674296.45	
7450.00	5.79	224.20	7449.91	-1.82	-1.77	1.64	11.50	610168.56	674295.13	
7475.00	8.66	224.20	7474.71	-4.08	-3.96	3.67	11.50	610166.30	674292.94	
7500.00	11.54	224.20	7499.32	-7.22	-7.02	6.49	11.50	610163.16	674289.88	
7525.00	14.41	224.20	7523.68	-11.24	-10.93	10.11	11.50	610159.14	674285.97	
7550.00	17.29	224.20	7547.73	-16.14	-15.69	14.51	11.50	610154.24	674281.21	
7575.00	20.16	224.20	7571.40	-21.89	-21.29	19.69	11.50	610148.49	674275.61	
7600.00	23.04	224.20	7594.65	-28.49	-27.70	25.62	11.50	610141.89	674269.20	
7625.00	25.91	224.20	7617.40	-35.91	-34.92	32.30	11.50	610134.47	674261.98	
7650.00	28.79	224.20	7639.60	-44.15	-42.93	39.70	11.50	610126.23	674253.97	
7675.00	31.66	224.20	7661.20	-53.17	-51.70	47.82	11.50	610117.21	674245.20	
7700.00	34.54	224.20	7682.14	-62.95	-61.22	56.62	11.50	610107.43	674235.68	
7725.00	37.41	224.20	7702.37	-73.48	-71.46	66.09	11.50	610096.90	674225.44	
7750.00	40.29	224.20	7721.84	-84.72	-82.39	76.20	11.50	610085.66	674214.51	
7770.57	42.65	224.20	7737.25	-94.49	-91.88	84.98	11.50	610075.89	674205.02	Build/Turn
7775.00	42.90	224.85	7740.50	-96.63	-93.99	86.93	11.50	610073.75	674202.91	
7800.00	44.37	228.44	7758.60	-108.47	-106.54	98.61	11.50	610061.91	674190.36	
7825.00	45.95	231.83	7776.23	-119.82	-120.14	111.38	11.50	610050.56	674176.76	
7850.00	47.62	235.04	7793.35	-130.67	-134.78	125.21	11.50	610039.71	674162.12	
7875.00	49.37	238.08	7809.91	-140.98	-150.40	140.07	11.50	610029.40	674146.50	



Weatherford Wft Plan Report X Y's.

**Weatherford**

Company: Devon Energy	Date: 2/21/2013	Time: 13:25:36	Page: 2
Field: Eddy Co. NM (NAD 83)	Co-ordinate (NE): Reference: Well: Strawberry 7 Fed Com 8H	Grid North	
Site: Strawberry 7 Fed Com 8H	Vertical (TVD) Reference: SITE 3500.0		
Well: Strawberry 7 Fed Com 8H	Section (VS): Reference: Well (0.00N 0.00E 274.05Azi)		
Wellpath: Lat	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comments
7900.00	51.21	240.96	7825.89	-150.73	-166.97	155.91	11.50	610019.65	674129.93	
7925.00	53.10	243.69	7841.23	-159.89	-184.46	172.70	11.50	610010.49	674112.44	
7950.00	55.06	246.29	7855.89	-168.44	-202.80	190.40	11.50	610001.94	674094.10	
7975.00	57.07	248.77	7869.85	-176.36	-221.97	208.96	11.50	609994.02	674074.93	
8000.00	59.13	251.14	7883.06	-183.63	-241.91	228.33	11.50	609986.75	674054.99	
8025.00	61.23	253.40	7895.49	-190.23	-262.56	248.47	11.50	609980.15	674034.34	
8050.00	63.37	255.58	7907.11	-196.15	-283.89	269.33	11.50	609974.23	674013.01	
8075.00	65.53	257.67	7917.90	-201.36	-305.83	290.85	11.50	609969.02	673991.07	
8100.00	67.73	259.69	7927.82	-205.86	-328.33	312.97	11.50	609964.52	673968.57	
8125.00	69.95	261.65	7936.84	-209.64	-351.34	335.65	11.50	609960.74	673945.56	
8150.00	72.19	263.56	7944.95	-212.68	-374.78	358.83	11.50	609957.70	673922.12	
8175.00	74.44	265.42	7952.13	-214.97	-398.62	382.44	11.50	609955.41	673898.28	
8200.00	76.72	267.23	7958.36	-216.52	-422.78	406.43	11.50	609953.86	673874.12	
8225.00	79.00	269.02	7963.61	-217.32	-447.20	430.74	11.50	609953.06	673849.70	
8250.00	81.30	270.77	7967.89	-217.36	-471.83	455.30	11.50	609953.02	673825.07	
8275.00	83.60	272.51	7971.17	-216.65	-496.60	480.06	11.50	609953.73	673800.30	
8300.00	85.91	274.23	7973.46	-215.19	-521.45	504.95	11.50	609955.19	673775.45	
8325.00	88.23	275.94	7974.74	-212.98	-546.32	529.91	11.50	609957.40	673750.58	
8350.39	90.58	277.67	7975.00	-209.97	-571.53	555.27	11.50	609960.41	673725.37	LP/Tgt
8400.00	90.58	277.67	7974.50	-203.35	-620.69	604.78	0.00	609967.03	673676.21	
8500.00	90.58	277.67	7973.49	-190.01	-719.79	704.57	0.00	609980.37	673577.11	
8600.00	90.58	277.67	7972.48	-176.66	-818.89	804.37	0.00	609993.72	673478.01	
8700.00	90.58	277.67	7971.47	-163.32	-917.99	904.16	0.00	610007.06	673378.91	
8800.00	90.58	277.67	7970.46	-149.98	-1017.09	1003.96	0.00	610020.40	673279.81	
8900.00	90.58	277.67	7969.45	-136.63	-1116.19	1103.76	0.00	610033.75	673180.71	
9000.00	90.58	277.67	7968.44	-123.29	-1215.29	1203.55	0.00	610047.09	673081.61	
9100.00	90.58	277.67	7967.43	-109.95	-1314.39	1303.35	0.00	610060.43	672982.51	
9200.00	90.58	277.67	7966.42	-96.60	-1413.50	1403.14	0.00	610073.78	672883.40	
9300.00	90.58	277.67	7965.41	-83.26	-1512.60	1502.94	0.00	610087.12	672784.30	
9400.00	90.58	277.67	7964.40	-69.91	-1611.70	1602.73	0.00	610100.47	672685.20	
9500.00	90.58	277.67	7963.39	-56.57	-1710.80	1702.53	0.00	610113.81	672586.10	
9600.00	90.58	277.67	7962.38	-43.23	-1809.90	1802.32	0.00	610127.15	672487.00	
9700.00	90.58	277.67	7961.37	-29.88	-1909.00	1902.12	0.00	610140.50	672387.90	
9800.00	90.58	277.67	7960.36	-16.54	-2008.10	2001.92	0.00	610153.84	672288.80	
9900.00	90.58	277.67	7959.35	-3.20	-2107.20	2101.71	0.00	610167.18	672189.70	
10000.00	90.58	277.67	7958.34	10.15	-2206.30	2201.51	0.00	610180.53	672090.60	
10100.00	90.58	277.67	7957.33	23.49	-2305.40	2301.30	0.00	610193.87	671991.50	
10200.00	90.58	277.67	7956.32	36.83	-2404.50	2401.10	0.00	610207.21	671892.40	
10300.00	90.58	277.67	7955.31	50.18	-2503.60	2500.89	0.00	610220.56	671793.30	
10400.00	90.58	277.67	7954.30	63.52	-2602.70	2600.69	0.00	610233.90	671694.20	
10500.00	90.58	277.67	7953.29	76.86	-2701.80	2700.48	0.00	610247.24	671595.10	
10600.00	90.58	277.67	7952.28	90.21	-2800.90	2800.28	0.00	610260.59	671496.00	
10700.00	90.58	277.67	7951.27	103.55	-2900.00	2900.08	0.00	610273.93	671396.90	
10800.00	90.58	277.67	7950.26	116.90	-2999.10	2999.87	0.00	610287.28	671297.80	
10900.00	90.58	277.67	7949.25	130.24	-3098.21	3099.67	0.00	610300.62	671198.69	
11000.00	90.58	277.67	7948.24	143.58	-3197.31	3199.46	0.00	610313.96	671099.59	
11100.00	90.58	277.67	7947.23	156.93	-3296.41	3299.26	0.00	610327.31	671000.49	
11200.00	90.58	277.67	7946.22	170.27	-3395.51	3399.05	0.00	610340.65	670901.39	
11300.00	90.58	277.67	7945.21	183.61	-3494.61	3498.85	0.00	610353.99	670802.29	
11400.00	90.58	277.67	7944.20	196.96	-3593.71	3598.64	0.00	610367.34	670703.19	
11500.00	90.58	277.67	7943.19	210.30	-3692.81	3698.44	0.00	610380.68	670604.09	
11600.00	90.58	277.67	7942.18	223.64	-3791.91	3798.24	0.00	610394.02	670504.99	
11700.00	90.58	277.67	7941.17	236.99	-3891.01	3898.03	0.00	610407.37	670405.89	



Weatherford Wft Plan Report X Y's.

**Weatherford**

Company: Devon Energy	Date: 2/21/2013	Time: 13:25:36	Page: 3
Field: Eddy Co. NM (NAD 83)	Co-ordinate (NE) Reference: Well: Strawberry 7 Fed Com 8H Grid North		
Site: Strawberry 7 Fed Com 8H	Vertical (TVD) Reference: SITE 3500.0		
Well: Strawberry 7 Fed Com 8H	Section (VS) Reference: Well (0.00N 0.00E 274.05Azi)		
Wellpath: Lat	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	MapN ft	MapE ft	Comments
11800.00	90.58	277.67	7940.16	250.33	-3990.11	3997.83	0.00	610420.71	670306.79	
11900.00	90.58	277.67	7939.15	263.67	-4089.21	4097.62	0.00	610434.05	670207.69	
12000.00	90.58	277.67	7938.14	277.02	-4188.31	4197.42	0.00	610447.40	670108.59	
12100.00	90.58	277.67	7937.12	290.36	-4287.41	4297.21	0.00	610460.74	670009.49	
12200.00	90.58	277.67	7936.11	303.71	-4386.51	4397.01	0.00	610474.09	669910.39	
12300.00	90.58	277.67	7935.10	317.05	-4485.61	4496.80	0.00	610487.43	669811.29	
12310.09	90.58	277.67	7935.00	318.40	-4495.61	4506.87	0.00	610488.78	669801.29	PBHL

Targets

Name	Description Dip	TVD Dir ft	N/S ft	E/W ft	Map Northing ft	Map Easting ft	Latitude Deg Min Sec	Longitude Deg Min Sec
PBHL		7935.00	318.40	-4495.61	610488.78	669801.29	32 40 39.289 N	103 54 56.968 W
-Rectangle (3960x50)								
LP/Tgt		7975.00	-209.97	-571.53	609960.41	673725.37	32 40 33.906 N	103 54 11.082 W

Casing Points

MD	TVD	Diameter	Hole Size	Name

Annotation

MD ft	TVD ft	
7399.67	7399.67	KOP
7770.57	7737.25	Build/Turn
8350.39	7975.00	LP
12310.08	7935.00	PBHL



Weatherford Anticollision Report



Weatherford

Company:	Devon Energy	Date:	2/21/2013	Time:	13:21:35	Page:	1
Field:	Eddy Co. NM (NAD:83)	Co-ordinate (NE) Reference:	Well: Strawberry 7 Fed Com 8H	Grid:	Nort		
Reference Site:	Strawberry 7 Fed Com 8H	Vertical (TVD) Reference:	SITE: 350010				
Reference Well:	Strawberry 7 Fed Com 8H						
Reference Wellpath:						Db:	Sybase

NO GLOBAL SCAN: Using user defined selection & scan criteria
Interpolation Method MD + Stations Interval: 100.00 ft
Depth Range: 100.00 to 12310.09 ft
Maximum Radius 40000.00 ft

Reference: Plan: Plan #1
Error Model: ISCWSA Ellipse
Scan Method: Closest Approach 3D
Error Surface: Ellipse

Plan: Plan #1

Date Composed: 2/21/2013

Version: 1

Principal: Yes

Tied-to: From Surface

Summary

Site	Offset Wellpath	Reference Offset	Ctrl Ctrl Edge	Separation	Warning
	Well	Wellpath	MD	MD	Distance Distance Factor
			ft	ft	ft ft
Exist. Strawberry 7	Strawberry 7 Fed Com V0	7750.00	7722.19	187.13	153.79 5.61

Site: Exist. Strawberry 7 Fed Com 5H

Well: Strawberry 7 Fed Com 5H

Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		Offset-Location			Ctr-Ctr-Edge		Separation	Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
100.00	100.00	96.06	96.06	0.09	0.09	179.45	-304.91	2.90	304.93	304.75	1665.78	
200.00	200.00	195.90	195.89	0.31	0.26	179.51	-304.51	2.58	304.52	303.95	534.21	
300.00	300.00	295.57	295.57	0.54	0.46	179.61	-304.31	2.08	304.32	303.32	304.75	
400.00	400.00	395.94	395.93	0.76	0.67	179.69	-304.08	1.62	304.09	302.65	212.38	
500.00	500.00	496.43	496.43	0.99	0.88	179.76	-303.69	1.29	303.70	301.83	162.34	
600.00	600.00	596.98	596.97	1.21	1.10	179.83	-303.12	0.91	303.13	300.82	131.22	
700.00	700.00	696.93	696.92	1.44	1.31	179.92	-302.47	0.40	302.47	299.72	109.97	
800.00	800.00	796.66	796.65	1.66	1.52	180.04	-301.89	-0.22	301.90	298.71	94.78	
900.00	900.00	896.76	896.74	1.89	1.73	180.17	-301.33	-0.87	301.34	297.72	83.23	
1000.00	1000.00	996.77	996.75	2.11	1.94	180.28	-300.74	-1.48	300.74	296.69	74.15	
1100.00	1100.00	1095.67	1095.65	2.34	2.15	180.39	-300.26	-2.05	300.26	295.78	67.00	
1200.00	1200.00	1194.56	1194.53	2.56	2.35	180.46	-300.32	-2.43	300.33	295.42	61.18	
1300.00	1300.00	1294.61	1294.59	2.79	2.56	180.53	-300.46	-2.76	300.47	295.13	56.22	
1400.00	1400.00	1395.24	1395.21	3.01	2.77	180.56	-300.53	-2.93	300.55	294.77	51.97	
1500.00	1500.00	1497.59	1497.56	3.24	2.99	180.50	-300.14	-2.59	300.16	293.94	48.20	
1600.00	1600.00	1598.71	1598.67	3.46	3.21	180.46	-299.00	-2.41	299.03	292.37	44.85	
1700.00	1700.00	1698.72	1698.68	3.69	3.42	180.45	-297.76	-2.35	297.79	290.69	41.93	
1800.00	1800.00	1799.13	1799.08	3.91	3.63	180.39	-296.46	-2.04	296.50	288.96	39.33	
1900.00	1900.00	1899.77	1899.70	4.14	3.85	180.27	-294.97	-1.41	295.02	287.03	36.96	
2000.00	2000.00	2000.09	2000.01	4.36	4.07	180.07	-293.32	-0.37	293.36	284.94	34.83	
2100.00	2100.00	2101.34	2101.23	4.59	4.29	179.77	-291.37	1.18	291.44	282.57	32.87	
2200.00	2200.00	2201.91	2201.74	4.81	4.50	179.32	-289.07	3.44	289.17	279.86	31.06	
2300.00	2300.00	2301.27	2301.03	5.03	4.72	178.69	-286.82	6.58	286.96	277.21	29.43	
2400.00	2400.00	2400.77	2400.42	5.26	4.93	177.85	-284.69	10.68	284.94	274.75	27.96	
2500.00	2500.00	2499.73	2499.26	5.48	5.15	176.91	-282.76	15.26	283.20	272.57	26.65	
2600.00	2600.00	2598.58	2598.00	5.71	5.35	176.01	-281.29	19.62	281.99	270.94	25.51	
2700.00	2700.00	2698.25	2697.59	5.93	5.56	175.24	-279.97	23.31	280.95	269.47	24.47	
2800.00	2800.00	2797.39	2796.69	6.16	5.76	174.68	-279.00	25.96	280.21	268.30	23.54	
2900.00	2900.00	2896.99	2896.27	6.38	5.96	174.26	-278.29	27.99	279.70	267.37	22.68	
3000.00	3000.00	2997.00	2996.26	6.61	6.16	173.91	-277.68	29.65	279.27	266.50	21.88	
3100.00	3100.00	3096.99	3096.24	6.83	6.37	173.65	-277.09	30.85	278.80	265.61	21.13	
3200.00	3200.00	3197.02	3196.27	7.06	6.58	173.43	-276.53	31.85	278.36	264.74	20.43	
3300.00	3300.00	3297.42	3296.65	7.28	6.79	173.20	-275.89	32.89	277.85	263.79	19.75	
3400.00	3400.00	3397.38	3396.61	7.51	7.00	172.98	-275.16	33.90	277.24	262.74	19.12	
3500.00	3500.00	3496.93	3496.15	7.73	7.21	172.79	-274.54	34.75	276.73	261.80	18.53	
3600.00	3600.00	3597.18	3596.40	7.96	7.42	172.62	-274.00	35.48	276.29	260.93	17.98	



Weatherford Anticollision Report

**Weatherford**

Company: Devon Energy Date: 2/21/2013 Time: 13:21:35 Page: 2
Field: Eddy Co. NM (NAD:83)
Reference Site: Strawberry 7 Fed Com 8H Co-ordinate(NE) Reference: Well: Strawberry 7 Fed Com 8H Grid:Nort
Reference Well: Strawberry 7 Fed Com 8H Vertical (TVD) Reference: SITE 3500.0
Reference Wellpath: Db: Sybase

Site: Exist. Strawberry 7 Fed Com 5H
Well: Strawberry 7 Fed Com 5H
Wellpath: 1 V0

Inter-Site Error: 0:00 ft

Reference MD	TVD	Offset MD	TVD	Semi-Major Axis Ref	Offset Offset	Major Axis TFO-HS	North	East	Location North	East	Ctr-Ctr Distance	Edge Distance	Separation Factor	Warning
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft	ft	ft		
3700.00	3700.00	3697.25	3696.46	8.18	7.63	172.47	-273.39	36.12	275.77	259.97	17.45			
3800.00	3800.00	3797.23	3796.44	8.41	7.84	172.34	-272.78	36.70	275.24	259.01	16.95			
3900.00	3900.00	3897.69	3896.90	8.63	8.05	172.22	-272.11	37.17	274.64	257.97	16.47			
4000.00	4000.00	3998.32	3997.53	8.86	8.27	172.10	-271.22	37.63	273.83	256.72	16.00			
4100.00	4100.00	4098.76	4097.95	9.08	8.48	171.96	-270.13	38.17	272.83	255.28	15.55			
4200.00	4200.00	4199.08	4198.26	9.31	8.70	171.79	-268.84	38.79	271.65	253.66	15.10			
4300.00	4300.00	4298.83	4298.00	9.53	8.91	171.64	-267.63	39.33	270.52	252.10	14.68			
4400.00	4400.00	4399.26	4398.43	9.75	9.12	171.52	-266.38	39.70	269.35	250.49	14.28			
4500.00	4500.00	4499.71	4498.87	9.98	9.33	171.43	-264.94	39.94	267.96	248.67	13.88			
4600.00	4600.00	4600.19	4599.34	10.20	9.55	171.33	-263.38	40.17	266.46	246.72	13.50			
4700.00	4700.00	4700.13	4699.26	10.43	9.76	171.26	-261.66	40.21	264.76	244.59	13.12			
4800.00	4800.00	4799.60	4798.72	10.65	9.97	171.22	-260.16	40.19	263.27	242.67	12.78			
4900.00	4900.00	4899.54	4898.65	10.88	10.17	171.18	-258.77	40.14	261.89	240.85	12.45			
5000.00	5000.00	4999.61	4998.71	11.10	10.39	171.12	-257.33	40.19	260.48	239.01	12.13			
5100.00	5100.00	5100.37	5099.45	11.33	10.60	170.96	-255.69	40.67	258.94	237.03	11.82			
5200.00	5200.00	5200.49	5199.55	11.55	10.81	170.70	-253.75	41.54	257.16	234.82	11.51			
5300.00	5300.00	5300.21	5299.25	11.78	11.02	170.44	-251.86	42.42	255.44	232.67	11.22			
5400.00	5400.00	5400.17	5399.19	12.00	11.23	170.16	-250.02	43.35	253.79	230.58	10.93			
5500.00	5500.00	5499.87	5498.87	12.23	11.44	169.87	-248.24	44.33	252.19	228.55	10.67			
5600.00	5600.00	5599.55	5598.53	12.45	11.65	169.57	-246.55	45.40	250.72	226.64	10.41			
5700.00	5700.00	5699.02	5697.98	12.68	11.85	169.28	-245.06	46.37	249.42	224.92	10.18			
5800.00	5800.00	5798.76	5797.71	12.90	12.06	169.01	-243.72	47.32	248.28	223.35	9.96			
5900.00	5900.00	5898.59	5897.52	13.13	12.27	168.73	-242.45	48.33	247.23	221.86	9.75			
6000.00	6000.00	5998.56	5997.49	13.35	12.48	168.45	-241.22	49.32	246.22	220.42	9.54			
6100.00	6100.00	6098.69	6097.60	13.58	12.69	168.18	-239.98	50.24	245.19	218.95	9.34			
6200.00	6200.00	6198.99	6197.89	13.80	12.90	167.89	-238.64	51.21	244.09	217.41	9.15			
6300.00	6300.00	6299.28	6298.16	14.03	13.12	167.54	-237.08	52.39	242.82	215.70	8.95			
6400.00	6400.00	6399.18	6398.04	14.25	13.33	167.16	-235.47	53.67	241.53	213.98	8.77			
6500.00	6500.00	6498.99	6497.82	14.47	13.55	166.70	-233.86	55.27	240.31	212.32	8.59			
6600.00	6600.00	6599.51	6598.32	14.70	13.76	166.20	-232.17	57.03	239.09	210.66	8.41			
6700.00	6700.00	6700.50	6699.27	14.92	13.98	165.76	-230.16	58.43	237.50	208.63	8.23			
6800.00	6800.00	6801.47	6800.22	15.15	14.19	165.40	-227.83	59.35	235.49	206.18	8.03			
6900.00	6900.00	6901.80	6900.50	15.37	14.41	165.08	-225.25	60.04	233.18	203.43	7.84			
7000.00	7000.00	7002.47	7001.13	15.60	14.63	164.77	-222.50	60.59	230.69	200.49	7.64			
7100.00	7100.00	7103.20	7101.82	15.82	14.84	164.50	-219.47	60.86	227.86	197.23	7.44			
7200.00	7200.00	7203.54	7202.11	16.05	15.06	164.25	-216.23	60.98	224.77	193.70	7.23			
7300.00	7300.00	7303.04	7301.55	16.27	15.28	163.96	-212.97	61.23	221.69	190.19	7.04			
7399.67	7399.67	7401.25	7399.72	16.50	15.48	163.59	-210.10	61.89	219.08	187.14	6.86			
7400.00	7400.00	7401.58	7400.05	16.50	15.48	299.39	-210.09	61.89	219.07	187.13	6.86			
7425.00	7424.99	7426.28	7424.74	16.55	15.54	299.06	-209.45	62.08	218.20	186.16	6.81			
7450.00	7449.91	7450.89	7449.34	16.59	15.59	298.39	-208.86	62.26	216.76	184.63	6.75			
7475.00	7474.71	7475.36	7473.80	16.63	15.64	297.38	-208.30	62.41	214.78	182.58	6.67			
7500.00	7499.32	7499.76	7498.20	16.68	15.69	296.02	-207.79	62.53	212.32	180.04	6.58			
7525.00	7523.68	7523.97	7522.41	16.72	15.74	294.30	-207.29	62.63	209.42	177.06	6.47			
7550.00	7547.73	7547.87	7546.30	16.77	15.79	292.22	-206.81	62.70	206.19	173.74	6.35			
7575.00	7571.40	7571.39	7569.82	16.81	15.84	289.79	-206.35	62.75	202.73	170.19	6.23			
7600.00	7594.65	7594.65	7593.07	16.86	15.89	287.00	-205.90	62.77	199.18	166.54	6.10			
7625.00	7617.40	7617.48	7615.90	16.91	15.93	283.88	-205.44	62.78	195.70	162.95	5.98			
7650.00	7639.60	7639.73	7638.15	16.96	15.98	280.48	-204.98	62.76	192.48	159.61	5.85			
7675.00	7661.20	7661.36	7659.77	17.01	16.03	276.86	-204.51	62.73	189.77	156.76	5.75			
7700.00	7682.14	7682.34	7680.75	17.07	16.07	273.10	-204.04	62.68	187.80	154.66	5.67			



Weatherford Anticollision Report

**Weatherford**

Company: Devon Energy Date: 2/21/2013 Time: 13:21:35 Page: 3
Field: Eddy Co. NM (NAD 83)
Reference Site: Strawberry 7 Fed Com 8H Co-ordinate (NE) Reference: Well: Strawberry 7 Fed Com 8H Grid: Nort
Reference Well: Strawberry 7 Fed Com 8H Vertical (TVD) Reference: SITE 3500.0
Reference Wellpath: Db: Sybase

Site: Exist. Strawberry 7 Fed Com 5H
Well: Strawberry 7 Fed Com 5H
Wellpath: 1 VO

Inter-Site Error: 0.00 ft

Reference MD ft	TVD ft	Offset MD ft	TVD ft	Semi-Major Axis Ref ft	Offset ft	TFO-HS deg	North ft	East ft	Ctr-Ctr Distance ft	Edge Distance ft	Separation Factor	Warning
7725.00	7702.37	7702.65	7701.05	17.14	16.12	269.27	-203.57	62.60	186.83	153.58	5.62	
7750.00	7721.84	7722.19	7720.58	17.21	16.16	265.48	-203.10	62.49	187.13	153.79	5.61	
7770.57	7737.25	7737.65	7736.04	17.27	16.19	262.47	-202.73	62.39	188.49	155.09	5.64	
7775.00	7740.50	7740.92	7739.30	17.29	16.20	261.33	-202.65	62.36	188.95	155.53	5.66	
7800.00	7758.60	7759.10	7757.48	17.39	16.24	255.08	-202.19	62.21	193.07	159.67	5.78	
7825.00	7776.23	7776.71	7775.08	17.49	16.27	249.22	-201.75	62.05	199.80	166.47	5.99	
7850.00	7793.35	7793.71	7792.07	17.61	16.31	243.76	-201.31	61.88	208.99	175.80	6.30	
7875.00	7809.91	7810.17	7808.53	17.73	16.35	238.64	-200.89	61.72	220.45	187.45	6.68	
7900.00	7825.89	7826.06	7824.42	17.85	16.38	233.86	-200.48	61.57	233.92	201.16	7.14	
7925.00	7841.23	7841.34	7839.69	17.99	16.41	229.37	-200.08	61.42	249.16	216.68	7.67	
7950.00	7855.89	7855.97	7854.32	18.14	16.44	225.15	-199.70	61.27	265.94	233.79	8.27	
7975.00	7869.85	7870.14	7868.48	18.29	16.47	221.12	-199.33	61.13	284.05	252.27	8.94	
8000.00	7883.06	7883.80	7882.13	18.46	16.50	217.23	-198.98	60.97	303.30	271.92	9.67	
8025.00	7895.49	7896.75	7895.07	18.64	16.53	213.46	-198.65	60.81	323.51	292.58	10.46	
8050.00	7907.11	7908.94	7907.26	18.83	16.56	209.74	-198.35	60.63	344.57	314.11	11.31	
8075.00	7917.90	7920.36	7918.67	19.03	16.58	206.00	-198.06	60.46	366.35	336.41	12.24	
8100.00	7927.82	7930.95	7929.26	19.24	16.60	202.14	-197.81	60.28	388.75	359.38	13.23	
8125.00	7936.84	7940.70	7939.01	19.46	16.62	198.02	-197.57	60.11	411.69	382.92	14.31	
8150.00	7944.95	7949.57	7947.87	19.70	16.64	193.45	-197.36	59.95	435.07	406.94	15.47	
8175.00	7952.13	7957.46	7955.76	19.95	16.66	188.19	-197.17	59.79	458.84	431.33	16.68	
8200.00	7958.36	7963.73	7962.03	20.20	16.67	181.82	-197.02	59.67	482.92	455.90	17.87	
8225.00	7963.61	7969.08	7967.38	20.47	16.68	173.64	-196.90	59.57	507.26	480.28	18.80	
8250.00	7967.89	7973.51	7971.80	20.74	16.69	162.71	-196.80	59.49	531.80	503.80	19.00	
8275.00	7971.17	7976.99	7975.28	21.02	16.70	148.01	-196.72	59.43	556.47	525.87	18.19	
8300.00	7973.46	7979.54	7977.83	21.31	16.70	129.50	-196.67	59.39	581.21	546.92	16.95	
8325.00	7974.74	7981.16	7979.45	21.60	16.71	109.73	-196.63	59.36	605.98	568.64	16.23	
8350.39	7975.00	7981.85	7980.14	21.90	16.71	92.26	-196.62	59.35	631.10	592.52	16.36	
8400.00	7974.50	7982.27	7980.56	22.72	16.71	92.50	-196.61	59.34	680.16	640.76	17.26	
8500.00	7973.49	7983.10	7981.38	24.52	16.71	92.99	-196.59	59.33	779.26	738.05	18.91	
8600.00	7972.48	9422.72	8815.49	26.50	28.43	180.98	-189.59	-832.14	848.21	825.04	36.60	
8700.00	7971.47	9520.94	8814.13	28.60	30.46	182.07	-192.60	-930.30	848.25	824.29	35.39	
8800.00	7970.46	9625.83	8811.84	30.81	32.75	183.41	-198.46	-1035.00	847.96	823.01	34.00	
8900.00	7969.45	9725.23	8809.24	33.10	34.99	184.73	-204.80	-1134.16	847.72	821.65	32.51	
9000.00	7968.44	9818.73	8806.81	35.46	37.17	186.03	-211.58	-1227.38	848.07	820.68	30.97	
9100.00	7967.43	9906.88	8805.45	37.88	39.27	187.26	-218.17	-1315.27	849.94	821.09	29.46	
9200.00	7966.42	10002.12	8804.54	40.34	41.60	188.53	-224.56	-1410.30	852.78	822.21	27.89	
9300.00	7965.41	10103.49	8803.74	42.84	44.07	189.92	-232.19	-1511.38	856.38	823.76	26.25	
9400.00	7964.40	10194.46	8802.78	45.37	46.31	191.18	-239.31	-1602.06	860.28	825.47	24.71	
9500.00	7963.39	10303.79	8801.40	47.92	49.05	192.74	-248.81	-1710.97	864.65	827.10	23.03	
9600.00	7962.38	10395.34	8799.65	50.50	51.32	194.07	-257.23	-1802.11	869.07	828.74	21.55	
9700.00	7961.37	10497.31	8798.04	53.10	53.98	195.57	-267.12	-1903.58	874.49	830.92	20.07	
9800.00	7960.36	10589.85	8796.01	55.71	56.32	196.94	-276.43	-1995.63	880.00	833.07	18.75	
9900.00	7959.35	10678.94	8795.17	58.34	58.57	198.21	-285.10	-2084.29	887.12	836.73	17.61	
10000.00	7958.34	10766.25	8794.92	60.98	60.83	199.46	-294.38	-2171.10	895.68	841.61	16.57	
10100.00	7957.33	10857.72	8796.17	63.63	63.29	200.64	-302.77	-2262.18	905.75	847.88	15.65	
10200.00	7956.32	10983.40	8796.74	66.29	66.58	202.20	-313.28	-2387.41	915.21	852.61	14.62	
10300.00	7955.31	11076.69	8795.56	68.96	69.00	203.36	-321.00	-2480.37	923.45	856.63	13.82	
10400.00	7954.30	11168.06	8794.57	71.64	71.37	204.54	-329.76	-2571.32	932.81	861.56	13.09	
10500.00	7953.29	11257.63	8793.88	74.32	73.63	205.71	-339.03	-2660.40	943.25	867.42	12.44	
10600.00	7952.28	11352.70	8792.85	77.01	76.02	207.07	-351.45	-2754.65	955.09	874.12	11.80	
10700.00	7951.27	11452.20	8791.46	79.71	78.80	208.45	-364.26	-2853.30	967.15	880.75	11.19	



Weatherford Anticollision Report



Weatherford

Company: Devon Energy Date: 2/21/2013 Time: 13:21:35 Page: 4
Field: Eddy Co. NM (NAD83)
Reference Site: Strawberry 7 Fed Com 8H Co-ordinate (NE) Reference: Well: Strawberry 7 Fed Com 8H Grid North
Reference Well: Strawberry 7 Fed Com 8H Vertical (TVD) Reference: SITE 3500.0
Reference Wellpath: Db: Sybase

Site: Exist. Strawberry 7 Fed Com 5H
Well: Strawberry 7 Fed Com 5H
Wellpath: 1 V0

Inter-Site Error: 0.00 ft

Reference		Offset		Semi-Major Axis		Offset Location		Ctr-Ctr Edge		Separation		Warning
MD	TVD	MD	TVD	Ref	Offset	TFO-HS	North	East	Distance	Distance	Factor	
ft	ft	ft	ft	ft	ft	deg	ft	ft	ft	ft		
10800.00	7950.26	11556.23	8791.53	82.41	81.66	209.62	-373.59	-2956.91	979.05	887.44	10.69	
10900.00	7949.25	11656.45	8792.64	85.11	84.38	210.57	-380.31	-3056.90	991.03	894.52	10.27	
11000.00	7948.24	11792.13	8794.58	87.82	87.98	211.58	-384.71	-3192.47	1001.95	900.04	9.83	
11100.00	7947.23	11887.25	8794.51	90.53	90.56	212.25	-386.30	-3287.58	1010.73	904.30	9.50	
11200.00	7946.22	11993.11	8793.73	93.25	93.40	213.01	-388.30	-3393.42	1019.21	907.90	9.16	
11300.00	7945.21	12095.22	8793.34	95.96	96.14	213.68	-389.44	-3495.53	1027.72	911.65	8.85	
11400.00	7944.20	12193.60	8792.51	98.68	98.79	214.34	-390.61	-3593.89	1036.04	915.17	8.57	
11500.00	7943.19	12288.88	8792.26	101.41	101.38	214.92	-391.29	-3689.17	1044.69	919.12	8.32	
11600.00	7942.18	12387.08	8791.72	104.13	104.05	215.56	-392.79	-3787.36	1053.69	923.20	8.08	
11700.00	7941.17	12480.58	8790.83	106.86	106.60	216.20	-394.88	-3880.83	1062.92	927.47	7.85	
11800.00	7940.16	12562.50	8790.30	109.59	108.82	216.80	-398.04	-3962.68	1073.50	933.20	7.65	
11900.00	7939.15	12654.76	8790.50	112.32	111.31	217.47	-402.32	-4054.84	1085.39	939.91	7.46	
12000.00	7938.14	12743.32	8790.71	115.06	113.67	218.14	-407.49	-4143.25	1098.19	947.49	7.29	
12100.00	7937.12	12845.83	8790.14	117.79	116.41	218.98	-414.58	-4245.51	1111.25	954.68	7.10	
12200.00	7936.11	12918.90	8789.93	120.53	118.30	219.58	-420.49	-4318.34	1125.46	963.86	6.96	
12300.00	7935.10	13003.64	8790.20	123.27	120.46	220.32	-429.16	-4402.64	1141.70	974.53	6.83	
12310.09	7935.00	13013.78	8790.22	123.54	120.73	220.42	-430.25	-4412.71	1143.39	975.59	6.81	

**Weatherford****Weatherford Drilling Services**

GeoDec v5.03

Report Date: February 21, 2013
Job Number: _____
Customer: Devon
Well Name: Strawberry 7 Fed Com 8H
API Number: _____
Rig Name: _____
Location: Eddy Co., NM
Block: _____
Engineer: RWJ

US State Plane 1983	Geodetic Latitude / Longitude
System: New Mexico Eastern Zone	System: Latitude / Longitude
Projection: Transverse Mercator/Gauss Kruger	Projection: Geodetic Latitude and Longitude
Datum: North American Datum 1983	Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: GRS 1980	Ellipsoid: Clarke 1866
North/South 610170.380 USFT	Latitude 32.6765397 DEG
East/West 674296.900 USFT	Longitude -103.9007101 DEG
Grid Convergence: .23°	
Total Correction: +7.40°	

Geodetic Location WGS84	Elevation =	0.0 Meters
Latitude =	32.67654° N	32° 40 min 35.543 sec
Longitude =	103.90071° W	103° 54 min 2.556 sec

Magnetic Declination =	7.63°	[True North Offset]
Local Gravity =	.9988 g	Checksum = 6610
Local Field Strength =	48637 nT	Magnetic Vector X = 23770 nT
Magnetic Dip =	60.46°	Magnetic Vector Y = 3184 nT
Magnetic Model =	bggm2012	Magnetic Vector Z = 42313 nT
Spud Date =	Jul 15, 2013	Magnetic Vector H = 23982 nT

Signed: _____


Date: _____

NOTES REGARDING BLOWOUT PREVENTERS
Devon Energy Production Company, LP
Strawberry 7 Fed Com 8H


Surface Location: 2005' FNL & 340' FEL, Unit H, Sec 7 T19S R31E, Eddy, NM
Bottom Hole Location: 1650' FNL & 340' FWL, Unit E, Sec 7 T19S R31E, Eddy, NM



1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated fittings will be in operable condition to withstand a minimum 3000 psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum 3000 psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

13-5/8" x 3,000 psi BOP Stack

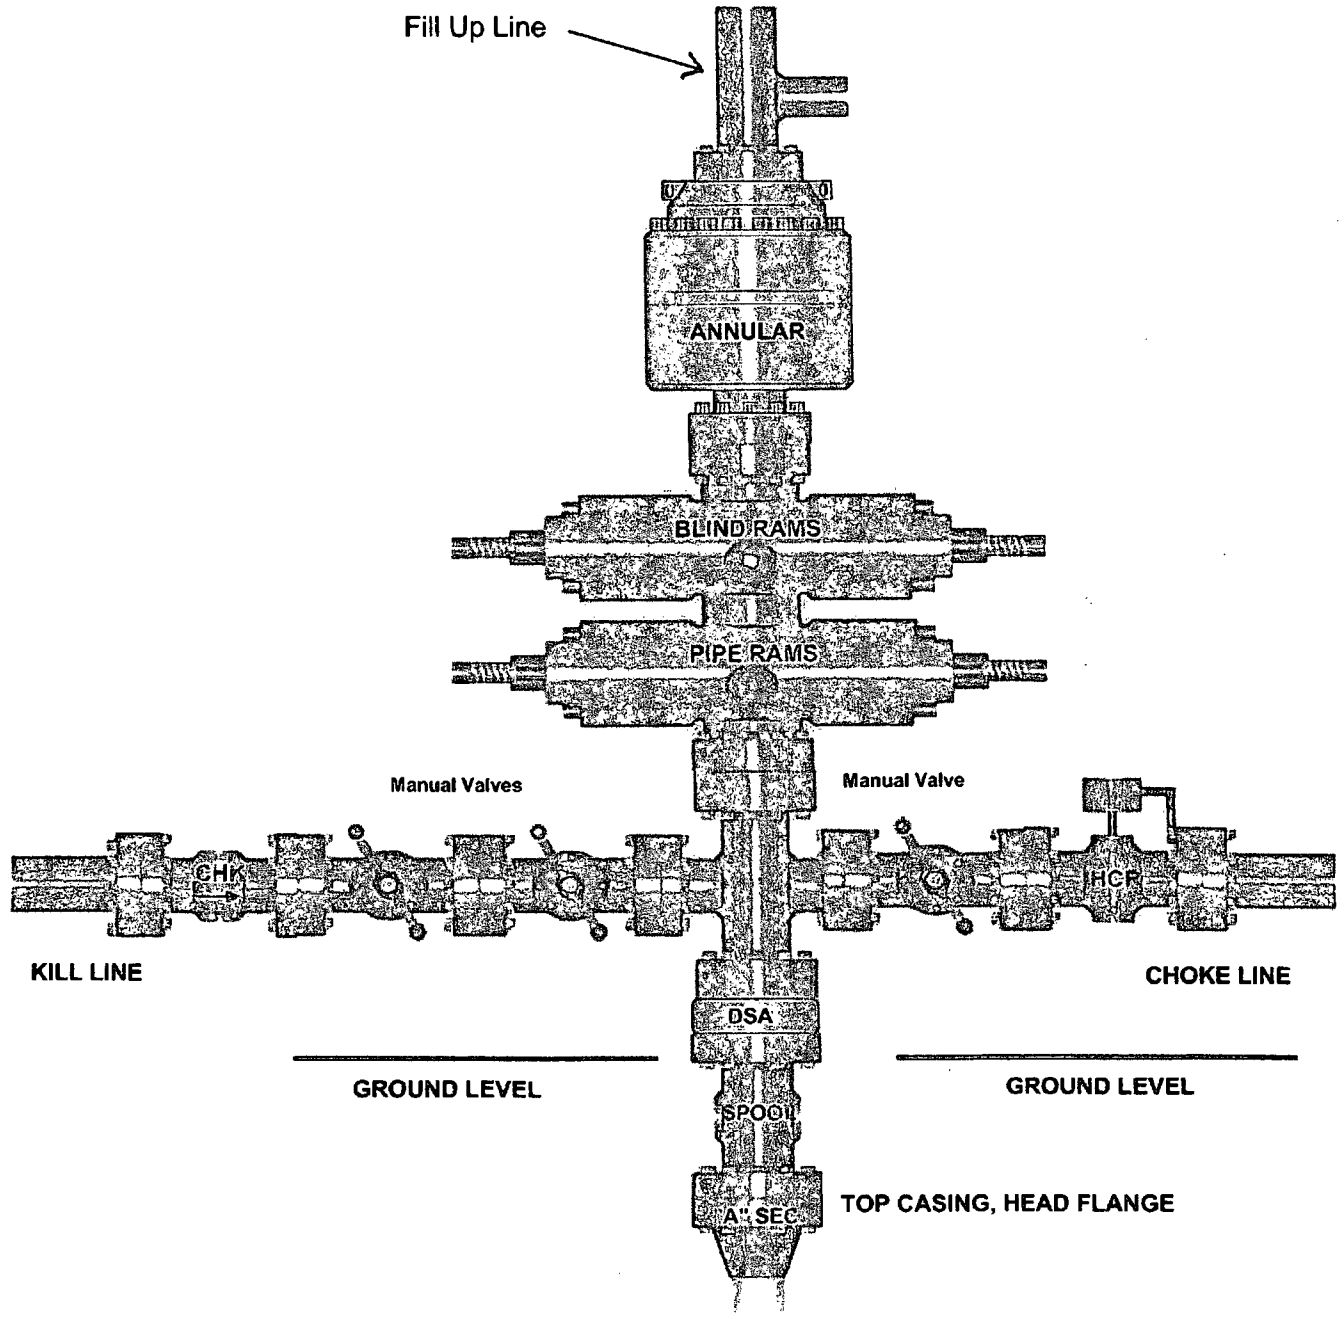


13-5/8" 3M BOPE & Closed Loop Equipment Schematic

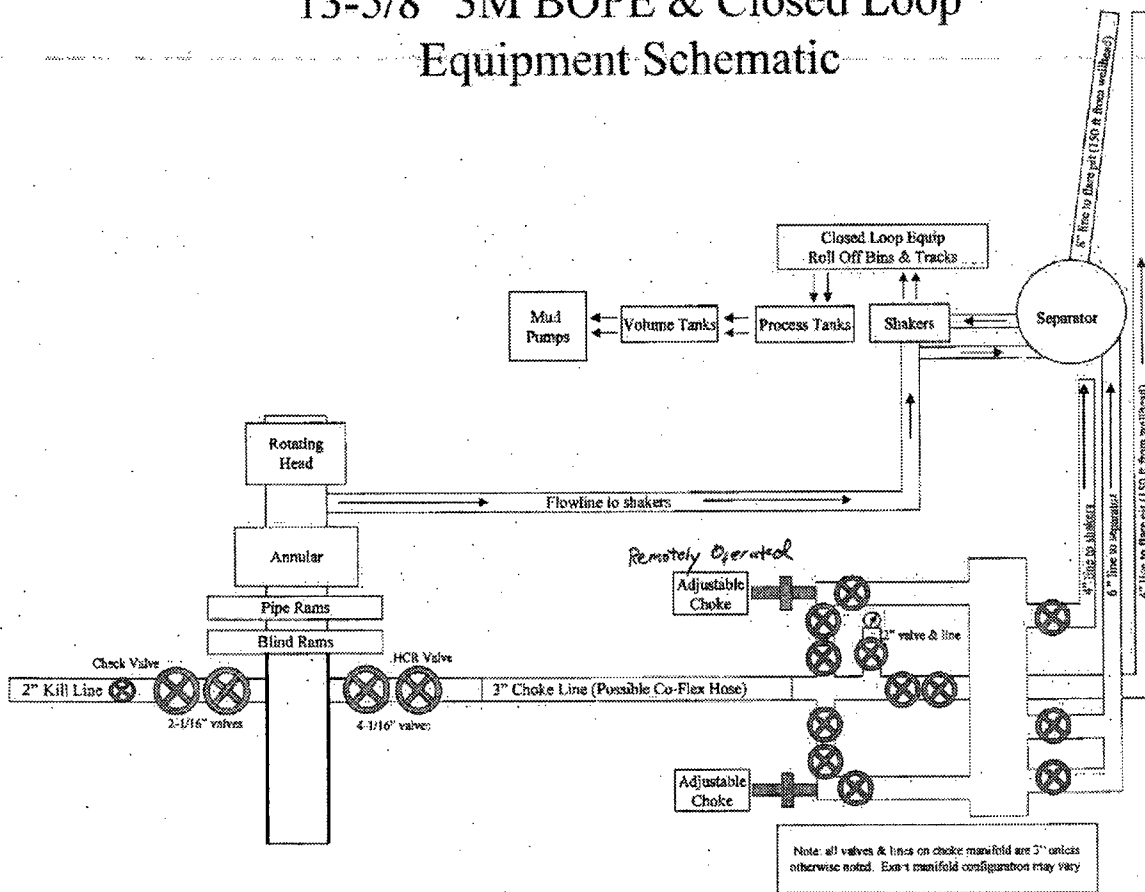

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1713	
PURCHASER: ContiTech Beattie Co.				P.O. N°: 002808	
CONTITECH ORDER N°: 426127		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 53622		NOMINAL / ACTUAL LENGTH: 10,67 m			
W.P. 68,96 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 25 MPa</p>					
COUPLINGS Type	Serial N°		Quality		Heat N°
3" coupling with 4 1/16" Flange end	5503 2029		AISI 4130 AISI 4130		N1590P 27566
INFOCHIP INSTALLED			API Spec 16 C Temperature rate:"B"		
All metal parts are flawless			Hose conform to NACE MR 01-75		
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date: 25. August. 2008	Inspector		Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept.  		

HARTMANN &

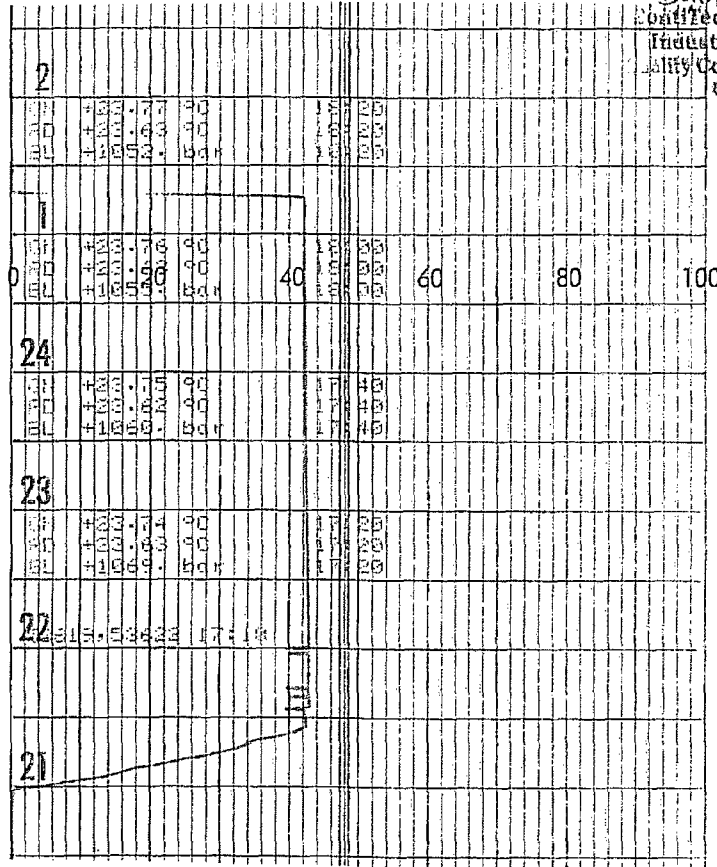

Qualitech Rubber
Industrial Kft.
Quality Control Dept.
(2)



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.


Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,


Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com





Commitment Runs Deep

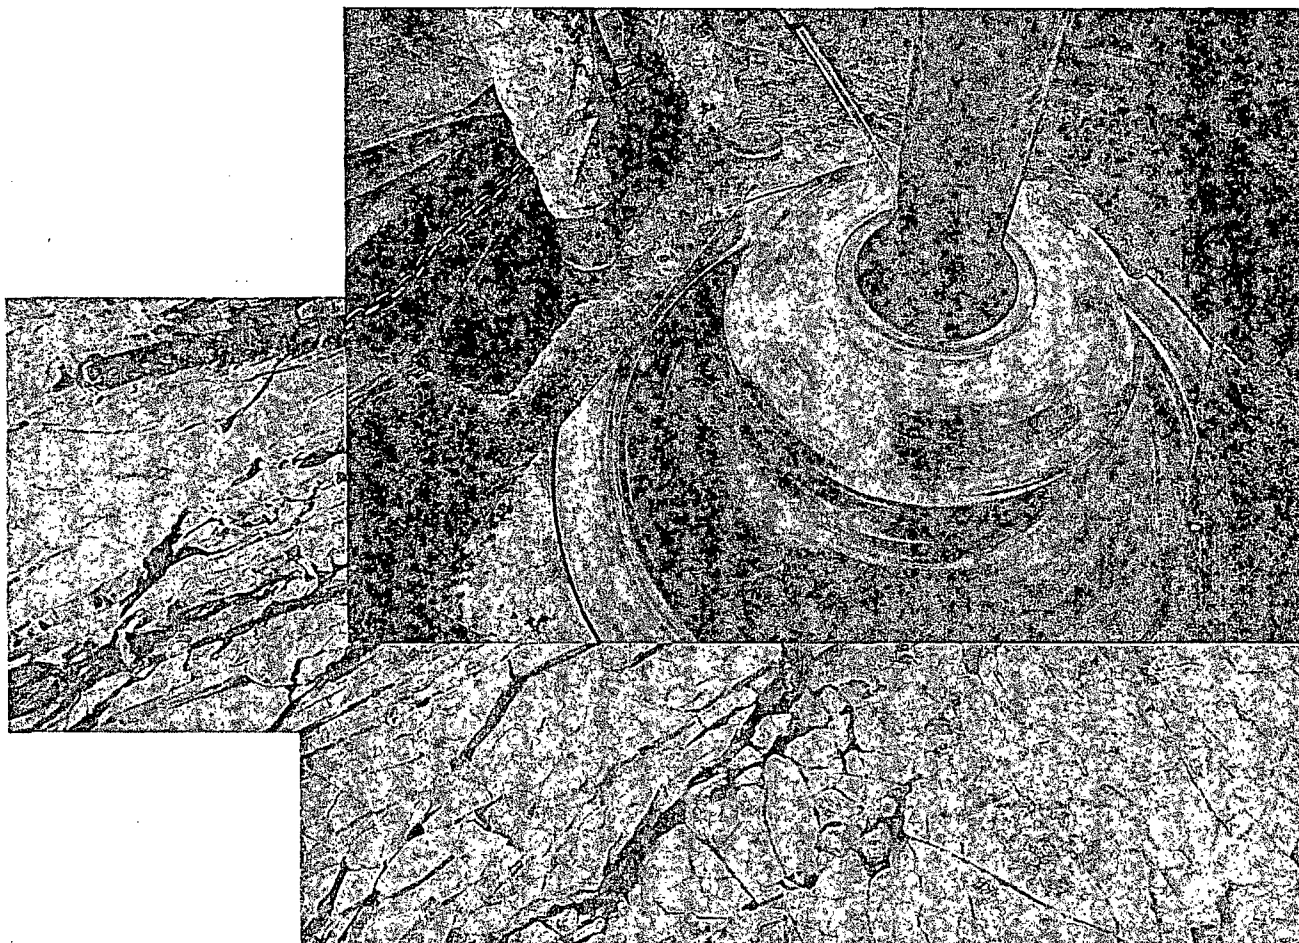

Design Plan
Operation and Maintenance Plan
Closure Plan

SENM - Closed Loop Systems
June 2010

I. Design Plan

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.


Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.

II. Operations and Maintenance Plan

Primary Shakers: The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

Mud Cleaner: The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.

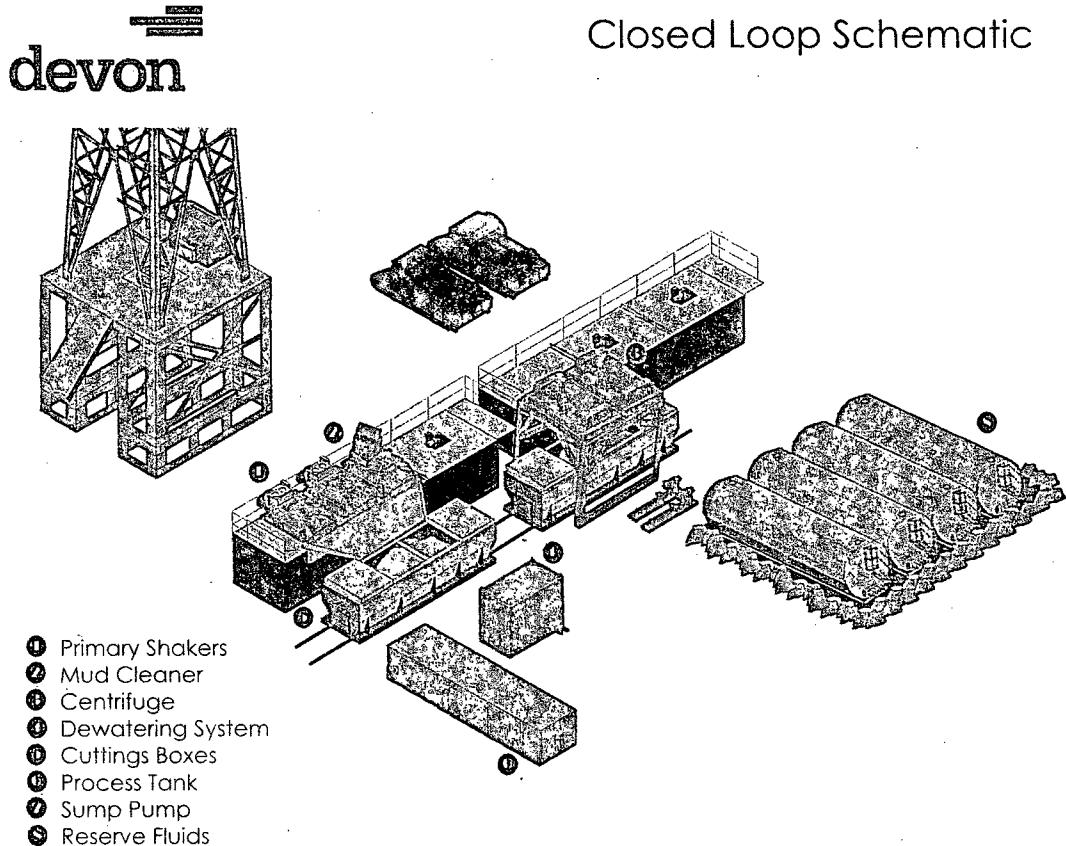

Centrifuges: The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

Dewatering System: The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

Cuttings Boxes: Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

Process Tank: (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

Sump and Sump Pump: The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

Reserve Fluids (Tank Farm): A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

III. Closure Plan

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.



Devon Energy - 1 Well Pad Rig Location Layout Safety Equipment Location

Secondary Egress

CAUTION
H₂S Poison Gas
May Be Present

CAUTION
H₂S Poison Gas
May Be Present

FLARE IGNITER
Flare stack with
Electronic Igniter

Pipe Racks

4" Panic line 150ft from wellbore
Mud/Gas Separator

175 ft

Closed Loop
Equip

Mud Logger

Volume Tanks Process Tanks Shakers

Water Tank Trip Tank Choke

(Remotely
operated)

Rig

Floor

Draw works

Spool

BOP Skid

HPU/Accumulator

175 ft

★ Primary Briefing Area

Potable
Water

Co Man Housing

Directional Housing

Frac Tank & Water Storage

Mud Storage

Diesel Tank

Generator

Generator

Generator

VFD House

Parts House

Mud Pump

Mud Pump

210 ft

H₂S Sensor Beneath
Rig Floor

Location Dimensions
470 ft x 350 ft
Scale: 1 inch = 50 ft

● Wellhead Location

Crew Housing

Change House

Rig Manager House

- | | | | |
|--|--|--|---|
| | Wind Indicators | | Self-Contained Breathing Apparatus (SCBA) |
| | Location Entrance Warning Sign used to control location in event of an emergency | | H ₂ S Sensors Located Around the Rig |
| | Safe Briefing Area | | H ₂ S Monitor Control/Alarm box |



CAUTION
H₂S Poison Gas
May Be Present

CAUTION
H₂S Poison Gas
May Be Present



**Devon Energy Center
333 West Sheridan Avenue
Oklahoma City, Oklahoma 73102-5015**

Hydrogen Sulfide (H₂S) Contingency Plan

For



Strawberry "7" Fed Com 8H

**Sec-7, T-19S R-31E
2005' FNL & 340' FEL,
LAT. = 32.6766591°N (NAD83)
LONG = 103.9012136°W**

Eddy County NM

Strawberry "7" Fed Com 8H

This is an open drilling site. H₂S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H₂S, including warning signs, wind indicators and H₂S monitor.

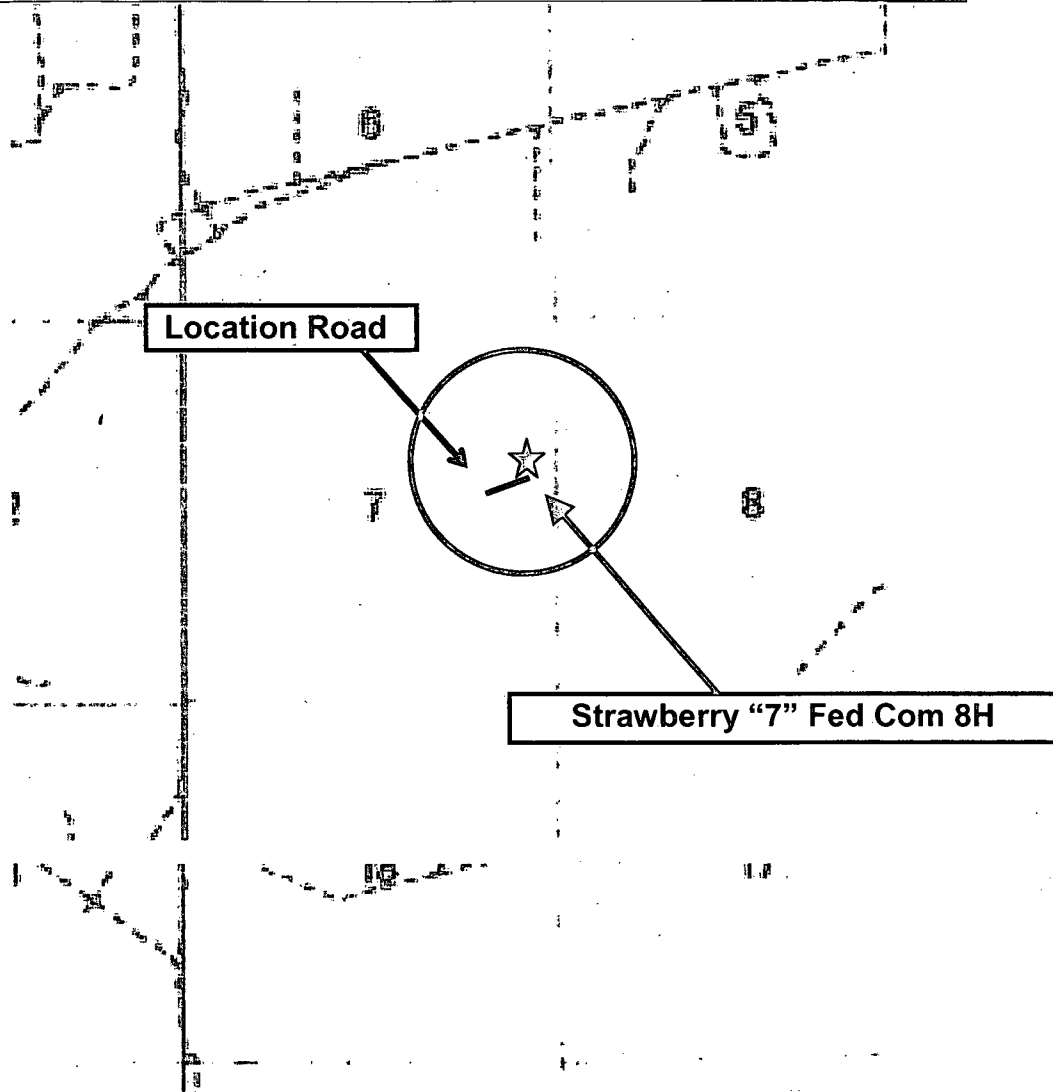

Assumed 100 ppm H₂S concentration shall trigger activation of this plan.
3000' (Radius of Exposure)

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road, West then Northwest on lease road. Crews should then block entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'
100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- **Isolate the area and prevent entry by other persons into the 100 ppm ROE.**
- **Evacuate any public places encompassed by the 100 ppm ROE.**
- **Be equipped with H₂S monitors and air packs in order to control the release.**
- **Use the "buddy system" to ensure no injuries occur during the response**
- **Take precautions to avoid personal injury during this operation.**
- **Contact operator and/or local officials to aid in operation. See list of phone numbers attached.**
- **Have received training in the**
 - **Detection of H₂S, and**
 - **Measures for protection against the gas,**
 - **Equipment used for protection and emergency response.**

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H₂S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Hydrogen Sulfide Drilling Operation Plan

I. HYDROGEN SULFIDE (H₂S) TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H₂S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H₂S metal components. If high tensile tubular are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H₂S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan.

II. HYDROGEN SULFIDE TRAINING

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H₂S.

1. Well Control Equipment

- A. Flare line
- B. Choke manifold
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.

2. Protective equipment for essential personnel:

- A. 30-minute SCBA units located in the doghouse and at briefing areas, as indicated on well site diagram. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

3. H₂S detection and monitoring equipment:

- A. Portable H₂S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H₂S levels of 20 PPM are reached. These units are usually capable of detecting SO₂, which is a byproduct of burning H₂S.

4. Visual warning systems:

- A. Wind direction indicators as shown on well site diagram

- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

5. Mud program:

- A. The mud program has been designed to minimize the volume of H₂S circulated to surface. Proper mud weight, safe drilling practices and the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.

6. Metallurgy:

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H₂S trim.
- B. All elastomers used for packing and seals shall be H₂S trim.

7. Communication:

- A. Radio communications in company vehicles including cellular telephones and 2-way radio
- B. Land line (telephone) communications at Office

8. Well testing:

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H₂S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

Devon Energy Corp. Company Call List

<u>Artesia (575)</u>	<u>Cellular</u>	<u>Office</u>	<u>Home</u>
Foreman – Robert Bell.....	748-7448	748-0178	746-2991
Asst. Foreman –Tommy Polly.....	748-5290.....	748-0165.....	748-2846
Don Mayberry.....	748-5235	748-0164	746-4945
Montral Walker	390-5182	748-0193	(936) 414-6246
Engineer – Marcos Ortiz.....	(405) 317-0666....	(405) 552-8152.....	(405) 381-4350

Agency Call List

<u>Lea</u>	<u>Hobbs</u>
<u>County</u>	Lea County Communication Authority
<u>(575)</u>	State Police
	City Police
	Sheriff's Office
	Ambulance
	Fire Department
	LEPC (Local Emergency Planning Committee).....
	NMOCD.....
	US Bureau of Land Management

<u>Eddy</u>	<u>Carlsbad</u>
<u>County</u>	State Police
<u>(575)</u>	City Police
	Sheriff's Office
	Ambulance
	Fire Department
	LEPC (Local Emergency Planning Committee).....
	US Bureau of Land Management
	NM Emergency Response Commission (Santa Fe)
	24 HR
	National Emergency Response Center (Washington, DC)

Emergency Services

	Boots & Coots IWC
	Cudd Pressure Control.....
	Halliburton
	B. J. Services.....
<i>Give</i>	Native Air – Emergency Helicopter – Hobbs.....
<i>GPS</i>	Flight For Life - Lubbock, TX
<i>position:</i>	Aerocare - Lubbock, TX
	Med Flight Air Amb - Albuquerque, NM
	Lifeguard Air Med Svc. Albuquerque, NM


Prepared in conjunction with
Dave Small




devon

Proposed Interim Site Reclamation


Devon Energy Production Co.
Strawberry 7 Fed Com 8H
2005' FNL & 340' FEL
Sec. 7-T19S-R31E
Eddy County, NM



Proposed
Reclamation
Area



Scale: 1in = 60ft.

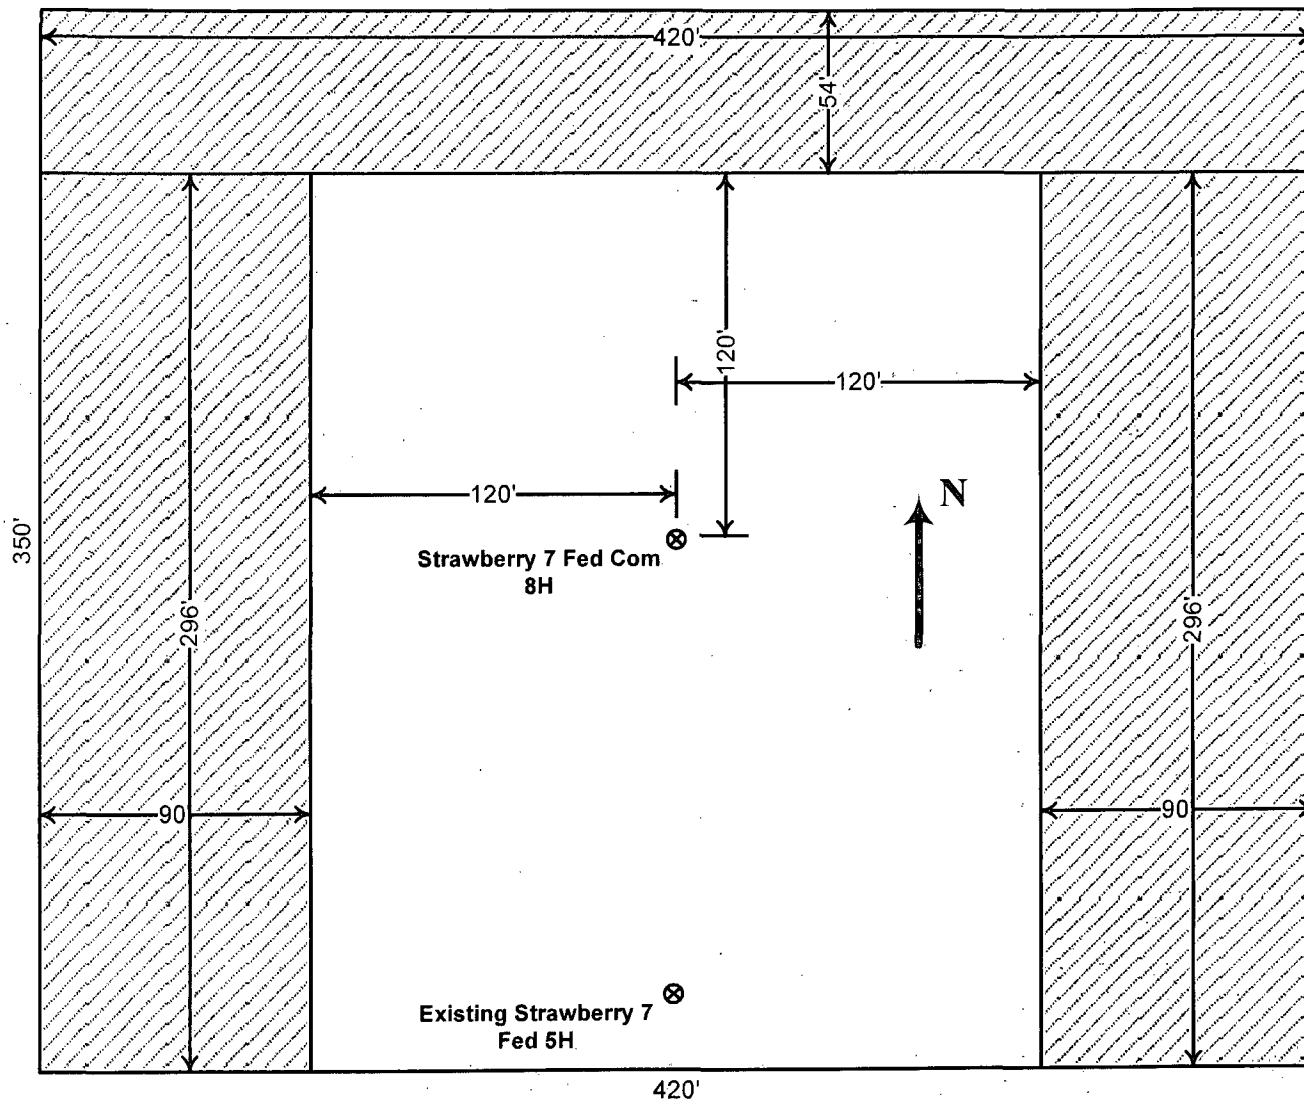

SURFACE USE PLAN
Devon Energy Production Company, LP
Strawberry 7 Fed Com 8H

Surface Location: 2005' FNL & 340' FEL, Unit H, Sec 7 T19S R31E, Eddy, NM
Bottom Hole Location: 1650' FNL & 340' FWL, Unit E, Sec 7 T19S R31E, Eddy, NM

1. Existing Roads:

- a. The well site and elevation plat for the proposed well are reflected on the well site layout; Form C-102. The well was staked by Madron Survors.
- b. All roads into the location are depicted on Exhibit 3. Existing roads will be maintained and kept the same or better condition than before operations began.
- c. Directions to Location: From CR 222 Shugart & CR 248 Lusk Plant go south/southwest on CR 222, 4.6 miles, turn right on caliche road & go north 2.0 miles, turn left & go northwest 660' bend right & go north 0.3 miles bend right and go northeast 0.2 miles turn left & go north/northwest 1.17 miles, bend right & go northeast 730' to existing pad for Strawberry 7 Federal 5H & location is north 150'..

2. New or Reconstructed Access Roads:

- a. The well site layout, Form C-102 shows the existing County road. Approximately 150' of new access road will be constructed as follows.
- b. The maximum width of the road will be 14'. It will be crowned and made of 6" rolled and compacted caliche. Water will be deflected, as necessary, to avoid accumulation and prevent surface erosion.
- c. Surface material will be native caliche. This material will be obtained from a BLM approved pit nearest in proximity to the location. The average grade will be approximately 1%.
- d. No cattle guards, grates or fence cuts will be required. No turnouts are planned.

3. Location of Existing Wells:

One Mile Radius Plat shows all existing and proposed wells within a one-mile radius of the proposed location. See attached plat.

4. Location of Existing and/or Proposed Production Facilities:

- a. In the event the well is found productive, the Strawberry Federal 2H tank battery Sec 7 T19S R31E will be utilized and the necessary production equipment will be installed at the well site. See Diagram. 1320 FNL 1750 FEL

If necessary, the well will be operated by means of an electric prime mover. Electric power poles will be set along side of the access road. If said power poles are needed, a plat and a sundry notice will be filed with your office.

- b. All flow lines will adhere to API standards. *a sundry notice will be filed*
- c. If the well is productive, rehabilitation plans are as follows:
 - i. The original topsoil from the well site will be returned to the location. The drill site will then be contoured as close as possible to the original state.

5. Location and Types of Water Supply:

This location will be drilled using a combination of water mud systems (outlined in the Drilling Program). The water will be obtained from commercial water stations in the area and hauled to location by transport truck using the existing and proposed roads shown in the C-102. On occasion, water will be obtained from a pre-existing water well, running a pump directly to the drill rig. In these cases where a poly pipeline is used to transport water for drilling purposes, proper authorizations will be secured. If a poly pipeline is used, the size, distance, and map showing route will be provided to the BLM via sundry notice.

6. Construction Materials:

The caliche utilized for the drilling pad and proposed access road will be from minerals that are located onsite or will be used onsite. If minerals are not available onsite, then an established mineral pit will be used to build the location and stem road.

7. Methods of Handling Waste Material:

- a. Drill cuttings will be disposed.
- b. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier, including broken sacks, will pick up salts remaining after completion of well.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Remaining drilling fluids will be sent to a closed loop system. Water produced during completion will be put into a closed loop system. Oil and condensate produced will be put into a storage tank and sold.
- f. Disposal of fluids to be transported by the following companies:
 - i. American Production Service Inc, Odessa TX
 - ii. Gandy Corporation, Lovington NM
 - iii. I & W Inc, Loco Hill NM
 - iv. Jims Water Service of Co Inc, Denver CO

8. Ancillary Facilities: No campsite or other facilities will be constructed as a result of this well.

9. Well Site Layout

- a. Exhibit D shows the proposed well site layout with dimensions of the pad layout.
- b. This exhibit indicated proposed location of sump pits and living facilities.
- c. Mud pits in the active circulating system will be steel pits.
- d. A closed loop system will be utilized.
- e. If a pit or closed loop system is utilized, Devon will comply with the NMOCD requirements 19.15.17 and submit form C-144 to the appropriate NMOCD District Office. A copy to be provided to the BLM.

10. Plans for Surface Reclamation

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original top soil will again be returned to the pad and contoured, as close as possible, to the original topography.
- b. The location and road will be rehabilitated as recommended by the BLM.
- c. If the well is deemed commercially productive, caliche from areas of the pad site not required for operations will be reclaimed. The original top soil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography.
- d. All disturbed areas not needed for active support of production operations will undergo interim reclamation. The portions of the cleared well site not needed for operational and safety purposes will be recontoured to a final or intermediate contour that blends with the surrounding topography as much as possible. Topsoil will be respread over areas not needed for all-weather operations.

11. Surface Ownership

- a. The surface is owned by the US Government and is administered by the Bureau of Land Management. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas.
- b. The proposed road routes and the surface location will be restored as directed by the BLM.

12. Other Information:

- a. The area surrounding the well site is grassland. The topsoil is very sandy in nature. The vegetation is moderately sparse with native prairie grass, sage bush, yucca and miscellaneous weeds. No wildlife was observed but it is likely that deer, rabbits, coyotes, and rodents traverse the area.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within 2 miles of location.
- d. A Cultural Resources Examination will be completed by the Permian Basin Cultural Resource Fund in lieu of being required to conduct a Class III Survey for cultural resources associated with their project within the BLM office in Carlsbad, New Mexico.

13. Bond Coverage:

Bond Coverage is Nationwide; Bond # is CO-1104

Operators Representative:

The Devon Energy Production Company, L.P. representatives responsible for ensuring compliance of the surface use plan are listed below.

Justin Lazzari - Operations Engineer Advisor
Devon Energy Production Company, L.P.
333 W. Sheridan
Oklahoma City, OK 73102-8260
(405) 228-8466 (office)
(405) 464-9261 (Cellular)

Jerry Mathews - Superintendent
Devon Energy Production Company, L.P.
Post Office Box 250
Artesia, NM 88211-0250
(575) 748-0161 (office)
(575) 748-5234 (home)

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Prod Co
LEASE NO.:	LC069464A
WELL NAME & NO.:	8H Strawberry 7 Fed Com
SURFACE HOLE FOOTAGE:	2005' FNL & 340' FEL
BOTTOM HOLE FOOTAGE:	1650' FNL & 340' FWL
LOCATION:	Section 7, T.19 S., R.31 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Communitization Agreement
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - Secretary's potash
 - Logging requirements
 - H2S – Onshore Order 6 requirements
 - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Communitization Agreement

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. In addition, the well sign shall include the surface and bottom hole lease numbers. If the Communitization Agreement number is known, it shall also be on the sign. If not, it shall be placed on the sign when the sign is replaced.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil in a low profile manner in order to prevent wind/water erosion of the topsoil. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be used for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

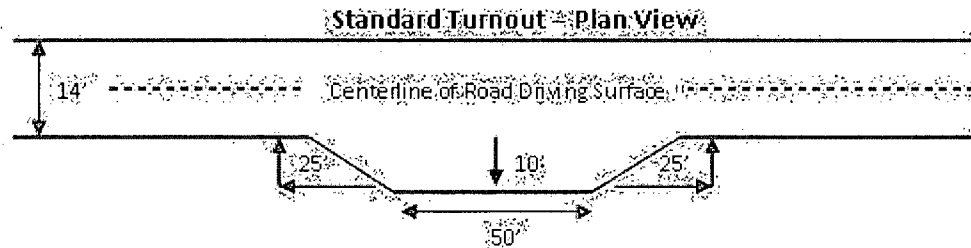


Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill out sloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

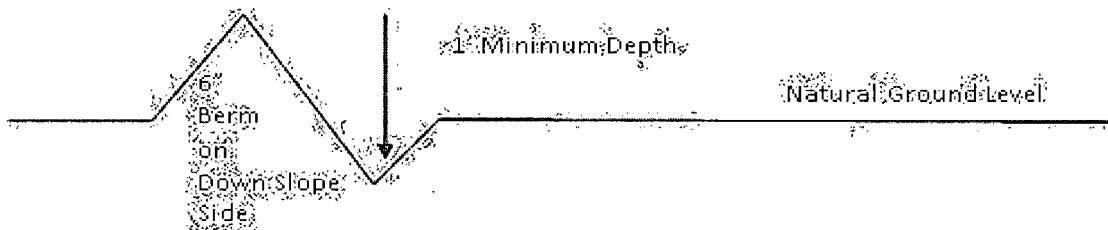

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Culvert Installations

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

Fence Requirement


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

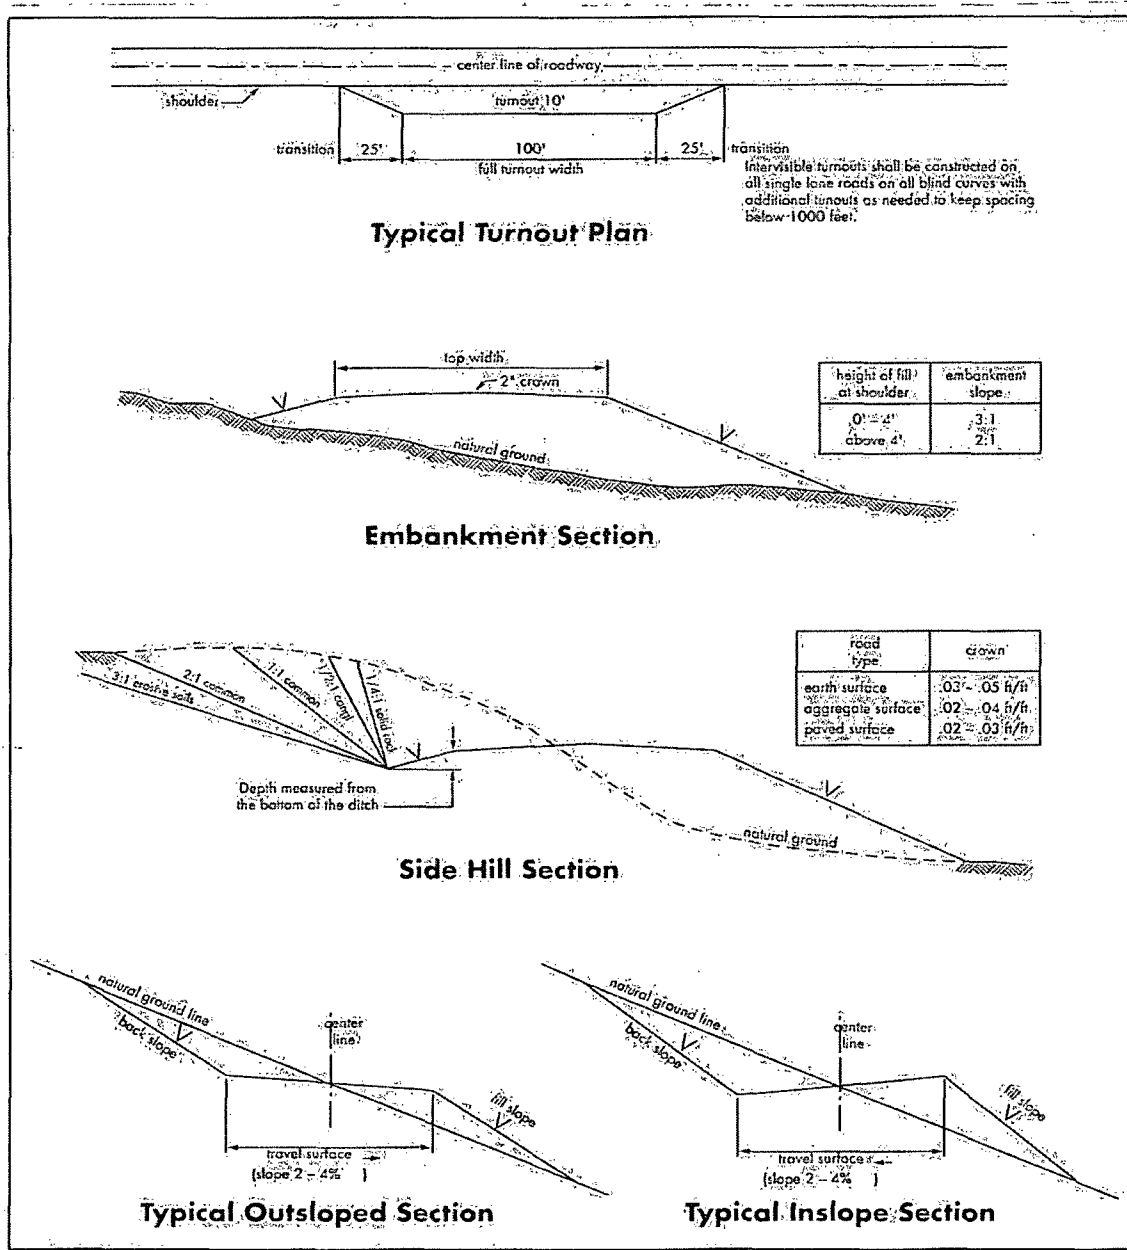

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Hydrogen Sulfide (H₂S) monitors shall be installed prior to drilling out the surface shoe. If H₂S is encountered in quantities greater than 10 PPM the well shall be shut in and H₂S equipment shall be installed and flare line must be extended pursuant to Onshore Oil and Gas Order #6. After detection, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#).

Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Secretary's Potash

Possible water and brine flows in the Artesia and Salado Groups.

Possible lost circulation in the Artesia Group, which includes the Capitan Reef.

1. The **13-3/8** inch surface casing shall be set at approximately **565** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:
 - ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to potash.

The pilot hole plugging procedure is approved as written

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

Operator is to submit sundry if DV tool depth varies by more than 100' from approved depth.

- a. First stage to DV tool, cement shall:
 - ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office before proceeding with second stage cement job. Operator shall have plans as to how they will achieve circulation on the next stage.
 - b. Second stage above DV tool, cement shall:
 - ☒ Cement should tie-back at least **500** feet into previous casing string. Operator shall provide method of verification.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor..** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M)** psi.
 - a. **For surface casing only:** If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.

4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
 - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

CRW 061113

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Containment Structures

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, Shale Green from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

Not applied for in Application.

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed: Pounds of seed x percent purity x percent germination = pounds pure live seed