

**UNORTHODOX  
LOCATION**

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

**NM OIL CONSERVATION  
ARTESIA DISTRICT**

OCD Art 03 2014

**RECEIVED**

FORM APPROVED  
OMB No. 1004-0137  
Expires October 31, 2014


14-746  
JES  
10-9-14

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. BHL: NMNM77018
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator Devon Energy Production Company, L.P.		7. If Unit or CA Agreement, Name and No.
3a. Address 333 W. Sheridan Oklahoma City, OK 73102-5010	3b. Phone No. (include area code) 405-228-7203	8. Lease Name and Well No. Harroun Trust 6 Fed Com 1H
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 10 FNL & 890 FEL, Lot 1 PP: 10 FNL & 1345 FEL At proposed prod. zone 330 FSL & 1980 FEL, O		9. API Well No. 30-015-42714
14. Distance in miles and direction from nearest town or post office* Approx. 5.5 miles NE of Malaga, NM		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 6 T24S R29E
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) See attached map	16. No. of acres in lease NMNM77018 40 ac	12. County or Parish Eddy
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. See attached map	19. Proposed Depth 6420' TVD 11274' MD	13. State NM
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 2956.3 GL	22. Approximate date work will start* 08/01/2014	17. Spacing Unit dedicated to this well 159.95 ac
		20. BLM/BIA Bond No. on file CO-1104; NBM-000801
		23. Estimated duration 45 Days

**24. Attachments**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM.             |

25. Signature 	Name (Printed/Typed) Trina C. Couch	Date 04/22/2014
Title Regulatory Analyst		

Approved by (Signature) <b>Steve Caffey</b>	Name (Printed/Typed) CARLSBAD FIELD OFFICE	Date SEP 30 2014
Title FIELD MANAGER		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

**APPROVAL FOR TWO YEARS**

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

**Carlsbad Controlled Water Basin**

Approval Subject to General Requirements  
& Special Stipulations Attached

**SEE ATTACHED FOR  
CONDITIONS OF APPROVAL**

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
311 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number <b>30-015-42714</b>		<sup>2</sup> Pool Code 42940	<sup>3</sup> Pool Name <b>Malaga</b> Malaga, Delaware
<sup>4</sup> Property Code <b>313784</b>	<sup>5</sup> Property Name <b>HARROUN TRUST 6 FED COM</b>		<sup>6</sup> Well Number <b>1H</b>
<sup>7</sup> OGRID No. <b>6137</b>	<sup>8</sup> Operator Name <b>DEVON ENERGY PRODUCTION COMPANY, L.P.</b>		<sup>9</sup> Elevation <b>2956.3</b>

<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
<b>1</b>	<b>6</b>	<b>24 S</b>	<b>29 E</b>		<b>10</b>	<b>NORTH</b>	<b>890</b>	<b>EAST</b>	<b>EDDY</b>

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn.	Feet from the	North/South line	Feet from the	East/West line	County
<b>O</b>	<b>6</b>	<b>24 S</b>	<b>29 E</b>		<b>330</b>	<b>SOUTH</b>	<b>1980</b>	<b>EAST</b>	<b>EDDY</b>

<sup>12</sup> Dedicated Acres 159.95 ac	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.
--	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>S89°35'46"E 2641.66 FT</p> <p>NW CORNER SEC. 6 LAT. = 32.2543216°N LONG. = 104.0323498°W</p> <p>NMSP EAST (FT) N = 456385.89 E = 634380.54</p> <p>LOT 4</p>		<p>S89°35'48"E 2649.74 FT</p> <p>N O CORNER SEC. 6 LAT. = 32.2542498°N LONG. = 104.0323806°W</p> <p>NMSP EAST (FT) N = 456387.27 E = 637021.56</p> <p>LOT 3</p>		<p>S89°35'48"E 2649.74 FT</p> <p>NE CORNER SEC. 6 LAT. = 32.2541772°N LONG. = 104.0152375°W</p> <p>NMSP EAST (FT) N = 456348.63 E = 639570.65</p> <p>LOT 2</p>		<p>S89°35'48"E 2649.74 FT</p> <p>SE CORNER SEC. 6 LAT. = 32.2541772°N LONG. = 104.0152375°W</p> <p>NMSP EAST (FT) N = 456348.63 E = 639570.65</p> <p>LOT 1</p>	
<p>W O CORNER SEC. 6 LAT. = 32.2469930°N LONG. = 104.0323287°W</p> <p>NMSP EAST (FT) N = 453719.89 E = 634394.53</p> <p>LOT 5</p>		<p>NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1983 (NAD83). LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD83). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES MODIFIED TO THE SURFACE.</p> <p>LOT 6</p>		<p>HARROUN TRUST "6" FED COM #1H LAT. = 32.2541741°N (NAD83) LONG. = 104.0181159°W</p> <p>NMSP EAST (FT) N = 456344.87 E = 638780.84</p> <p>LOT 7</p>		<p>SE CORNER SEC. 6 LAT. = 32.2395725°N LONG. = 104.0151888°W</p> <p>NMSP EAST (FT) N = 451035.71 E = 639701.43</p>	
<p>SW CORNER SEC. 6 LAT. = 32.2396647°N LONG. = 104.0323069°W</p> <p>NMSP EAST (FT) N = 451053.97 E = 634408.74</p>		<p>S O CORNER SEC. 6 LAT. = 32.2396110°N LONG. = 104.0237671°W</p> <p>NMSP EAST (FT) N = 451044.84 E = 637049.13</p>		<p>BOTTOM OF HOLE LAT. = 32.2405142°N LONG. = 104.0211946°W</p> <p>NMSP EAST (FT) N = 451372.46 E = 637719.87</p>		<p>Project Area</p> <p>Producing Area</p>	

<sup>17</sup> OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

*Trina C. Couch* 6/23/14  
Signature Date  
Trina C. Couch, Regulatory Analyst  
Printed Name  
trina.couch@dmv.com  
E-mail Address

<sup>18</sup> SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 10, 2014  
Date of Survey  
FILMON F. JARAMILLO  
Signature and Seal of Professional Surveyor  
Certificate Number: FILMON F. JARAMILLO, PLS 12797  
SURVEY NO. 2844

# SITE MAP



127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

### DIRECTIONS TO LOCATION

**DIRECTIONS TO LOCATION**  
BEGINNING AT THE INTERSECTION OF US 285 AND CR 720, GO EAST ON CR 720 0.8 MILES TO HARROUN ROAD ON LEFT. GO NORTH-NORTHEAST ON HARROUN ROAD FOR 3.1 MILES TO FORK IN ROAD. TAKE LEFT CONTINUE NORTH ON HARROUN ROAD 0.5 MILES TO A CALICHE LEASE ROAD ON RIGHT, GO RIGHT TO EXISTING PAD OF HARROUN TRUST #5H. SITE IS SOUTH OF PAD.

DEVON ENERGY PRODUCTION COMPANY, L.P.  
HARROUN TRUST "6" FED COM #1H  
LOCATED 10 FT. FROM THE NORTH LINE  
AND 890 FT. FROM THE EAST LINE OF  
SECTION 6, TOWNSHIP 24 SOUTH,  
RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO


*JUNE 5, 2014*

SURVEY NO. 2844A

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO  
(575) 234-3341

301 SOUTH CANAL  
(575) 234-3341

SECTION 6, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO  
LOCATION VERIFICATION MAP

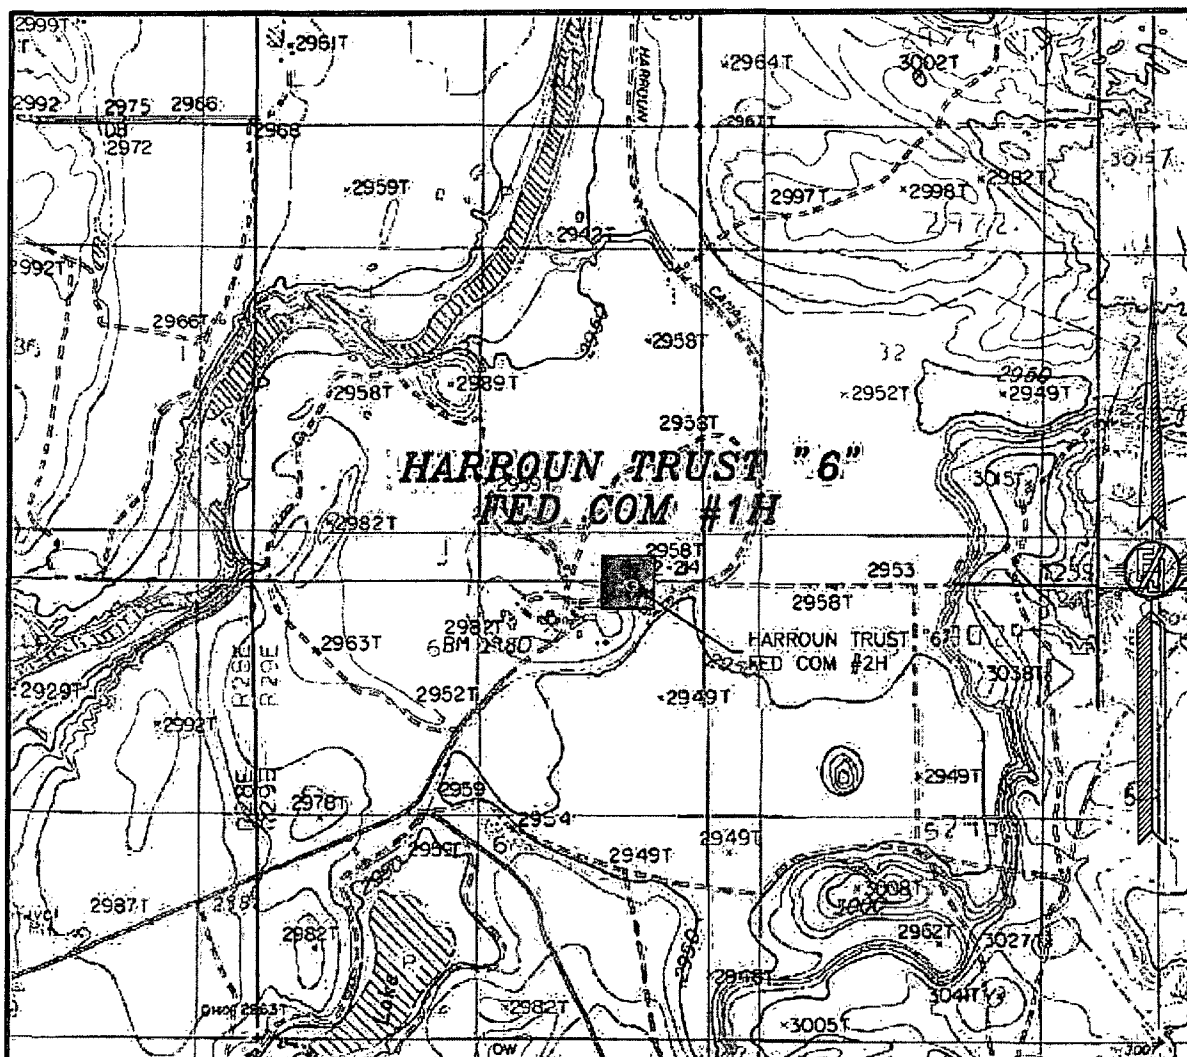

USGS QUAD MAP:  
MALAGA


NOT TO SCALE

DEVON ENERGY PRODUCTION COMPANY, L.P.  
**HARROUN TRUST "6" FED COM #1H**  
LOCATED 10 FT. FROM THE NORTH LINE  
AND 890 FT. FROM THE EAST LINE OF  
SECTION 6, TOWNSHIP 24 SOUTH,  
RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO

APRIL 10, 2014

MADRON SURVEYING, INC. 301 SOUTH CANAL, CARLSBAD, NEW MEXICO  
(575) 234-3341 SURVEY NO. 2844

SECTION 6, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO  
VICINITY MAP

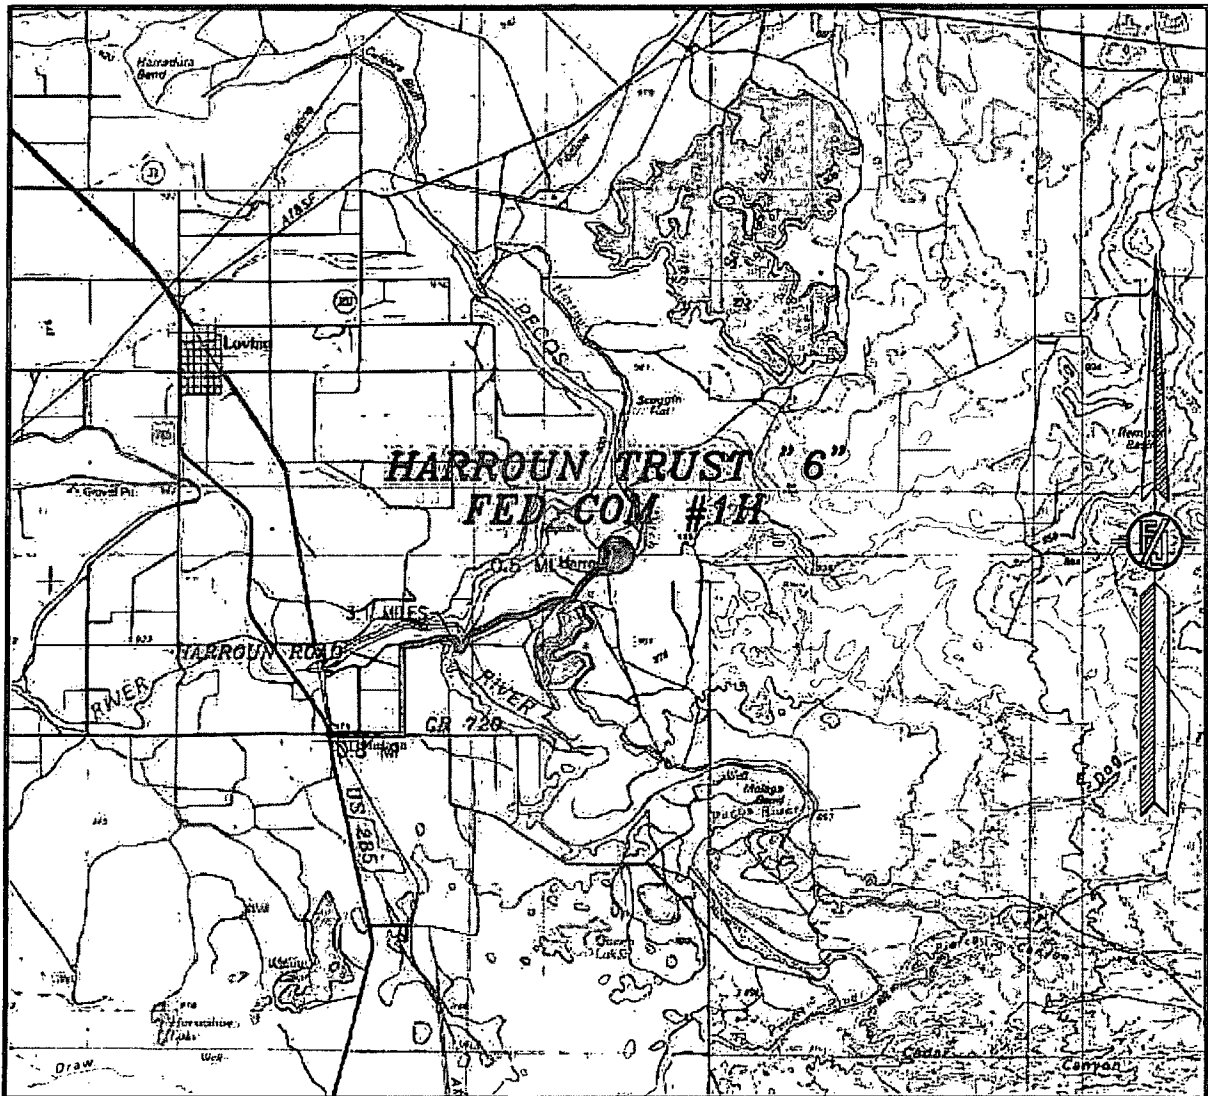

DISTANCES IN MILES

NOT TO SCALE

DEVON ENERGY PRODUCTION COMPANY, L.P.  
**HARROUN TRUST "6" FED COM #1H**  
LOCATED 10 FT. FROM THE NORTH LINE  
AND 890 FT. FROM THE EAST LINE OF  
SECTION 6, TOWNSHIP 24 SOUTH,  
RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO

**DIRECTIONS TO LOCATION**

BEGINNING AT THE INTERSECTION OF US 285 AND CR 720, GO EAST  
ON CR 720 0.8 MILES TO HARROUN ROAD ON LEFT; GO  
NORTH-NORTHEAST ON HARROUN ROAD FOR 3.1 MILES TO FORK IN  
ROAD. TAKE LEFT CONTINUE NORTH ON HARROUN ROAD 0.5 MILES TO  
A CALICHE LEASE ROAD ON RIGHT, GO RIGHT TO EXISTING PAD OF  
HARROUN TRUST #5H, SITE IS SOUTH OF PAD.

APRIL 10, 2014

SURVEY NO. 2844

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

SECTION 6, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO  
AERIAL PHOTO



NOT TO SCALE  
AERIAL PHOTO:  
GOOGLE EARTH  
APRIL 2013

DEVON ENERGY PRODUCTION COMPANY, L.P.

**HARROUN TRUST "6" FED COM #1H**


LOCATED 10 FT. FROM THE NORTH LINE  
AND 890 FT. FROM THE EAST LINE OF  
SECTION 6, TOWNSHIP 24 SOUTH,  
RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO

APRIL 10, 2014

SURVEY NO. 2844

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

SECTION 6, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO  
ACCESS AERIAL ROUTE MAP

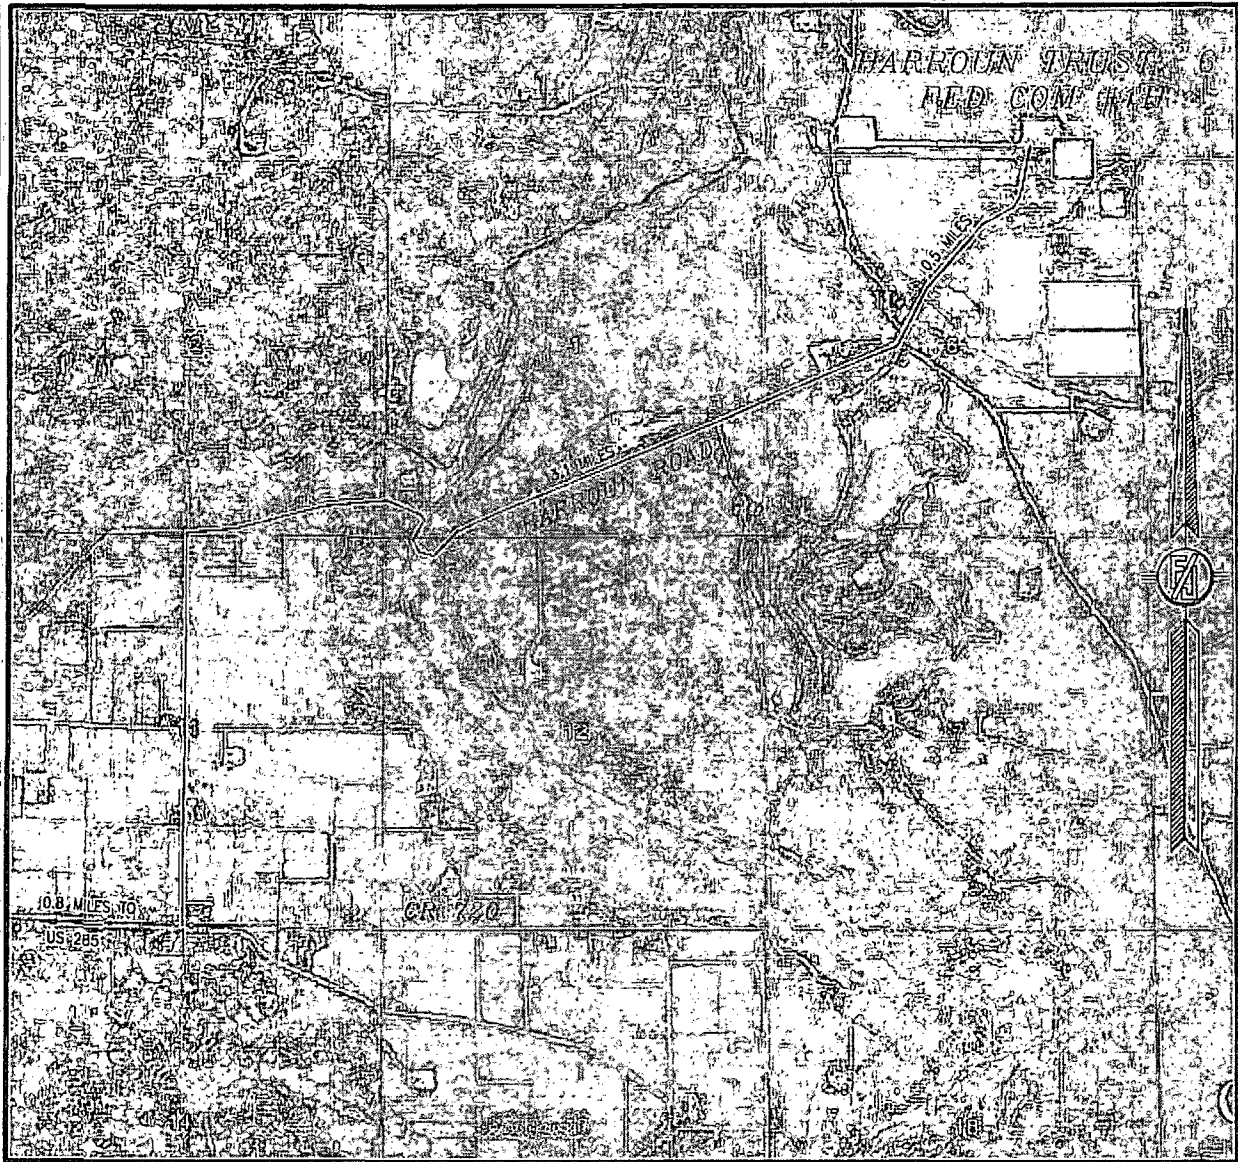


NOT TO SCALE  
AERIAL PHOTO:  
GOOGLE EARTH  
APRIL 2013

DEVON ENERGY PRODUCTION COMPANY, L.P.  
**HARROUN TRUST "6" FED COM #1H**  
LOCATED 10 FT. FROM THE NORTH LINE  
AND 890 FT. FROM THE EAST LINE OF  
SECTION 6, TOWNSHIP 24 SOUTH,  
RANGE 29 EAST, N.M.P.M.  
EDDY COUNTY, STATE OF NEW MEXICO

APRIL 10, 2014

SURVEY NO. 2844

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

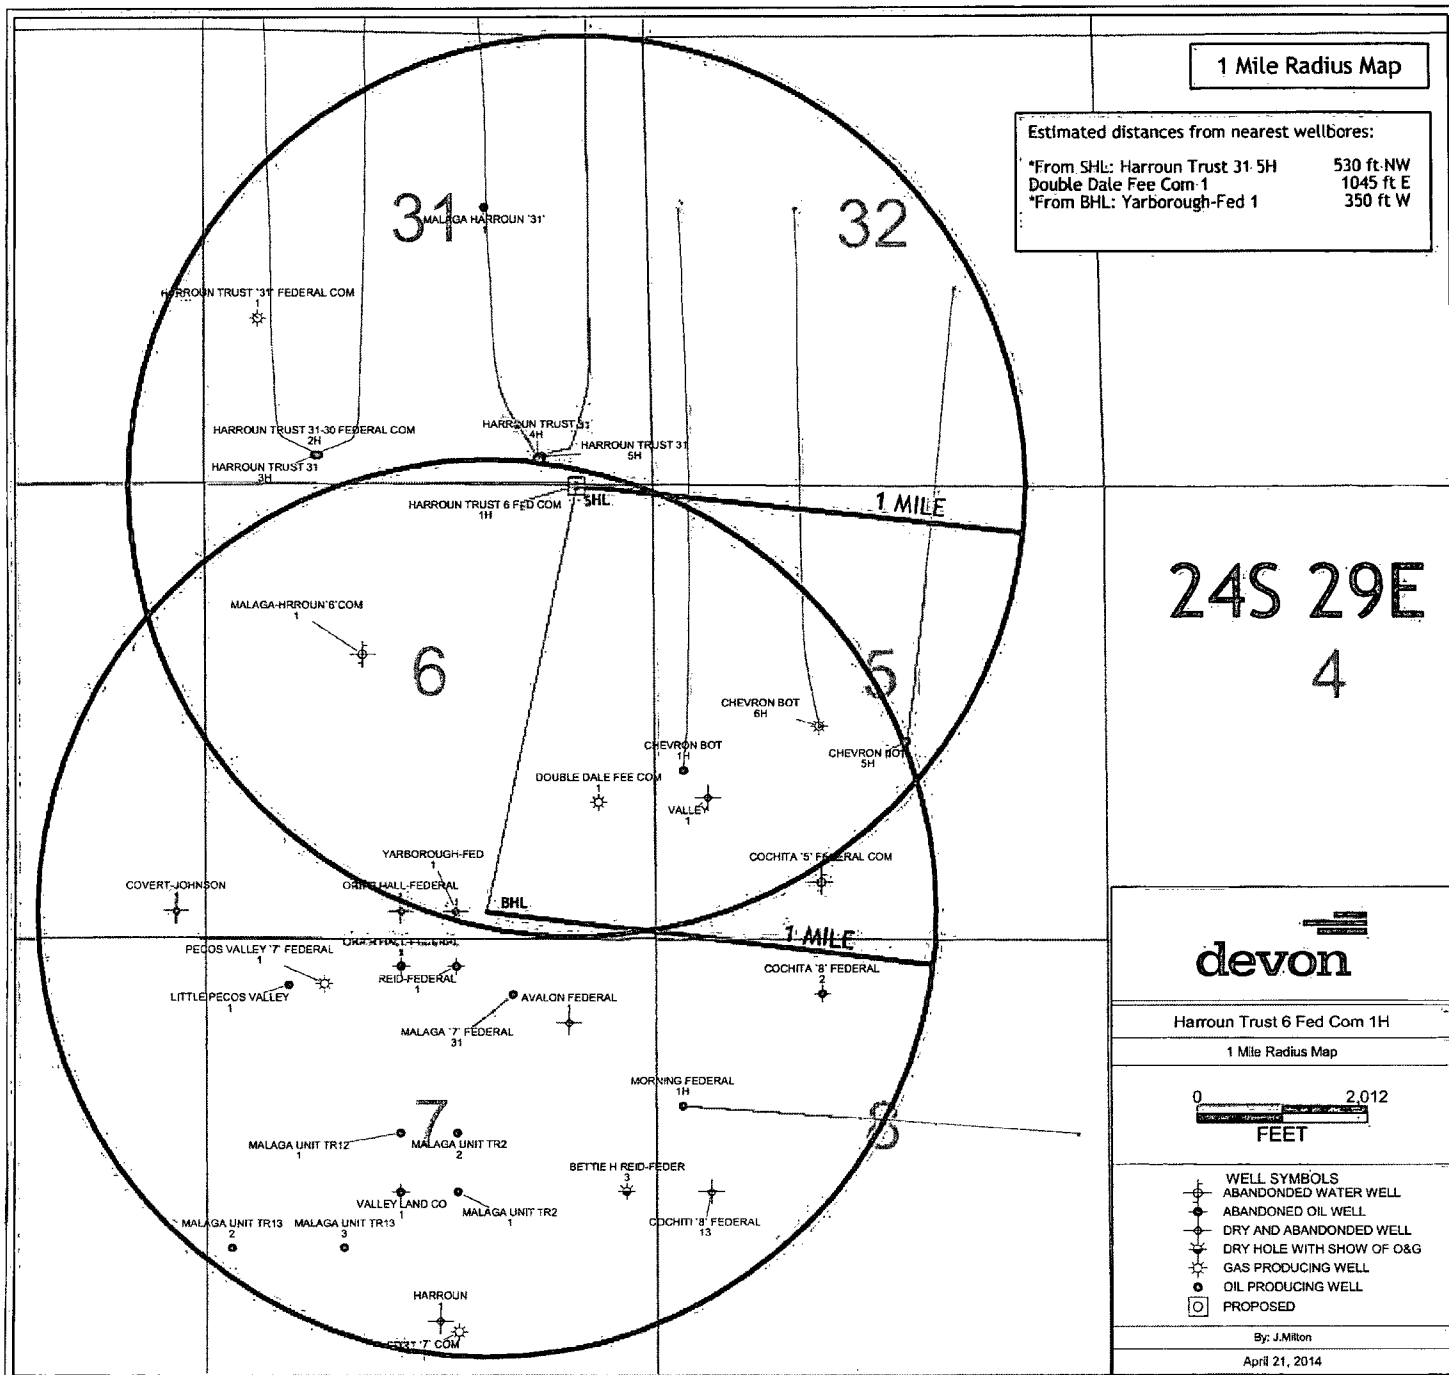

**DRILLING PROGRAM**

Devon Energy Production Company, L.P.  
**Harroun Trust 6 Fed Com 1H**

**1. Geologic Name of Surface Formation: Quaternary**

**2. Estimated Tops of Geological Markers & Depths of Anticipated FW, Oil, or Gas:**

a. Fresh Water	40'	
b. Rustler	202'	Barren
c. Top of Salt	544'	Barren
d. Base of Salt	2533'	Barren
e. Delaware	2783'	Oil / Gas
f. Bell Canyon	2816'	Oil / Gas
g. Cherry Canyon	3662'	Oil / Gas
h. Brushy Canyon	4930'	Oil / Gas
Total Depths	6420' TVD	11274' MD

### 3. Pressure Control Equipment:

A 3M 13-5/8" BOP system (Double Ram and Annular preventer) will be installed and tested prior to drilling out the surface casing shoe. The BOP system used to drill the intermediate hole will be tested per BLM Onshore Oil and Gas Order 2.

A 3M 13-5/8" BOP system (Double Ram and Annular preventer) will be installed and tested prior to drilling out the intermediate casing shoe. The BOP system used to drill the production hole will be tested per BLM Onshore Oil and Gas Order 2.

The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.

Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line); **if an H&P rig drills this well. Otherwise no flex line is needed.** The line will be kept as straight as possible with minimal turns.

See  
COA

### Auxiliary Well Control and Monitoring Equipment:

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.

#### 4. Casing Program:

See  
COA

Hole Size	Hole Interval	Casing OD	Casing Interval	Weight (lb/ft)	Collar	Grade	Collapse Design Factor	Burst Design Factor	Tension Design Factor
17-1/2"	0 - 500'	13-3/8"	0 - 500'	48	STC	H-40	3.44	7.74	22.54
12-1/4"	500-2790'	9-5/8"	0-2790'	36	LTC	J-55	1.39	2.43	4.51
8-3/4"	2790-11274'	5-1/2"	0-11274'	17	BTC	P-110	2.79	3.46	5.20

#### Casing Notes:

- All casing is new and API approved

**Maximum Lateral TVD: 6420'**

#### 5. Proposed mud Circulations System:

See  
COA

Depth	Mud Weight	Viscosity	Fluid Loss	Type System
0-500'	8.4-8.6	30-34	N/C	FW
500-2790'	10.0	28-32	N/C	Brine
2790-11274'	8.6-9.2	28-32	N/C	FW

The necessary mud products for weight addition and fluid loss control will be on location at all times. Visual mud monitoring equipment will be in place to detect volume changes indicating loss or gain of circulating fluid volume. If abnormal pressures are encountered, electronic/mechanical mud monitoring equipment will be installed.

## 6. Cementing Table:

String	Number of sx	Weight lbs/gal	Water Volume g/sx	Yield cf/sx	Stage; Lead/Tail	Slurry Description
13-3/8" Surface Casing Single Stage	550	14.8	6.36	1.34	Tail	Class C Cement + 1% BWOC Calcium Chloride + 64.1% Fresh Water
13-3/8" Surface Casing Two Stage Option	190	13.7	8.66	1.67	Tail	Class C Cement + 0.4% BWOC LAP-1 + 0.2% BWOC HR-601 + 0.2 lb/sk D-Air 5000 + 4% BWOC Bentonite + 69.3% Fresh Water
	DV Tool at 300ft					<i>removed per Spencer Stewart 9-26-14</i>
	250	13.7	8.66	1.67	Tail	Class C Cement + 0.4% BWOC LAP-1 + 0.2% BWOC HR-601 + 0.2 lb/sk D-Air 5000 + 4% BWOC Bentonite + 69.3% Fresh Water
9-5/8" Intermediate Casing Single Stage Option	640	12.9	9.82	1.85	Lead	(65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake + 70.9 % Fresh Water
	220	14.8	6.32	1.33	Tail	Class C Cement + 0.125 lbs/sack Poly-E-Flake + 63.5% Fresh Water
9-5/8" Intermediate Casing Two Stage Option	220	13.7	8.66	1.67	Tail	Class C Cement + 0.4% BWOC LAP-1 + 0.2% BWOC HR-601 + 0.2 lb/sk D-Air 5000 + 4% BWOC Bentonite + 69.3% Fresh Water
	DV Tool at 2160ft					
	450	12.9	9.82	1.85	Lead	(65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake + 70.9 % Fresh Water
	210	14.8	6.32	1.33	Tail	Class C Cement + 0.125 lbs/sack Poly-E-Flake + 63.5% Fresh Water
5-1/2" Production Casing	450	11	14.94	2.66	Lead	Tuned Light® Cement + 0.125 lb/sk Pol-E-Flake + 76.5% Fresh Water
	1360	14.5	5.31	1.20	Tail	(50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.25% bwoc CFR-3 + 0.1% bwoc HR-601 + 2% bwoc Bentonite + 58.8% Fresh Water

### TOC for all Strings:

Surface @ 0'  
 Intermediate @ 0'  
 Production @ 2290' *2250'*

**Notes:**

- Cement volumes Surface 100%, Intermediate 50%, Production based on at least 25% excess
- Actual cement volumes will be adjusted based on fluid caliper and/or caliper log data
- If severe loss circulation is encountered while drilling the surface and/or the intermediate wellbores, a DV tool will be installed a minimum of 50' below the previous casing shoe and of 200' above the current shoe. If the DV tool has to be moved, the cement volumes will be adjusted proportionately.

**7. Logging, Coring, and Testing Program:**

- a. Drill stem tests will be based on geological sample shows.
- b. If a drill stem test is anticipated, a procedure, equipment to be used, and safety measures will be provided via sundry notice to the BLM.
- c. Resistivity and porosity logs are planned below the intermediate casing point. Stated logs run will be named in the Completion Report and submitted to the BLM.
- d. No coring program is planned.
- e. Additional Testing will be initiated subsequent to setting the production casing. Specific intervals will be targeted based on log evaluation, geological sample shows, and drill stem tests.

**8. Potential Hazards:**


- a. No abnormal pressures or temperatures are expected. There is no known presence of H<sub>2</sub>S in this area, and none is anticipated to be encountered. If H<sub>2</sub>S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation being used to drill this well. Estimated BHP: 2889 psi, and estimated BHT: 120 degrees.
- See COA* b. Hydrogen Sulfide detection equipment will be in operation after drilling out the surface casing shoe until the production string is cemented. Breathing equipment will be on location upon drilling the surface casing shoe until total depth is reached.

**9. Anticipated Starting Date and Duration of Operations:**


- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 20 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

# devon


Harroun Trust 6 Fed Com 1H  
Eddy Co, NM




KB-2981  
GL-2956



VS (US ft)(Bearing:180.91° Scale:500USft/in)

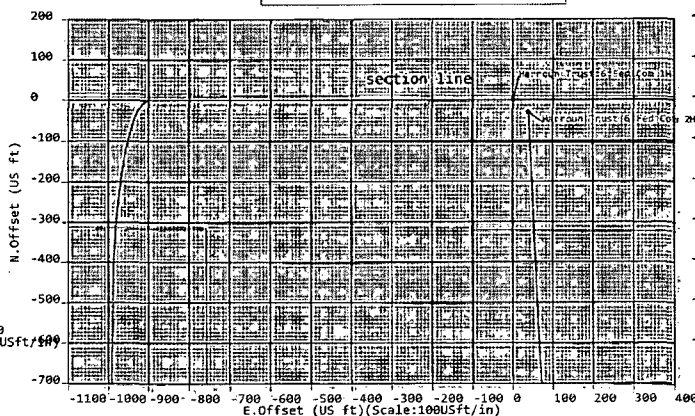

E. Offset (US ft)(Scale:100USft/in)

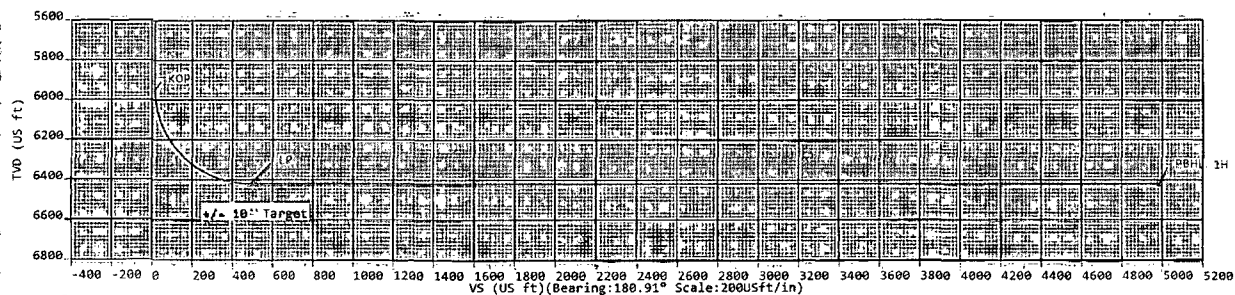

VS (US ft)(Bearing:180.91° Scale:200USft/in)

## Plan Data for Harroun Trust 6 Fed Com 1H

Plan Point Information:									
Deg	Inc	Az	TVD	+N/-S	+E/-W	North	East	VSec	DLS
(USft)	(°)	(°)	(USft)	(USft)	(USft)	(USft)	(USft)	(USft)	(DLSU)
0.00	0.00	0.00	0.00	0.00	0.00	456344.87	637780.84	0.00	0.00
600.00	0.00	0.00	500.00	0.00	0.00	456344.87	637780.84	0.00	0.00
1100.00	10.00	270.00	1097.47	0.00	-43.52	456344.87	637737.32	0.69	2.00
6028.49	10.00	270.00	5951.08	0.00	-89.35	456344.87	637781.49	14.28	0.00
6777.18	90.00	180.91	6420.00	-476.09	-89.59	455868.78	637791.25	491.75	12.00
11274.86	90.00	180.91	6420.00	-4972.41	-1060.97	451372.46	637719.87	4988.64	0.00

## Plan Data for Harroun Trust 6 Fed Com 1H

Target Set Information:									
Name: Harroun Trust 6 Fed Com 1H									
Position offsets from Slot centre									
Name	TVD	+N/-S	+E/-W	North	East	Shape	Comment		
(USft)	(USft)	(USft)	(USft)	(USft)	(USft)				
PBHL 1H	6420.00	-4972.41	-1060.97	451372.46	637719.87	Cuboid			


## Plan Data for Harroun Trust 6 Fed Com 1H

Slot: Harroun Trust 6 Fed Com 1H			
Position:			
Offset is from Site centre			
+N/-S: 0.00USft	Northring: 456344.87USft	Latitude: 32°15'15.0"	
+E/-W: 0.00USft	Easting: 638780.84USft	Longitude: -104°1'5.2"	
Elevation Above VRD: 2956.00USft			

Harroun Trust 6 Fed Com 1H  
Harroun Trust 6 Fed Com 2H



# Weatherford

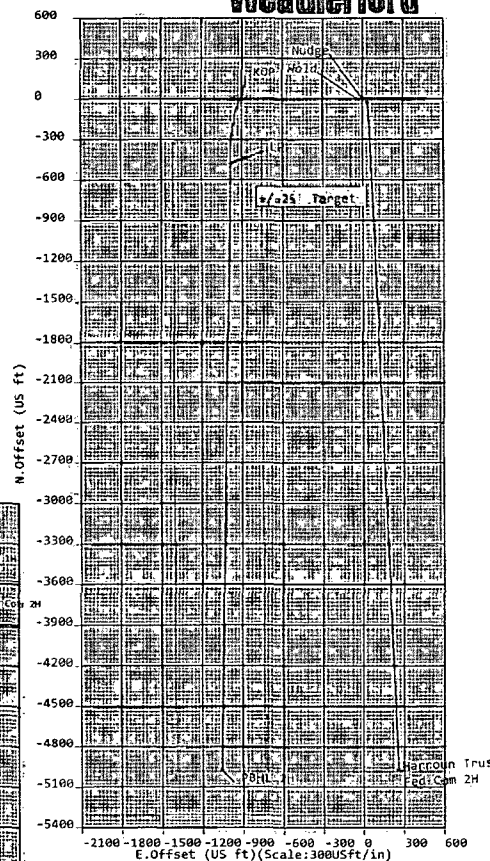

E. Offset (US ft)(Scale:300USft/in)

Sign Off: Russell Joyner

**5D Plan Report****Devon Energy**

**Field Name:** *Eddy Co, NM (Nad 83 NME)*  
**Site Name:** *Harroun Trust 6 Fed Com 1, 2H Pad*  
**Well Name:** *Harroun Trust 6 Fed Com 1H*  
**Plan:** *P1:V2*

22 April 2014



## Harroun Trust 6 Fed Com 1H

<b>Field Name</b>	<b>Map Units :</b> US ft			<b>Company Name :</b> Devon Energy		
Eddy Co, NM (Nad 83 NME)	<b>Vertical Reference Datum (VRD) :</b> Mean Sea Level					
	<b>Projected Coordinate System :</b> NAD83 / New Mexico East (ftUS)					
	<b>Comment :</b>					
<b>Site Name</b> Harroun Trust 6 Fed Com 1H Pad	<b>Units :</b> US ft	<b>North Reference :</b> Grid	<b>Convergence Angle :</b> 0.17			
	<b>Position</b>	<b>Northing :</b> 456344.87 US ft	<b>Latitude :</b> 32° 15' 15.03"			
		<b>Easting :</b> 638780.84 US ft	<b>Longitude :</b> -104° 1' 5.22"			
	<b>Elevation above Mean Sea Level:</b> 2956.00 US ft					
	<b>Comment :</b>					
<b>Slot Name</b> Harroun Trust 6 Fed Com 1H	<b>Position (Offsets relative to Site Centre)</b>					
	<b>+N / -S :</b> 0.00 US ft	<b>Northing :</b> 456344.87 US ft	<b>Latitude :</b> 32° 15' 15.03"			
	<b>+E / -W :</b> 0.00 US ft	<b>Easting :</b> 638780.84 US ft	<b>Longitude :</b> -104° 1' 5.22"			
	<b>Slot TVD Reference :</b> Ground Elevation					
	<b>Elevation above Mean Sea Level:</b> 2956.00 US ft					
	<b>Comment :</b>					
<b>Well Name</b> Harroun Trust 6 Fed Com 1H	<b>Type :</b> Main well		<b>UWI :</b>		<b>Plan :</b> P1-V2	
	<b>Rig Height Drill Floor :</b> 25.00 US ft		<b>Comment :</b>			
	<b>Relative to Mean Sea Level:</b> 2981.00 US ft					
	<b>Closure Distance :</b> 5084.34 US ft		<b>Closure Azimuth :</b> 192.045°			
	<b>Vertical Section (Position of Origin Relative to Slot )</b>					
	<b>+N / -S :</b> 0.00 US ft		<b>+E / -W :</b> 0.00 US ft		<b>Az :</b> 180.91°	
	<b>Magnetic Parameters</b>					
	<b>Model :</b> BGGM	<b>Field Strength :</b> 48275.2nT	<b>Dec :</b> 7.54°	<b>Dip :</b> 60.04°	<b>Date :</b> 05/Jul/2014	

### Target Set

**Name :** Harroun Trust 6 Fed Com 1H  
**Number of Targets :** 1

### Comment :

<b>Target Name:</b>	<b>Position (Relative to Slot centre)</b>		
PBHL 1H	<b>+N / -S :</b> -4972.41 US ft	<b>Northing :</b> 451372.46 US ft	<b>Latitude :</b> 32° 14' 25.85"
	<b>+E / -W :</b> -1060.97 US ft	<b>Easting :</b> 637719.87 US ft	<b>Longitude :</b> -104° 1' 17.74"
<b>Shape:</b>	<b>TVD (Drill Floor) :</b> 6420.00 US ft		
Cuboid	<b>Orientation Azimuth :</b> 0.00°		<b>Inclination :</b> 0.00°
	<b>Dimensions Length :</b> 20.00 US ft	<b>Breadth :</b> 20.00 US ft	<b>Height :</b> 20.00 US ft

Well path created using minimum curvature.

## SD Plan Report

Salient Points (Relative to Slot centre, TVD relative to Drill Floor)											Comment
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	DLS (°/100 US ft)	VS (US ft)	B. Rate (°/100 US ft)	T. Rate (°/100 US ft)	T. Face (°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	-0.00	0.00	0.00	0.00	
600.00	0.00	0.00	600.00	0.00	0.00	0.00	-0.00	0.00	0.00	0.00	Nudge
1100.00	10.00	270.00	1097.47	0.00	-43.52	2.00	0.69	2.00	0.00	270.00	Hold
6028.49	10.00	270.00	5951.08	0.00	-899.35	0.00	14.28	0.00	0.00	0.00	KOP
6777.18	90.00	180.91	6420.00	-476.09	-989.59	12.00	491.75	10.69	-11.90	270.90	LP
11274.06	90.00	180.91	6420.00	-4972.41	-1060.97	0.00	4988.64	0.00	0.00	0.00	PBHL 1H

Interpolated Points (Relative to Slot centre, TVD relative to Drill Floor)											Comment
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N. Offset (US ft)	E. Offset (US ft)	VS (US ft)	DLS (°/100 US ft)	Northing (US ft)	Easting (US ft)		
0.00	0.00	0.00	0.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
100.00	0.00	0.00	100.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
200.00	0.00	0.00	200.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
300.00	0.00	0.00	300.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
400.00	0.00	0.00	400.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
500.00	0.00	0.00	500.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		
600.00	0.00	0.00	600.00	0.00	0.00	-0.00	0.00	456344.87	638780.84		Nudge
700.00	2.00	270.00	699.98	0.00	-1.75	0.03	2.00	456344.87	638779.09		
800.00	4.00	270.00	799.84	0.00	-6.98	0.11	2.00	456344.87	638773.86		
900.00	6.00	270.00	899.45	0.00	-15.69	0.25	2.00	456344.87	638765.15		
1000.00	8.00	270.00	998.70	0.00	-27.88	0.44	2.00	456344.87	638752.96		
1100.00	10.00	270.00	1097.47	0.00	-43.52	0.69	2.00	456344.87	638737.32		Hold
1200.00	10.00	270.00	1195.95	0.00	-60.89	0.97	0.00	456344.87	638719.95		
1300.00	10.00	270.00	1294.43	0.00	-78.25	1.24	0.00	456344.87	638702.59		
1400.00	10.00	270.00	1392.91	0.00	-95.62	1.52	0.00	456344.87	638685.22		
1500.00	10.00	270.00	1491.39	0.00	-112.98	1.79	0.00	456344.87	638667.86		
1600.00	10.00	270.00	1589.87	0.00	-130.35	2.07	0.00	456344.87	638650.49		
1700.00	10.00	270.00	1688.35	0.00	-147.71	2.35	0.00	456344.87	638633.13		
1800.00	10.00	270.00	1786.83	0.00	-165.08	2.62	0.00	456344.87	638615.76		
1900.00	10.00	270.00	1885.31	0.00	-182.44	2.90	0.00	456344.87	638598.40		
2000.00	10.00	270.00	1983.79	0.00	-199.81	3.17	0.00	456344.87	638581.03		
2100.00	10.00	270.00	2082.27	0.00	-217.17	3.45	0.00	456344.87	638563.67		
2200.00	10.00	270.00	2180.75	0.00	-234.54	3.72	0.00	456344.87	638546.30		
2300.00	10.00	270.00	2279.23	0.00	-251.90	4.00	0.00	456344.87	638528.94		
2400.00	10.00	270.00	2377.72	0.00	-269.27	4.28	0.00	456344.87	638511.57		
2500.00	10.00	270.00	2476.20	0.00	-286.63	4.55	0.00	456344.87	638494.21		
2600.00	10.00	270.00	2574.68	0.00	-303.99	4.83	0.00	456344.87	638476.85		
2700.00	10.00	270.00	2673.16	0.00	-321.36	5.10	0.00	456344.87	638459.48		
2800.00	10.00	270.00	2771.64	0.00	-338.72	5.38	0.00	456344.87	638442.12		
2900.00	10.00	270.00	2870.12	0.00	-356.09	5.66	0.00	456344.87	638424.75		
3000.00	10.00	270.00	2968.60	0.00	-373.45	5.93	0.00	456344.87	638407.39		
3100.00	10.00	270.00	3067.08	0.00	-390.82	6.21	0.00	456344.87	638390.02		
3200.00	10.00	270.00	3165.56	0.00	-408.18	6.48	0.00	456344.87	638372.66		
3300.00	10.00	270.00	3264.04	0.00	-425.55	6.76	0.00	456344.87	638355.29		
3400.00	10.00	270.00	3362.52	0.00	-442.91	7.03	0.00	456344.87	638337.93		
3500.00	10.00	270.00	3461.00	0.00	-460.28	7.31	0.00	456344.87	638320.56		
3600.00	10.00	270.00	3559.48	0.00	-477.64	7.59	0.00	456344.87	638303.20		
3700.00	10.00	270.00	3657.97	0.00	-495.01	7.86	0.00	456344.87	638285.83		
3800.00	10.00	270.00	3756.45	0.00	-512.37	8.14	0.00	456344.87	638268.47		
3900.00	10.00	270.00	3854.93	0.00	-529.74	8.41	0.00	456344.87	638251.10		
4000.00	10.00	270.00	3953.41	0.00	-547.10	8.69	0.00	456344.87	638233.74		
4100.00	10.00	270.00	4051.89	0.00	-564.47	8.96	0.00	456344.87	638216.37		
4200.00	10.00	270.00	4150.37	0.00	-581.83	9.24	0.00	456344.87	638199.01		
4300.00	10.00	270.00	4248.85	0.00	-599.20	9.52	0.00	456344.87	638181.64		
4400.00	10.00	270.00	4347.33	0.00	-616.56	9.79	0.00	456344.87	638164.28		
4500.00	10.00	270.00	4445.81	0.00	-633.93	10.07	0.00	456344.87	638146.91		
4600.00	10.00	270.00	4544.29	0.00	-651.29	10.34	0.00	456344.87	638129.55		
4700.00	10.00	270.00	4642.77	0.00	-668.66	10.62	0.00	456344.87	638112.18		
4800.00	10.00	270.00	4741.25	0.00	-686.02	10.90	0.00	456344.87	638094.82		

## 5D Plan Report

Interpolated Points (Relative to Slot centre, TVD relative to Drill Floor)										
MD (US-ft)	Incl (°)	Az (°)	TVD (US-ft)	N. Offset (US-ft)	E. Offset (US-ft)	VS (US-ft)	DLS (°/100 US-ft)	Northing (US-ft)	Easting (US-ft)	Comment
4900.00	10.00	270.00	4839.73	0.00	-703.39	11.17	0.00	456344.87	638077.45	
5000.00	10.00	270.00	4938.22	0.00	-720.75	11.45	0.00	456344.87	638060.09	
5100.00	10.00	270.00	5036.70	0.00	-738.12	11.72	0.00	456344.87	638042.72	
5200.00	10.00	270.00	5135.18	0.00	-755.48	12.00	0.00	456344.87	638025.36	
5300.00	10.00	270.00	5233.66	0.00	-772.84	12.27	0.00	456344.87	638008.00	
5400.00	10.00	270.00	5332.14	0.00	-790.21	12.55	0.00	456344.87	637990.63	
5500.00	10.00	270.00	5430.62	0.00	-807.57	12.83	0.00	456344.87	637973.27	
5600.00	10.00	270.00	5529.10	0.00	-824.94	13.10	0.00	456344.87	637955.90	
5700.00	10.00	270.00	5627.58	0.00	-842.30	13.38	0.00	456344.87	637938.54	
5800.00	10.00	270.00	5726.06	0.00	-859.67	13.65	0.00	456344.87	637921.17	
5900.00	10.00	270.00	5824.54	0.00	-877.03	13.93	0.00	456344.87	637903.81	
6000.00	10.00	270.00	5923.02	0.00	-894.40	14.20	0.00	456344.87	637886.44	
6028.49	10.00	270.00	5951.08	0.00	-899.35	14.28	0.00	456344.87	637881.49	KOP
6100.00	13.25	229.39	6021.23	-5.34	-911.80	19.82	12.00	456339.53	637869.04	
6200.00	22.93	205.54	6116.29	-30.47	-928.96	45.22	12.00	456314.40	637851.88	
6300.00	34.07	196.02	6204.08	-75.13	-945.15	90.13	12.00	456269.74	637835.69	
6400.00	45.61	190.85	6280.76	-137.37	-959.66	152.59	12.00	456207.50	637821.18	
6500.00	57.31	187.41	6342.97	-214.47	-971.85	229.88	12.00	456130.40	637808.99	
6600.00	69.08	184.77	6387.99	-303.07	-981.20	318.61	12.00	456041.80	637799.64	
6700.00	80.88	182.53	6413.87	-399.28	-987.29	414.91	12.00	455945.59	637793.55	
6777.18	90.00	180.91	6420.00	-476.09	-989.59	491.75	12.00	455868.78	637791.25	LP
6800.00	90.00	180.91	6420.00	-498.91	-989.95	514.57	0.00	455845.96	637790.89	
6900.00	90.00	180.91	6420.00	-598.90	-991.54	614.57	0.00	455745.97	637789.30	
7000.00	90.00	180.91	6420.00	-698.89	-993.12	714.57	0.00	455645.98	637787.72	
7100.00	90.00	180.91	6420.00	-798.88	-994.71	814.57	0.00	455545.99	637786.13	
7200.00	90.00	180.91	6420.00	-898.86	-996.30	914.57	0.00	455446.01	637784.54	
7300.00	90.00	180.91	6420.00	-998.85	-997.89	1014.57	0.00	455346.02	637782.95	
7400.00	90.00	180.91	6420.00	-1098.84	-999.47	1114.57	0.00	455246.03	637781.37	
7500.00	90.00	180.91	6420.00	-1198.83	-1001.06	1214.57	0.00	455146.04	637779.78	
7600.00	90.00	180.91	6420.00	-1298.81	-1002.65	1314.57	0.00	455046.06	637778.19	
7700.00	90.00	180.91	6420.00	-1398.80	-1004.24	1414.57	0.00	454946.07	637776.60	
7800.00	90.00	180.91	6420.00	-1498.79	-1005.82	1514.57	0.00	454846.08	637775.02	
7900.00	90.00	180.91	6420.00	-1598.78	-1007.41	1614.57	0.00	454746.09	637773.43	
8000.00	90.00	180.91	6420.00	-1698.76	-1009.00	1714.57	0.00	454646.11	637771.84	
8100.00	90.00	180.91	6420.00	-1798.75	-1010.59	1814.57	0.00	454546.12	637770.25	
8200.00	90.00	180.91	6420.00	-1898.74	-1012.17	1914.57	0.00	454446.13	637768.67	
8300.00	90.00	180.91	6420.00	-1998.72	-1013.76	2014.57	0.00	454346.15	637767.08	
8400.00	90.00	180.91	6420.00	-2098.71	-1015.35	2114.57	0.00	454246.16	637765.49	
8500.00	90.00	180.91	6420.00	-2198.70	-1016.94	2214.57	0.00	454146.17	637763.90	
8600.00	90.00	180.91	6420.00	-2298.69	-1018.52	2314.57	0.00	454046.18	637762.32	
8700.00	90.00	180.91	6420.00	-2398.67	-1020.11	2414.57	0.00	453946.20	637760.73	
8800.00	90.00	180.91	6420.00	-2498.66	-1021.70	2514.57	0.00	453846.21	637759.14	
8900.00	90.00	180.91	6420.00	-2598.65	-1023.28	2614.57	0.00	453746.22	637757.56	
9000.00	90.00	180.91	6420.00	-2698.64	-1024.87	2714.57	0.00	453646.23	637755.97	
9100.00	90.00	180.91	6420.00	-2798.62	-1026.46	2814.57	0.00	453546.25	637754.38	
9200.00	90.00	180.91	6420.00	-2898.61	-1028.05	2914.57	0.00	453446.26	637752.79	
9300.00	90.00	180.91	6420.00	-2998.60	-1029.63	3014.57	0.00	453346.27	637751.21	
9400.00	90.00	180.91	6420.00	-3098.59	-1031.22	3114.57	0.00	453246.28	637749.62	
9500.00	90.00	180.91	6420.00	-3198.57	-1032.81	3214.57	0.00	453146.30	637748.03	
9600.00	90.00	180.91	6420.00	-3298.56	-1034.40	3314.57	0.00	453046.31	637746.44	
9700.00	90.00	180.91	6420.00	-3398.55	-1035.98	3414.57	0.00	452946.32	637744.86	
9800.00	90.00	180.91	6420.00	-3498.54	-1037.57	3514.57	0.00	452846.33	637743.27	
9900.00	90.00	180.91	6420.00	-3598.52	-1039.16	3614.57	0.00	452746.35	637741.68	
10000.00	90.00	180.91	6420.00	-3698.51	-1040.75	3714.57	0.00	452646.36	637740.09	
10100.00	90.00	180.91	6420.00	-3798.50	-1042.33	3814.57	0.00	452546.37	637738.51	
10200.00	90.00	180.91	6420.00	-3898.49	-1043.92	3914.57	0.00	452446.38	637736.92	
10300.00	90.00	180.91	6420.00	-3998.47	-1045.51	4014.57	0.00	452346.40	637735.33	
10400.00	90.00	180.91	6420.00	-4098.46	-1047.10	4114.57	0.00	452246.41	637733.74	
10500.00	90.00	180.91	6420.00	-4198.45	-1048.68	4214.57	0.00	452146.42	637732.16	

## SD Plan Report

Interpolated Points (Relative to Slot centre, TVD relative to Drill Floor)										
MD (US ft)	Inc (°)	Az (°)	TVD (US ft)	N.Offset (US ft)	E.Offset (US ft)	VS (US ft)	DLS (°/100 US ft)	Northing (US ft)	Easting (US ft)	Comment
10600.00	90.00	180.91	6420.00	-4298.44	-1050.27	4314.57	0.00	452046.43	637730.57	
10700.00	90.00	180.91	6420.00	-4398.42	-1051.86	4414.57	0.00	451946.45	637728.98	
10800.00	90.00	180.91	6420.00	-4498.41	-1053.45	4514.57	0.00	451846.46	637727.39	
10900.00	90.00	180.91	6420.00	-4598.40	-1055.03	4614.57	0.00	451746.47	637725.81	
11000.00	90.00	180.91	6420.00	-4698.38	-1056.62	4714.57	0.00	451646.49	637724.22	
11100.00	90.00	180.91	6420.00	-4798.37	-1058.21	4814.57	0.00	451546.50	637722.63	
11200.00	90.00	180.91	6420.00	-4898.36	-1059.79	4914.57	0.00	451446.51	637721.05	
11274.06	90.00	180.91	6420.00	-4972.41	-1060.97	4988.64	0.00	451372.46	637719.87	PBHL 1H

**5D Anti-Collision Report****Devon Energy****Field Name:** *Eddy Co, NM (Nad 83 NME)***Site Name:** *Harroun Trust 6 Fed Com 1, 2H Pad***Well Name:** *Harroun Trust 6 Fed Com 1H*

22 April 2014




**Weatherford**

## Harroun Trust 6 Fed Com 1H

<b>Field Name</b> Eddy Co, NM (Nad 83 NME)	<b>Map Units</b> : US ft	<b>Company Name</b> : Devon Energy	
	<b>Vertical Reference Datum (VRD)</b> : Mean Sea Level		
<b>Site Name</b> Harroun Trust 6 Fed Com 1, 2H Pad	<b>Projected Coordinate System</b> : NAD83 / New Mexico East (ftUS)		
	<b>Comment</b> :		
	<b>Units</b> : US ft	<b>North Reference</b> : Grid	<b>Convergence Angle</b> : 0.17
<b>Slot Name</b> Harroun Trust 6 Fed Com 1H	<b>Position</b>	<b>North</b> : 456344.87 US ft	<b>Latitude</b> : 32° 15' 15.03"
		<b>East</b> : 638780.84 US ft	<b>Longitude</b> : -104° 1' 5.22"
	<b>Elevation above Mean Sea Level</b> : 2956.00 US ft		
<b>Well Name</b> Harroun Trust 6 Fed Com 1H	<b>Comment</b> :		
	<b>Position (Offsets relative to Site Centre)</b>		
	<b>+N / -S</b> : 0.00 US ft	<b>North</b> : 456344.87 US ft	<b>Latitude</b> : 32° 15' 15.03"
	<b>+E / -W</b> : 0.00 US ft	<b>East</b> : 638780.84 US ft	<b>Longitude</b> : -104° 1' 5.22"
	<b>Slot TVD Reference</b> : Ground Elevation		
	<b>Elevation above Mean Sea Level</b> : 2956.00 US ft		
	<b>Comment</b> :		
<b>Well Name</b> Harroun Trust 6 Fed Com 1H	<b>Type</b> : Main well	<b>UWI</b> :	<b>Plan</b> : Working Plan
	<b>Rig Height</b> : 25.00 US ft	<b>Comment</b> :	
	<b>Drill Floor</b> : 25.00 US ft		
	<b>Relative to Mean Sea Level</b> : 2981.00 US ft		
	<b>Closure Distance</b> : 5084.34 US ft	<b>Closure Azimuth</b> : 192.045°	
	<b>Vertical Section (Position of Origin Relative to Slot)</b>		
	<b>+N / -S</b> : 0.00 US ft	<b>+E / -W</b> : 0.00 US ft	<b>Az</b> : 180.91°
<b>Magnetic Parameters</b>			
<b>Model</b> : BGGM	<b>Field Strength</b> : 48275.2nT	<b>Dec</b> : 7.54°	<b>Dip</b> : 60.04°
		<b>Date</b> : 05/Jul/2014	

Collision / Uncertainty Analysis				
Primary Well	Start MD (US ft)	End MD (US ft)	Collision Risk Interval	No. of Std Deviations in Error Computation
Harroun Trust 6 Fed Com 1H (p)	0.00	11274.06	100.00	2

Secondary Well Names
Harroun Trust 6 Fed Com 2H (p)

Anti Collision Report Terminology
S.Minor, S.Major : Radii of the ellipse of uncertainty at the current location as seen in the along hole direction.
PHI : Angle between high-side vector and semi-minor axis
TVD Spread : Total TVD range of the ellipsoid of uncertainty at the current location
ES : Distance between the extremities of the primary and secondary uncertainty ellipsoids in the direction Cr-Cr
T.Face to Sec : Angle between the Hi-Side vector of the primary well at the current location and line of closest approach between the two wells

Separation factors calculated using Pedal Curve (Independent Uncertainty). Well path created using minimum curvature.

## 5D Anti-Collision Report

**Anti-Collision Proximity Summary (TVD relative to )**

SF	Secondary Well Name	Pri MD (US ft)	Sec MD (US ft)	TVD (US ft)	CC (US ft)	ES (US ft)	SF	Risk
	Harroun Trust 6 Fed Com 2H (p)	11274.06	11113.77	6420.00	1318.32	1135.98	7.23	

Secondary Well : Harroun Trust 6 Fed Com 2H (p) (TVD Relative to Drill Floor (Primary) : All Azimuth Relative to GRID NORTH)									Risk
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T Face to Sec (°)	S Major (US ft)	S Minor (US ft)	CC (US ft)	ES (US ft)	SF	
0.00	0.00	0.00	127.01	0.00	0.00	50.30	49.59	70.60	
100.00	100.00	100.00	127.01	0.11	0.11	50.30	49.37	53.93	
200.00	200.00	200.00	127.01	0.34	0.34	50.30	48.92	36.41	
300.00	300.00	300.00	127.01	0.56	0.56	50.30	48.47	27.48	
400.00	400.00	400.00	127.01	0.79	0.79	50.30	48.02	22.07	
500.00	500.00	500.00	127.01	1.01	1.01	50.30	47.58	18.44	
600.00	600.00	600.00	127.01	1.24	1.24	50.30	47.13	15.83	
700.00	699.98	699.98	215.86	1.46	1.46	51.71	48.10	14.33	
800.00	799.84	799.84	212.77	1.69	1.69	56.03	51.99	13.86	
900.00	899.45	899.45	208.59	1.91	1.91	63.54	59.05	14.15	
1000.00	998.70	998.70	204.20	2.13	2.13	74.48	69.54	15.07	
1100.00	1097.47	1097.47	200.17	2.35	2.35	89.00	83.60	16.48	
1200.00	1195.95	1195.95	196.92	2.58	2.58	105.50	99.64	18.02	
1300.00	1294.43	1294.43	194.55	2.80	2.80	122.23	115.92	19.37	
1400.00	1392.91	1392.91	192.76	3.02	3.02	139.12	132.36	20.58	
1500.00	1491.39	1491.39	191.35	3.24	3.24	156.12	148.91	21.65	
1600.00	1589.87	1589.87	190.22	3.46	3.46	173.18	165.50	22.53	
1700.00	1688.35	1688.35	189.29	3.68	3.68	190.31	182.16	23.35	
1800.00	1786.83	1786.83	188.52	3.90	3.90	207.47	198.86	24.09	
1900.00	1885.31	1885.31	187.86	4.13	4.13	224.66	215.59	24.76	
2000.00	1983.79	1983.79	187.30	4.35	4.35	241.88	232.34	25.37	
2100.00	2082.27	2082.27	186.81	4.57	4.57	259.12	249.12	25.92	
2200.00	2180.75	2180.75	186.39	4.79	4.79	276.37	265.91	26.42	
2300.00	2279.23	2279.23	186.01	5.01	5.01	293.64	282.71	26.88	
2400.00	2377.72	2377.72	185.67	5.23	5.23	310.91	299.52	27.30	
2500.00	2476.20	2476.20	185.37	5.45	5.45	328.20	316.35	27.69	
2600.00	2574.68	2574.68	185.11	5.68	5.68	345.49	333.18	28.05	
2700.00	2673.16	2673.16	184.86	5.90	5.90	362.80	350.01	28.37	
2800.00	2771.64	2771.64	184.64	6.12	6.12	380.10	366.85	28.68	
2900.00	2870.12	2870.12	184.44	6.34	6.34	397.41	383.69	28.96	
3000.00	2968.60	2968.60	184.25	6.56	6.56	414.73	400.54	29.22	
3100.00	3067.08	3067.08	184.08	6.78	6.78	432.05	417.39	29.46	
3200.00	3165.56	3165.56	183.92	7.00	7.00	449.38	434.24	29.69	
3300.00	3264.04	3264.04	183.78	7.23	7.23	466.70	451.10	29.91	
3400.00	3362.52	3362.52	183.64	7.45	7.45	484.03	467.96	30.11	
3500.00	3461.00	3461.00	183.52	7.67	7.67	501.36	484.82	30.31	
3600.00	3559.48	3559.48	183.40	7.89	7.89	518.70	501.68	30.49	
3700.00	3657.97	3657.97	183.29	8.11	8.11	536.03	518.55	30.66	
3800.00	3756.45	3756.45	183.19	8.33	8.33	553.37	535.42	30.82	
3900.00	3854.93	3854.93	183.09	8.55	8.55	570.71	552.29	30.97	
4000.00	3953.41	3953.41	183.00	8.78	8.78	588.05	569.16	31.12	
4100.00	4051.89	4051.89	182.91	9.00	9.00	605.39	586.03	31.26	
4200.00	4150.37	4150.37	182.83	9.22	9.22	622.74	602.90	31.39	
4300.00	4248.85	4248.85	182.75	9.44	9.44	640.08	619.78	31.52	
4400.00	4347.33	4347.33	182.68	9.66	9.66	657.43	636.65	31.64	
4500.00	4445.81	4445.81	182.61	9.88	9.88	674.78	653.53	31.76	
4600.00	4544.29	4544.29	182.55	10.10	10.10	692.12	670.40	31.87	
4700.00	4642.77	4642.77	182.48	10.32	10.32	709.47	687.28	31.97	
4800.00	4741.25	4741.25	182.42	10.55	10.55	726.82	704.16	32.07	
4900.00	4839.73	4839.73	182.37	10.77	10.77	744.17	721.04	32.17	
5000.00	4938.22	4938.22	182.31	10.99	10.99	761.52	737.92	32.26	
5100.00	5036.70	5036.70	182.26	11.21	11.21	778.87	754.80	32.35	

## SD Anti-Collision Report

Secondary Well : Harroun Trust 6 Fed Com 2H (p) (TVD Relative to Drill Floor (Primary) : All Azimuth Relative to GRID NORTH)									
Pri MD (US ft)	TVD (US ft)	Sec MD (US ft)	T Face to Sec (°)	S Major (US ft)	S Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
5200.00	5135.18	5135.18	182.21	11.43	11.43	796.23	771.68	32.44	
5300.00	5233.66	5233.66	182.17	11.65	11.65	813.58	788.56	32.52	
5400.00	5332.14	5332.14	182.12	11.87	11.87	830.93	805.44	32.59	
5500.00	5430.62	5430.62	182.08	12.10	12.10	848.29	822.32	32.67	
5600.00	5529.10	5529.10	182.04	12.32	12.32	865.64	839.20	32.74	
5700.00	5627.58	5627.58	182.00	12.54	12.54	882.99	856.08	32.81	
5800.00	5726.06	5726.06	181.96	12.76	12.76	900.35	872.96	32.88	
5900.00	5824.54	5824.54	181.92	12.98	12.98	917.70	889.84	32.94	
6000.00	5923.02	5923.02	181.88	13.20	13.20	935.06	906.73	33.00	
6100.00	6012.31	6012.46	223.19	13.38	13.27	952.61	923.88	33.16	
6200.00	6095.94	6098.19	247.90	13.51	13.10	970.56	941.47	33.37	
6300.00	6175.56	6184.59	258.05	13.67	12.59	988.23	958.75	33.53	
6400.00	6248.89	6272.25	263.50	13.86	11.82	1004.89	974.94	33.54	
6500.00	6313.46	6361.75	266.79	14.15	10.91	1019.91	989.37	33.39	
6600.00	6366.60	6453.67	268.74	14.56	9.89	1032.71	1001.25	32.82	
6700.00	6405.38	6548.53	269.68	15.14	9.02	1042.79	1010.12	31.92	
6800.00	6426.76	6646.85	269.63	15.90	8.47	1049.83	1015.67	30.73	
6900.00	6430.00	6747.59	269.46	16.84	8.54	1055.86	1019.77	29.26	
7000.00	6430.00	6847.41	269.46	17.92	8.83	1061.86	1023.67	27.81	
7100.00	6430.00	6947.23	269.46	19.10	9.16	1067.86	1027.34	26.36	
7200.00	6430.00	7047.05	269.47	20.39	9.54	1073.86	1030.82	24.95	
7300.00	6430.00	7146.87	269.47	21.75	9.96	1079.86	1034.13	23.61	
7400.00	6430.00	7246.69	269.47	23.19	10.43	1085.86	1037.39	22.40	
7500.00	6430.00	7346.51	269.47	24.67	10.92	1091.86	1040.42	21.23	
7600.00	6430.00	7446.33	269.48	26.20	11.44	1097.86	1043.39	20.16	
7700.00	6430.00	7546.15	269.48	27.77	11.98	1103.86	1046.33	19.19	
7800.00	6430.00	7645.97	269.48	29.37	12.54	1109.86	1049.24	18.31	
7900.00	6430.00	7745.79	269.49	31.00	13.07	1115.86	1052.02	17.48	
8000.00	6430.00	7845.61	269.49	32.65	13.69	1121.86	1054.72	16.71	
8100.00	6430.00	7945.43	269.49	34.32	14.30	1127.86	1057.40	16.01	
8200.00	6430.00	8045.24	269.49	36.00	14.86	1133.86	1060.08	15.37	
8300.00	6430.00	8145.06	269.50	37.70	15.50	1139.86	1062.75	14.78	
8400.00	6430.00	8244.88	269.50	39.42	16.17	1145.86	1065.42	14.24	
8500.00	6430.00	8344.70	269.50	41.14	16.79	1151.86	1068.08	13.75	
8600.00	6430.00	8444.52	269.50	42.87	17.40	1157.86	1070.61	13.27	
8700.00	6430.00	8544.34	269.51	44.62	18.07	1163.86	1073.14	12.83	
8800.00	6430.00	8644.16	269.51	46.37	18.74	1169.86	1075.67	12.42	
8900.00	6430.00	8743.98	269.51	48.12	19.41	1175.86	1078.19	12.04	
9000.00	6430.00	8843.80	269.51	49.89	20.09	1181.87	1080.71	11.68	
9100.00	6430.00	8943.62	269.52	51.65	20.77	1187.87	1083.22	11.35	
9200.00	6430.00	9043.44	269.52	53.43	21.45	1193.87	1085.73	11.04	
9300.00	6430.00	9143.26	269.52	55.21	22.13	1199.87	1088.23	10.75	
9400.00	6430.00	9243.08	269.52	56.99	22.82	1205.87	1090.72	10.47	
9500.00	6430.00	9342.90	269.53	58.77	23.51	1211.87	1093.21	10.21	
9600.00	6430.00	9442.72	269.53	60.56	24.20	1217.87	1095.69	9.97	
9700.00	6430.00	9542.54	269.53	62.35	24.89	1223.87	1098.13	9.73	
9800.00	6430.00	9642.36	269.53	64.15	25.58	1229.87	1100.56	9.51	
9900.00	6430.00	9742.18	269.54	65.95	26.28	1235.87	1102.98	9.30	
10000.00	6430.00	9842.00	269.54	67.74	26.98	1241.87	1105.40	9.10	
10100.00	6430.00	9941.82	269.54	69.55	27.68	1247.87	1107.82	8.91	
10200.00	6430.00	10041.64	269.54	71.35	28.38	1253.87	1110.23	8.73	
10300.00	6430.00	10141.46	269.54	73.16	29.09	1259.87	1112.64	8.56	
10400.00	6430.00	10241.28	269.55	74.96	29.79	1265.87	1115.05	8.39	
10500.00	6430.00	10341.10	269.55	76.77	30.50	1271.87	1117.45	8.24	
10600.00	6430.00	10440.92	269.55	78.58	31.21	1277.87	1119.85	8.09	
10700.00	6430.00	10540.74	269.55	80.39	31.91	1283.87	1122.25	7.94	
10800.00	6430.00	10640.56	269.55	82.21	32.62	1289.87	1124.65	7.81	
10900.00	6430.00	10740.38	269.56	84.02	33.33	1295.88	1127.04	7.68	

## 5D Anti-Collision Report

Secondary Well : Harroun Trust 6 / Fed Com 2H (p) (TVD Relative to Drill Floor (Primary) ; All Azimuth Relative to GRID NORTH)									
Prim'D (US ft)	TVD (US ft)	Sec MD (US ft)	T Face to Sec (°)	S Major (US ft)	S Minor (US ft)	CC (US ft)	ES (US ft)	SF	Risk
11000.00	6430.00	10840.20	269.56	85.84	34.04	1301.88	1129.43	7.55	
11100.00	6430.00	10940.02	269.56	87.65	34.76	1307.88	1131.82	7.43	
11200.00	6430.00	11039.84	269.56	89.47	35.47	1313.88	1134.21	7.31	
11274.06	6430.00	11113.77	269.56	90.81	36.00	1318.32	1135.98	7.23	



**Weatherford**

## Weatherford Drilling Services

GeoDec4 v2.0.0.3

---

Report Date: April 22, 2014  
Job Number: \_\_\_\_\_  
Customer: Devon Energy  
Well Name: Harroun Trust 6 Fed Com 1H  
API Number: \_\_\_\_\_  
Rig Name: \_\_\_\_\_  
Location: Eddy Co, NM Nad83 NME  
Block: \_\_\_\_\_  
Engineer: RWJ

---

NAD83 / New Mexico East (ftUS)	NAD83 (1986)
Projected Coordinate System	Geodetic Coordinate System
Datum: North American Datum 1983 (1986)	Datum: North American Datum 1983 (1986)
Ellipsoid: GRS 1980	Ellipsoid: GRS 1980
EPSG: 2257	EPSG: 4269
North: 456344.87 US Survey Foot	Latitude: 32.254174 Degree
East: 638780.84 US Survey Foot	Longitude: -104.018116 Degree
Convergence: 0.17°	
Declination: 7.54°	
Total Correction: 7.37°	
Datum Transformation: none	

---

### Geodetic Location WGS84

MSL Elevation = 0 m  
Latitude = 32° 15' 15.03" N  
Longitude = 104° 01' 05.22" W

---

Magnetic Declination = 7.54 deg	[True North Offset]
Local Gravity = .9988 g	Checksum = 6573
Local Field Strength = 48275 nT	Magnetic Vector X = 23897 nT
Magnetic Dip = 60.04 deg	Magnetic Vector Y = 3164 nT
Magnetic Model = bggm2013.bgs	Magnetic Vector Z = 41826 nT
Run Date = July 05, 2014	Magnetic Vector H = 24105 nT


---

Signed: \_\_\_\_\_ Date: \_\_\_\_\_

©2013 Weatherford

Warning: This information is controlled, and any printed version is deemed as uncontrolled unless suitably endorsed by a controlling authority or accompanied by a controlled table of contents in order to ensure adequate revision control.

# 13-5/8" 3M BOPE & Closed Loop Equipment Schematic

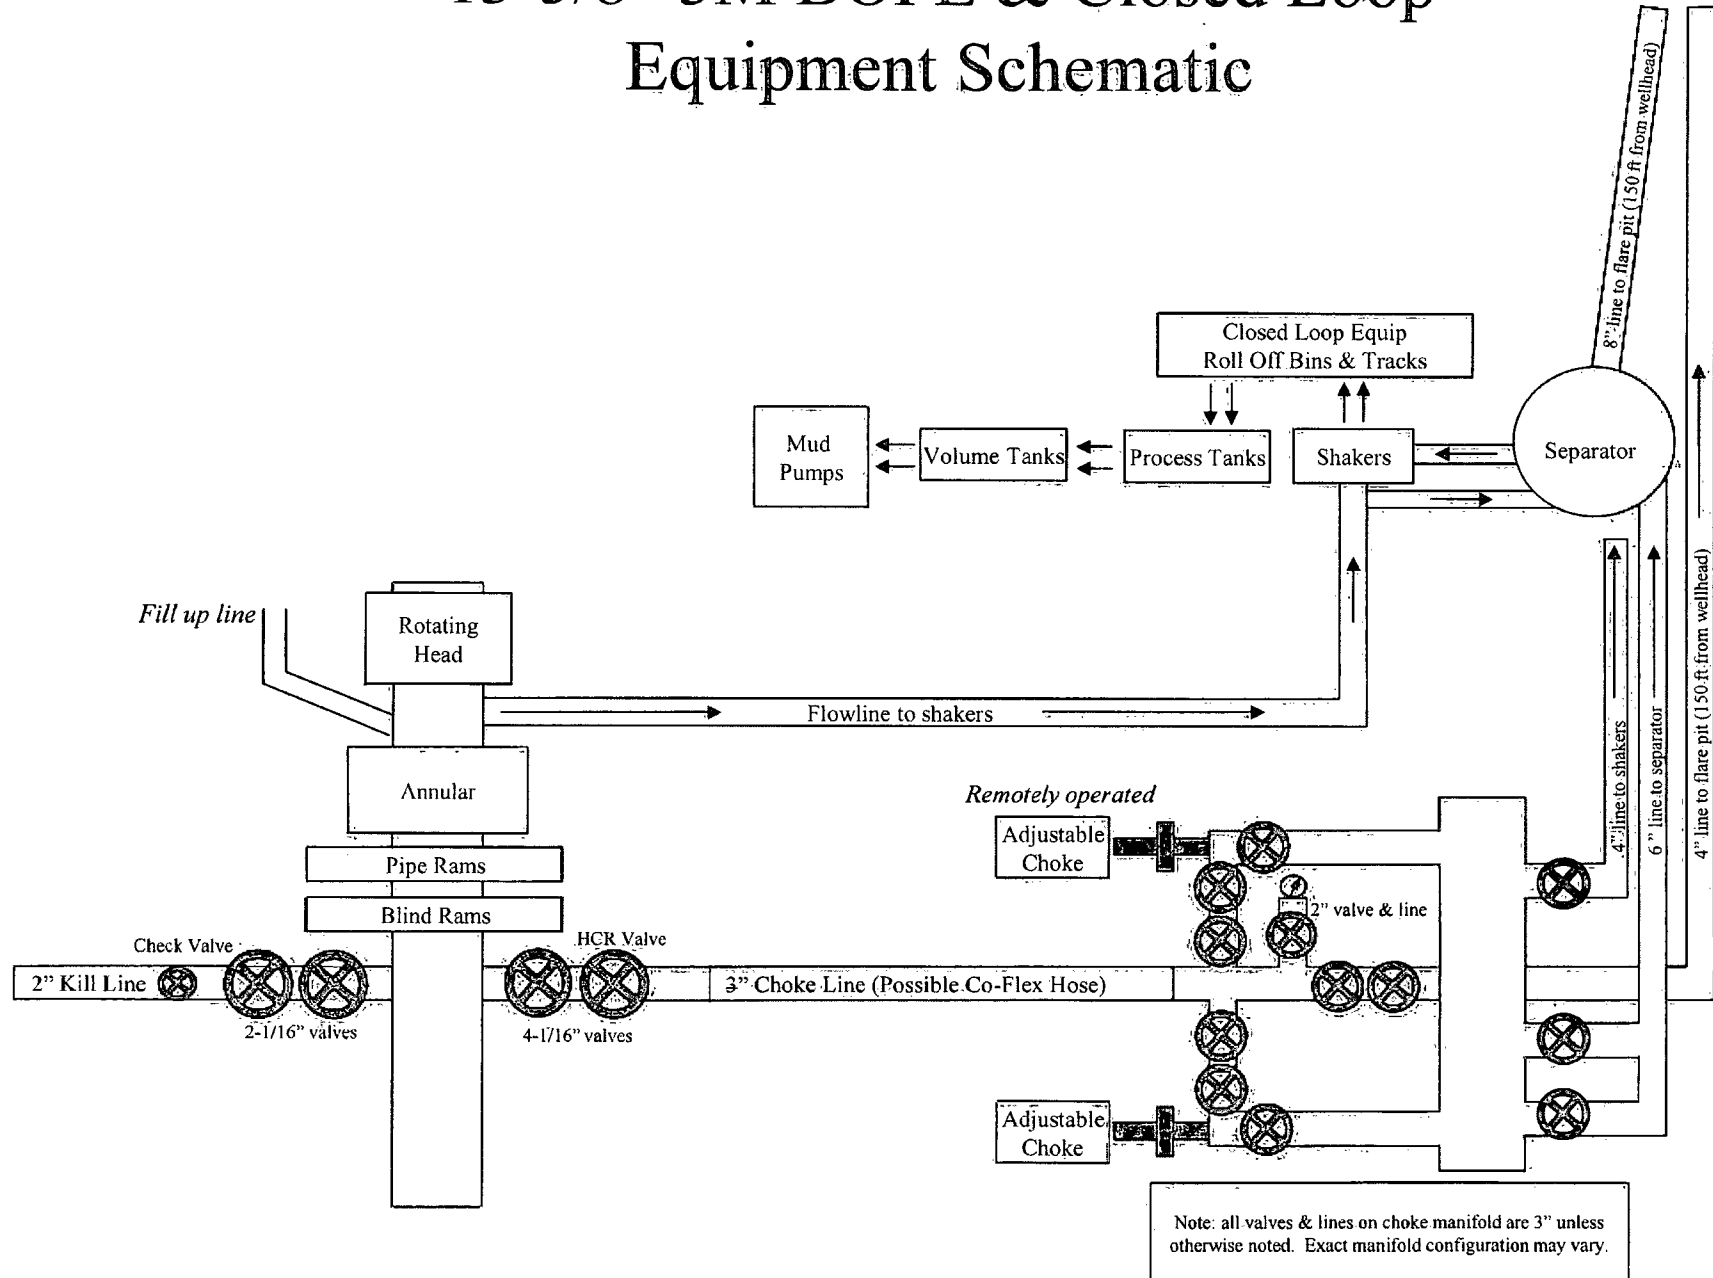

## **NOTES REGARDING BLOWOUT PREVENTERS**

Devon Energy Production Company, L.P.  
Harroun Trust 6 Fed Com 1H

1. Drilling Nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated filings will be in operable condition to withstand a minimum of 3000psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum of 3000psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.



Fluid Technology

ContiTech Beattie Corp.

Website: [www.contitechbeattie.com](http://www.contitechbeattie.com)

Monday, June 14, 2010

RE: Drilling & Production Hoses  
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental ContiTech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.

Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson  
Sales Manager  
ContiTech Beattie Corp

ContiTech Beattie Corp,  
11535 Brittmoore Park Drive,  
Houston, TX 77041  
Phone: +1 (832) 327-0141  
Fax: +1 (832) 327-0148  
[www.contitechbeattie.com](http://www.contitechbeattie.com)





Midwest Hose  
& Specialty, Inc.

### INTERNAL HYDROSTATIC TEST CERTIFICATE

Customer: CACTUS		Customer P.O. Number: RE-CERT M5322&M1075	
HOSE SPECIFICATIONS			
Type: Rotary/Vibrator Hose CHOKE HC / API 7K		Hose Length: 35 FEET	
I.D. INCHES		O.D. INCHES	
WORKING PRESSURE	TEST PRESSURE	BURST PRESSURE	
5,000 PSI	10,000 PSI	N/A PSI	
COUPLINGS			
Part Number	Stem Lot Number	Ferrule Lot Number	
Type of Coupling: SWAGE-IT		Die Size:	
PROCEDURE			
<i>Hose assembly pressure tested with water at ambient temperature.</i>			
TIME HELD AT TEST PRESSURE		ACTUAL BURST PRESSURE:	
12 3/4 MIN.		N/A PSI	
Hose Assembly Serial Number: 194103-2		Hose Serial Number:	
Comments: ASSET# M5322			
Date: 3/6/2013	Tested: Billy Balok	Approved: John J. Brown	



Midwest Hose  
& Specialty, Inc.

## Internal Hydrostatic Test Graph

March 17, 2013

Customer: Cactus


Pick Ticket #: 194103

### Hose Specifications

<u>Hose Type</u>	<u>Length</u>
C&K	35'
<u>I.D.</u>	<u>O.D.</u>
"	"
<u>Working Pressure</u>	<u>Burst Pressure</u>
5000 PSI	Standard Safety Multiplier Applies

### Verification

<u>Type of Fitting</u>	<u>Coupling Method</u>
4 1/16 10K	Swage
<u>Die Size</u>	<u>Final O.D.</u>
0	0
<u>Hose Serial #</u>	<u>Hose Assembly Serial #</u>
0	194103-2

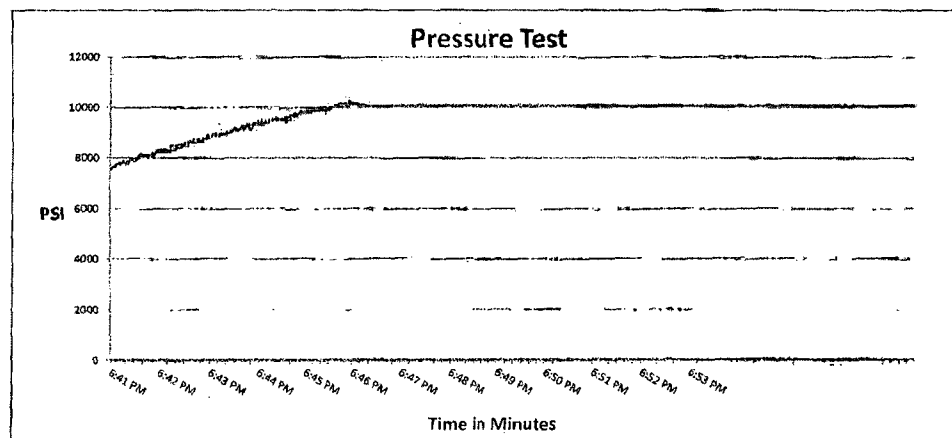

Test Pressure  
10000 PSI

Time Held at Test Pressure  
12 3/4 Minutes

Actual Burst Pressure

Peak Pressure  
10253 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Billy Balak

Approved By: Joshua Dahlem

DATE: 03/18/13 10:10AM

## PACKING LIST

PAGE: 1 OF 1



Midwest Hose  
& Specialty, Inc.

Ship From  
Midwest Hose & Specialty, Inc.  
3312 S I-35 Service Road  
Oklahoma City OK 73129  
USA

Ship To

Cactus Drilling Co., LLC  
ATTN: John Andrade  
8300 SW 15th  
Oklahoma City OK  
USA

Bill To

Cactus Drilling Co., LLC  
ATTN: Accounts Payable  
8300 SW 15th Street  
Oklahoma City OK 73120-9594  
USA

Payment Terms	1% 10 - NET 30 DAYS (1NET30)
Ship Method	PICKUP
Freight Terms	Prepaid
Customer Ship	CACTUS01
Cartons	1
Weight	0.00
Tracking Nbrs	

Shipping Notes:

Cust phone: 577-5347  
Written by: ESPARKMAN

Customer PO: Re-Cert M5322 & M1075

Mark Number: John Andrade

Packing List #:00194103

INVOICE REQUIREMENTS:

1. Purchase Order Number and Rig # Required
2. Proof of Delivery Required

Received By: \_\_\_\_\_  
Date Received: \_\_\_\_\_


Print Name: \_\_\_\_\_  
Work Phone #: \_\_\_\_\_

LIN	ITEM / DESCRIPTION	UOM	QUANTITY ORDERED	QUANTITY ORDERED	QUANTITY BACK ORDERED	QUANTITY TOTAL QUANTITY
0010	TESTLABOR Internal Hydrostratic Test Labor Your item # is: M5322 & M1075	EA	2.00	0.00	0.00	2.00
					Unit Price: 500.00	Ext. Price: 1,000.00
	PL#: 00194103 Picked by: BBALAK SO#: 00162217 Shipped by: ESPARKMAN				AMOUNT	1,000.00
					FREIGHT/INSUR/HANDLE	0.00
					SALES TAX	\$83.75
					TOTAL	1,083.75

Questions? Phone: (800) 375-2358



Commitment Runs Deep

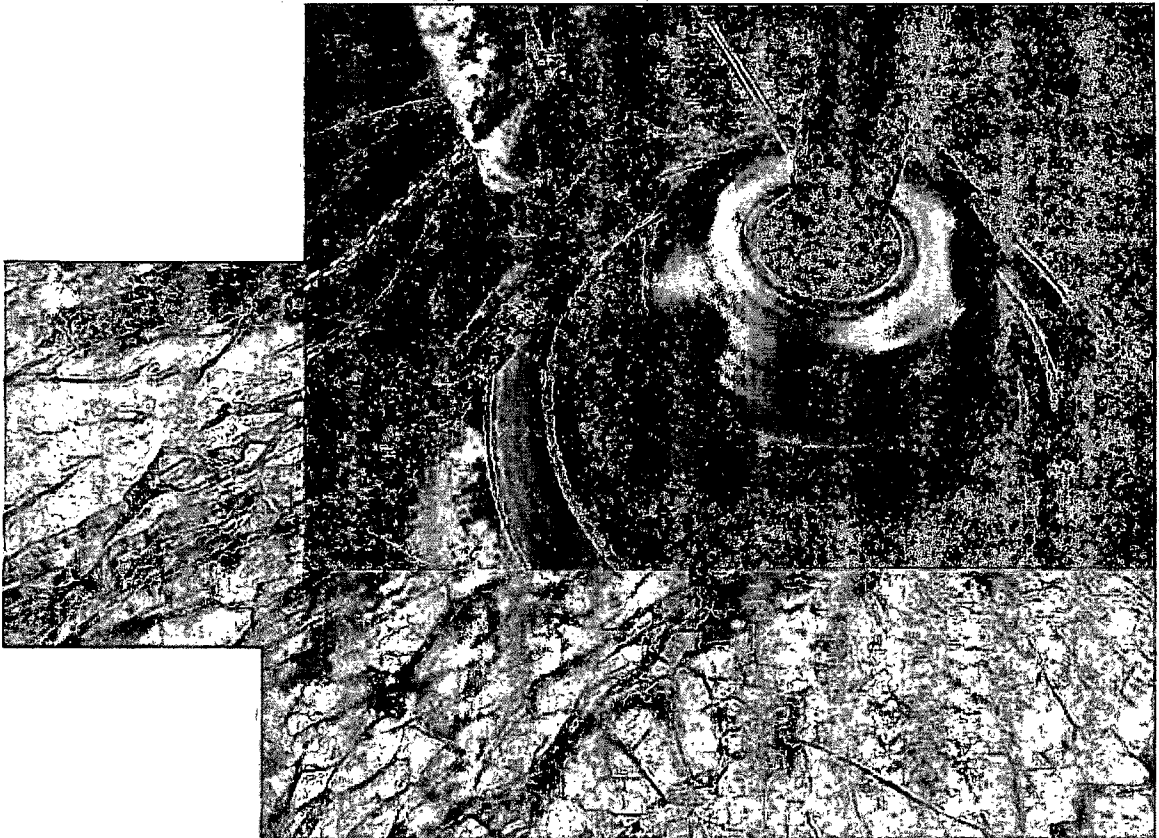

Design Plan  
Operation and Maintenance Plan  
Closure Plan

SENM - Closed Loop Systems  
June 2010

## **I. Design Plan**

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


## **II. Operations and Maintenance Plan**

*Primary Shakers:* The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

**Mud Cleaner:** The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.

**devon**

## Closed Loop Schematic

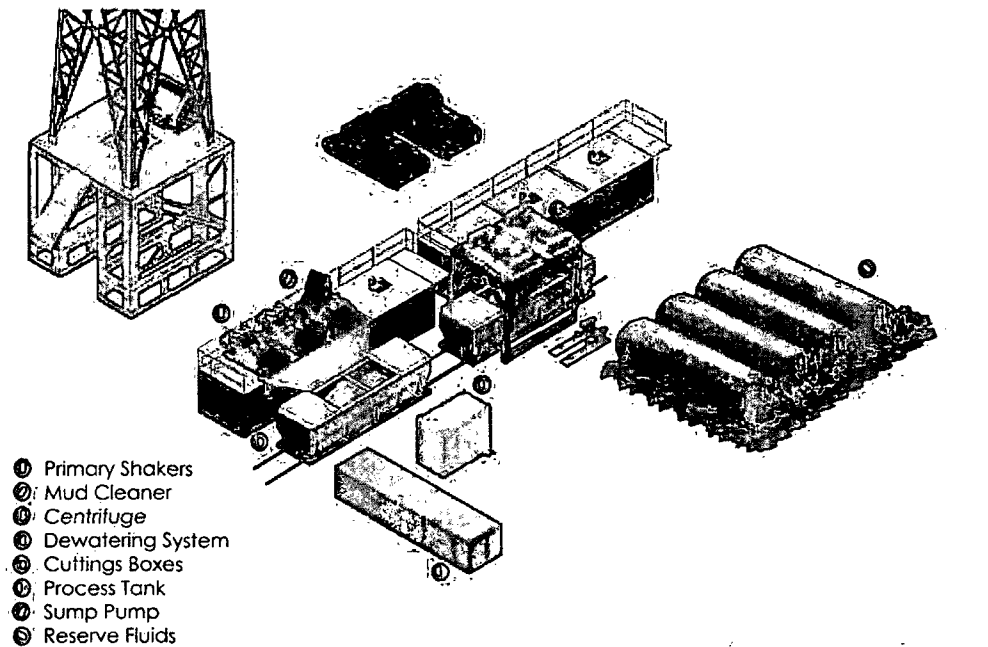

**MI SWACO**

**Centrifuges:** The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

**Dewatering System:** The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

*Cuttings Boxes:* Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

*Process Tank:* (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

*Sump and Sump Pump:* The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

*Reserve Fluids (Tank Farm):* A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.


A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

### **III. Closure Plan**

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.

# H&P Flex Rig Location Layout

## 2 Well Pad

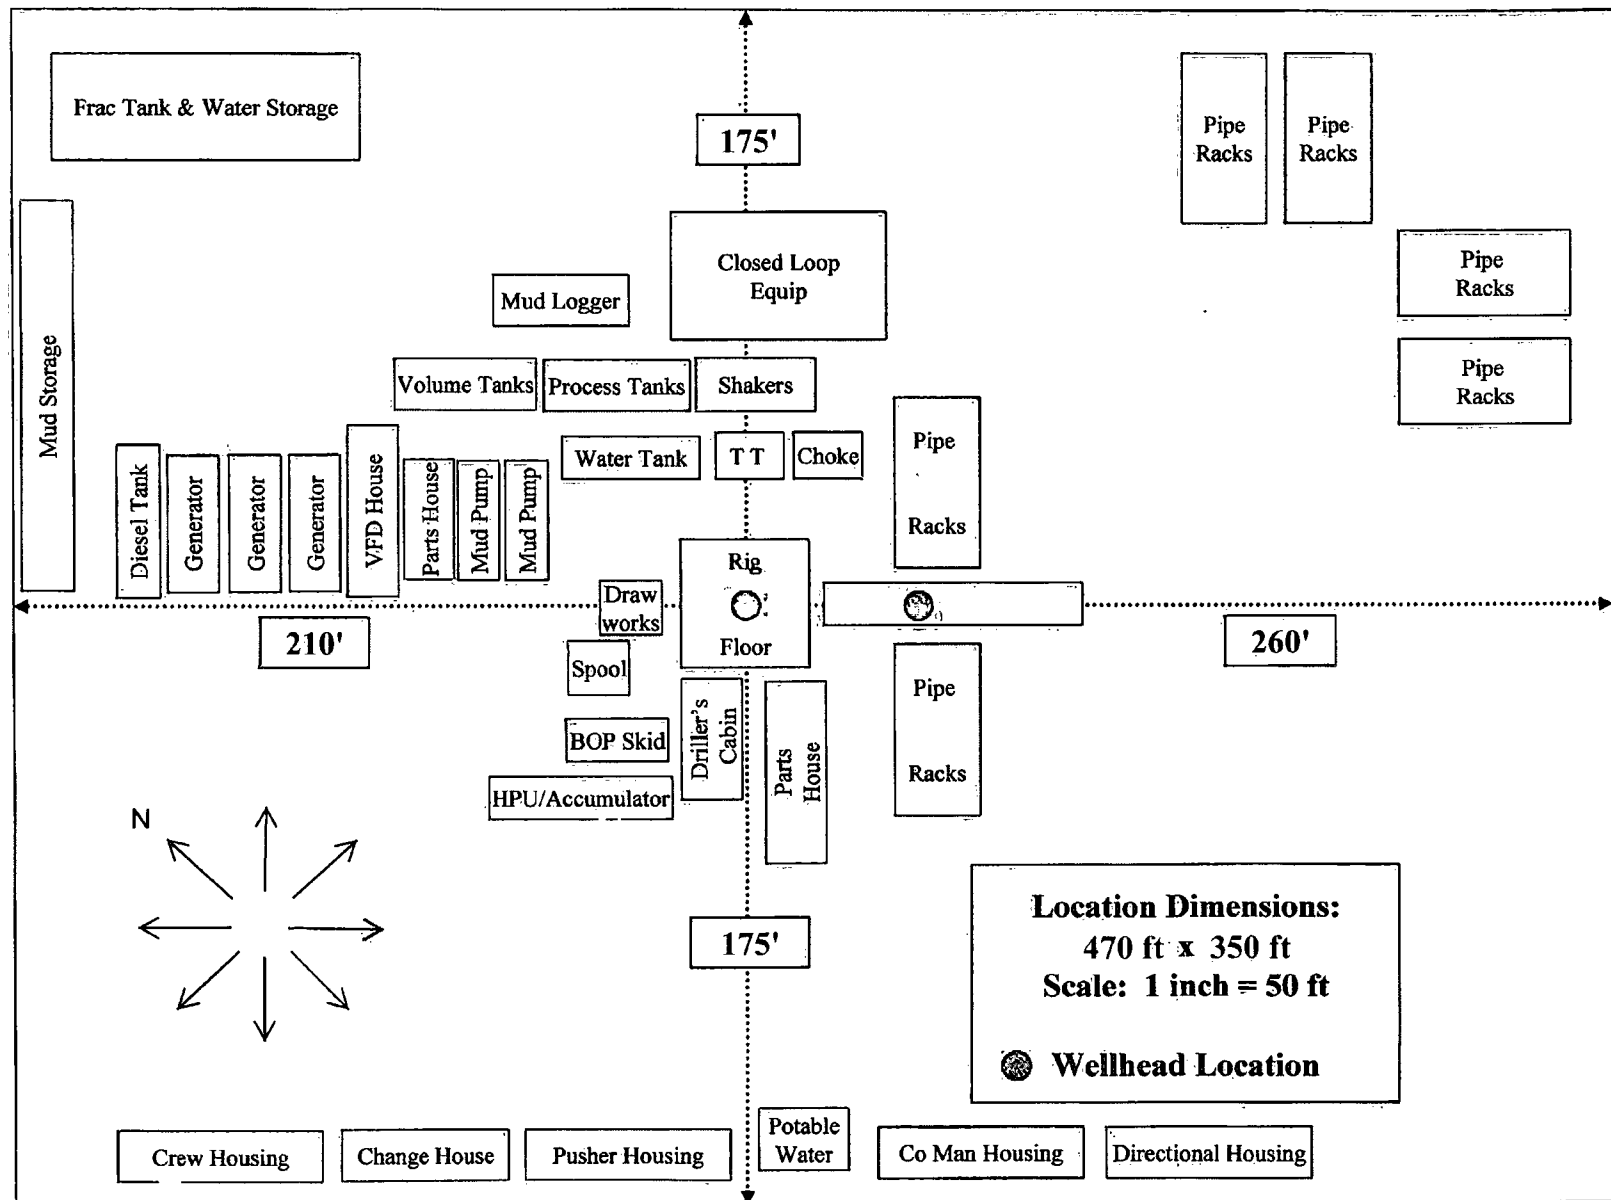



**Devon Energy Center  
333 West Sheridan Avenue  
Oklahoma City, Oklahoma 73102-5015**

# **Hydrogen Sulfide (H<sub>2</sub>S) Contingency Plan**

**For**



**Harroun Trust 6 Fed Com 1H**

**Sec-6, T-24S R-29E  
10' FNL & 890' FEL,  
LAT. = 32.2541741°N (NAD83)  
LONG = 104.0181159°W**

**Eddy County NM**

## Harroun Trust 6 Fed Com 1H

This is an open drilling site. H<sub>2</sub>S monitoring equipment and emergency response equipment will be used within 500' of zones known to contain H<sub>2</sub>S, including warning signs, wind indicators and H<sub>2</sub>S monitor.

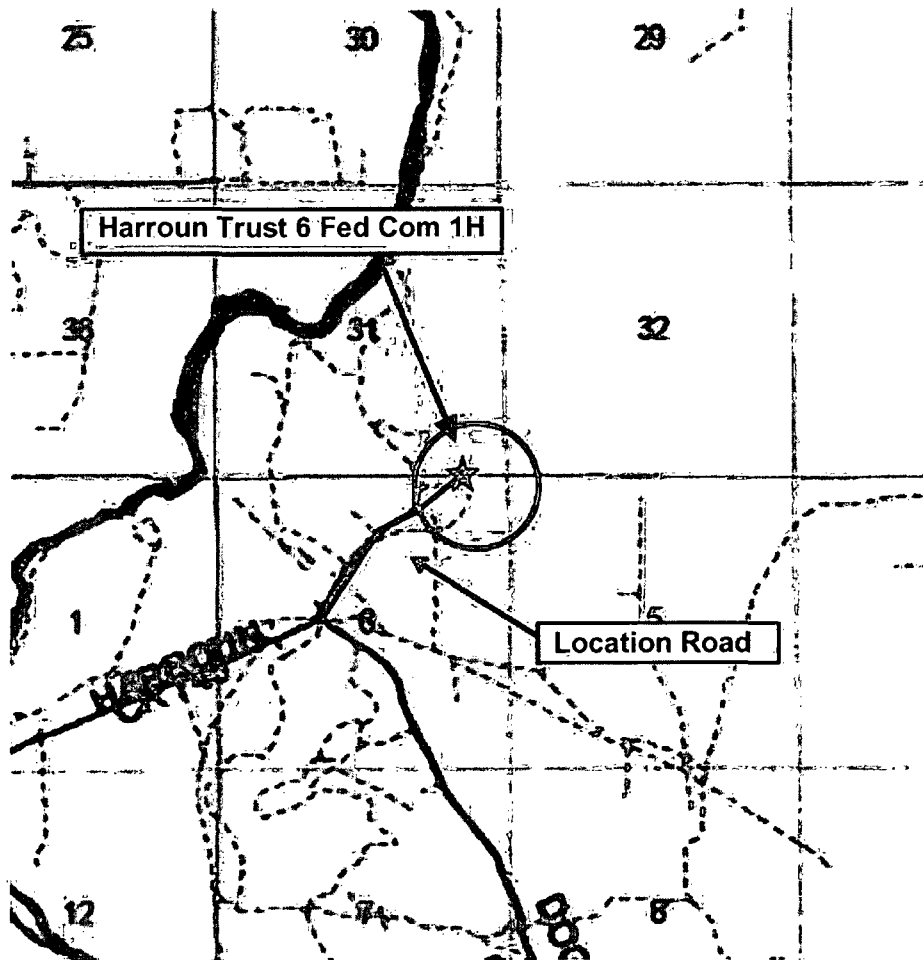

Assumed 100 ppm H<sub>2</sub>S ~ 3000' (Radius of Exposure)  
100 ppm H<sub>2</sub>S concentration shall trigger activation of this plan.

### Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road, West then Northwest on lease road. Crews should then block entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

**Assumed 100 ppm ROE = 3000'**  
**100 ppm H<sub>2</sub>S concentration shall trigger activation of this plan.**

#### **Emergency Procedures**

In the event of a release of gas containing H<sub>2</sub>S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H<sub>2</sub>S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the
  - Detection of H<sub>2</sub>S, and
  - Measures for protection against the gas,
  - Equipment used for protection and emergency response.

#### **Ignition of Gas Source**

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

#### **Characteristics of H<sub>2</sub>S and SO<sub>2</sub>**

<b>Common Name</b>	<b>Chemical Formula</b>	<b>Specific Gravity</b>	<b>Threshold Limit</b>	<b>Hazardous Limit</b>	<b>Lethal Concentration</b>
<b>Hydrogen Sulfide</b>	H <sub>2</sub> S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
<b>Sulfur Dioxide</b>	SO <sub>2</sub>	2.21 Air = 1	2 ppm	N/A	1000 ppm

## **Contacting Authorities**

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

## **Hydrogen Sulfide Drilling Operation Plan**

### **I. HYDROGEN SULFIDE (H<sub>2</sub>S) TRAINING**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

1. The hazards and characteristics of hydrogen sulfide (H<sub>2</sub>S)
2. The proper use and maintenance of personal protective equipment and life support systems.
3. The proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
4. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

1. The effects of H<sub>2</sub>S metal components. If high tensile tubular are to be used, personnel will be trained in their special maintenance requirements.
2. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
3. The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan and Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H<sub>2</sub>S zone (within 3 days or 500 feet) and weekly H<sub>2</sub>S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan.

## **II. HYDROGEN SULFIDE TRAINING**

Note: All H<sub>2</sub>S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonable expected to contain H<sub>2</sub>S.

### **1. Well Control Equipment**

- A. Flare line
- B. Choke manifold - With Remotely Operated Choke
- C. Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
- D. Auxiliary equipment may include if applicable: annular preventer and rotating head.
- E. Mud/Gas Separator

### **2. Protective equipment for essential personnel:**

- A. 30-minute SCBA units located in the doghouse and at briefing areas, as indicated on well site diagram. As it may be difficult to communicate audibly while wearing these units, hand signals shall be utilized.

### **3. H<sub>2</sub>S detection and monitoring equipment:**

- A. Portable H<sub>2</sub>S monitors positioned on location for best coverage and response. These units have warning lights and audible sirens when H<sub>2</sub>S levels of 20 PPM are reached. These units are usually capable of detecting SO<sub>2</sub>, which is a byproduct of burning H<sub>2</sub>S.

### **4. Visual warning systems:**

- A. Wind direction indicators as shown on well site diagram
- B. Caution/ Danger signs shall be posted on roads providing direct access to locations. Signs will be painted a high visibility yellow with black lettering of sufficient size to be reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

**5. Mud program:**

- A. The mud program has been designed to minimize the volume of H<sub>2</sub>S circulated to surface. Proper mud weight, safe drilling practices and the use of H<sub>2</sub>S scavengers will minimize hazards when penetrating H<sub>2</sub>S bearing zones.

**6. Metallurgy:**

- A. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold lines, and valves shall be H<sub>2</sub>S trim.
- B. All elastomers used for packing and seals shall be H<sub>2</sub>S trim.

**7. Communication:**

- A. Radio communications in company vehicles including cellular telephones and 2-way radio
- B. Land line (telephone) communications at Office

**8. Well testing:**

- A. Drill stem testing will be performed with a minimum number of personnel in the immediate vicinity, which are necessary to safety and adequately conduct the test. The drill stem testing will be conducted during daylight hours and formation fluids will not be flowed to the surface. All drill-stem-testing operations conducted in an H<sub>2</sub>S environment will use the closed chamber method of testing.
- B. There will be no drill stem testing.

## Devon Energy Corp. Company Call List

<u>Artesia (575)</u>	<u>Cellular</u>	<u>Office</u>	<u>Home</u>
Foreman – Robert Bell.....	748-7448 .....	748-0178 .....	746-2991
Asst. Foreman –Tommy Polly.....	748-5290 .....	748-0165 .....	748-2846
Don Mayberry .....	748-5235 .....	748-0164 .....	746-4945
Montral Walker .....	390-5182 .....	748-0193 .....	(936) 414-6246
Engineer – Marcos Ortiz.....	(405) 317-0666.....	(405) 552-8152.....	(405) 381-4350

## Agency Call List

<u>Lea</u>	<b>Hobbs</b>	
<u>County</u>	Lea County Communication Authority .....	393-3981
<u>(575)</u>	State Police .....	392-5588
	City Police .....	397-9265
	Sheriff's Office .....	393-2515
	Ambulance.....	911
	Fire Department.....	397-9308
	LEPC (Local Emergency Planning Committee).....	393-2870
	NMOCD .....	393-6161
	US Bureau of Land Management.....	393-3612

<u>Eddy</u>	<b>Carlsbad</b>	
<u>County</u>	State Police .....	885-3137
<u>(575)</u>	City Police .....	885-2111
	Sheriff's Office .....	887-7551
	Ambulance .....	911
	Fire Department.....	885-2111
	LEPC (Local Emergency Planning Committee).....	887-3798
	US Bureau of Land Management.....	887-6544
	NM Emergency Response Commission (Santa Fe) .....	(505) 476-9600
	24 HR .....	(505) 827-9126
	National Emergency Response Center (Washington, DC) ....	(800) 424-8802

## **Emergency Services**

Boots & Coots IWC .....	(800)-256-9688 or (281) 931-8884
Cudd Pressure Control.....	(915) 699-0139 or (915) 563-3356
Halliburton.....	(575) 746-2757
B. J. Services.....	(575) 746-3569


<i>Give</i>	Native Air – Emergency Helicopter – Hobbs.....	(575) 392-6429
<i>GPS</i>	Flight For Life - Lubbock, TX .....	(806) 743-9911
<i>position:</i>	Aerocare - Lubbock, TX .....	(806) 747-8923
	Med Flight Air Amb - Albuquerque, NM .....	(575) 842-4433
	Lifeguard Air Med Svc. Albuquerque, NM .....	(575) 272-3115

Prepared in conjunction with  
Dave Small





# Devon Petroleum - Well Pad Rig Location Layout Safety Equipment Location

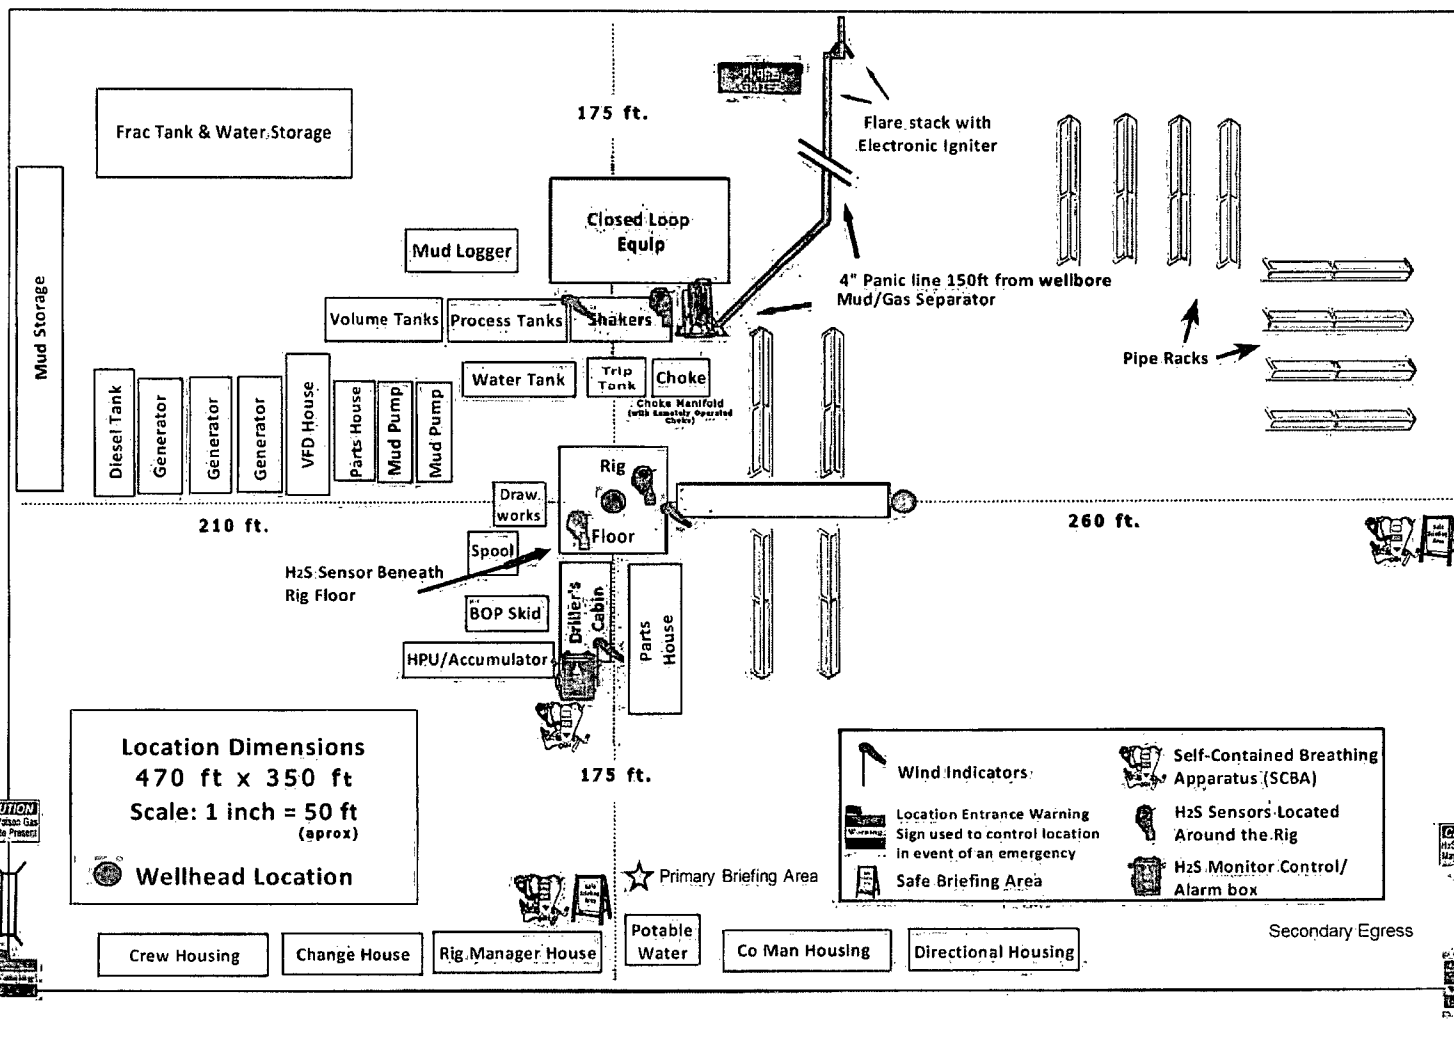

**devon**

**Proposed Interim  
Site Reclamation**


Devon Energy Production Co.  
Harroun Trust 6 Fed Com  
1H & 2H  
Sec. 6-T24S-R29E  
Lea County, NM



Proposed  
Reclamation  
Area



Scale: 1in = 60ft.

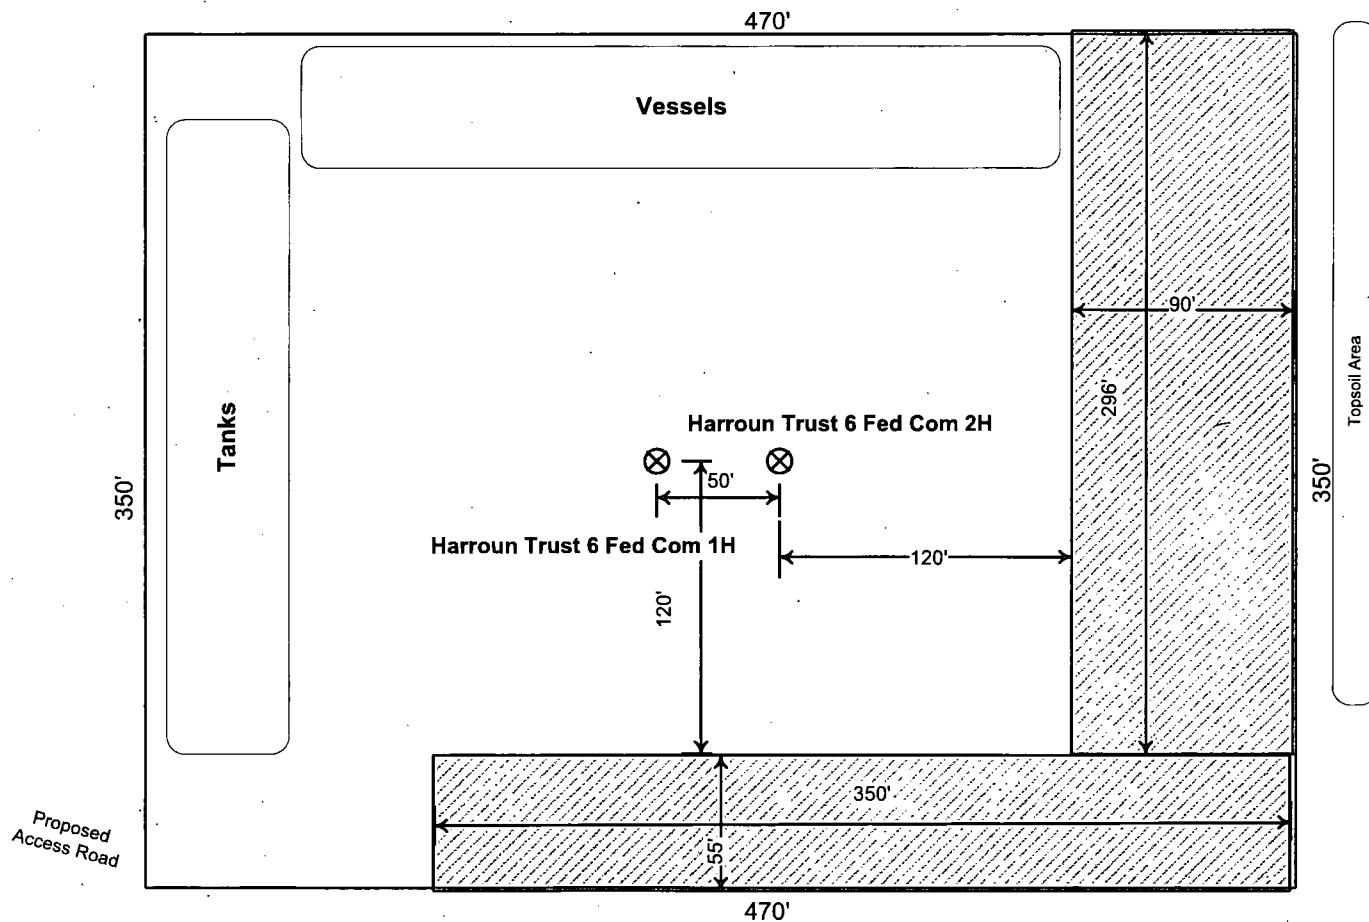

## **SURFACE USE PLAN**

Devon Energy Production Company, L.P.  
Harroun Trust 6 Fed Com 1H

### **1. Existing Roads:**

- a. The well site and elevation plat for the proposed well are reflected on the "Site Map". The well was staked by Madron Surveying, Inc.
- b. All roads into the location are depicted on the "Vicinity Map". The operator will repair pot holes, clear ditches, repair the crown, etc. All existing structures on the entire access route such as cattle guards, culverts, etc. will be properly repaired or replaced if they are damaged or have deteriorated beyond practical use. BLM written approval will be acquired before application of surfactants, binding agents, or other dust suppression chemicals on roadways.
- c. Directions to Location: Beginning at the intersection of US 285 and CR 720, go East on CR 720 0.8 miles to Harroun Road on left, go North-Northeast on Harroun road for 3.1 miles to fork in road, take left continue North on Harroun Road 0.5 miles to a Caliche Lease Road on right, go right to existing pad of Harroun Trust #5, site is South of pad.

### **2. New or Reconstructed Access Roads:**

- a. The "Site Map" shows new constructed access road, which will be approximately 242 LF from the existing Lease road.
- b. The maximum driving width of the access road will be 14 feet. The maximum width of surface disturbance when constructing the access road will not exceed 25 feet. The road will be crowned and ditched with 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 3 feet wide with 3:1 slopes. The driving surface will be made of 6" rolled and compacted caliche.
- c. No cattle guards, grates or fence cuts will be required. No turnouts are planned.

### **3. Location of Existing Wells:**

The attached "One Mile Radius Map" shows all existing and proposed wells within a one-mile radius of the proposed location.

### **4. Location of Existing and/or Proposed Production Facilities:**

- a. In the event the well is found productive, a tank battery and necessary production equipment will be installed onsite. See "Interim Reclamation Diagram".
- b. If necessary, the well will be operated by means of an electric prime mover. If electric power poles are needed, a plat and a sundry notice will be filed with your office.
- c. All flow lines will adhere to API standards.
- d. If the well is productive, rehabilitation plans are as follows:
  - i. A closed loop system will be utilized.
  - ii. The original topsoil from the well site will be returned to the location. The drill site will then be contoured as close as possible to the original state.

**5. Location and Types of Water Supply:**

This location will be drilled using a combination of water mud systems (outlined in the Drilling Program). The water will be obtained from commercial water stations in the area and hauled to location by transport truck using the existing and proposed roads described and depicted on the "Vicinity Map". On occasion, water will be obtained from a pre-existing water well, running a pump directly to the drill rig. In cases where a poly pipeline is used to transport water for drilling purposes, proper authorizations will be secured. If a poly pipeline is used, the size, distance, and map showing route will be provided to the BLM via sundry notice.

**6. Construction Materials:**

Obtaining caliche: One primary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means caliche will be obtained from the actual well site. Actual amounts will vary for each pad. The procedure below has been approved by BLM personnel:

- a. The top 6 inches of topsoil is pushed off and stockpiled along the side of the location.
- b. Subsoil is removed and stockpiled within the surveyed well pad.
- c. When caliche is found, material will be stock piled within the pad site to build the location and road.
- d. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road.
- e. Once well is drilled, the stock piled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced.
- f. Neither caliche, nor subsoil will be stock piled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the Well Site Layout or survey plat.

In the event that no caliche is found onsite, caliche will be hauled in from a BLM approved caliche pit or other established mineral pit. A BLM mineral material permit will be acquired prior to obtaining any mineral material from BLM pits or land.

**7. Methods of Handling Waste Material:**

- a. Drill cuttings will be safely contained in a closed loop system and disposed of properly at a NMOCD approved disposal site.
- b. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier will pick up salts remaining after completion of well, including broken sacks.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Remaining drilling fluids will be sent to a closed loop system. Water produced during completion will be put into a closed loop system. Oil and condensate produced will be put into a storage tank and sold.
- f. Disposal of fluids to be transported by the following companies:
  - i. American Production Service Inc, Odessa TX
  - ii. Gandy Corporation, Lovington NM
  - iii. I & W Inc, Loco Hill NM
  - iv. Jims Water Service of Co Inc, Denver CO

8. **Ancillary Facilities:** No campsite or other facilities will be constructed as a result of this well.
9. **Well Site Layout**
  - a. The Rig Location Layout attachment shows the proposed well site layout and pad dimensions.
  - b. The Rig Location Layout attachment proposes location of sump pits and living facilities.
  - c. Mud pits in the active circulating system will be steel pits.
  - d. A closed loop system will be utilized.
  - e. If a pit or closed loop system is utilized, Devon will provide a copy of the Design Plan to the BLM.
10. **Plans for Surface Reclamation:**
  - a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original top soil will again be returned to the pad and contoured, as close as possible, to the original topography.
  - b. The location and road will be rehabilitated as recommended by the BLM.
  - c. If the well is deemed commercially productive, caliche from areas of the pad site not required for operations will be reclaimed. The original top soil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography.
  - d. All disturbed areas not needed for active support of production operations will undergo interim reclamation. The portions of the cleared well site not needed for operational and safety purposes will be recontoured to a final or intermediate contour that blends with the surrounding topography as much as possible. Topsoil will be respread over areas not needed for all-weather operations.
11. **Surface Ownership**
  - a. The surface is owned by a Private Landowner and an agreement has been reached. The minerals are owned and administered by the U. S. Federal Government. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas. Landowner information as follows:

City of Carlsbad  
101 N. Halagueno  
Carlsbad, NM 99221
  - b. The proposed road routes and the surface location will be restored as directed by the BLM.

**12. Other Information:**

- a. The area surrounding the well site is grassland. The topsoil is very sandy in nature. The vegetation is moderately sparse with native prairie grass, sage bush, yucca and miscellaneous weeds. No wildlife was observed but it is likely that deer, rabbits, coyotes, and rodents traverse the area.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within 2 miles of location.
- d. A Cultural Resources Examination will be completed by Southern New Mexico Archaeological Services, Inc. and forwarded to the BLM office in Carlsbad, New Mexico.

**13. Bond Coverage:**

Bond Coverage is Nationwide; Bond # is CO-1104 & NMB-000801.

**Operators Representative:**

The Devon Energy Production Company, L.P. representatives responsible for ensuring compliance of the surface use plan are listed below.

Kim Henderson - Operations Engineer  
Devon Energy Production Company, L.P.  
333 W. Sheridan  
Oklahoma City, OK 73102-5010  
(405) 552-6505 (office)  
(405) 4793869 (Cellular)

Don Mayberry - Superintendent  
Devon Energy Production Company, L.P.  
Post Office Box 250  
Artesia, NM 88211-0250  
(575) 748-3371 (office)  
(575) 746-4945 (home)

## Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 22nd day of April 2014.

Printed Name: Trina C. Couch

Signed Name: 

Position Title: Regulatory Analyst

Address: 333 W. Sheridan, OKC OK 73102

Telephone: (405)-552-6559

## PECOS DISTRICT CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	<b>Devon Energy Production Company, L.P.</b>
<b>LEASE NO.:</b>	<b>NMMN-77018</b>
<b>WELL NAME &amp; NO.:</b>	<b>Harroun Trust 6 Fed Com 1H</b>
<b>SURFACE HOLE FOOTAGE:</b>	<b>0010' FNL &amp; 0890' FEL</b>
<b>BOTTOM HOLE FOOTAGE</b>	<b>0330' FSL &amp; 1980' FEL</b>
<b>LOCATION:</b>	<b>Section 06, T. 24 S., R 29 E., NMPM</b>
<b>COUNTY:</b>	<b>Eddy County, New Mexico</b>

### TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Communitization Agreement
- ☐ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
  - Cement Requirements
  - Medium Cave/Karst
  - Logging Requirements
  - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
  - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

## **I. GENERAL PROVISIONS**

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

## **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

## **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

## **V. SPECIAL REQUIREMENT(S)**

### **Communitization Agreement**

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. In addition, the well sign shall include the surface and bottom hole lease numbers. If the Communitization Agreement number is known, it shall also be on the sign. If not, it shall be placed on the sign when the sign is replaced.

## **VI. CONSTRUCTION**

### **A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

### **B. TOPSOIL**

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

### **C. CLOSED LOOP SYSTEM**

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

### **D. FEDERAL MINERAL MATERIALS PIT**

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

### **E. WELL PAD SURFACING**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

### **F. EXCLOSURE FENCING (CELLARS & PITS)**

**Exclosure Fencing**

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

**G. ON LEASE ACCESS ROADS****Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

**Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

**Crowning**

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

**Ditching**

Ditching shall be required on both sides of the road.

**Turnouts**


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

**Drainage**

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

#### **Cross Section of a Typical Lead-off Ditch**

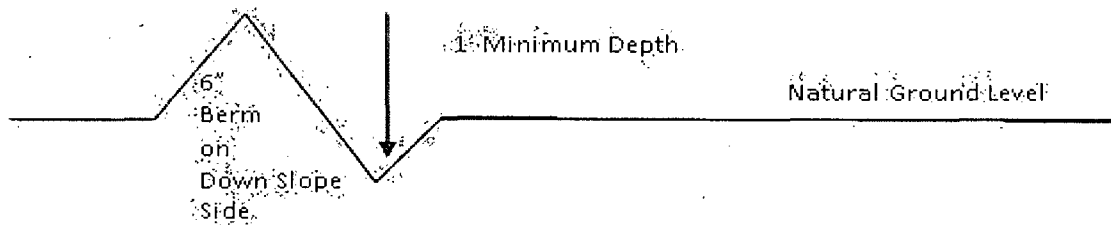

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

#### **Formula for Spacing Interval of Lead-off Ditches**

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

#### **Cattleguards**

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.

#### **Fence Requirement**

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.


#### **Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.


## Construction Steps

1. Salvage topsoil
2. Construct road


3. Redistribute topsoil
4. Revegetate slopes

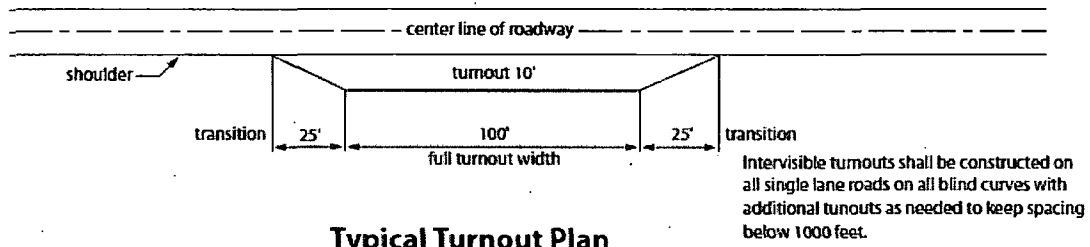


**Typical Turnout Plan**




**Level Ground Section**

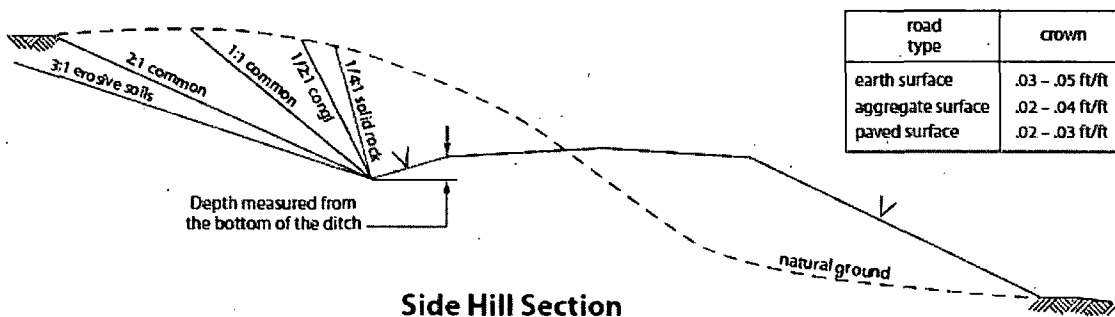

**Side Hill Section**

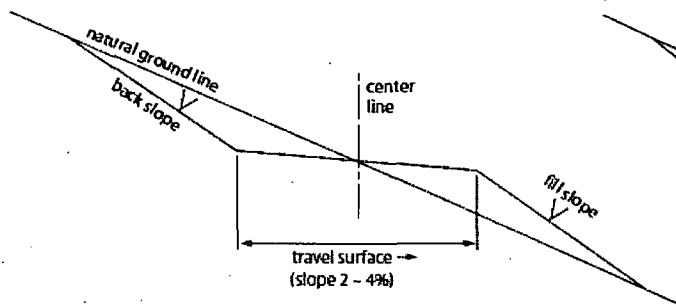

**Typical Outsloped Section**

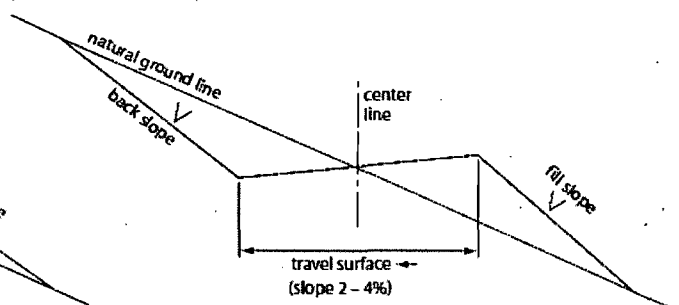

**Typical Insloped Section**

Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

## VII. DRILLING

### A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

1. **Although Hydrogen Sulfide has not been reported in the area, it is always a potential hazard. Operator has stated that they will have monitoring equipment in place prior to drilling out of the surface shoe. If Hydrogen Sulfide is encountered, report measured amounts and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

### B. CASING

**Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).**

**The initial wellhead installed on the well will remain on the well with spools used as needed.**

**Centralizers required on surface casing per Onshore Order 2.III.B.1.f.**

**Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. IF OPERATOR DOES NOT HAVE THE WELL SPECIFIC CEMENT DETAILS ONSITE PRIOR TO PUMPING THE CEMENT FOR EACH CASING STRING, THE WOC WILL BE 30 HOURS. See individual casing strings for details regarding lead cement slurry requirements.**

**No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.**

**Medium Cave/Karst**

**Possibility of water flows in the Castile.**

**Possibility of lost circulation in the Rustler, Salado, and Delaware.**

1. The **13-3/8 inch** surface casing shall be set at approximately **250 feet** (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing, which shall be set at approximately **2750** feet (near the basal anhydrite of the Castile formation) is:

**Option #1 (Single Stage):**

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

**Option #2:**

**Operator has proposed DV tool at depth of 2160', but will adjust cement proportionately if moved. DV tool shall be set a minimum of 50' below previous shoe and a minimum of 200' above current shoe. Operator shall submit sundry if DV tool depth cannot be set in this range. If an ECP is used, it is to be set a minimum of 50' below the shoe to provide cement across the shoe. If it cannot be set below the shoe, a CBL shall be run to verify cement coverage.**

- a. First stage to DV tool:

- ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office before proceeding with second stage cement job. Operator should have plans as to how they will achieve circulation on the next stage.

- b. Second stage above DV tool:

- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

**If 75% or greater lost circulation occurs while drilling the intermediate casing hole, the cement on the production casing must come to surface.**

**Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.**

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

- ☒ Cement should tie-back at least 500 feet into previous casing string. Operator shall provide method of verification. **Excess calculates to 23% - Additional cement may be required.**

4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

### C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **3000 (3M) psi**.
  - a. **For surface casing only:** If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

#### **D. DRILL STEM TEST**

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

#### **E. WASTE MATERIAL AND FLUIDS**

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**JAM 092914**

## **VIII. PRODUCTION (POST DRILLING)**

### **A. WELL STRUCTURES & FACILITIES**

#### **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Exclosure Netting (Open-top Tanks)**

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

#### **Chemical and Fuel Secondary Containment and Exclosure Screening**

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

#### **Open-Vent Exhaust Stack Exclosures**

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

#### **Containment Structures**

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the

largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

### **IX. INTERIM RECLAMATION**

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

### **X. FINAL ABANDONMENT & RECLAMATION**

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

(Insert Seed Mixture Here)  
Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

Species	lb/acre
Sand dropseed ( <i>Sporobolus cryptandrus</i> )	1.0
Sand love grass ( <i>Eragrostis trichodes</i> )	1.0
Plains bristlegrass ( <i>Setaria macrostachya</i> )	2.0

\*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed