
Submit 1 Copy To Appropriate District	State of No	ew Mexico	Form C-103		
Office <u>District I</u> – (575) 393-6161	Energy, Minerals an	d Natural Resources	Revised August 1, 2011		
1625 N French Dr , Hobbs, NM 88240 District II – (575) 748-1283			WELL API NO. 30-015-39652		
811 S. First St., Artesia, NM 88210	OIL CONSERVA		5. Indicate Type of Lease		
<u>District III</u> – (505) 334-6178 1000 Rio Brazos Rd, Aztec, NM 87410		st. Francis Dr.	STATE FEE		
<u>District IV</u> – (505) 476-3460 1220 S. St. Francis Dr., Santa Fe, NM	Santa Fe,	NM 87505	6. State Oil & Gas Lease No.		
87505					
SUNDRY NOT (DO NOT USE THIS FORM FOR PROPO DIFFERENT RESERVOIR. USE "APPLI		N OR PLUG BACK TO A	7. Lease Name or Unit Agreement Name Roo 22 State		
PROPOSALS) 1. Type of Well: Oil Well	Gas Well Other		8. Well Number #6		
2. Name of Operator	Gus Well Guler		9. OGRID Number		
OXY USA INC			16696 10. Pool name or Wildcat		
3. Address of Operator PO BOX 4294; HOUSTON, TX 7	7210		ARTESIA; GLORIETA-YESO (O) - 96830		
4. Well Location					
Unit LetterF			feet from theWline		
Section 22	Township 17S	Range 28E	NMPM County EDDY		
	11. Elevation (Show whet	her DR, RKB, RT, GR, etc. 3580'			
	84				
12. Check	Appropriate Box to Indi	cate Nature of Notice,	Report or Other Data		
NOTICE OF IN	ITENTION TO:	l Sur	SEQUENT REPORT OF:		
PERFORM REMEDIAL WORK		REMEDIAL WOR			
TEMPORARILY ABANDON		COMMENCE DRI	_		
PULL OR ALTER CASING	MULTIPLE COMPL	CASING/CEMEN	T JOB 🔲		
DOWNHOLE COMMINGLE					
OTHER:			MPLETION 🗵		
13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of					
of starting any proposed war proposed completion or rec		NMAC. For Multiple Co.	mpletions: Attach wellbore diagram of		
	r				
Roo 22 State #6					
08/06/2012 – RU Schlumberger wireline make two runs with GR-CBL-VDL-CCL logs. Tag PBTD @ 4860', logs show good					
cement. Load casing with 2 bbls, pressure up on casing to 5,000 psi – hold pressure for 30 minutes (test good) bleed off					
pressure to pump truck. 08/14/2012 – PERF INTERVALS: 3592-3597 and 3647-3652 w/ 4 SPF, 40 holes, 0.48" EHD; 3866-3871 w/ 1 SPF, 5 holes,					
0.48" EHD; 4014-4019, 4128-4133, 4251-4256, 4313-4318, 4657-4662 and 4760-4765 w/ 5 SPF, 150 holes, 0.48" EHD.					
08/14/2012 - FRAC WITH Cross Linked Gel: 511,958 gals; Linear Gel: 44,300 gals; 15% HCl Acid: 7,500 gals; 100 Mesh:					
11,906 lbs; 16/30 Resin Coated SD: 715,729 lbs. RD FRAC TANKS & WIRLINE.					
08/24/2012 – MIRU CLEANOUT RIG. BEGAN AFTER FRAC CLEANOUT. 08/29/2012 – COMPLETE AFTER FRAC CLEANOUT TO PBTD. RDMO. RECEIVED					
08/29/2012 - COMPLETE AFTER	FRAC CLEANOUT TO PBIL	J. KDIVIO.	•		
			OCT 01 2012		
			NMOCD ARTESIA		
I hereby certify that the information	above is true and complete t	o the best of my knowledge	e and belief.		
SIGNATURE MULLI TITLE_REGULATORY ANALYST DATE _09/28/2012					
For State Use Only	AKIE E-mail ad	uress: _jenniter_duarte@o	xy.com PHONE: _713-513-6640		
APPROVED BY) ST HE M.	1/5R DATE 10/9/12		
Conditions of Approval (if any):		a you	DATE		
• • • • • • • • • • • • • • • • • • • •					

Occidental Oil & Gas Corp – Permian Primary – North NM/Terrell RMT					
Well: Roo 22 State #6		API: 30-015-39652			
State: New Mexico	County: Eddy	T18S R28E, Sec 22	1774' FNL & 1466' FWL		
Field: Empire	TD: 4,905'	PBTD: 4,862'	KB: 3,594.4° ASL		
Casing Size	Grade/Weight	Depth [.]	Cement [.]		
9-5/8'`	J-55 LTC / 36#	416°	400 sx, circ'd to surf		
5-1/2"	L-80 LTC / 17#	4,905`	1,310 sx, circ'd to surf		

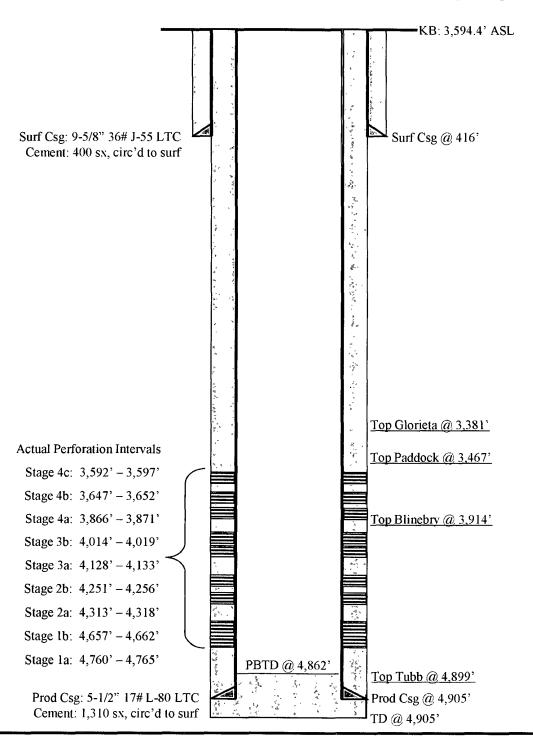

		<u> </u>
	Well:	Roo 22 State #6
	API:	3001539652
Surf	ace Location	
	Producing Method Code:	Р
Wel	l Completion Data:	
	Spud Date:	7/22/2012
	TD DATE:	7/31/2012
:	Ready Date (COMPLETED DATE):	8/29/2012
	RIG RELEASE DATE:	8/1/2012
	Date Frac setup:	8/14/2012
	Date Frac rigdown:	8/14/2012
	Date post-frac cleanout started:	8/24/2012
	Date post-frac cleanout finished:	8/29/2012
	TD:	4905'
	PBTD:	4862'
		3592-3597, 3647-3652; 4 SPF, 40 holes, 0.48" EHD ;
		3866-3871; 1 SPF, 5 holes, 0.48 " EHD; 4014-4019,
		4128-4133, 4251-4256, 4313-4318, 4657-4662, 4760-
	Perforations: (INTERVALS, SPF, SIZE)	4765; 5 SPF, 150 holes, 0.48 " EHD.
	DHC, MC:	-
	Surface Casing - Date Set:	
	Surface Casing - Hole Size:	12-1/4""
	Surface Casing - Type & weight:	36# J-55 LTC
	Surface Casing - Casing Size:	9-5/8"
	Surface Casing - Depth Set:	416'
	Surface Casing - Sacks Cement:	400 sx
	Surface Casing - TOC:	Surface (circ'd)
	Date & test data for Surface Casing:	
	Production Casing - Date Set:	
	Production Casing - Hole Size:	7-7/8"
	Production Casing - Type & Weight:	17# L-80 LTC
	Production Casing - Casing Size:	5-1/2"
ĺ	Production Casing - Depth Set:	4905'
	Production Casing - Sacks Cement:	1310 sx
	Production Casing - TOC:	Surface (circ'd)
	Date & test data for Production Casing:	8/06/12; 5000 psi, held pressure for 30 min.
	Tubing Size:	2-7/8"
- 1	Tubing Depth:	3468'
	Test Data:	
}	Date New Oil:	9/13/2012
	Test Date:	9/16/2012
	Test Length:	24
	Tbg. Pressure:	324
	Csg. Pressure:	130
	Choke Size:	
	Oil:	74
ŀ	Water:	1845
}	Gas:	63
- +	GAS - OIL RATIO	851.35 scf/bbl
· ·	OIL GRAVITY - API (CORR)	39
	Test Method: DISPOSITION OF GAS (SOLD, USED FOR FUEL,	P
- 1	DISPOSITION OF GAS (SOLD, USED FOR FUEL, 1	SOLD (currently being flored but will be sald)
		SOLD (currently being flared but will be sold)