1625 N. Freych Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210 District III 1000 Rio Brazos Road, Aztec, NM 87410 District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

Form C-144 June 1, 2004 For drilling and production facilities, submit to appropriate NMOCD District Office.
For downstream facilities, submit to Santa Fe office


Oil Conservation Division Santa Fe, NM 87505

1220 South St. Francis Dr.

Pit or Below-Grade Tank Registration or Closure	
Is pit or below-grade tank covered by a "general plan"? Yes No x	
Type of action: Registration of a pit or below-grade tank [Closure of a pit or below-grade tank]	
Operator: Pogo Producing Company Telephone: 432-685-8100 e-mail address: wrightc@pogoproducing.com	
Address: P. O. Box 10340, Midland, TX 79702-7340	
Facility or well name: Harroun 15 #14 API#: 3	30-015- 32620 U/L or Qtr/Qtr D Sec 15 T 24S R 29E
	32:13:22.58N Longitude 103:58:41.59W NAD: 1927 1983
Surface Owner: Federal State X Private Indian	
<u>Pit</u>	Below-grade tank Volume:bbl Type of fluid: Construction material: Double-walled, with leak detection? Yes
Type: Drilling ☑ Production ☐ Disposal ☐	Volume:bbl Type of fluid:
Workover Emergency	Construction material:
Lined [Unlined [Double-walled, with leak detection? Yes If not, explain why not.
Liner type: Synthetic Thickness 12 mil Clay	
Pit Volume 20400bbl	
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet (20 points)
	50 feet or more, but less than 100 feet (10 points)
	100 feet or more X (0 points) O
Wellhead protection area: (Less than 200 feet from a private domestic	Yes (20 points)
water source, or less than 1000 feet from all other water sources.)	No X (0 points)
water sources, or less than 1000 feet from an other water sources.)	
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet (20 points)
	200 feet or more, but less than 1000 feet (10 points)
	1000 feet or more X1 (0 points)
·	Ranking Score (Total Points)
f this is a pit closure: (1) Attach a diagram of the facility showing the pit's relationship to other equipment and tanks. (2) Indicate disposal location: (check the onsite box if	
your are burying in place) onsite 🔀 offsite 🗌 If offsite, name of facility (3) Attach a general description of remedial action taken including	
emediation start date and end date. (4) Groundwater encountered: No 🗵 Yes 🗌 If yes, show depth below ground surface ft. and attach sample results.	
5) Attach soil sample results and a diagram of sample locations and excavations.	
Additional Comments: Amended to show onsite disposal	
Constructed before 4/15/04	
I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that the above-described pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines. a general permit , or an (attached) alternative OCD-approved plan .	
00.405.405	
Date: 09/06/05	
Printed Name/Title Cathy Wright, Sr Eng Tech Signature Cathy Whight	
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.	
Approval:	
Printed Name/Title Field Supervisor Signature Signature	

Pit Closing Procedure:

Pits are dewatered. Dirt contractor digs a deep bury pit adjacent to the drilling pit. Deep bury pit is lined with 12 mil plastic. Dirt contractor pushes contents of drilling pit into the deep bury pit. Deep bury pit is capped with 20 mil plastic then covered with 3 feet of fill dirt.

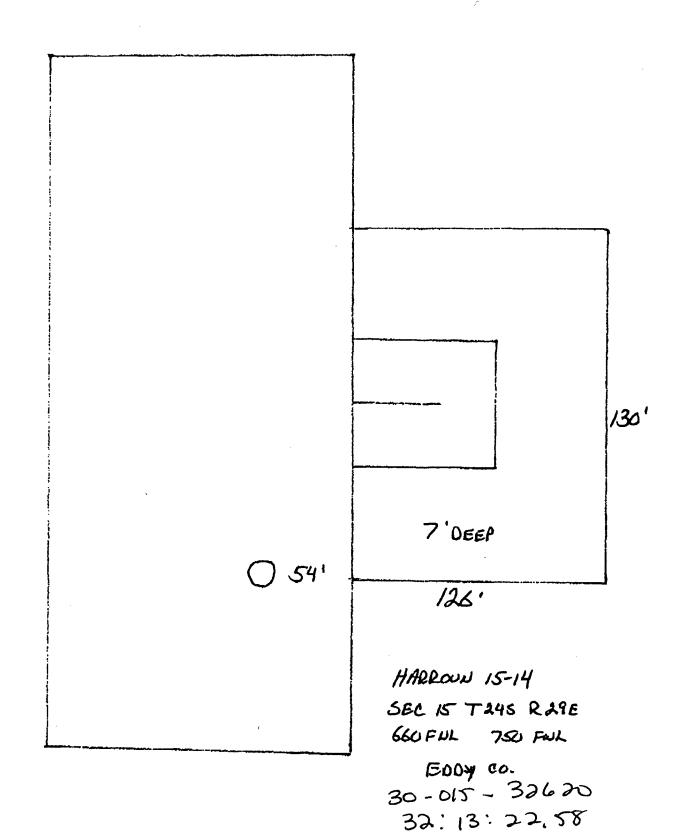

søde e

4329434252

JUN 05,2005 10:58 Butters

103: 581 41.59