OCD Artesia FORM APPROVED Form 3160-3 OMB No. 1004-0137 Expires March 31, 2007 (April 2004) UNITED STATES 5HL- LCU29435A Lease Serial No. DEPARTMENT OF THE INTERIOR BHL NMLC - 029435B BUREAU OF LAND MANAGEMENT 6. If Indian, Allotee or Tribe Name APPLICATION FOR PERMIT TO DRILL OR REENTER 7. If Unit or CA Agreement, Name and No DRILL la. Type of work: REENTER 8. Lease Name and Well No. ✓ Single Zone Multiple Zone lb. Type of Well: ✓ Oil Well Gas Well NFE FEDERAL #39H <308724> Name of Operator 9. API Well No. APACHE CORPORATION 30-015-3b. Phone No. (include area 10. Field and Pool, or Exploratory 3a. Address 303 VETERANS AIRPARK LN #3000 CEDAR LAKE; GLORIETA-YESO MIDLAND, TX 79705 432-818-1167 11, Sec., T. R. M. or Blk. and Survey or Area 4. Location of Well (Report location clearly and in accordance with any State requirements.*) 572' FNL & 1000' FEL UL: A SEC: 7 NMLC-029435A At surface SEC: 7 T17S R31E At proposed prod. zone 572' FNL & 330' FEL UL: A SEC: 8 NMLC-029435B 12. County or Parish 13 State 14. Distance in miles and direction from nearest town or post office* 6.7 MILES EAST NORTHEAST FROM LOCO HILLS, NM **EDDY** NM Distance from proposed 17. Spacing Unit dedicated to this well 16. No. of acres in lease 330 location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 1885 ACRES 200 ACRES 20. BLM/BIA Bond No. on file 18. Distance from proposed location* to nearest well, drilling, completed, 19. Proposed Depth BLM - CO - 1463 NATIONWIDE / NMB000736 applied for, on this lease, ft. MDW 114361 22. Approximate date work will start* 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 23. Estimated duration As Sonn As Approved 3748 ~ 25 DAYS 24. Attachments The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form: 1. Well plat certified by a registered surveyor. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). Such other site specific information and/or plans as may be required by the authorized officer. Date 1125/12 25. Signature Name (Printed/Typed) SORINA L. FLORES Title SUPV OF DRILLING SERVICES Date DEC Name (Printed/Typed) Approved by (Signature) 7 2012 /s/ Don Peterson Title Office FIELD MANAGER CARLSBAD FIELD OFFICE Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon. APPROVAL FOR TWO YEARS Conditions of approval, if any, are attached. Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

Roswell Controlled Water Basin

RECEIVED DEC 11 2012

Approval Subject to General Requirements & Special Stipulations Attached

nmocd artesia see attached for CONDITIONS OF APPROVAL DISTRICT I 1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

Phone: (575) 393-6161 Fax: (575) 393-0720 DISTRICT II 811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 DISTRICT III 1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, NM 87505 Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, New Mexico 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

□AMENDED REPORT

3239

JWSC W.O.: 12.11.0470

WELL LOCATION AND ACREAGE DEDICATION PLAT


30-015-	40903	Pool Code 96831	Cedar Lake: Glorieta	•					
Property Code			operty Name	Well Number					
308724		NFE	FEDERAL	39H					
OGRID No.		Op	perator Name	Elevation					
813		APACHE CORPORATION							
		Const	Continu						

Surface Location

UL or lot No.	Section	Township	Range	Lot ldn	Feet from the	North/South line	Feet from the	East/West line	County
A	7	17-S	31-E		572	NORTH	1000	EAST	EDDY

Bottom Hole Location If Different From Surface

-	UL or lot No.	Section	Townsh	ip	Range	Lot Idn	Fe	et from the	North/South line	Feet from the	East/West line	County
	A	8	17-S	;	31-E			572	NORTH	330	EAST	EDDY
	Dedicated Acres		nsolidation Co	ode (Order No.							
	200				•							

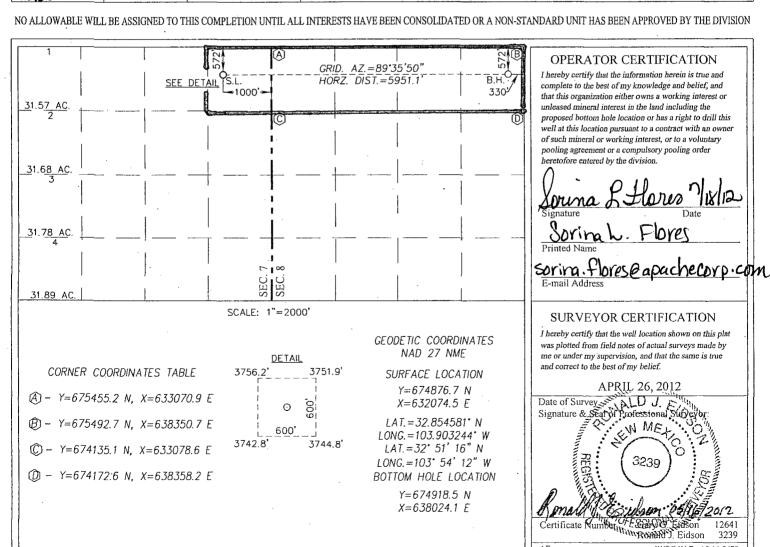

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT CARLSBAD FIELD OFFICE 620 E. GREENE STREET CARLSBAD, NM 88220

STATEMENT ACCEPTING RESPONSIBILITY FOR OPERATIONS

Operator Name:	APACHE CORPORATION
Street or Box:	303 VETERANS AIRPARK LANE, STE. 3000
City, State:	Midland, TX
Zip Code:	79705
_	iccepts all applicable terms, conditions, stipulations, and restrictions ions conducted on the leased land or portion thereof, as described
Lease No: NV	ILC-029435A & NMLC-029435B NFE FEDERAL #39H
Legal Description	of Land: SHL: 572' FNL & 1000' FEL BHL: 572' FNL & 330' FEL
UL: A Section:	
County: EDDY	State: NM
Bond Coverage:	\$150,000
Statewide Oil and	Gas Surety Bond, APACHE CORPORATION.
BLM Bond File No.	: BLM-CO-1463 NATIONWIDE / NMB000736
Signature:	Oby L Smith Printed Name: BOBBY L. SMITH
Title: DRI	LLING MANAGER, PERMIAN REGION
Date:	24/12
Apache Corporation	

Responsibility Letter

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT CARLSBAD FIELD OFFICE 620 E. GREENE STREET CARLSBAD. NM 88220

OPERATOR CERTIFICATION

I HEARBY CERTIFY THAT I, OR SOMEONE UNDER MY DIRECT SUPERVISION, HAVE INSPECTED THE DRILL SITE AND ACCESS ROUTE PROPOSED HEREIN; THAT I AM FAMILIAR WITH THE CONDITIONS WHICH CURRENTLY EXIST; THAT I HAVE FULL KNOWLEDGE OF STATE AND FEDERAL laws applicable to this operation; that the statements made in the APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Executed this 24 TH day of JULY, 2012

Well: NFE FEDERAL 39H	
Operator Name: APACHE CO	DRPORATION
Signature: Term West	Printed Name: TERRY WEST
Title: Drilling Engineer	Date:
Email (optional): terry.wes	st@apachecorp.com
Street or Box: 303 Vetera	ins Airpark Ln., Ste. 3000
City, State, Zip Code: Midland, T	X 79705
Telephone: 4	32-818-1114
Field Representative (if not above si	-
Address (if different from above):	
Telephone (if different from above)	
Email (optional):	

Agents not directly employed by the operator must submit a letter from the operator authorizing that the agent to act or file this application on their behalf.

DRILLING PLAN: BLM COMPLIANCE (Supplement to BLM 3160-3)

APACHE CORPORATION (OGRID: 873) NFE FEDERAL #39H

Lease #: NMLC-029435B Projected TVD: ~5700' MD: ~11436' GL: 3748'

SHL: 572' FNL & 1000' FEL UL: A SEC: 7

BHL: 572' FNL & 330' FEL LOT: A SEC: 8

T17S R31E EDDY COUNTY, NM

1. GEOLOGIC NAME OF SURFACE FORMATION: Eolian/Piedmond Alluvial Deposits

2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Quaternary Aeolian	Surf	Queen	2445'
Rustler	322'	Grayburg	2819'
Salt Top	544'	San Andres	3170' (Oil)
Salt Bottom	1391'	Glorieta	4640'
Yates	1554'	Yeso (Paddock)	4691' (Oil)
Seven Rivers	1799'	TVD / MD	~5700' / ~11436'

Avg Depth to Ground Water: ~91'

Fresh water & prospectively valuable minerals, as described by BLM, encountered during drilling, will be recorded by depth & adequately protected. All oil & gas shows within zones of correlative rights will be tested to determine commercial potential. Surface FW sands will be protected by setting 13-3/8" csg @250' & circ cmt back to surface. Hydrocarbon zones will be protected by setting 9-5/8" csg @ ~3500', if water flow is encountered, then 7" @ ~5260'; 4-1/2" liner f/7" csg though build @ ~5268' TVD/MD holding at ~5865' MD.

3. CASING PROGRAM:

All casing is new & API approved

<u>.</u> [STRING	HOLE SIZE	DEPTH	OD CSG	WEIGHT	COLLAR	GRADE	COLLAPSE	BURST	TENSION
1	Surface	17-1/2"	0'-350 405	13-3/8"	48#	STC	H-40	1.125	1.21	1.8
	Intermediate *	12-1/4"	0′ - 3500′	9-5/8"	36#	STC	J-55	1.125	1.21	1.8
	Production	8-3/4"	0' - 5260'	7"·	26#	LTC	J-55	1.125	1.21	1.8
	Production Liner	6-1/8"	5160' – 11436'	4.5"	11.6#	LTC	L-80	1.125	1.21	1.8

^{*}Contingency: 9-5/8" string will only be ran if water flows are encountered.

4. CEMENT PROGRAM:

Surface (TOC - Surface) **100% excess cmt to surf** Cmt with:

Lead: 180 sx Class C w/4% Gel + 2% CaCL2 + 0.125#/sx CF → 0.25#/sx Defoamer (13.5 wt, 1.75 yld)

Compressive Strengths: **12 hr** – 786 psi **24 hr** – 1213 psi

Tail: 200 sx Class C w/ 1% CaCL2 (14.8 wt, 1.33 yld)

Compressive Strengths: 12 hr - 1565 psi 24 hr - 2442 psi

<u>Intermediate (TOC – Surface) **50% excess cmt to surf**. Cmt with:</u>

Lead: 700 sx Class C w/4% Gel + 2% CaCL2 + 0.125 #/sx CF + 0.25 #/sx Defoamer (13.5 wt, 1.75 yld)

Compressive Strengths: **12 hr** – 709 psi **24 hr** – 1103 psi

Tail: 380 sx Class C w/ 1% Retarder (14.8 wt, 1.33 yld)

Compressive Strengths: 12 hr - 1654 psi 24 hr - 2256 psi

(May use a DVT & modify cmt program for a 2 stage job, if a strong water flow is encountered)

Production (TOC: Surface) **35% excess cmt** Cmt with:

Lead: 240 sx Class C 50/50 Poz w/5% Salt + 10% Gel + 3 #/sx KOLSeal + 0.25% Defoamer + 0.125 #/sx CF (11.9 wt, 2.46 yld)

Compressive Strengths: 12 hr - 156 psi 24 hr - 1081 psi

Tail: 390 sx PVL w/1.3% Salt + 5% Expanding cmt + 0.5% Gel suppressing agent + 0.1% antisetting agent + 0.25% Defoamer + 0.2% Retarder (13.0 wt, 1.48 yld)

Compressive Strengths: 12 hr – 642 psi 24 psi – 1016 psi

*Contingency: If 9-5/8" string is not ran, the following cmt program will be used for the Production string & will bring cmt to surface using 35% excess:

<u>Lead</u>: 910 sx Class C 50/50 w/5% Salt + 10% Gel + 3 #/sx KOL Seal + 0.25% Defoamer + 0.125 #/sx CF (11.9 wt, 2.46 yld)

Compressive Strengths: 12 hr – 156 psi 24 hr – 1081 psi

<u>Tail:</u> 760 sx PVL w/1.3% Salt + 5% Expanding cmt + 0.5% Gel suppressing agent + 0.1% antisetting agent + 0.25% Defoamer + 0.2% Retarder (13.0 wt, 1.48 yld)

Compressive Strengths: 12 hr - 642 psi 24 psi - 1016 psi

D. Apache proposes to run a multiple packer system on the 4-1/2" production liner which will tie back into the 7" string (No Cmt). 9-5/8" string will only be run if water flows are encountered. May have to use DVT & modify cmt program for a 2-stage job, if a strong water flow is encountered. Contingency cmt for production string will be used if intermediate string is not run. Intermediate string will only be run if water flows are encountered. An isolation pkr will be set at or a few feet inside the lease offset limit & no ports will be placed between this isolation pkr & the liner top pkr, if the adjoining leases are not going to be unitized.

** The above cmt volumes could be revised pending caliper measurement from open hole logs. For Surface csg: If cmt does not circ to surface, the appropriate BLM office shall be notified. The TOC shall be determined as directed by the BLM for the specific set of circumstances. Cement will then be brought to surface via either 1" or ready mix operations, as specified by the BLM at that time.

5. PROPOSED CONTROL EQUIPMENT

"EXHIBIT 3" shows a 13-5/8" 3M psi WP BOP consisting of at least annular bag type preventer. This BOP will be nippled up on the 13-3/8" surface csg head & tested to 70% of casing burst. After the 9-5/8" intermediate csg is set & cemented (or after the 7" string, if the 9-5/8" casing isn't ran), either a 13-5/8" or an 11" 3M BOP consisting of an annular bag type preventer, middle blind rams and bottom pipe rams will be installed in place of the original BOP & utilized continuously until TD is reached. The BOP will be tested at 2000 psi, maximum surface pressure is not expected to exceed 2M psi, BHP is calculated to be approximately 2171 psi. *All BOP's & associated equipment will be tested as per BLM Drilling Operations Order #2. The BOP will be operated & checked each 24 hr period & blind rams will be operated & checked when the drill pipe is out of the hole. Functional tests will be documented on the daily driller's log. "EXHIBIT 3" also shows a 3M psi choke manifold with a 3" blow down line. Full opening stabbing valve & Kelly cock will be on derrick floor in case of need. No abnormal pressures of temperatures are expected in this well. No nearby wells have encountered any problems.

* Contingency: Apache respectfully requests a variance for using a flex hose contingent on type of rig used due to rig scheduling. If a flex hose is utilized, the company man will have all proper certified paperwork for that hose available on location. Possible flex hose specifications listed below:

Flex Hose Variance Statement

Apache request a variance if Basic 44 is used to drill this well to use a co-flex line between the BOP & choke manifold.

Manufacturer: NRP Jones
Serial #: MJL001CK

Length: 26 Size: 3 Ends – Flanges / Clamps

WP rating: 10,000psi Anchors required by manufacturer – Yes / No

6. AUXILIARY WELL CONTROL EQUIPMENT / MONITORING EQUIPMENT:

13-3/8" & 11" x 3000 psi Double BOP/Blind & pipe ram (3M BOP/BOPE to be used as 2M system)

4-1/2" x 3000 psi Kelly valve

13-3/8" & 11" x 3000 psi mud cross – H2S detector on production hole

Gate-type safety valve 3" choke line from BOP to manifold

2" adjustable chokes – 3" blow down line

Fill up line as per Onshore Order 2

7. PROPOSED MUD CIRCULATION SYSTEM: (Closed Loop System)

INTERVAL	MW (ppg)	VISC (sec/qt)	FLUID LOSS (cc)	MUD TYPE
0'-250'405	8.4 – 9.0	30 – 45	NC	FW
,350' to 3500' *	9.8 – 10.2	28 – 34	NC .	· Brine
3500' – 5260'	8.6 – 9.1	28 – 36	NC	FW/Brine .
5260' 11436'	. 8.6 – 9.1	28 – 40	15 - NC	FW/Brine

^{*} Contingency: If 9-5/8" string is not run, these mud properties will be continued to the next casing seat instead of those indicated on the next line.

8. LOGGING, CORING & TESTING PROGRAM: See COA

- A. OH logs: Dual Laterolog, MSFL, CNL, Litho-Density, Gamma Ray, Caliper & Sonic from TD back to last csg shoe.
- **B.** Run CNL, Gamma Ray from last csg shoe back to surface.
- **C.** No cores, DST's or mud logger are planned at this time.
- **D.** Additional testing will be initiated subsequent to setting the 5-1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows & drill stem tests.

9. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered, however, the proposed mud program will be modified to increase the mud-weight. There is known presence of H_2S in this area. If H_2S is encountered the operator will comply with the provisions of *Onshore Oil & Gas Order No. 6.* No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated <u>BHP: 2171 psi</u> and estimated <u>BHT: 115°.</u>

10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:

Road and location construction will begin after BLM has approved APD. Anticipated spud date will be after BLM approval and as soon as rig is available. Move in operations and drilling is expected to take $\sim 25 \frac{\text{days}}{\text{days}}$. If production casing is run then an additional $90 \frac{\text{days}}{\text{days}}$ will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

11. OTHER FACETS OF OPERATION:

After running csg, cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Cedar Lake; Glorieta-Yeso formation will be perforated and stimulated in order to establish production. The well will be swab tested & potentialed as an oil well.

^{**} The necessary mud products for weight addition and fluid loss control will be on location at all times. In order to run open hole logs & casing, the above mud properties may have to be altered to meet these needs.



Apache Corporation

Eddy County, NM (Nad27) NFE Federal NFE Federal 39H Wellbore #1

Plan: Plan#1 071912

Apache

19 July, 2012





Phoenix Technology Services

Apache



Well NFE Federal 39H Local Co-ordinate Reference: Company: Apache Corporation WELL @ 3770.00usft (Original Well Elev) Project: Eddy County, NM (Nad27) TVD Reference: WELL @ 3770.00usft (Original Well Elev) Site: NFE Federal MD Reference: NFE Federal 39H Well: North Reference: Survey Calculation Method: Minimum Curvature Wellbore: Wellbore #1 GCR DB v5000 Design: Plan#1 071912. Database: Project Eddy County, NM (Nad27) US State Plane 1927 (Exact solution) Mean Sea Level Map System: System Datum: NAD 1927 (NADCON CONUS) Geo Datum: Map Zone: New Mexico East 3001 Site NFE Federal 673,264.70 usft Northing: Latitude: 32° 51' 0.4904 N Site Position: 103° 53' 57.3497 W 633,303.50 usft Longitude: From: Map Easting: 0.24° 13-3/16 " **Grid Convergence: Position Uncertainty:** 0.00 usft Slot Radius: Well NFE Federal 39H +N/-S 0.00 usft Latitude: 32° 51' 16.4910 N Well Position Northing: 674,876.70 usft +E/-W 0.00 usft 632,074.50 usft Longitude: 103° 54' 11.6793 W Easting: 0.00 usft **Ground Level:** 3,745.00 usft Position Uncertainty Wellhead Elevation: Wellbore Wellbore #1 Field Strength Model Name Sample Date Declination . Dip Angle Magnetics (nT) (°) (°) 07/19/12 60.69 48,847 IGRF2010_14 7.65 Plan#1 071912 Design Audit Notes: 0.00 Version: PLAN Phase: Tie On Depth: Vertical Section: Depth From (TVD) +N/-S +E/-W Direction (usft) (usft) (usft) (°) 0.00 0.00 0.00 89.60 Survey Tool Program Date 07/19/12 From To (usft) (usft) Survey (Wellbore) Tool:Name Description 11,436.45 Plan#1 071912 (Wellbore #1) MWD MWD - Standard 0.00



Phoenix Technology Services Apache



Company:

Apache Corporation

Eddy County, NM (Nad27)

Site: NFE Federal Well Wellbore: Wellbore #1 Design: Plan#1 071912 Local Co-ordinate Reference:

TVD Reference:

North Reference:

Survey Calculation Method: Database: Well NFE Federal 39H

WELL @ 37.70.00usff (Original Well Elev) WELL @ 37.70.00usff (Original Well Elev)

Grid

Minimum, Curvature, GCR DB v5000

	**.	٠.,			S		75		٠.
DI	21	21	20	ď	30		m.	0	.,
	a		10	. •	. •	•	·v	c	y

		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		TVDS	ΤVD	N/S E/V	Strategie in the strate		DLeg,	Northing.	Easting
gish and		A	(°)	/(usft)	(ùsft)	(usft) (usf	0.00	(usft) (%/1 0.00	00usft) 0.00	(usft) 674,876.70	(üsft) 632,074.50
	0.00	0.00	0.00	-3,770.00	0.00	0.00		0.00	0.00	674,876.70	632,074.50
1	100.00	0.00	0.00	-3,670.00	100.00	0.00	0.00				-
	200.00	0.00	0.00	-3,570.00	200.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	300.00	0.00	0.00	-3,470.00	300.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	322.00	0.00	0.00	-3,448.00	322.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	Rustier		•			•					
	400.00	0.00	0.00	-3,370.00	400.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	500.00	0.00	0.00	-3,270.00	500.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
1	544.00	0.00	0.00	-3,226.00	544.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	T/Salt		· ·				-				1.55
	600.00	0.00	0.00	-3,170.00	600.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	700.00	0.00	0.00	-3,070.00	700.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	800.00	0.00	0.00	-2,970.00	800.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	900.00	0.00	0.00	-2,870.00	900.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,000.00	0.00	0.00	-2,770.00	1,000.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,100.00	0.00	0.00	-2,670.00	1,100.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,200.00	0.00	0.00	-2,570.00	1,200.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,300.00	0.00	0.00	-2,470.00	1,300.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,391.00	0.00	0.00	-2,379.00	1,391.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	B/Salt								· .		10
	1,400.00	0.00	0.00	-2,370.00	1,400.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,500.00	0.00	0.00	-2,270.00	1,500.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,554.00	0.00	0.00	-2,216.00	1,554.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	Yates										. Paris Pro
	1,600.00	0.00	0.00	-2,170.00	1,600.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,700.00	0.00	0.00	-2,070.00	1,700.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
j	1,800.00	0.00	0.00	-1,970.00	1,800.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
	1,900.00	0.00	0.00	-1,870.00	1,900.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50



Phoenix Technology Services Apache

PHOENIX
TECHNOLOGY SERVICES

Company: Project:

Apache Corporation Eddy County, NM (Nad27)

Site: NFE Federal NFE Federal 39H Wellbore: Wellbore.#1 Design: Plan#1 071912

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference: Survey Calculation Method:

Database: 🔝 🐭 🔭

Well NEE Federal 39H

WELL @ 3770.00usft (Original Well Elev) WELL @ 3770.00usft (Original Well Elev)

Grid

Minimum Curvature GCR DB v5000

Planned Survey

一十分,我就们有她的那么那么那么那么那么那么说,这一样,那一个好好,这个一个都不是我的女孩,不是一个女孩,一个女孩,这一个女孩,这一个女孩,这一个女子,这一样,	E/W V. s (usft) (us	ec m (9)	DLeg	Northing	Easting
(usft) (usft) (usft) (usft)		ft) 191			CONTRACTOR OF THE PROPERTY OF
		Secretary Burney	100usft)	(usft)	(usft)
2,000.00 0.00 0.00 -1,770.00 2,000.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,100.00 0.00 -1,670.00 2,100.00 0.00	0.00	0.00	. 0.00	674,876.70	632,074.50
2,200.00 0.00 0.00 -1,570.00 2,200.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,300.00 0.00 -1,470.00 2,300.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,400.00 0.00 -1,370.00 2,400.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,445.00 0.00 0.00 -1,325.00 2,445.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
. Queen				State Control	
2,500.00 0.00 0.00 -1,270.00 2,500.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,600.00 0.00 -1,170.00 2,600.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,700.00 0.00 0.00 -1,070.00 2,700.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,800.00 0.00 -970.00 2,800.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
2,900.00 0.00 -870.00 2,900.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,000.00 0.00 0.00 -770.00 3,000.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,100.00 0.00 0.00 -670.00 3,100.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,170.00 0.00 0.00 -600.00 3,170.00 0.00	0.00	0.00	.0.00	674,876.70	632,074.50
San Andres		· · · · · · · · · · · · · · · · · · ·		E Service	in the state of
3,200.00 0.00 -570.00 3,200.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,300.00 0.00 0.00 -470.00 3,300.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,400.00 0.00 -370.00 3,400.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,500.00 0.00 -270.00 3,500.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,600.00 0.00 0.00 -170.00 3,600.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,700.00 0.00 -70.00 3,700.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,800.00 0.00 0.00 30.00 3,800.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
3,900.00 0.00 0.00 130.00 3,900.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,000.00 0.00 0.00 230.00 4,000.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,100.00 0.00 0.00 330.00 4,100.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,200.00 0.00 0.00 430.00 4,200.00 0.00	0.00	0.00	0.00	674,876.70	632,074.50



Phoenix Technology Services

Apache



Company: Project:

Apache Corporation

Eddy County, NM (Nad27)

Site: Well:

NFE Federal NFE Federal 39H

Wellbore #1 Wellbore: Design: Plan#1 071912 Local Co-ordinate Reference: TVD Reference:

"MD Reference: North Reference:

Survey Calculation Method: Database:

WELL @ 3770.00usft (Original Well Elev) WELL @ 3770.00usft (Original Well Elev)

Grid

Minimum Curvature GCR DB v5000

Well NEE Federal 39H

Planned Survey	a a a a a a a a a a a a a a a a a a a 	 		Kanar San Telahan Banyang Tan	राज्य क्रिकारका स्थापक वस्त्र र	24 T. SAC STAR	্র এক চলাল চার্ডির	TERRE AT TRACK		Transport of the
MD	ic Azi ((azimuth)	VDSS)	ΤVD	oN/S	EM	/ Sec	DLeg	Northing **	Easting
(usft)			(usft)	(jusft)				(100usft)		(usft)
4,300.00	0.00	0.00	530.00	4,300.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,400.00	0.00	0.00	630.00	4,400.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,500.00	0.00	0.00	730.00	4,500.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,600.00	0.00	0.00	830.00	4,600.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,638.00	0.00	0.00	868.00	4,638.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
Giorieta 4,684.00	0.00	0.00	914.00	4,684.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
Yeso (Paddock)										
4,700.00	0.00	0.00	930.00	4,700.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,800.00	0.00	0.00	1,030.00	4,800.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
4,900.00	0.00	0.00	1,130.00	4,900.00	0.00	0.00	0.00	- 0.00	674,876.70	632,074.50
5,000.00	0.00	0.00	1,230.00	5,000.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
5,100.00	0.00	0.00	1,330.00	5,100.00	0.00	0.00	0.00	0.00	674,876.70	632,07.4.50
5,162.00	0.00	0.00	1,392.00	5,162.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
Yeso (Blinebry)					•				ere propinsi ng men	talania ira
5,200.00	0.00	0.00	1,430.00	5,200.00	0.00	0.00	0.00	0.00	674,876.70	632,074.50
5,268.45	0.00	0.00	1,498.45	5,268.45	0.00	0.00	0.00	0.00	674,876.70	632,074.50
Start Build 15.00 5,300.00	4.73	89.60	1,529.96	5,299.96	0.01	1.30	1.30	15.00	674,876.71	632,075.80
5,300.00	4.73 19.73	89.60	1,627.41	5,397.41	0.16	22.43	22.43	15.00	674,876.86	632,096.93
			·	·						
5,500.00	34.73	89.60	1,716.08	5,486.08	. 0.48	68.06	68.06	15.00	674,877.18	632,142.56
5,600.00	49.73	89.60	1,789.91	5,559.91	0.95	135.08	135.08	15.00	674,877.65	632,209.58
5,700.00	64.73	89.60	1,843.88	5,613.88	1.54	218.92	218.93	15.00	674,878.24	632,293.42
5,800.00	79.73	89.60	1,874.31	5,644.31	2.21	313.88	313.89	15.00	674,878.91	632,388.38
5,865.05	89.49	89.60	1,880.41	5,650.41	2.66	378.56	378.57	15.00	674,879.36	632,453.06
Start 5571.40 hold at	5865.05 MD						* ••			
5,900.00	89.49	89.60	1,880.72	5,650.72	2.91	413.51	413.52	0.00	674,879.61	632,488.01
6,000.00	89.49	89.60	1,881.61	5,651.61	3.61	513.50	513.51	0.00	674,880.31	632,588.00



Phoenix Technology Services Apache



Company:

Apache Corporation

Rroject: Eddy County, NM (Nad27)

Site:^ Well: NFE Federal NFE Federal 39H

-Wellbore: Design: Wellbore #1 Plan#1 071912 Local Co-ordinate Reference:

TVD Reference:

North Reference: Survey Calculation Method: Database: Well NFE Federal 39H

WELL @ 3770.00usft (Original Well Elev) WELL @ 3770.00usft (Original Well Elev)

Grid

Minimum Curvature

Planned Survey

Planned Survey	i di	<u> Arian magazakaran arigi</u>	<u> सुर्व र बर्गिया पुरूष सम्बद्ध</u> ा	ता के _{कि} र्मान के सुद्रा के सुद्रा है.			Tan Kiji Makatan	· Beller Brigging	40.00 P. V. 10.00 P. 10.00	E Ton Party Land
MD	Inc	Azi (azimuth)	TVDSS	πvD	N/S	E/W	v. sêc	DLeg"	Northing =	Easting
(usft)	· · · · · · · · · · · · · · · · · · ·	(°)	(usft)	(usft)'	(usft)		(usft)	(°/100usft)	ो(usft) और ्र	(usft)
6,100.00	89.49	89.60	1,882.50	5,652.50	4.31	613.50	613.51	0.00	674,881.01	632,688.00
6,200.00	. 89.49	. 89.60	1,883.39	5,653.39	5.01	713.49	713.51	0.00	674,881.71	632,787.99
6,300.00	89.49	89.60	1,884.28	5,654.28	5.72	813.48	813.50	0.00	674,882.42	632,887.98
6,400.00	89.49	89.60	1,885.17	5,655.17	6.42	913.48	913.50	0.00	674,883.12	632,987.98
6,500.00	89.49	89.60	1,886.06	5,656.06	7.12	1,013.47	1,013.49	0.00	674,883.82	633,087.97
6,600.00	89.49	89.60	1,886.95	5,656.95	7.82	1,113.46	1,113.49	0.00	674,884.52	633,187.96
6,700.00	89.49	89.60	1,887.84	5,657.84	8.53	1,213.46	1,213.49	0.00	674,885.23	633,287.96
6,800.00	89.49	89.60	1,888.73	5,658.73	9.23	1,313.45	. 1,313.48	. 0.00	674,885.93	633,387.95
6,900.00	89.49	89.60	1,889.62	5,659.62	9.93	1,413.44	1,413.48	0.00	674,886.63	633,487.94
7,000.00	89.49	89.60	1,890.51	5,660.51	10.63	1,513.44	1,513.48	. 0.00	674,887.33	633,587.94
7,100.00	89.49	89.60	1,891.40	5,661.40	11.34	1,613.43	1,613.47	0.00	674,888.04	633,687.93
7,200.00	89.49	89.60	1,892.29	5,662.29	12.04	1,713.42	1,713.47	0.00	674,888.74	633,787.92
7,300.00	89.49	89.60	1,893.18	5,663.18	12.74	1,813.42	1,813.46	0.00	674,889.44	633,887.92
7,400.00	89.49	89.60	1,894.07	5,664.07	13.44	1,913.41	1,913.46	0.00	674,890.14	633,987.91
7,500.00	89.49	89.60	1,894.96	5,664.96	14.15	2,013.41	2,013.46	0.00	674,890.85	634,087.91
7,600.00	89.49	89.60	1,895.85	5,665.85	14.85	2,113.40	2,113.45	0.00	674,891.55	634,187.90
7,700.00	89.49	89.60	1,896.74	5,666.74	15.55	2,213.39	2,213.45	0.00	674,892.25	634,287.89
7,800.00	89.49	89.60	1,897.63	5,667.63	16.25	2,313.39	2,313.44	0.00	674,892.95	634,387.89
7,900.00	89.49	89.60	1,898.52	5,668.52	16.96	2,413.38	2,413.44	0.00	674,893.66	634,487.88
8,000.00	89.49	89.60	1,899.41	5,669.41	17.66	2,513.37	2,513.44	0.00	674,894.36	634,587.87
8,100.00	89.49	89.60	1,900.30	5,670.30	18.36	2,613.37	2,613.43	0.00	674,895.06	634,687.87
8,200.00	89.49	89.60	1,901.19	5,671.19	19.06	2,713.36	2,713.43	0.00	674,895.76	634,787.86
8,300.00	89.49	89.60	1,902.08	5,672.08	19.77	2,813.35	2,813.42	0.00	674,896.47	634,887.85
8,400.00	89.49	89.60	1,902.97	5,672.97	20.47	2,913.35	2,913.42	0.00	674,897.17	634,987.85
8,500.00	89.49	89.60	1,903.86	5,673.86	21.17	3,013.34	3,013.42	0.00	674,897.87	635,087.84
8,600.00	89.49	89.60	1,904.75	5,674.75	21.87	3,113.33	3,113.41	0.00	674,898.57	635,187.83
8,700.00	89.49	89.60	1,905.64	5,675.64	. 22.58	3,213.33	3,213.41	0.00	674,899.28	635,287.83



Phoenix Technology Services

Apache



Company: Apache Corporation

Eddy County, NM (Nad27)

Project: Site: Well: NFE Federal NEE Federal 39H Wellbore: Design: Wellbore #1 Plan#1 071912

Local Co-ordinate Reference:

TVD Reference: MD Reference:

North Reference:

Database:

Well NFE Federal 39H

WELL @ 3770.00usft (Original Well Elev) WELL @ 3770:00usft (Original Well Elev)

Grid

Minimum Curvature GCR DB v5000

Pla			

Planned Survey	71			***	*** ** ** ** ** ** ** ** ** ** ** ** **	7	TRANSPORT TO THE PROPERTY OF THE PARTY OF TH	 		، ز السين يسويسي
MD (usft)	Inc Azi	(azimuth)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)		DLeg 00úsft)	Northing (usft)	Easting (usft)
8,800.00	89.49	89.60	1,906.53	5,676.53	23.28	3,313.32	3,313.40	0.00	674,899.98	635,387.82
8,900.00	89.49	89.60	1,907.42	5,677.42	23.98	3,413.32	3,413.40	0.00	674,900.68	635,487.82
9,000.00	89.49	89.60	1,908.31	5,678.31	24.68	3,513.31	3,513.40	0.00	674,901.38	635,587.81
9,100.00	89.49	89.60	1,909.20	5,679.20	25.39	3,613.30	3,613.39	0.00	674,902.09	635,687.80
9,200.00	89.49	89.60	1,910.09	5,680.09	26.09	3,713.30	3,713.39	0.00	674,902.79	635,787.80
9,300.00	89.49	89.60	1,910.98	5,680.98	26.79	3,813.29	3,813.38	0.00	674,903.49	635,887.79
9,400.00	89.49	89.60	1,911.87	5,681.87	27.49	3,913.28	3,913.38	0.00	674,904.19	635,987.78
9,500.00	89.49	89.60	1,912.76	5,682.76	28.20	4,013.28	4,013.38	0.00	674,904.90	636,087.78
9,600.00	89.49	89.60	1,913.65	5,683.65	28.90	4,113.27	4,113.37	0.00	674,905.60	636,187.77
9,700.00	89.49	89.60	1,914.54	5,684.54	29.60	4,213.26	4,213.37	0.00	674,906.30	636,287.76
9,800.00	89.49	89.60	1,915.43	5,685.43	30.30	4,313.26	4,313.36	0.00	674,907.00	636,387.76
9,900.00	89.49	89.60	1,916.32	5,686.32	31.01	4,413.25	4,413.36	0.00	674,907.71	636,487.75
10,000.00	89.49	89.60	1,917.21	5,687.21	31.71	4,513.24	4,513.36	0.00	674,908.41	636,587.74
10,100.00	89.49	89.60	1,918.10	5,688.10	32.41	4,613.24	4,613.35	0.00	674,909.11	636,687.74
10,200.00	89.49	89.60	1,918.99	5,688.99	33.11	4,713.23	4,713.35	0.00	674,909.81	636,787.73
10,300.00	89.49	89.60	1,919.88	5,689.88	33.82	4,813.23	4,813.34	0.00	674,910.52	636,887.73
10,400.00	89.49	89.60	1,920.77	5,690.77	34.52	4,913.22	4,913.34	0.00	674,911.22	636,987.72
10,500.00	89.49	89.60	1,921.66	5,691.66	35.22	5,013.21	5,013.34	0.00	674,911,92	637,087.71
10,600.00	89.49	89.60	1,922.55	5,692.55	35.92	5,113.21	5,113.33	0.00	674,912.62	637,187.71
10,700.00	89,49	89.60	1,923.44	5,693.44	36.63	5,213.20	5,213.33	0.00	674,913.33	637,287.70
10,800.00	89.49	89.60	1,924.33	5,694.33	37.33	5,313.19	5,313.32	0.00	674,914.03	637,387.69
10,900.00	89.49	89.60	1,925.23	5,695.23	38.03	5,413.19	5,413.32	0.00	674,914.73	637,487.69
11,000.00	89.49	89.60	1,926.12	5,696.12	38.73	5,513.18	5,513.32	0.00	674,915.43	637,587.68
11,100.00	89.49	89.60	1,927.01	5,697.01	39.44	5,613.17	5,613.31	0.00	674,916.14	637,687.67
11,200.00	89.49	89.60	1,927.90	5,697.90	40.14	5,713.17	5,713.31	0.00	674,916.84	637,787.67
11,300.00	89.49	89.60	1,928.79	5,698.79	40.84	5,813.16	5,813.30	0.00	674,917.54	637,887.66
11,400.00	89.49	89.60	1,929.68	5,699.68	41.54	5,913.15	5,913.30	0.00	674,918.24	637,987.65



Phoenix Technology Services

Apache



Site: Well: Wellbore:	Apache Corporat Eddy County, NM NFE Federal NFE Federal 39H Wellbore #1 Plan#1 071912	1 (Nad27)					TVD Reference: MD Reference: North Reference		WELL (WELL (Grid Minimu		d. (Original Well I (Original Well I	
Planned Survey MD (usft)	lnc (9)		(°)		(usft)	N/S ùsft)	E/W (usft)	V.Sec (usft)		sft)	Northing (úsft) 674,918.50	Easting (usft) 638,024.10
11,436.4 TD at 114		9.49	89.60	1,930.00	5,700.00	41.80	5,949.60	5,949.7	5	0.00	674,916.50	030,024.10
10 ut 174												
Formations												
	Measured Depth (usft)	Vertical Depth (usft)	Nar	me	"Litholo	IV.	Dip Dip Directi (°) (°)	on .				
	4,638.00	4,638.00	Glorieta									
	2,445.00	-	Queen			•						
	4,684.00	4,684.00	Yeso (Paddock)									
	544.00	544.00	T/Salt B/Salt									
	1,391.00 322.00	1,391.00 322.00	B/Salt Rustler									•
	1,554.00	1,554.00	Yates								•	
	3,170.00	3,170.00	San Andres									
	5,162.00	•	Yeso (Blinebry)									
Plan Annotations	3 4		3 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -							المراجعة المستراء		1
	Measured V Depth	/ertical Depth (usft)	Local Coor +N/-S (usft)	dinates +E/-W (usft)	Comment							
	5,268.45	5,268.45	0.00	0.00	Start Build 15.00			•				
	5,865.05	5,650.41	2.66	378.56	Start 5571.40 hold a	at 5865.05 MD						
	11,436.45	5,700.00	41.80	5,949.60	TD at 11436.45		-CATAL					
Checked By:					Approved By:					Date:		

Apache Corporation

Vertical

PROJECT DETAILS: Eddy County, NM (Nad27)

Geodelic System: US State Plane 1927 (Exact solution Datum: NAD 1927 (NADCON CONUS) Ellipsoid: Clarke 1866 Zone: New Mexico East 3001 System Datum: Mean Sea Level

Location North: Grid


Project: Eddy County, NM (Nad27) Site: NFE Federal

> Well: NFE Federal 39H Wellbore: Wellbore #1 Plan: Plan#1 071912

Rig: _





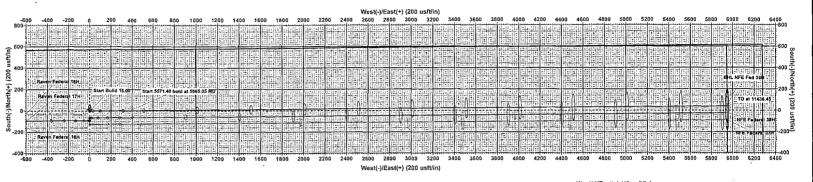


WELL DETAILS: NFE Federal 39H

Ground Level: 3745.00 Easting Latittude Longitude 632074.5032° 51' 16.4910 103° 54' 11.6793 W

WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

+E/-W 5949.60 Name TVD BHL NFE Fed 39760,00 Northing 674918,50



FORMATION TOP DETAILS

TVDPath MDPath Formation 322,00 322,00 Rustler 544,00 544,00 T/Salt 1391,00 1391,00 B/Salt 1554,00 1554,00 1554,00 15554,00 15554,00 15554,00 15554,00 15554,00 15554,00 1554,00 1564,

				SECTI	ON DETA	AILS				
.05	0.00 0.00 0.00 69.49 89.49	Azi 0.00 0.00 89.60 89.60	TVD 0.00 5268.45 5650.41 5700.00	+N/-S 0.00 0.00 2.66 41.80	+E/-W 0.00 0.00 378.56 5949.60	Dleg 0.00 0.00 15:00 0.00	TFace 0.00 0.00 89.60 0.00	VSect 0.00 0.00 378.57 5949.75	BHL NFE Fed 39H	

ANNOTATIONS


TVD MD Annotation 5268.45 5268.45 Start Build 15.00 5650.41 5865.05 Start 5571.40 hold at 5865.05 MD 5700.00 11436.45 TD at 11436.45


PHOENIX





Azimuths to Grid North True North: -0.23°

Magnetic Field Strength: 48847.3snT Dip Angle: 60.69* Date: 07/19/2012 Model: IGRF2010_14

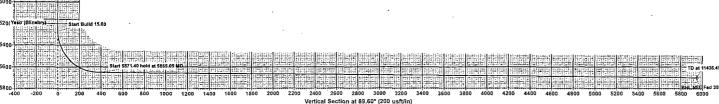

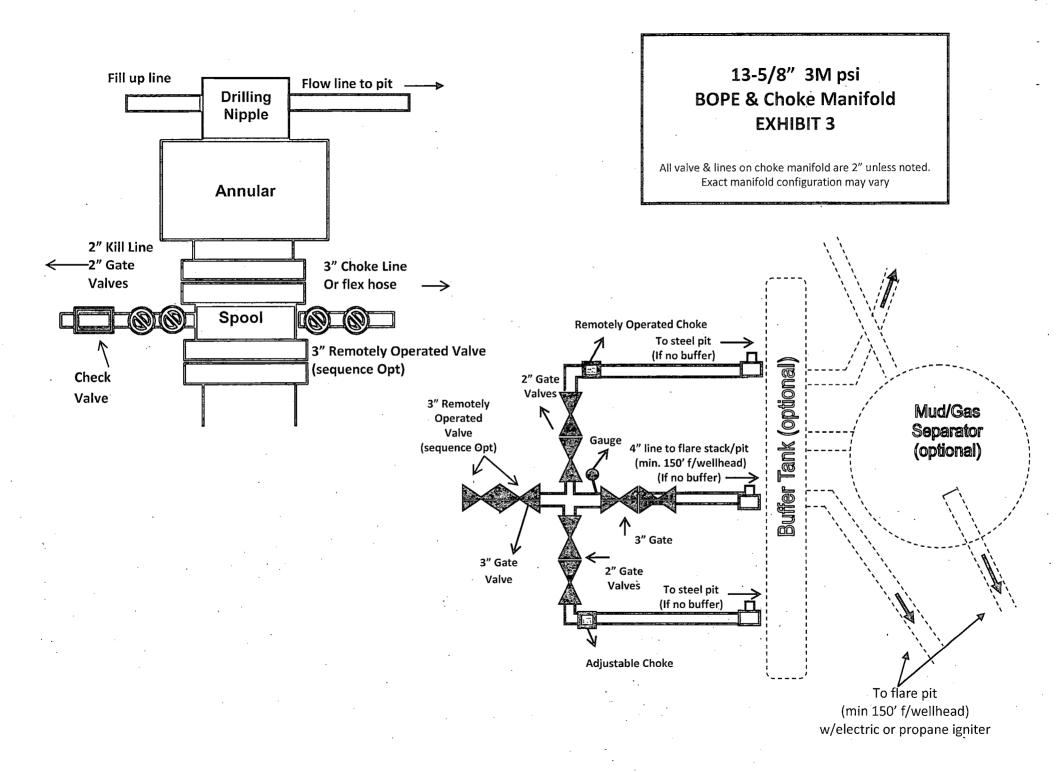

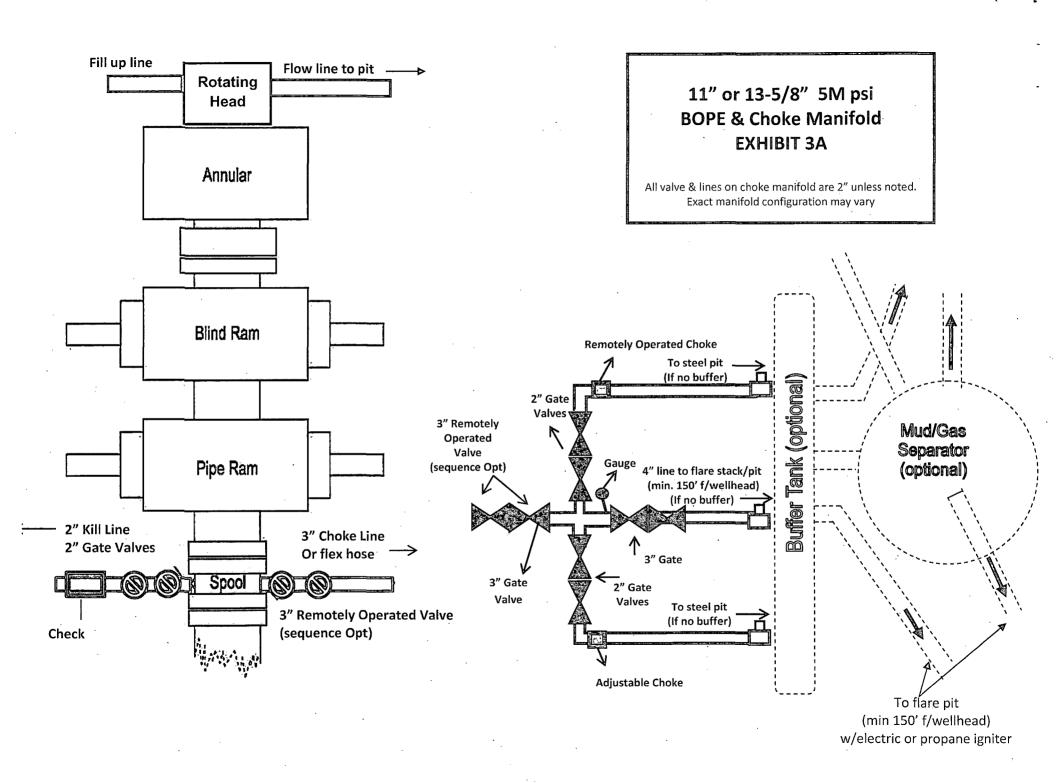

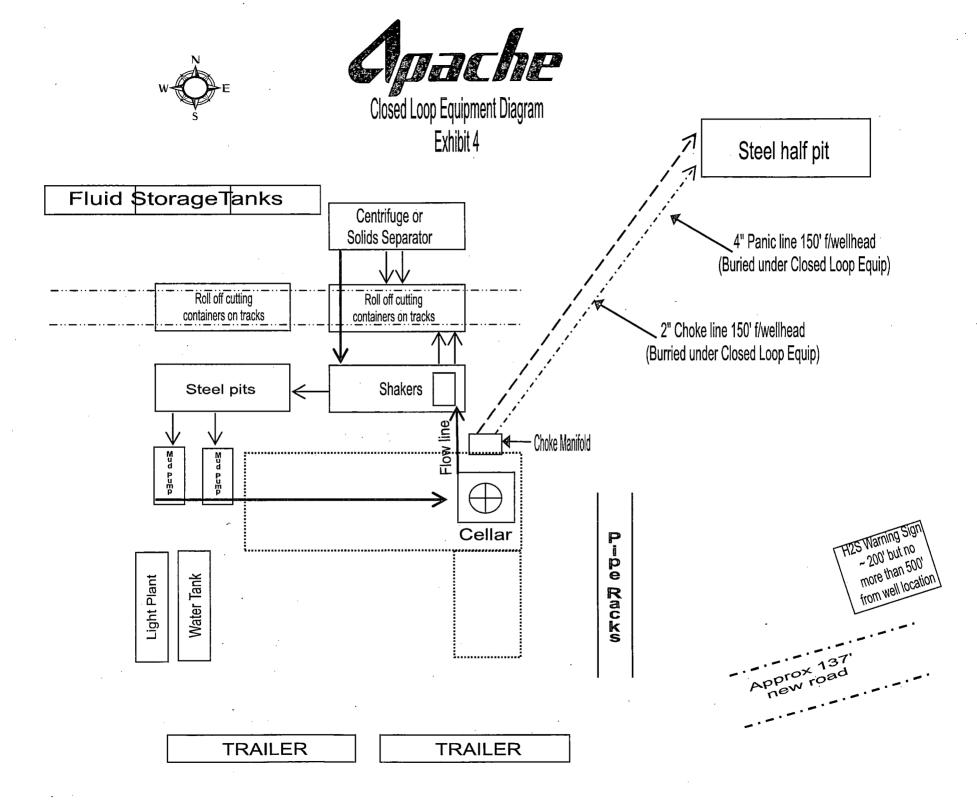



DESIGN PLAN, OPERATING & MAINTENANCE PLAN, & CLOSURE PLAN FOR OCD FOR C-144

NFE FEDERAL #39H

DESIGN PLAN

Fluid & cuttings coming from drilling operations will pass over the Shale Shaker with the cuttings going to the Sundance Inc / CRI haul off bin and the cleaned fluid returning to the working steel pits.

Equipment includes:

- 2-500 bbl steel frac tanks (fresh water for drilling)
- 2 180 bbl steel working pits
- 3 75 bbl steel haul off bins
- 2 Pumps (6-1/2" x 10" PZ 10 or equivalent)
- 1 Shale shaker
- 1 Mud cleaner QMAX MudStripper

OPERATING AND MAINTENANCE PLAN

Inspection to occur every tour for proper operation of system and individual components. If any problems are found they will be repaired and/or corrected immediately.

CLOSURE PLAN


All haul bins containing cuttings will be removed from location and hauled to Sundance Incorporated (NM-01-0003) disposal site located 3 miles East of Eunice, NM on the Texas border / Controlled Recovery, Inc's (NM-01-0006) disposal site located near mile marker 66 on Highway 62/180.


Sorina L. Flores Supv. of Drilling Services



RIG ORIENTATION & LAYOUT RAVEN FEDERAL #16H #17H #18H NFE FEDERAL #37H #38H #39H EXHIBIT 5

נו					
	<		350'		·
•	[HAUL O	FF BINS		
,		WORKING PIT	WORKING PIT		
T O P S O	PMP	PMP	RIG O	P P P P P P P P P P P P P P P P P P P	Ŏ Q
SO-L STOCK P-LE	LIGHT PLANT	W A T E R T A N K	D O G H O U S E	P-PE RACKS	400'
		TRAILER	TRAILER		Approx 137' New Road

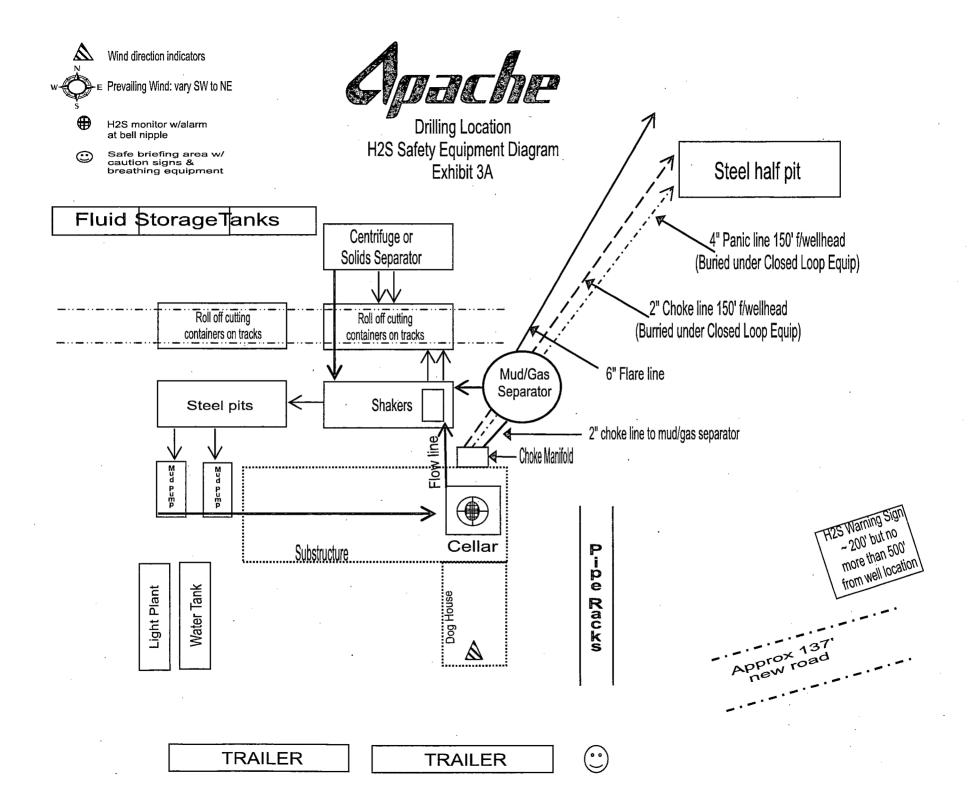



Certificate of Conformance

DATE	10-	[-]	12	

SERIAL NO. MTKOO1CK PART NO. NA

SIZE 3 LENGTH 26


HYDROSTATICALLY TESTED AT 10,000 #

BY Chet Sounders Q.A.

NEPHI RUBBER PRODUCTS CORP.

Corporate Office: P.O. Box 310 • LaPorte, Indiana 46352 • (800)348-8868 • (219)362-9908 • Fax Number (219)324-0815

Manufacturing: 255 West 11th North • Nephi, Utah 84648 • (800)453-1480 • (435)623-1740 • Fax Number (435)623-2638

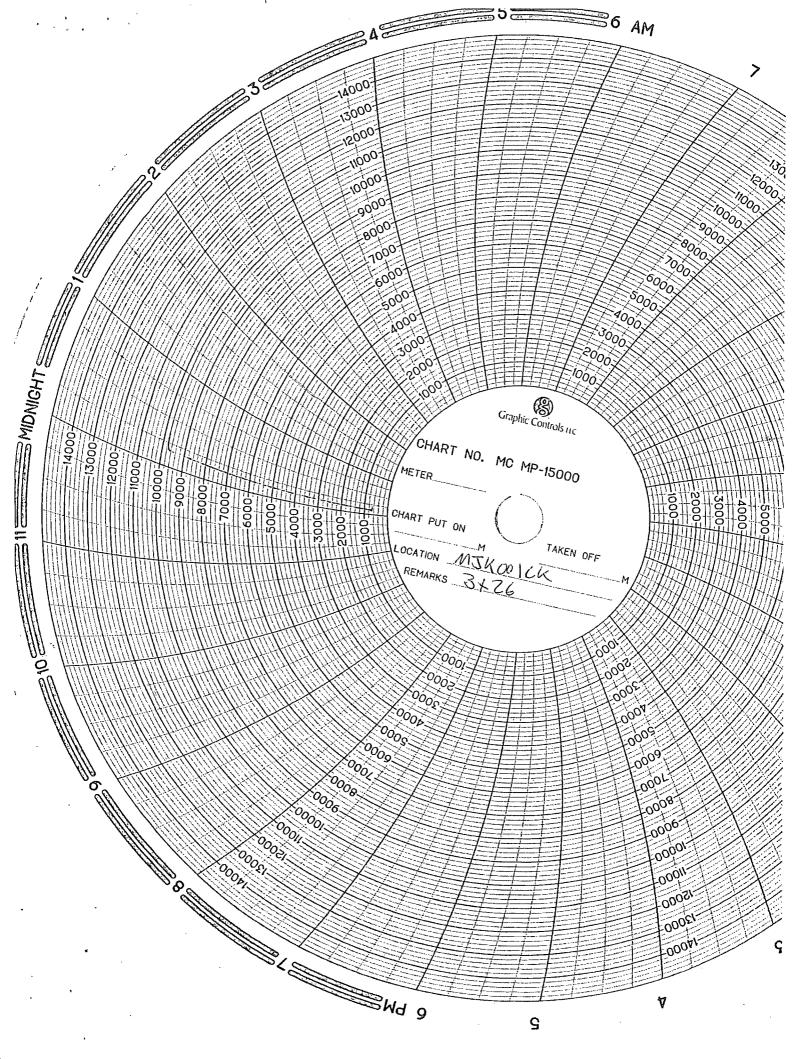

HYDROGEN SULFIDE (H2S) DRILLING OPERATIONS PLAN

Hydrogen Sulfide Training:

<u>All regularly assigned personnel, contracted or employed by Apache Corporation</u> will receive training from qualified instructor(s) in the following areas prior to commencing drilling possible hydrogen sulfide bearing formations in this well:

- The hazards and characteristics of hydrogen sulfide (H₂S)
- The proper use and maintenance of personal protective equipment and life support systems.
- The proper use of H₂S detectors, alarms, warning systems, briefing area, evacuation procedures & prevailing winds.
- The proper techniques for first aid and rescue procedures.

Supervisory personnel will be trained in the following areas:

- The effects of H₂S on metal components. If high tensile tubulars are to be utilized, personnel will be trained in their special maintenance requirements.
- Corrective action & shut-in procedures when drilling or reworking a well & blowout prevention / well control procedures.
- The contents and requirements of the H₂S Drilling Operations Plan

There will be an initial training session just prior to encountering a known or probable H_2S zone (within 3 days or 500') and weekly H_2S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H_2S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received proper training.

H₂S SAFETY EQUIPMENT AND SYSTEMS:

Well Control Equipment that will be available & installed if H2S is encountered:

- Flare Line with electronic igniter or continuous pilot.
- Choke manifold with a minimum of one remote choke.
- Blind rams & pipe rams to accommodate all pipe sizes with properly sized closing unit.
- · Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head & flare gun with flares

Protective Equipment for Essential Personnel:

• Mark II Survive-air 30 minute units located in dog house & at briefing areas, as indicated on wellsite diagram.

H2S Dection and Monitoring Equipment:

- Two portable H₂S monitors positioned on location for best coverage & response. These units have warning lights & audible sirens when H₂S levels of 20 ppm are reached.
- One portable H₂S monitor positioned near flare line.

H2S Visual Warning Systems:

- Wind direction indicators are shown on wellsite diagram.
- Caution / Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used when appropriate. "EXHIBIT 7"

Mud Program:

- The Mud Program has been designed to minimize the volume of H₂S circulated to the surface. Proper mud weights, safe drilling practices & the use of H₂S scavengers will minimize hazards when penetrating H₂S bearing zones.
- A mud-gas separator and H₂S gas buster will be utilized as needed.

Metallurgy:

- All drill strings, casing, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold & lines, & valves will be suitable for H₂S service.
- All elastomers used for packing & seals shall be H₂S trim.

Communication:

• Cellular telephone and 2-way radio communications in company vehicles, rig floor and mud logging trailer.

HYDROGEN SULFIDE (H2S) CONTINGENCY PLAN

Assumed 100 ppm ROE = 3000'

100 ppm H₂S concentration shall trigger activation of this plan.

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H₂S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operators and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the :
 - o Detection of H₂S, and
 - o Measures for protection against the gas,
 - o Equipment used for protection and emergency response.

Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = I	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = I	2 ppm	N/A	1000 ppm

Contacting Authorities

Apache Corporation personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Apache's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

WELL CONTROL EMERGENCY RESPONSE PLAN

I. GENERAL PHILOSOPHY

Our objective is to ensure that during an emergency, a predetermined procedure is followed so that prompt decisions can be made based on accurate information.

The best way to handle and emergency is with an experienced organization set up for the sole purpose of solving the problem. The *Well Control Emergency Response Team* was organized to handle dangerous & expensive well control problems. The *Team* is structured such that each individual can contribute the most from his area of expertise. Key decision-makers are determined prior to an emergency to avoid confusion about who is in charge.

If the well is flowing uncontrolled at the surface or subsurface, *The Emergency Response Team* will be mobilized. The *Team* is customized for the people currently on the Apache staff. Staff changes may require a change in the plan.

II. EMERGENCY PROCEDURE ON DRILLING OR COMPLETION OPERATIONS

A. In the event of an emergency the *Drilling Foreman or Tool-Pusher* will immediately contact only one of the following starting with the first name listed:

Name	Office	Mobile	Home
Danny Laman – Drlg Superintendent	432-818-1022	432-634-0288	432-520-3528
Terry West – Drilling Engineer	432-818-1114	432-664-7254	
Bobby Smith – Drilling Manager	432-818-1020	432-556-7701	
Jeff Burt – EH&S Coordinator		432-631-9081	

^{**}This one phone call will free the Drilling Foreman to devote his full time to securing the safety of personnel & equipment. This call will initiate the process to mobilize the Well Control Emergency Response Team. Apache maintains an Emergency Telephone Conference Room in the Houston office. This room is available for us by the Permian Region. The room has 50 separate telephone lines.

- **B.** The Apache employee contacted by the Drilling Foreman will begin contacting the rest of the *Team*. If **Danny Laman** is out of contact, **Terry West** will be notified.
- **C.** If a member of the *Emergency Response Team* is away from the job, he must be available for call back. Telephone numbers should be left with secretaries or a key decision-maker.
- **D.** Apache's reporting procedure for spills or releases of oil or hazardous materials will be implemented when spills or releases have occurred or are probable.

EMERGENCY RESPONSE NUMBERS:

SHERIFF DEPARTMENT	
Eddy County	575-887-7551
Lea County	575-396-3611
FIRE DEPARTMENT	911
Artesia	575-746-5050
Carlsbad	575-885-2111
. Eunice	575-394-2111
Hobbs	575-397-9308
Jai	575-395-2221
Lovington	575-396-2359
HOSPITALS	911
Artesia Medical Emergency	575-746-5050
Carlsbad Medical Emergency	575-885-2111
Eunice Medical Emergency	575-394-2112
Hobbs Medical Emergency	575-397-9308
Jal Medical Emergency	575-395-2221
Lovington Medical Emergency	575-396-2359
AGENT NOTIFICATIONS	
Bureau of Land Management	575-393-3612
New Mexico Oil Conservation Division	575-393-6161


EXHIBIT #7

WARNING

YOU ARE ENTERING AN H₂S AREA AUTHORIZED PERSONNEL ONLY

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED
- 2. HARD HATS REQUIRED
- 3. SMOKING DESIGNATED AREAS ONLY
- 4. BE WIND CONSCIOUS AT ALL TIMES
- 5. CHECK WITH APACHE CORPORATION

APACHE CORPORATION 1-888-257-6840

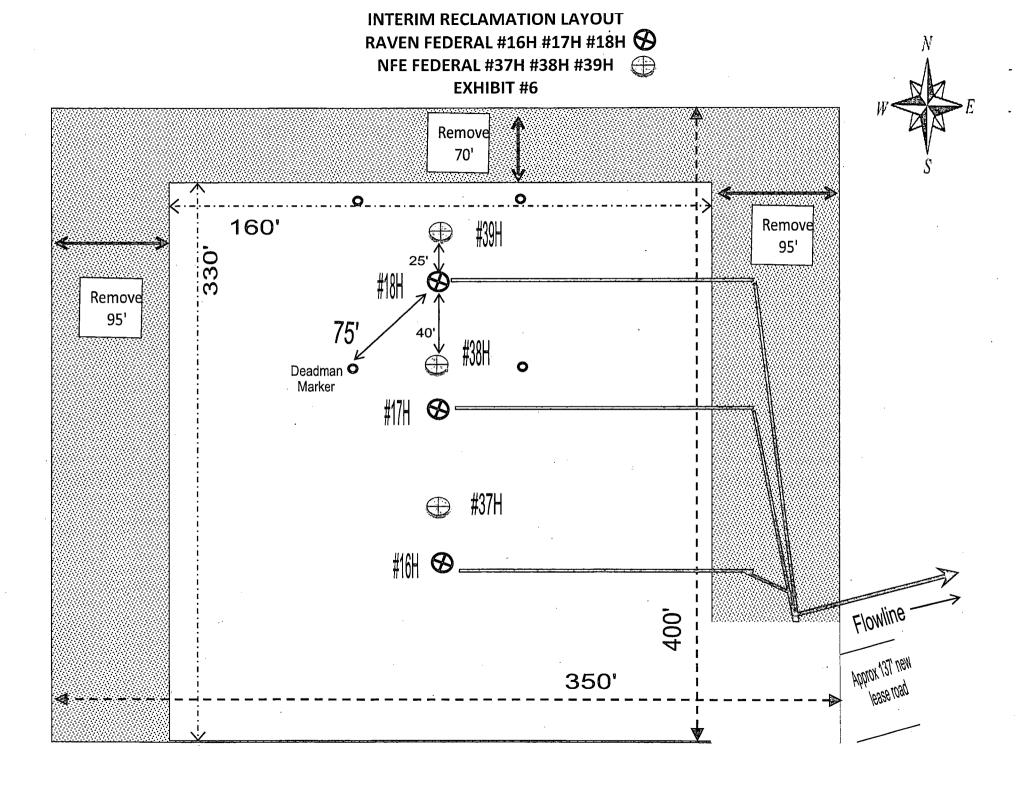



SURFACE USE PLAN OF OPERATIONS

NFE Federal #39H Lease #: NMLC – 029435B
SHL: 572' FNL & 1000' FEL UL: A SEC: 7 BHL: 572' FNL & 330' FEL UL: 1 SEC: 8
T17S R31E Eddy County, NM

EXISTING ROADS

A. Proposed Well Site Location:

a. The well site & elevation plat for the proposed well are reflected on the well site layout (form C-102). Well staked by John West Surveying Company.

B. Existing Roads

a. From the intersection of US Hwy #82 & CR #221 (Skelly), Go North approx 1.3 miles, turn Right, go Northeast approx 0.6 miles, turn Right, go East approx 0.4 miles, turn Left, go North approx 0.5 miles to road survey, follow road survey Southwest approx 137' to location.

C. Route Location

a. Approx 137' of new road is expected to be constructed. The existing lease road will be used to the extent possible. If a lease/access road needs to be constructed, all lease roads will be graded in compliance with BLM standards. See E (a).

D. Existing Road Maintenance or Improvement Plan

- a. *EXHIBIT* 1 is a portion of a topo map showing the well & roads in the vicinity of the proposed location. The proposed well site & access route to the location are indicated in BLUE on *EXHIBIT* 1. Right of way using this proposed route will be requested if necessary.
- b. Routing grading & maintenance of existing roads will be conducted as necessary to maintain their condition as long as any operations continue on this lease. Roads will be maintained according to specifications in "EXISTING ROADS Section E (a)" of this Surface Use Plan.

E. Width, Max Grade, Turnout Ditches, Culverts, Cattle Guards, & Surface Equipment

a. All lease roads will be graded in compliance with BLM standards. All new & reconstructed roads will have a width & "crown design" (i.e. The max width of the driving surface will be 14'. The road will be crowned & ditched with a 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 1' deep with 3:1 slopes. The driving surface will be made of 6" rolled & compacted caliche.) If required, culverts and cattle guards will be set per BLM Specs.

LOCATION OF EXISTING WELLS

A. "EXHIBIT 2" indicates existing wells within a one mile radius of the proposed location.

LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

- A. Production facilities will be located at the new NFE Federal Battery.
- B. New Facilities in the Event of Production

In the event well is productive, APACHE will install approx 1100' of 6" & approx 400' of 10" steel flow line, internal poly liner, externally wrapped with synergy, to the proposed new NFE Federal Battery following existing lease roads. Pipeline and battery will be applied for under ROW grant or sundry notice at a later date. (No pumping units will be used, fluid will be lifted with Electronic Submersible Pump.) If electricity is needed, power will be obtained from Central Valley Electric. Path & length will vary pending Central Valley Electric Coop evaluation. Central Valley Electric will apply for ROW for their power lines. "SEE EXHIBIT 1".

C. Rehabilitation of Disturbed Areas Unnecessary for Production

Following the construction, those access areas required for continued production will be graded to provide drainage and minimize erosion. The areas unnecessary for use will be graded to blend in with the surrounding topography "SEE PLANS FOR RESTORATION OF THE SURFACE"

LOCATION AND TYPE OF WATER SUPPLY

A. All water (fresh or otherwise) needed for the drilling and completion of this well will be purchased from a commercial source and trucked to the location via existing and/or proposed access roads. No water source wells will be drilled and no surface water will be utilized.

CONSTRUCTION MATERIALS

. A. Materials

On-site caliche will be used for any required access road and/or well site pad. If necessary, caliche will be hauled from a BLM approved pit. No surface materials will be disturbed except those necessary for actual grading and construction of the drill site and access road.

METHODS FOR HANDLING WASTE DISPOSAL

A. Cuttings

Cuttings will be contained in roll off bins and disposed of hauled to a state approved disposal facility.

B. Drilling Fluids

Drilling fluids will be contained in steel pits, frac tanks and disposed at licensed disposal sites and/or will be cleaned and reused.

C. Produced Fluids

Water production will be contained in steel pits. Fluids may be cleaned and reused and/or disposed at a state approved facility. Hydrocarbon fluid or other fluids that may be produced during testing will be retained in test tanks until sold and hauled from site.

D. Salts

Salts remaining after completion will be picked up by supplier, including broken sacks.

E. Sewage

Current laws and regulations pertaining to the disposal of human waste will be complied with. A Port-a-John will be provided for the crews. This will be properly maintained during the drilling operations and removed upon completion of the well. Port-a-John will be cleaned out periodically.

F. Garbage

Receptacles for garbage disposal during the drilling of this well will be provided and equipped to prevent scattering by wind, animals, etc. This waste will be hauled to an approved landfill site.

G. Cleanup of Well Site

Upon release of the drilling rig, the surface of the drilling pad will be graded to accommodate a completion rig if electric log analysis indicates potential productive zones. Reasonable cleanup will be performed prior to the final restoration of the site.

ANCILLARY FACILITIES

A. Upon completion, and/or testing of this well, rental tank facilities will be utilized until permanent storage is established. No camps, airstrips or staging are anticipated to be constructed.

WELLSITE LAYOUT

A. Rig Orientation and Layout

"EXHIBIT 5" shows the dimensions of the well pad, closed loop system and the location of the major rig components. Only minor leveling of the well site will be required. No significant cuts or fills will be necessary.

B. Closed Loop System

A Closed Loop System will be used. Cuttings will be stored in steel roll off bins until they are hauled to a state approved disposal facility. A C-144 has been submitted to the appropriate OCD district office for approval. "SEE EXHIBIT 4"

C. Location of Access Road

"SEE EXHIBIT 1 & John West Surveying well site pad location plat"

PLANS FOR SURFACE RECLAMATION

A. Reserve Pit Cleanup

Not applicable. Closed Loop System will be used. .

B. Restoration Plans (Production Developed) "SEE EXHIBIT 6"

Those areas not required for production will be graded & recontoured to match surrounding topography and surfacing material will be removed. Topsoil from the soil pile will be loaded over the disturbed area to the extent possible and will be seeded. Subsurface soils from East side of the pad will be spread over the downsized areas for recontouring & then topsoil will be spread back over these areas. The portion of the site required for production will be graded to minimize erosion and provide access during inclement conditions. This may need to be modified in certain circumstances to prevent inundation of the locations' pad and surface facilities. Due to the topography of the area, no problems are anticipated and no erosion or other detrimental effects are expected as a result of this operation. Following depletion and abandonment of the site, restoration procedures will be those that follow under "ITEM C" of "PLANS FOR SURFACE RECLAMATION".

C. Restoration Plans (No Production Developed)

With no production developed, the entire surface disturbed by construction of the well site will be restored as closely as possible to its pre-operation appearance, including re-vegetation. Surfacing material will be removed and the site will be recontoured to match surrounding topography with provisions made to minimize erosion. The topsoil, as available, shall be placed in a uniform layer and seeded according to the Bureau of Land Management's stipulations. Due to the topography of the area, no problems are anticipated and no erosion or other detrimental effects are expected as a result of this operation.

D. Rehabilitation's Timetable

Upon completion of drilling operations, the initial cleanup of the site will be performed as soon as weather and site conditions allow economic execution of the work.

SURFACE OWNERSHIP

A. Surface Ownership of drill site & access routes:

United Stated Department of the Interior c/o Bureau of Land Management 620 E. Greene St.
Carlsbad, NM 88220

OTHER INFORMATION

A. Terrain, Soil, Vegetation, Wildlife, Surface Use

Slightly rolling hills; Topsoil is made up of caliche and sand; Plants are sparse, primarily grasses, some mesquite & shinnery oak; No wildlife observed but likely that deer, rabbits, coyotes & rodents traverse the area, which are all typical of the semi-arid desert land; Land primarily used for grazing.

B. Surface Water

There are no ponds, lakes, streams or rivers within several miles of the proposed location.

C. Water Wells

No known water wells within 1-1/2 miles of the proposed location.

D. Residences and Buildings

No dwellings within the immediate vicinity of the proposed location.

E. Historical Sites

None observed.

F. Archeological Resources

An Apache agrees to contribute funding to the Permian Basin Cultural Resource Fund in lieu of being required to conduct a Class III survey for cultural resources associated with this project. Any location or construction conflicts will be resolved before construction begins.

- G. Onsite: Onsite by John Fast, BLM Specialist.
- H. Well Signs: Well signs will be incompliance per State requirements and specifications.
- I. Drilling Contractor: Pending

OPERATOR'S FIELD REPRESENTATIVE

(Field personnel responsible for compliance with development plan for surface use)

DRILLING

Danny Laman
Drilling Superintendent
303 Veterans Airpark Ln #3000
Midland, TX 79705
432-818-1022 - office
432-634-0288 – cell

PRODUCTION

Travis Carnes Sr. Production Foreman 2350 W. Marland Blvd Hobbs, NM 88240 575-393-2144 – w 432-425-2962 – c

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:
LEASE NO.:
LC029435B
WELL NAME & NO.:
SURFACE HOLE FOOTAGE:
BOTTOM HOLE FOOTAGE
LOCATION:
COUNTY:
Apache Corp
LC029435B
S9H NFE Federal
S72' FNL & 1000' FEL
S72' FNL & 330' FEL
Section 7, T.17 S., R.31 E., NMPM
Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

☐ General Provisions
Permit Expiration
Archaeology, Paleontology, and Historical Sites
☐ Noxious Weeds
Special Requirements
Flowline ROW
Lesser Prairie-Chicken Timing Stipulations
Ground-level Abandoned Well Marker
Communitization Agreemen
☐ Construction
Notification
Topsoil
Closed Loop System
Federal Mineral Material Pits
Well Pads
Roads
Road Section Diagram
□ Drilling
H ₂ S Requirements-Onshore Order #6
Logging Requirements
Waste Material and Fluids
☐ Production (Post Drilling)
Well Structures & Facilities
Pipelines
Electric Lines
☐ Interim Reclamation
☐ Final Abandonment & Reclamation

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Apply for flowline with ROW

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

<u>Ground-level Abandoned Well Marker to avoid raptor perching</u>: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

Communitization Agreement

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-6235 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil in a low profile manner in order to prevent wind/water erosion of the topsoil. The topsoil to be stripped is approximately 4 inches in depth. The topsoil will be used for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty (20) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

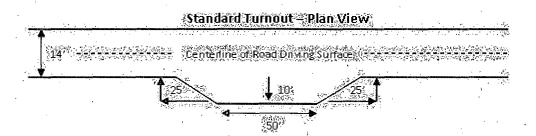


Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

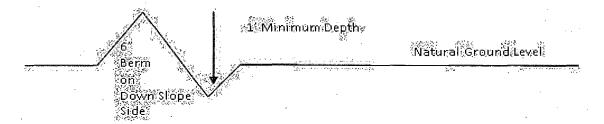

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope:
$$\frac{400'}{4\%}$$
 + 100' = 200' lead-off ditch interval

Culvert Installations

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

Fence Requirement

Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

shoulder _____ Intervisible turnouts shall be constructed all single lane roods on all blind curves additional tunouts as needed to keep sp below 1000 feet. Typical Turnout Plan height of fill a) shoulders Embankment Section road type .03 - .05 h/h earth surface 02 - 04 h/h Side Hill Section uovel surfoce (slope 2 - 4%) **Typical Outsloped Section** Typical Inslope Section

Figure 1 - Cross Sections and Plans For Typical Road Sections

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified a minimum of 4 hours in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOPE tests

Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

- 1. A Hydrogen Sulfide (H2S) Drilling Plan should be activated 500 feet prior to drilling into the Grayburg formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.
- 2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. If the drilling rig is removed without approval an Incident of Non-Compliance will be written and will be a "Major" violation.
- 3. The record of the drilling rate along with the GR/N well log run from TD to surface shall be submitted to the BLM office as well as all other logs run in the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#).

Changes to the approved APD cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possible water and brine flows in the Salado and Artesia Groups. Possible lost circulation in the Grayburg and San Andres formations.

- 1. The 13-3/8 inch surface casing shall be set at approximately 405 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Contingency 9-5/8" intermediate Casing:

2.	The minimum required fill of cement behind the 9-5/8 inch intermediate casing is
	☐ Cement to surface. If cement does not circulate see B.1.a, c-d above.

Cement as proposed. Operator shall provide method of verification.

3. The minimum required fill of cement behind the 7 inch production casing is:

- 4. The minimum required fill of cement behind the 4-1/2 inch production liner is:
 - ☐ Cement not required Packer system to be used
- 5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000** (**2M**) psi.
 - a. For surface casing only: If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips or where the float does not hold, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater.

However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not** a **cup** or **J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The results of the test shall be reported to the appropriate BLM office.
- d. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- e. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

CRW 120512

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Containment Structures

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color Shale Green, Munsell Soil Color Chart # 5Y 4/2

- B. PIPELINES (not permitted)
- C. ELECTRIC LINES (not applied for in APD)

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture for LPC Sand/Shinnery Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

Species	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

^{*}Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed