


Form 3160-3  
(April 2004)



OCD Artesia

FORM APPROVED  
OMB No. 1004-0137  
Expires March 31, 2007

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.  
NMLC-029426B

6. If Indian, Allottee or Tribe Name

TES  
1/18/2013

1a. Type of work: ☒ DRILL ☐ REENTER

7. If Unit or CA Agreement, Name and No.

1b. Type of Well: ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

8. Lease Name and Well No.  
CROW FEDERAL #16H <308711>

2. Name of Operator  
APACHE CORPORATION

9. API Well No.  
30-015- 40990

3a. Address 303 VETERANS AIRPARK LN #3000  
MIDLAND, TX 79705

3b. Phone No. (include area code)  
432-818-1167

<873>

10. Field and Pool, or Exploratory  
CEDAR LAKE; GLORIETA-YESO

4. Location of Well (Report location clearly and in accordance with any State requirements.)\*

At surface 1745' FSL & 110' FWL

At proposed prod. zone 1745' FSL & 330' FEL

11. Sec., T. R. M. or Blk. and Survey or Area

SEC: 9 T17S R31E

<96831>  
= 26 770 >

14. Distance in miles and direction from nearest town or post office\*  
7.8 MILES NORTHEAST OF LOCO HILLS, NM

12. County or Parish  
EDDY

13. State  
NM

15. Distance from proposed\*  
location to nearest  
property or lease line, ft.  
(Also to nearest drig. unit line, if any)  
110'

16. No. of acres in lease  
1919.88 ACRES

17. Spacing Unit dedicated to this well  
160 ACRES

18. Distance from proposed location\*  
to nearest well, drilling, completed,  
applied for, on this lease, ft.  
~ 30'

19. Proposed Depth  
TVD ~ 5170'  
MD ~ 9681'

20. BLM/BIA Bond No. on file  
BLM-CO-1463 NATIONWIDE; NMB000736

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
3838' GL

22. Approximate date work will start\*

AS Soon AS APD Approved

23. Estimated duration  
~ 25 DAYS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, shall be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature *Sorina L. Flores*  
Title SUPV OF DRILLING SERVICES

Name (Printed/Typed)  
SORINA L. FLORES

Date  
1/16/12

Approved by (Signature) *Ts/ James A. Amos*

Name (Printed/Typed)

Date JAN 11 2013

Title  
FIELD MANAGER

Office  
CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

Roswell Controlled Water Basin

Approval Subject to General Requirements  
& Special Stipulations Attached

SEE ATTACHED FOR  
CONDITIONS OF APPROVAL

DISTRICT I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, New Mexico 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number <b>30-015-40990</b>	Pool Code <b>96831</b>	Pool Name <b>FRBN Cedar Lake; Glorieta-Yeso</b>
Property Code <b>308711</b>	Property Name <b>CROW FEDERAL</b>	Well Number <b>16H</b>
OGRID No. <b>873</b>	Operator Name <b>APACHE CORPORATION</b>	Elevation <b>3838'</b>

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
L	9	17-S	31-E		1745	SOUTH	110	WEST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I	9	17-S	31-E		1745	SOUTH	330	EAST	EDDY

Dedicated Acres <b>160</b>	Joint or Infill	Consolidation Code	Order No. <b>11-9681</b>
-------------------------------	-----------------	--------------------	-----------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

<p>CORNER COORDINATES TABLE</p> <p>A) Y=672852.6 N, X=638365.7 E</p> <p>B) Y=672888.0 N, X=643646.5 E</p> <p>C) Y=671532.5 N, X=638373.2 E</p> <p>D) Y=671567.1 N, X=643654.3 E</p>	<p>GEODETIC COORDINATES NAD 27 NME</p> <p>SURFACE LOCATION Y=671957.6 N X=638480.8 E</p> <p>LAT.=32.846484° N LONG.=103.882424° W</p> <p>LAT.=32° 50' 47" N LONG.=103° 52' 57" W</p> <p>BOTTOM HOLE LOCATION Y=671988.6 N X=643321.9 E</p>	<p><b>OPERATOR CERTIFICATION</b></p> <p>I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.</p> <p><i>Sorina L Flores</i> 8/15/12 Signature Date</p> <p><b>Sorina L. Flores</b> Printed Name</p> <p><i>Sorina.Flores@apachecorp.com</i> E-mail Address</p>
		<p><b>SURVEYOR CERTIFICATION</b></p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>MAY 18, 2012</p> <p>Date of Survey</p> <p>Signature &amp; Seal of Professional Surveyor:</p> <p><i>Ronald E. Eidson</i> Professional Surveyor</p> <p>Certificate Number: 3239</p> <p>W.O.: 12.11.0477</p>

UNITED STATES DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
CARLSBAD FIELD OFFICE  
620 E. GREENE STREET  
CARLSBAD, NM 88220

OPERATOR CERTIFICATION

I HEARBY CERTIFY THAT I, OR SOMEONE UNDER MY DIRECT SUPERVISION, HAVE INSPECTED THE DRILL SITE AND ACCESS ROUTE PROPOSED HEREIN; THAT I AM FAMILIAR WITH THE CONDITIONS WHICH CURRENTLY EXIST; THAT I HAVE FULL KNOWLEDGE OF STATE AND FEDERAL laws applicable to this operation; that the statements made in the APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Executed this 3<sup>rd</sup> day of October, 2012

Well: CROW FEDERAL #16H

Operator Name: APACHE CORPORATION

Signature:  Printed Name: TERRY WEST

Title: Drilling Engineer Date: \_\_\_\_\_

Email (optional): terry.west@apachecorp.com

Street or Box: 303 Veterans Airpark Ln., Ste. 3000

City, State, Zip Code: Midland, TX 79705

Telephone: 432-818-1114

Field Representative (if not above signatory): \_\_\_\_\_

Address (if different from above): \_\_\_\_\_

Telephone (if different from above): \_\_\_\_\_

Email (optional): \_\_\_\_\_

Agents not directly employed by the operator must submit a letter from the operator authorizing that the agent to act or file this application on their behalf.

DRILLING PLAN: BLM COMPLIANCE  
(Supplement to BLM 3160-3)

**APACHE CORPORATION (OGRID: 873) CROW FEDERAL #16H**

Lease #: NMLC-029426B Projected TVD: ~ 5170' MD: ~ 9681' GL: 3838'  
SHL: 1745' FSL & 110' FWL UL: L SEC: 9 BHL: 1745' FSL & 110' FWL UL: I SEC: 9  
T17S R31E EDDY COUNTY, NM

**1. GEOLOGIC NAME OF SURFACE FORMATION:** Eolian/Piedmond Alluvial Deposits

**2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:**

Quaternary Aeolian	Surf	Queen	2740'
Rustler	529'	Grayburg	3155'
Salt Top	722'	San Andres	3490' (Oil)
Salt Bottom	1683'	Glorieta	4954'
Yates	1845'	Yeso (Paddock)	5036' (Oil)
Seven Rivers	2127'	TD	TVD: 5170' MD: 9681'

Avg Depth to Ground Water: ~91'

Fresh water & prospectively valuable minerals, as described by BLM, encountered during drilling, will be recorded by depth & adequately protected. All oil & gas shows within zones of correlative rights will be tested to determine commercial potential. Surface FW sands will be protected by setting 13-3/8" csg @ 555' & circ cmt back to surface. Hydrocarbon zones will be protected by setting 9-5/8" csg @ ~ 3500', if water flow is encountered, then 7" @ ~ 4610'; 4-1/2" liner f/ 7" csg though build @ ~ 4618' TVD/MD holding @ ~ 5204' MD.

**3. CASING PROGRAM:** All casing is new & API approved

STRING	HOLE SIZE	DEPTH	OD CSG	WEIGHT	COLLAR	GRADE	COLLAPSE	BURST	TENSION
Surface	17-1/2"	0' - <del>555'</del> 470'	13-3/8"	48#	STC	H-40	1.0	1.21	1.8
Intermediate *	12-1/4"	0' - 3500'	9-5/8"	36#	STC	J-55	1.0	1.21	1.8
Production	8-3/4"	0' - 4610'	7"	26#	LTC	J-55	1.0	1.21	1.8
Production Liner	6-1/8"	4510' - 9681'	4.5"	11.6#	LTC	L-80	1.125	1.21	1.8

\*Contingency: 9-5/8" sting will only be ran if water flows are encountered.

**4. CEMENT PROGRAM:**

**A. Surface (TOC - Surface) \*\*100% excess cmt to surf\*\* Cmt with:**

Lead: 340 sx Class C w/4% Gel + 2% CaCL2 + 0.125#/sx CF + 0.25#/sx Defoamer (13.5 wt, 1.75 yld)

Compressive Strengths: 12 hr - 786 psi 24 hr - 1213 psi

Tail: 200 sx Class C w/ 1% CaCL2 (14.8 wt, 1.33 yld)

Compressive Strengths: 12 hr - 1565 psi 24 hr - 2442 psi

**B. Intermediate (TOC - Surface) \*\*50% excess cmt to surf\*\* Cmt with:**

Lead: 710 sx Class C w/4% Gel + 2% CaCL2 + 0.125 #/sx CF + 0.25 #/sx Defoamer (13.5 wt, 1.75 yld)

Compressive Strengths: 12 hr - 709 psi 24 hr - 1103 psi

Tail: 380 sx Class C w/ 1% Retarder (14.8 wt, 1.33 yld)

Compressive Strengths: 12 hr - 1654 psi 24 hr - 2256 psi

(May use a DVT & modify cmt program for a 2 stage job, if a strong water flow is encountered)

**C. Production (TOC: Surface) \*\*35% excess cmt\*\* Cmt with:**

Lead: 240 sx Class C 50/50 Poz w/5% Salt + 10% Gel + 3 #/sx KOLSeal + 0.25% Defoamer + 0.125 #/sx CF  
(11.9 wt, 2.46 yld)

Compressive Strengths: 12 hr - 156 psi 24 hr - 1081 psi

Tail: 300 sx PVL w/1.3% Salt + 5% Expanding cmt + 0.5% Gel suppressing agent + 0.1% antisetting agent +  
0.25% Defoamer + 0.2% Retarder (13.0 wt, 1.48 yld)

Compressive Strengths: 12 hr - 642 psi 24 psi - 1016 psi

does not meet  
BLM min.

\*Contingency: If 9-5/8" string is not ran, the following cmt program will be used for the Production string & will bring cmt to surface using 35% excess:

Lead: 1000 sx Class C 50/50 w/5% Salt + 10% Gel + 3 #/sx KOL Seal + 0.25% Defoamer + 0.125 #/sx CF  
(11.9 wt, 2.46 yld)

Compressive Strengths: 12 hr – 156 psi 24 hr – 1081 psi

Tail: 300 sx PVL w/1.3% Salt + 5% Expanding cmt + 0.5% Gel suppressing agent + 0.1% antisetting agent + 0.25% Defoamer + 0.2% Retarder (13.0 wt, 1.48 yld)

Compressive Strengths: 12 hr – 642 psi 24 hr – 1016 psi

- D. Apache proposes to run a multiple packer system on the 4-1/2" production liner which will tie back into the 7" string (No cmt). 9-5/8" string will only be ran if water flows are encountered. May have to use DVT & modify cmt program for a 2-stage job, if a strong water flow is encountered. Contingency cmt for production string will be used if intermediate string is not run. Intermediate string will only be run if water flows are encountered. An isolation packer will be set on either side of the Glorieta top & no ports will be placed between this isolation packer & the liner top packer.

*See COA*  
\*\* The above cmt volumes could be revised pending caliper measurement from open hole logs. For Surface csg: If cmt does not circ to surface, the appropriate BLM office shall be notified. The top of cement shall be determined by either a temperature survey or by tagging, as directed by the BLM for the specific set of circumstances. Cement will then be brought to surface via either 1" or ready mix operations, as specified by the BLM at that time.

## 5. PROPOSED CONTROL EQUIPMENT

*See COA*  
"EXHIBIT 3" shows a 13-5/8" 3M psi WP BOP consisting of at least annular bag type preventer. This BOP will be nipped up on the 13-3/8" surface csg head & tested to 70% of casing burst. After the 9-5/8" intermediate csg is set & cemented (or after the 7" string, if the 9-5/8" casing isn't ran), either a 13-5/8" or an 11" 3M BOP consisting of an annular bag type preventer, middle blind rams and bottom pipe rams will be installed in place of the original BOP & utilized continuously until TD is reached. The BOP will be tested at 2000 psi, maximum surface pressure is not expected to exceed 2M psi, BHP is calculated to be approximately 2274 psi. \*All BOP's & associated equipment will be tested as per BLM Drilling Operations Order #2. The BOP will be operated & checked each 24 hr period & blind rams will be operated & checked when the drill pipe is out of the hole. Functional tests will be documented on the daily driller's log. "EXHIBIT 3" also shows a 3M psi choke manifold with a 3" blow down line. Full opening stabbing valve & Kelly cock will be on derrick floor in case of need. No abnormal pressures or temperatures are expected in this well. No nearby wells have encountered any problems.

## 6. AUXILIARY WELL CONTROL EQUIPMENT / MONITORING EQUIPMENT:

13-3/8" & 11" x 3000 psi Double BOP/Blind & pipe ram (3M BOP/BOPE to be used as 2M system)  
4-1/2" x 3000 psi Kelly valve  
13-3/8" & 11" x 3000 psi mud cross – H2S detector on production hole  
Gate-type safety valve 3" choke line from BOP to manifold  
2" adjustable chokes – 3" blow down line  
Fill up line as per Onshore Order 2

## 7. PROPOSED MUD CIRCULATION SYSTEM: (Closed Loop System)

*See COA*

INTERVAL	MW (ppg)	VISC (sec/qt)	FLUID LOSS (cc)	MUD TYPE
0' – 555' 470	8.6 – 8.8	28 – 30	NC	FW
470555' to 3500' *	9.8 – 10.2	28 – 34	NC	Brine
3500' – 4610'	8.6 – 9.1	28 – 36	NC	FW/Brine
4610' – 9681'	8.6 – 9.1	28 – 40	15 - NC	FW/Brine

\* Contingency: If 9-5/8" string is not run, these mud properties will be continued to the next casing seat instead of those indicated on the next line.

\*\* The necessary mud products for weight addition and fluid loss control will be on location at all times. In order to run open hole logs & casing, the above mud properties may have to be altered to meet these needs.

## **8. LOGGING, CORING & TESTING PROGRAM:**

- A. OH logs: Dual Laterolog, MSFL, CNL, Litho-Density, Gamma Ray, Caliper & Sonic from TD back to last csg shoe.
- B. Run CNL, Gamma Ray from last csg shoe back to surface.
- C. No cores, DST's or mud logger are planned at this time.
- D. Additional testing will be initiated subsequent to setting the 5-1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows & drill stem tests.

## **9. POTENTIAL HAZARDS:**

No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered, however, the proposed mud program will be modified to increase the mud-weight. There is known presence of H<sub>2</sub>S in this area. If H<sub>2</sub>S is encountered the operator will comply with the provisions of *Onshore Oil & Gas Order No. 6*. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP: 2274 psi and estimated BHT: 115°.

## **10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:**

Road and location construction will begin after BLM has approved APD. Anticipated spud date will be after BLM approval and as soon as rig is available. Move in operations and drilling is expected to take ~25 days. If production casing is run then an additional 90 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

## **11. OTHER FACETS OF OPERATION:**

After running csg, cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Cedar Lake; Glorieta-Yeso formation will be perforated and stimulated in order to establish production. The well will be swab tested & potentialized as an oil well.



**PHOENIX**  
TECHNOLOGY SERVICES

## **Apache Corporation**

Eddy County, NM (Nad27)

Section 9, T17S - R31E

Crow Federal 16H

Wellbore #1

Plan: Plan #1 080812

## **Apache**

08 August, 2012



**PHOENIX**  
TECHNOLOGY SERVICES



# Phoenix Technology Services

Apache



<b>Company:</b>	Apache Corporation	<b>Local Co-ordinate Reference:</b>	Well Crow Federal 16H
<b>Project:</b>	Eddy County, NM (Nad27)	<b>TVD Reference:</b>	WELL @ 3863.00usft (Original Well Elev + 25' KB)
<b>Site:</b>	Section 9, T17S - R31E	<b>MD Reference:</b>	WELL @ 3863.00usft (Original Well Elev + 25' KB)
<b>Well:</b>	Crow Federal 16H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Plan #1 080812	<b>Database:</b>	GCR DB v5000

<b>Project:</b>	Eddy County, NM (Nad27)		
<b>Map System:</b>	US State Plane 1927 (Exact solution)	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	NAD 1927 (NADCON CONUS)		
<b>Map Zone:</b>	New Mexico East 3001		

<b>Site:</b>	Section 9, T17S - R31E				
<b>Site Position:</b>	<b>Northing:</b>	671,957.60 usft	<b>Latitude:</b>	32° 50' 47.3419 N	
<b>From:</b>	Map	<b>Easting:</b>	638,480.80 usft	<b>Longitude:</b>	103° 52' 56.7258 W
<b>Position Uncertainty:</b>	0.00 usft	<b>Slot Radius:</b>	13-3/16 "	<b>Grid Convergence:</b>	0.24 °

<b>Well:</b>	Crow Federal 16H					
<b>Well Position</b>	<b>+N/-S</b>	0.00 usft	<b>Northing:</b>	671,957.60 usft	<b>Latitude:</b>	32° 50' 47.3419 N
	<b>+E/-W</b>	0.00 usft	<b>Easting:</b>	638,480.80 usft	<b>Longitude:</b>	103° 52' 56.7258 W
<b>Position Uncertainty</b>		0.00 usft	<b>Wellhead Elevation:</b>	usft	<b>Ground Level:</b>	3,838.00 usft

<b>Wellbore:</b>	Wellbore #1				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF2010_14	08/08/12	7.64	60.68	48,839

<b>Design:</b>	Plan #1 080812			
<b>Audit Notes:</b>				
<b>Version:</b>	<b>Phase:</b>	PLAN	<b>Tie On Depth:</b>	0.00
<b>Vertical Section:</b>	<b>Depth From (TVD)</b>	<b>+N/-S (usft)</b>	<b>+E/-W (usft)</b>	<b>Direction (°)</b>
	0.00	0.00	0.00	89.63

<b>Survey Tool Program</b>	Date 08/08/12			
<b>From (usft)</b>	<b>To (usft)</b>	<b>Survey (Wellbore)</b>	<b>Tool Name</b>	<b>Description</b>
0.00	9,681.22	Plan #1 080812 (Wellbore #1)	MWD	MWD - Standard





Phoenix Technology Services  
Apache



Company:	Apache Corporation	Local Co-ordinate Reference:	Well Crow Federal 16H.
Project:	Eddy County, NM (Nad27)	TVD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Site:	Section 9, T17S - R31E	MD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Well:	Crow Federal 16H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1 080812	Database:	GCR DB v5000

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Northing (usft)	Easting (usft)	
0.00	0.00	0.00	-3,863.00	0.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
100.00	0.00	0.00	-3,763.00	100.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
200.00	0.00	0.00	-3,663.00	200.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
300.00	0.00	0.00	-3,563.00	300.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
400.00	0.00	0.00	-3,463.00	400.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
500.00	0.00	0.00	-3,363.00	500.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
529.00	0.00	0.00	-3,334.00	529.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
Rustler											
600.00	0.00	0.00	-3,263.00	600.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
700.00	0.00	0.00	-3,163.00	700.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
722.00	0.00	0.00	-3,141.00	722.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
T/Salt											
800.00	0.00	0.00	-3,063.00	800.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
900.00	0.00	0.00	-2,963.00	900.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,000.00	0.00	0.00	-2,863.00	1,000.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,100.00	0.00	0.00	-2,763.00	1,100.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,200.00	0.00	0.00	-2,663.00	1,200.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,300.00	0.00	0.00	-2,563.00	1,300.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,400.00	0.00	0.00	-2,463.00	1,400.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,500.00	0.00	0.00	-2,363.00	1,500.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,600.00	0.00	0.00	-2,263.00	1,600.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,683.00	0.00	0.00	-2,180.00	1,683.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
B/Salt											
1,700.00	0.00	0.00	-2,163.00	1,700.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,800.00	0.00	0.00	-2,063.00	1,800.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
1,845.00	0.00	0.00	-2,018.00	1,845.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
Yates											
1,900.00	0.00	0.00	-1,963.00	1,900.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	



Phoenix Technology Services  
Apache



Company:	Apache Corporation	Local Co-ordinate Reference:	Well Crow Federal 16H.
Project:	Eddy County, NM (Nad27)	TVD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Site:	Section 9, T17S - R31E	MD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Well:	Crow Federal 16H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1 080812	Database:	GCR DB v5000

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	D Leg (°/100usft)	Northing (usft)	Easting (usft)	
2,000.00	0.00	0.00	-1,863.00	2,000.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,100.00	0.00	0.00	-1,763.00	2,100.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,127.00	0.00	0.00	-1,736.00	2,127.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
Seven Rivers											
2,200.00	0.00	0.00	-1,663.00	2,200.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,300.00	0.00	0.00	-1,563.00	2,300.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,400.00	0.00	0.00	-1,463.00	2,400.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,500.00	0.00	0.00	-1,363.00	2,500.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,600.00	0.00	0.00	-1,263.00	2,600.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,700.00	0.00	0.00	-1,163.00	2,700.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,740.00	0.00	0.00	-1,123.00	2,740.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
Queen											
2,800.00	0.00	0.00	-1,063.00	2,800.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
2,900.00	0.00	0.00	-963.00	2,900.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,000.00	0.00	0.00	-863.00	3,000.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,100.00	0.00	0.00	-763.00	3,100.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,155.00	0.00	0.00	-708.00	3,155.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
Grayburg											
3,200.00	0.00	0.00	-663.00	3,200.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,300.00	0.00	0.00	-563.00	3,300.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,400.00	0.00	0.00	-463.00	3,400.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,490.00	0.00	0.00	-373.00	3,490.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
San Andres											
3,500.00	0.00	0.00	-363.00	3,500.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,600.00	0.00	0.00	-263.00	3,600.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,700.00	0.00	0.00	-163.00	3,700.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	
3,800.00	0.00	0.00	-63.00	3,800.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80	



Phoenix Technology Services  
Apache



Company:	Apache Corporation	Local Co-ordinate Reference:	Well Crow Federal 16H
Project:	Eddy County, NM (Nad27)	TVD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Site:	Section 9, T17S - R31E	MD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Well:	Crow Federal 16H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1 080812	Database:	GCR DB v5000

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)	V: Sec (usft)	DLeg (%/100usft)	Northing (usft)	Easting (usft)
3,900.00	0.00	0.00	37.00	3,900.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,000.00	0.00	0.00	137.00	4,000.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,100.00	0.00	0.00	237.00	4,100.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,200.00	0.00	0.00	337.00	4,200.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,300.00	0.00	0.00	437.00	4,300.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,400.00	0.00	0.00	537.00	4,400.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,500.00	0.00	0.00	637.00	4,500.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,600.00	0.00	0.00	737.00	4,600.00	0.00	0.00	0.00	0.00	671,957.60	638,480.80
4,618.79	0.00	0.00	755.79	4,618.79	0.00	0.00	0.00	0.00	671,957.60	638,480.80
Start Build 15.00										
4,700.00	12.18	89.63	836.39	4,699.39	0.06	8.60	8.60	15.00	671,957.66	638,489.40
4,800.00	27.18	89.63	930.28	4,793.28	0.27	42.18	42.19	15.00	671,957.87	638,522.98
4,900.00	42.18	89.63	1,012.28	4,875.28	0.63	98.92	98.93	15.00	671,958.23	638,579.72
5,000.00	57.18	89.63	1,076.79	4,939.79	1.12	174.95	174.95	15.00	671,958.72	638,655.75
5,027.80	61.35	89.63	1,091.00	4,954.00	1.27	198.84	198.85	15.00	671,958.87	638,679.64
Glorieta										
5,100.00	72.18	89.63	1,119.44	4,982.44	1.70	265.09	265.09	15.00	671,959.30	638,745.89
5,200.00	87.18	89.63	1,137.30	5,000.30	2.33	363.19	363.19	15.00	671,959.93	638,843.99
5,204.32	87.83	89.63	1,137.48	5,000.48	2.35	367.50	367.51	15.00	671,959.95	638,848.30
Start 4476.90 hold at 5204.32 MD										
5,300.00	87.83	89.63	1,141.11	5,004.11	2.97	463.11	463.12	0.00	671,960.57	638,943.91
5,400.00	87.83	89.63	1,144.89	5,007.89	3.61	563.04	563.05	0.00	671,961.21	639,043.84
5,500.00	87.83	89.63	1,148.68	5,011.68	4.25	662.96	662.98	0.00	671,961.85	639,143.76
5,600.00	87.83	89.63	1,152.47	5,015.47	4.89	762.89	762.91	0.00	671,962.49	639,243.69
5,700.00	87.83	89.63	1,156.25	5,019.25	5.53	862.82	862.83	0.00	671,963.13	639,343.62
5,800.00	87.83	89.63	1,160.04	5,023.04	6.16	962.74	962.76	0.00	671,963.76	639,443.54
5,900.00	87.83	89.63	1,163.83	5,026.83	6.80	1,062.67	1,062.69	0.00	671,964.40	639,543.47



Phoenix Technology Services  
Apache



Company:	Apache Corporation	Local Co-ordinate Reference:	Well Crow Federal 16H
Project:	Eddy County, NM (Nad27)	TVD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Site:	Section 9, T17S - R31E	MD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Well:	Crow Federal 16H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1 080812	Database:	GCR DB v5000

Planned Survey											
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Northing (usft)	Easting (usft)	
6,000.00	87.83	89.63	1,167.61	5,030.61	7.44	1,162.59	1,162.62	0.00	671,965.04	639,643.39	
6,100.00	87.83	89.63	1,171.40	5,034.40	8.08	1,262.52	1,262.55	0.00	671,965.68	639,743.32	
6,142.29	87.83	89.63	1,173.00	5,036.00	8.36	1,304.78	1,304.81	0.00	671,965.96	639,785.58	
(Yeso) Paddock											
6,200.00	87.83	89.63	1,175.19	5,038.19	8.72	1,362.45	1,362.48	0.00	671,966.32	639,843.25	
6,300.00	87.83	89.63	1,178.97	5,041.97	9.36	1,462.37	1,462.40	0.00	671,966.96	639,943.17	
6,400.00	87.83	89.63	1,182.76	5,045.76	10.00	1,562.30	1,562.33	0.00	671,967.60	640,043.10	
6,500.00	87.83	89.63	1,186.54	5,049.54	10.64	1,662.23	1,662.26	0.00	671,968.24	640,143.03	
6,600.00	87.83	89.63	1,190.33	5,053.33	11.28	1,762.15	1,762.19	0.00	671,968.88	640,242.95	
6,700.00	87.83	89.63	1,194.12	5,057.12	11.92	1,862.08	1,862.12	0.00	671,969.52	640,342.88	
6,800.00	87.83	89.63	1,197.90	5,060.90	12.56	1,962.00	1,962.04	0.00	671,970.16	640,442.80	
6,900.00	87.83	89.63	1,201.69	5,064.69	13.20	2,061.93	2,061.97	0.00	671,970.80	640,542.73	
7,000.00	87.83	89.63	1,205.48	5,068.48	13.84	2,161.86	2,161.90	0.00	671,971.44	640,642.66	
7,100.00	87.83	89.63	1,209.26	5,072.26	14.48	2,261.78	2,261.83	0.00	671,972.08	640,742.58	
7,200.00	87.83	89.63	1,213.05	5,076.05	15.12	2,361.71	2,361.76	0.00	671,972.72	640,842.51	
7,300.00	87.83	89.63	1,216.84	5,079.84	15.76	2,461.64	2,461.69	0.00	671,973.36	640,942.44	
7,400.00	87.83	89.63	1,220.62	5,083.62	16.40	2,561.56	2,561.61	0.00	671,974.00	641,042.36	
7,500.00	87.83	89.63	1,224.41	5,087.41	17.04	2,661.49	2,661.54	0.00	671,974.64	641,142.29	
7,600.00	87.83	89.63	1,228.20	5,091.20	17.68	2,761.41	2,761.47	0.00	671,975.28	641,242.21	
7,700.00	87.83	89.63	1,231.98	5,094.98	18.32	2,861.34	2,861.40	0.00	671,975.92	641,342.14	
7,800.00	87.83	89.63	1,235.77	5,098.77	18.96	2,961.27	2,961.33	0.00	671,976.56	641,442.07	
7,900.00	87.83	89.63	1,239.55	5,102.55	19.60	3,061.19	3,061.26	0.00	671,977.20	641,541.99	
8,000.00	87.83	89.63	1,243.34	5,106.34	20.24	3,161.12	3,161.18	0.00	671,977.84	641,641.92	
8,100.00	87.83	89.63	1,247.13	5,110.13	20.88	3,261.05	3,261.11	0.00	671,978.48	641,741.85	
8,200.00	87.83	89.63	1,250.91	5,113.91	21.52	3,360.97	3,361.04	0.00	671,979.12	641,841.77	
8,300.00	87.83	89.63	1,254.70	5,117.70	22.16	3,460.90	3,460.97	0.00	671,979.76	641,941.70	
8,400.00	87.83	89.63	1,258.49	5,121.49	22.80	3,560.82	3,560.90	0.00	671,980.40	642,041.62	



# Phoenix Technology Services

## Apache



Company:	Apache Corporation	Local Co-ordinate Reference:	Well Crow Federal 16H
Project:	Eddy County, NM (Nad27)	TVD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Site:	Section 9, T17S - R31E	MD Reference:	WELL @ 3863.00usft (Original Well Elev + 25' KB)
Well:	Crow Federal 16H	North Reference:	Grid
Wellbore:	Wellbore #1	Survey Calculation Method:	Minimum Curvature
Design:	Plan #1 080812	Database:	GCR DB v5000

Planned Survey										
MD (usft)	Inc (°)	Azi (azimuth) (°)	TVDSS (usft)	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	DLeg (°/100usft)	Northing (usft)	Easting (usft)
8,500.00	87.83	89.63	1,262.27	5,125.27	23.44	3,660.75	3,660.83	0.00	671,981.04	642,141.55
8,600.00	87.83	89.63	1,266.06	5,129.06	24.08	3,760.68	3,760.75	0.00	671,981.68	642,241.48
8,700.00	87.83	89.63	1,269.85	5,132.85	24.72	3,860.60	3,860.68	0.00	671,982.32	642,341.40
8,800.00	87.83	89.63	1,273.63	5,136.63	25.36	3,960.53	3,960.61	0.00	671,982.96	642,441.33
8,900.00	87.83	89.63	1,277.42	5,140.42	26.00	4,060.46	4,060.54	0.00	671,983.60	642,541.26
9,000.00	87.83	89.63	1,281.21	5,144.21	26.64	4,160.38	4,160.47	0.00	671,984.24	642,641.18
9,100.00	87.83	89.63	1,284.99	5,147.99	27.28	4,260.31	4,260.40	0.00	671,984.88	642,741.11
9,200.00	87.83	89.63	1,288.78	5,151.78	27.92	4,360.23	4,360.32	0.00	671,985.52	642,841.03
9,300.00	87.83	89.63	1,292.57	5,155.57	28.56	4,460.16	4,460.25	0.00	671,986.16	642,940.96
9,400.00	87.83	89.63	1,296.35	5,159.35	29.20	4,560.09	4,560.18	0.00	671,986.80	643,040.89
9,500.00	87.83	89.63	1,300.14	5,163.14	29.84	4,660.01	4,660.11	0.00	671,987.44	643,140.81
9,600.00	87.83	89.63	1,303.92	5,166.92	30.48	4,759.94	4,760.04	0.00	671,988.08	643,240.74
9,681.22	87.83	89.63	1,307.00	5,170.00	31.00	4,841.10	4,841.20	0.00	671,988.60	643,321.90
TD at 9681.22										

Formations						
Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)	
722.00	722.00	T/Salt				
1,683.00	1,683.00	B/Salt				
2,740.00	2,740.00	Queen				
6,142.29	5,036.00	(Yeso) Paddock				
1,845.00	1,845.00	Yates				
5,027.80	4,954.00	Glorieta				
3,490.00	3,490.00	San Andres				
3,155.00	3,155.00	Grayburg				
529.00	529.00	Rustler				
2,127.00	2,127.00	Seven Rivers				



Phoenix Technology Services  
Apache



<b>Company:</b>	Apache Corporation	<b>Local Co-ordinate Reference:</b>	Well Crow Federal 16H
<b>Project:</b>	Eddy County, NM (Nad27)	<b>TVD Reference:</b>	WELL @ 3863.00usft (Original Well Elev + 25' KB)
<b>Site:</b>	Section 9, T17S - R31E	<b>MD Reference:</b>	WELL @ 3863.00usft (Original Well Elev + 25' KB)
<b>Well:</b>	Crow Federal 16H	<b>North Reference:</b>	Grid
<b>Wellbore:</b>	Wellbore #1	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Design:</b>	Plan #1 080812	<b>Database:</b>	GCR DB.v5000



Plan Annotations					
Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates			
		+N/-S (usft)	+E/-W (usft)	Comment	
4,618.79	4,618.79	0.00	0.00	Start Build 15.00	
5,204.32	5,000.48	2.35	367.50	Start 4476.90 hold at 5204.32 MD	
9,681.22	5,170.00	31.00	4,841.10	TD at 9681.22	

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------



## PROJECT DETAILS: Eddy County, NM (Nad27)

Geodetic System: US State Plane 1927 (Exact solution)  
Datum: NAD 1927 (NADCON CONUS)  
Ellipsoid: Clarke 1866  
Zone: New Mexico East 3001  
System Datum: Mean Sea Level  
Location North: Grid

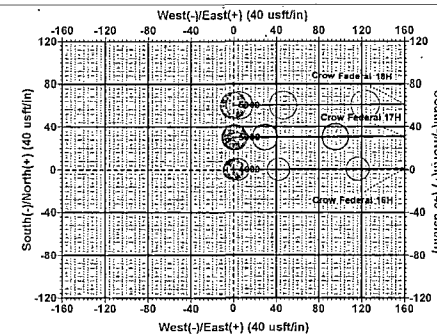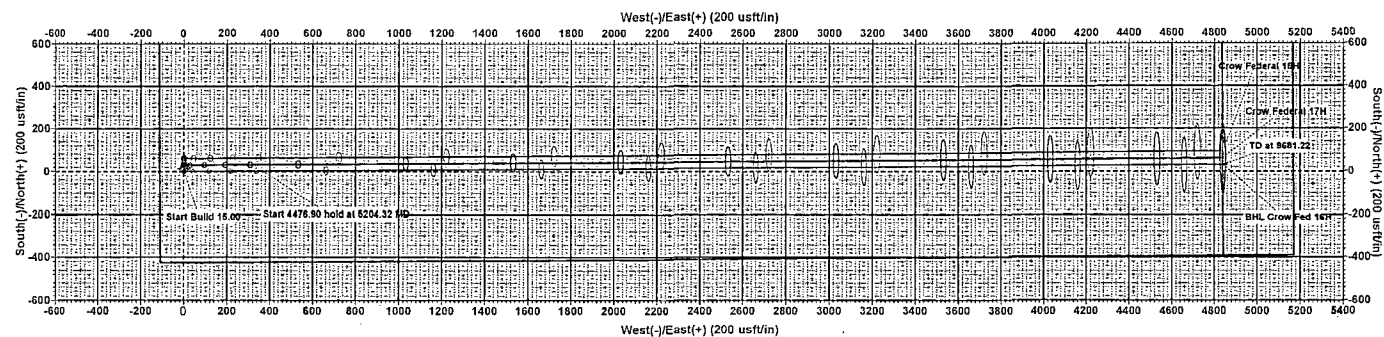

**WELL DETAILS:** Crow Federal 16H

Ground Level: 3838.00			
Northing	Easting	Latitude	Longitude
671957.60	638480.80	32° 50' 47.3419 N	103° 52' 56.7258 W

### WELLBORE TARGET DETAILS (MAP CO-ORDINATES)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Shape
BHL Crow Fed 16H	5170.00	31.00	4841.10	671988.60	643321.90	Point

FORMATION TOP DETAILS

TVDPATH	MDPATH	FORMATION
529.00	529.00	Rustier
722.00	722.00	T/Salt
1683.00	1683.00	B/Salt
1845.00	1845.00	Yates
2127.00	2127.00	Seven Rivers
2740.00	2740.00	Queen
3155.00	3155.00	Grayburg
3490.00	3490.00	San Andres
4954.00	5027.80	Glorieta
5036.00	6142.29	(Yeso) Paddock



## SECTION DETAILS


MD	Inc	Azi	TVD	+N/S	+E/W	Dleg	TFace	VSEct
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
4618.79	0.00	0.00	4618.79	0.00	0.00	0.00	0.00	0.00
5204.32	67.83	89.63	5000.48	2.35	387.50	15.00	89.63	367.51
9681.22	87.83	89.63	5179.00	31.00	4841.10	0.00	0.00	4841.20

BHL Crow Fed 16H

## ANNOTATIONS


TVD	MD	Annotation
4618.79	4618.79	Start Build 15.00
5000.48	5204.32	Start 4476.90 hold at 5204.32 MD
5170.00	9681.22	TD at 9681.22

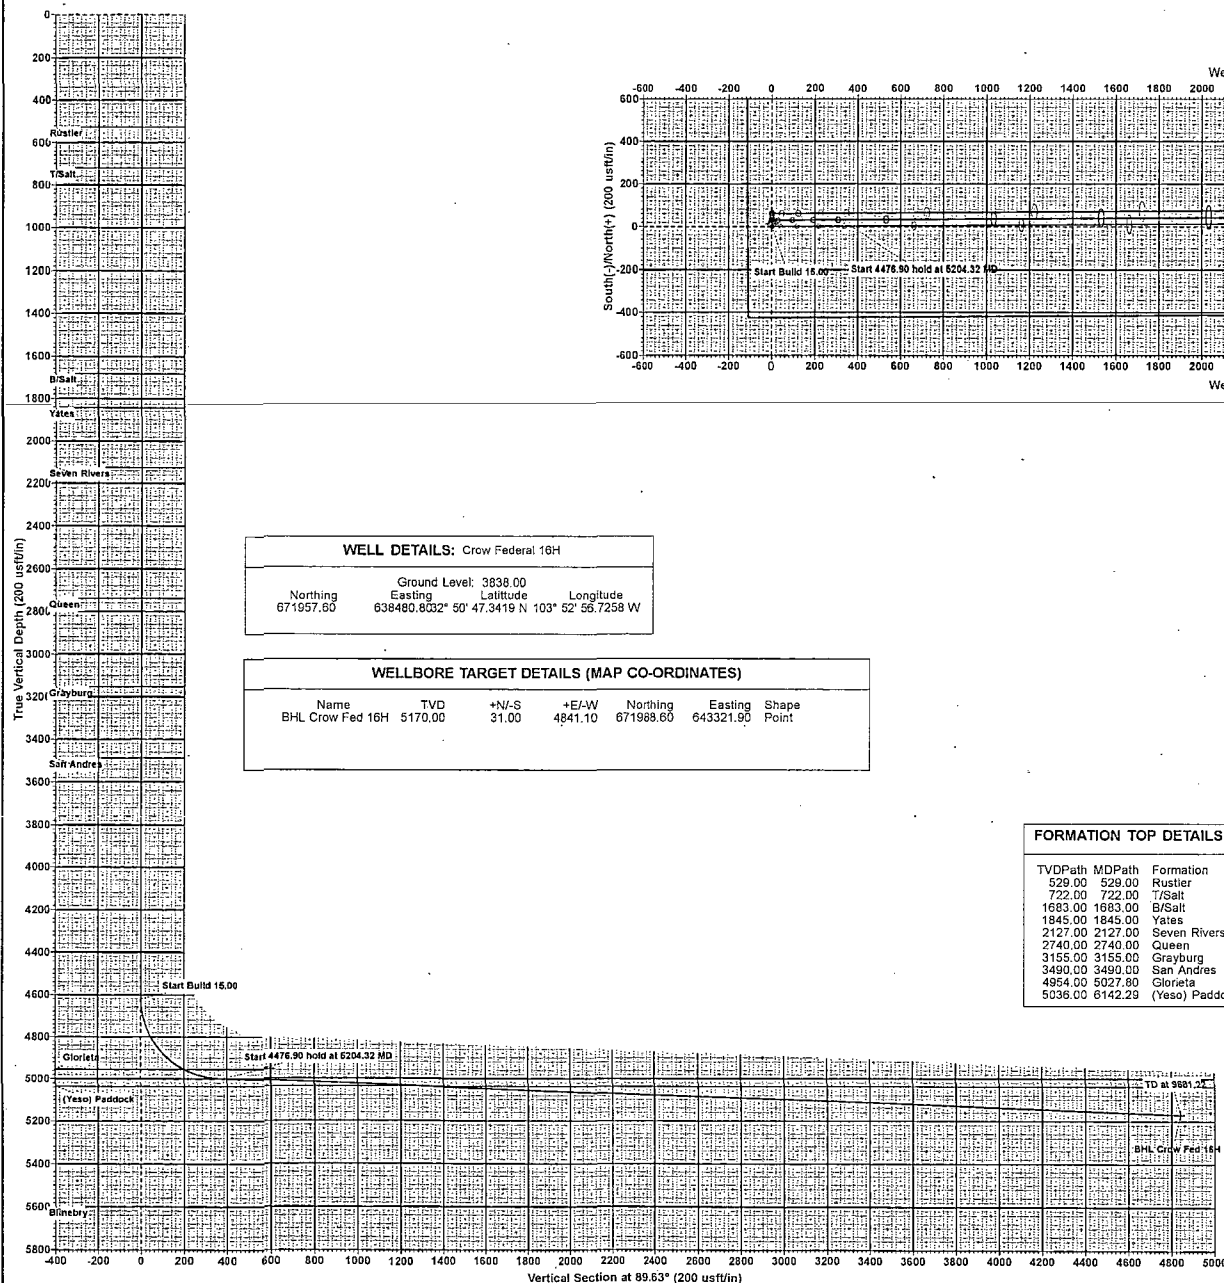

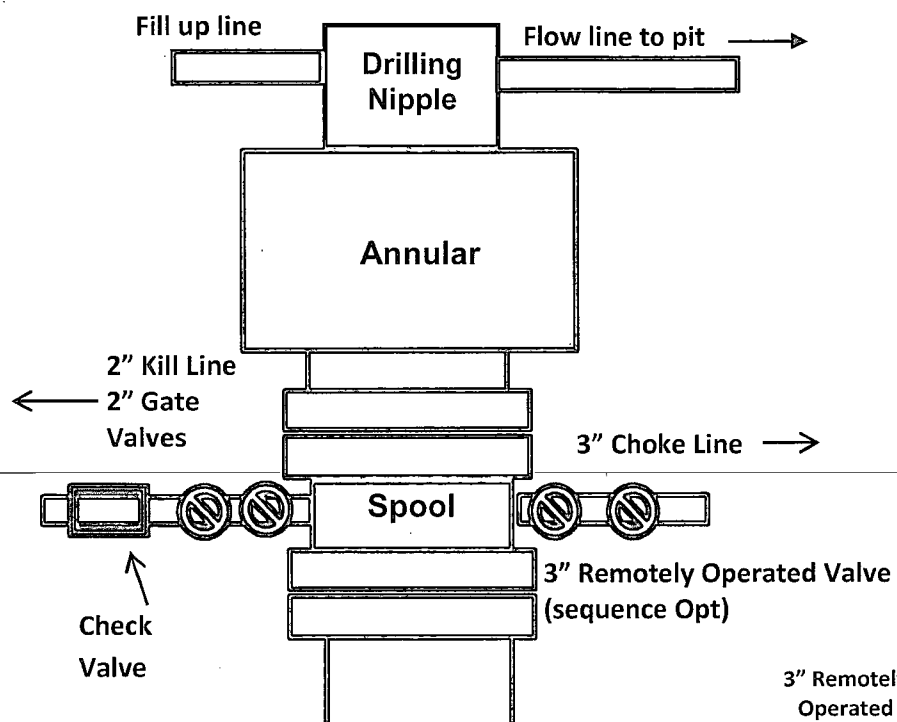


# 13-5/8" 3M psi BOPE & Choke Manifold EXHIBIT 3

All valve & lines on choke manifold are 2" unless noted.  
Exact manifold configuration may vary

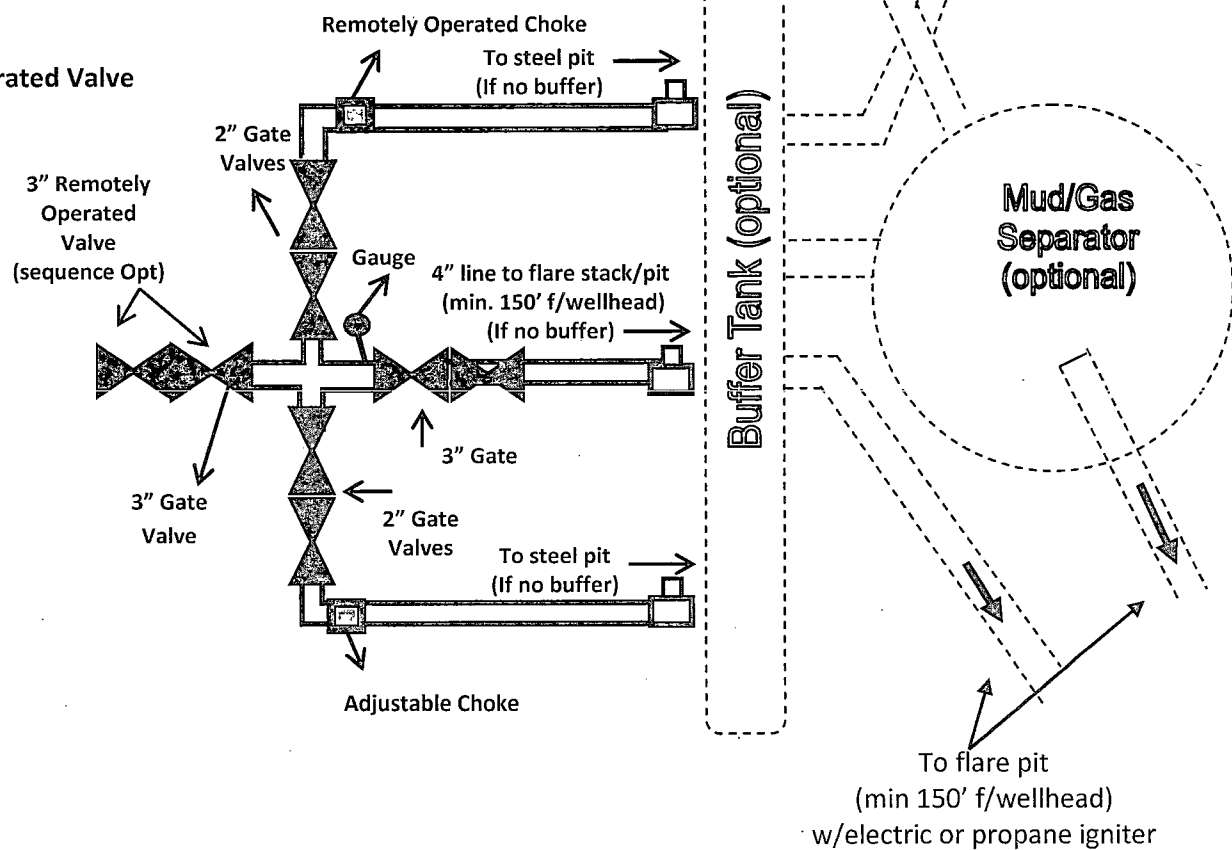




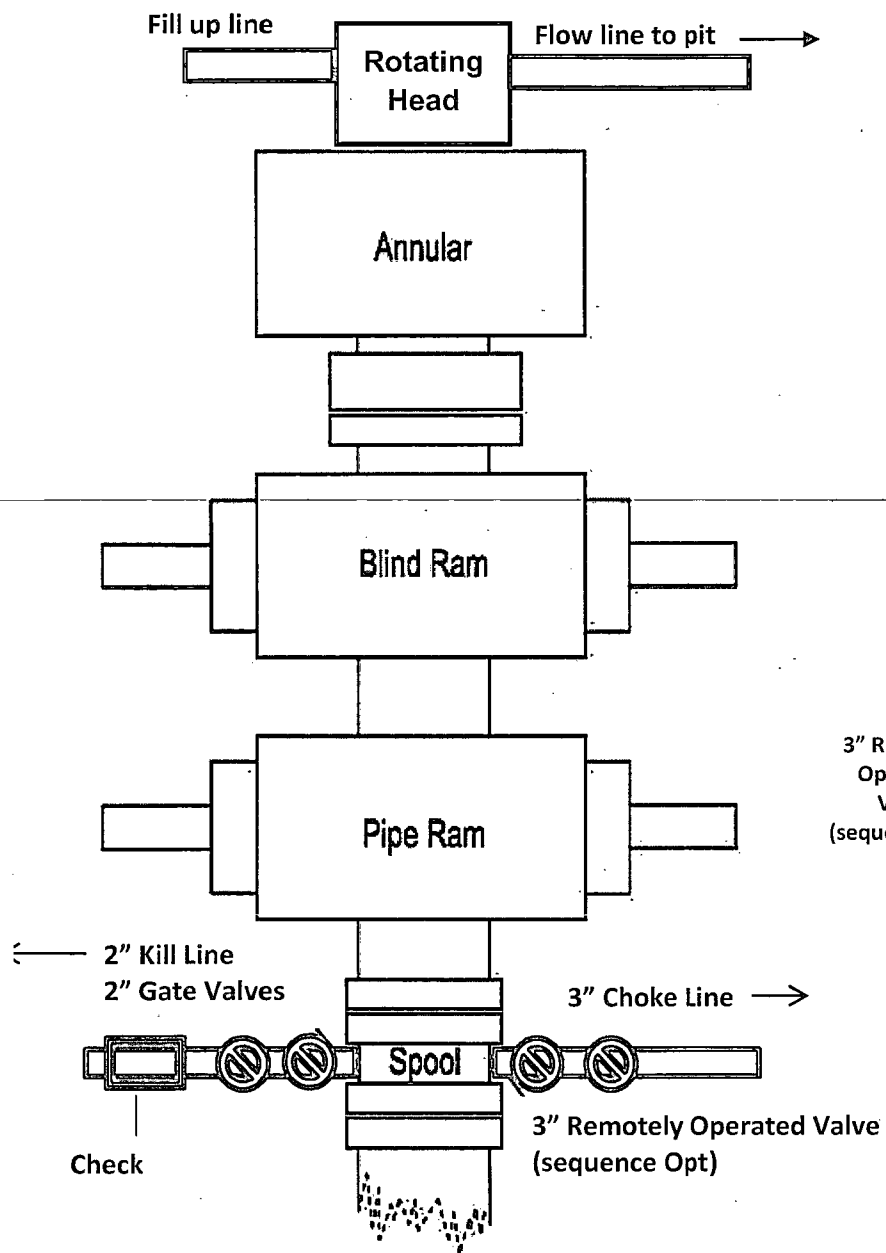

**11" or 13-5/8" 3M psi  
BOPE & Choke Manifold  
EXHIBIT 3A**


All valve & lines on choke manifold are 2" unless noted.  
Exact manifold configuration may vary

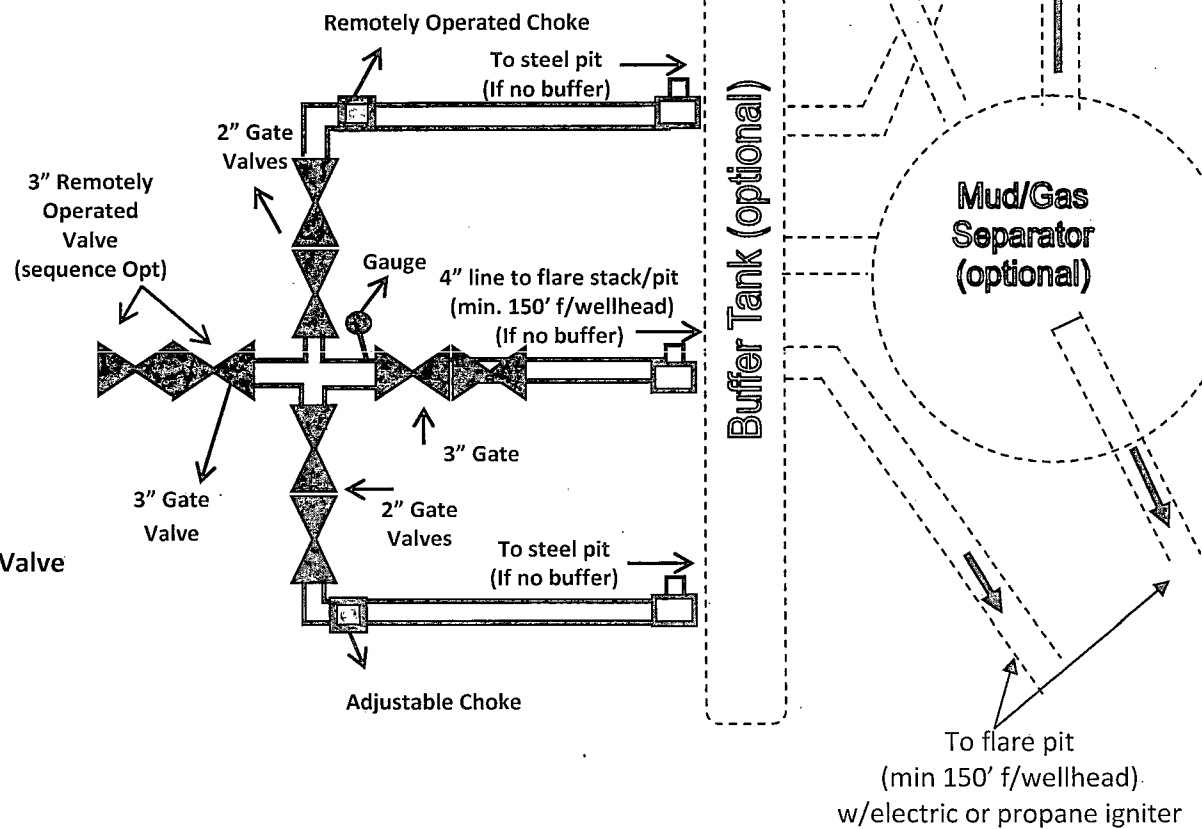

# Apache

## Closed Loop Equipment Diagram

Exhibit 4

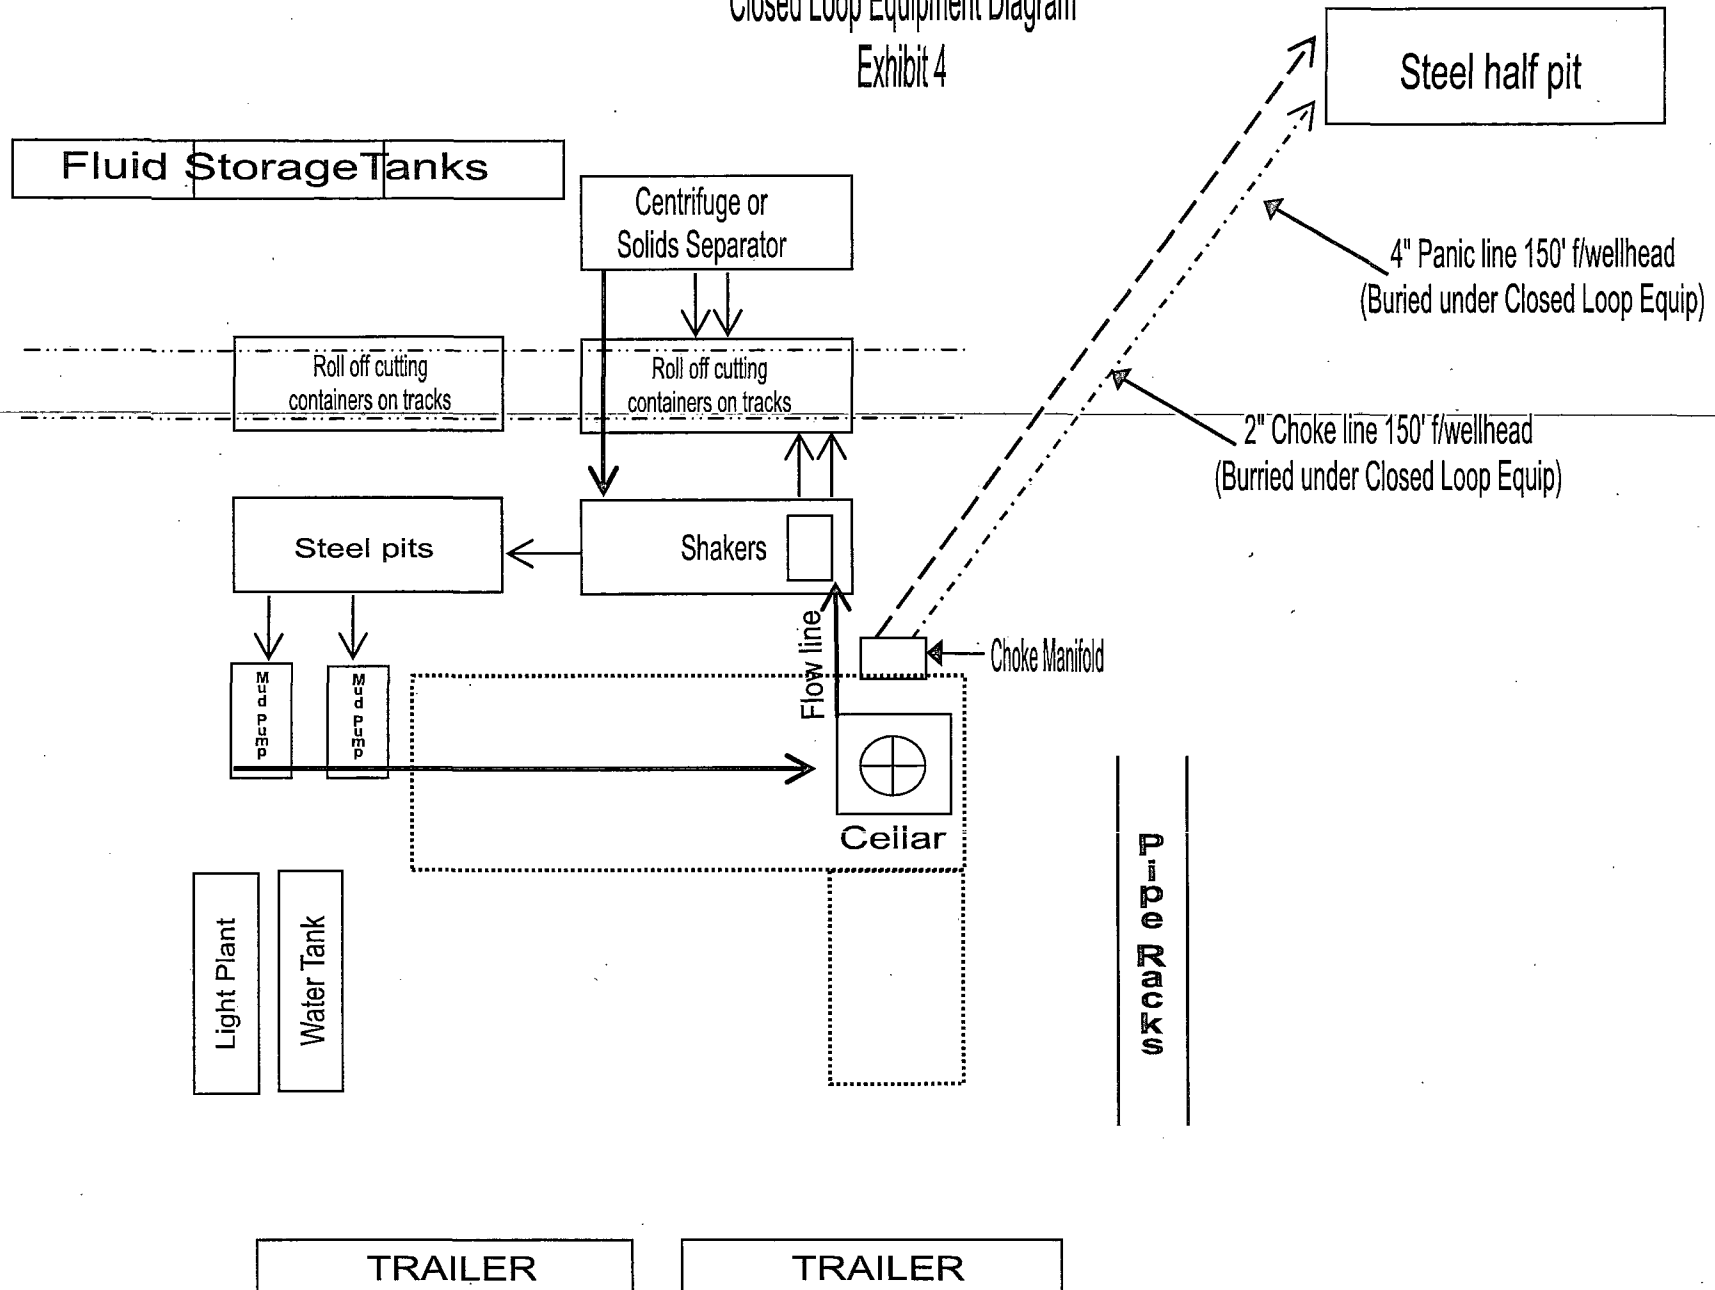



## **DESIGN PLAN, OPERATING & MAINTENANCE PLAN, & CLOSURE PLAN FOR OCD FOR C-144**

### **CROW FEDERAL #16H**

#### **DESIGN PLAN**

Fluid & cuttings coming from drilling operations will pass over the Shale Shaker with the cuttings going to the Sundance Inc / CRI haul off bin and the cleaned fluid returning to the working steel pits.

Equipment includes:

- 2 – 500 bbl steel frac tanks (fresh water for drilling)
- 2 – 180 bbl steel working pits
- 3 – 75 bbl steel haul off bins
- 2 – Pumps (6-1/2" x 10" PZ 10 or equivalent )
- 1 – Shale shaker
- 1 – Mud cleaner – QMAX MudStripper

#### **OPERATING AND MAINTENANCE PLAN**

Inspection to occur every tour for proper operation of system and individual components. If any problems are found they will be repaired and/or corrected immediately.


#### **CLOSURE PLAN**

All haul bins containing cuttings will be removed from location and hauled to Sundance Incorporated (NM-01-0003) disposal site located 3 miles East of Eunice, NM on the Texas border / Controlled Recovery, Inc's (NM-01-0006) disposal site located near mile marker 66 on Highway 62/180.

Sorina L. Flores  
Supv. of Drilling Services

# Apache

Drilling Location  
H2S Safety Equipment Diagram  
Exhibit 3A

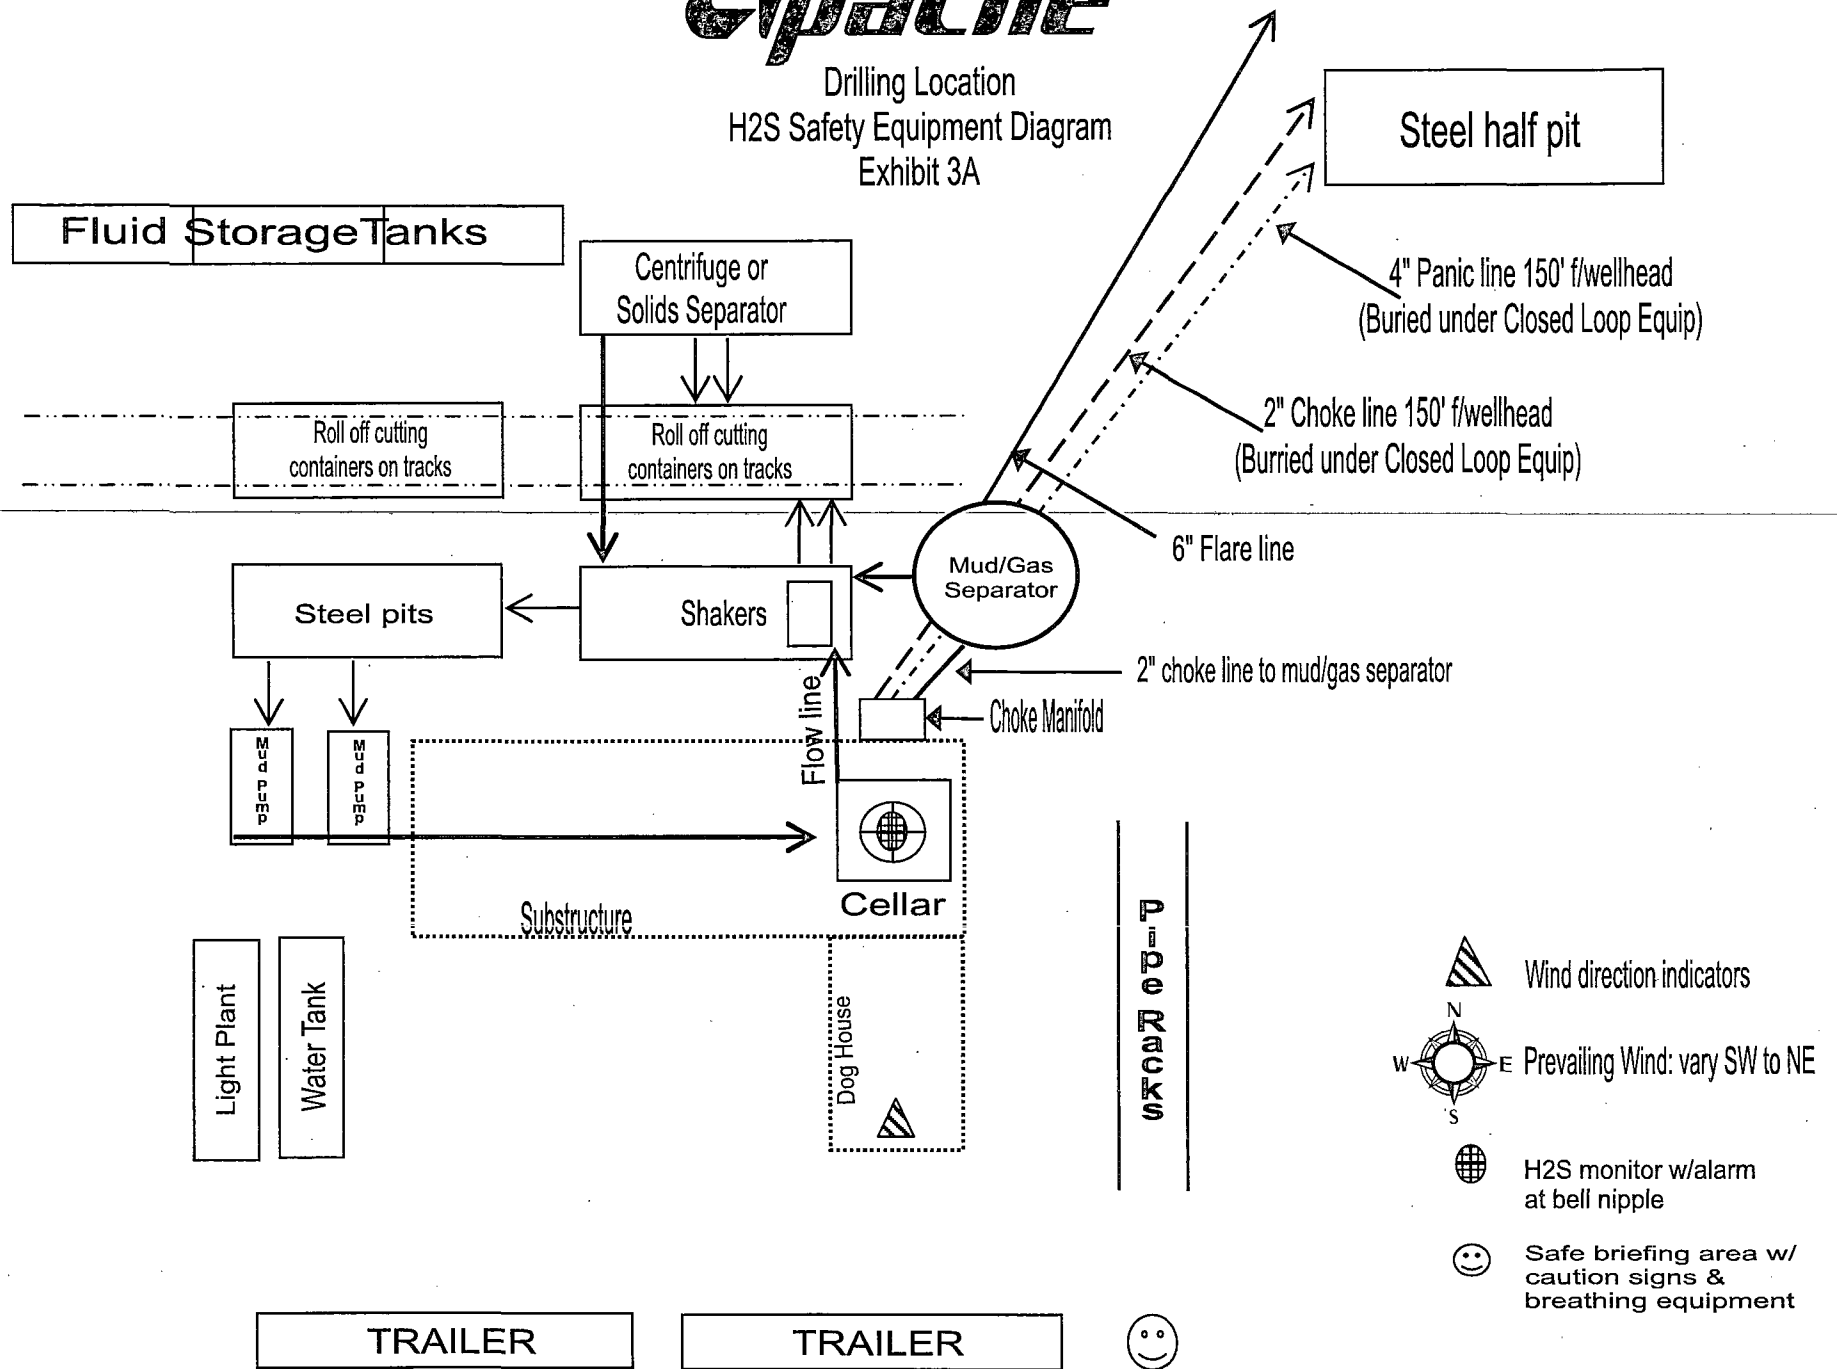

## **HYDROGEN SULFIDE (H<sub>2</sub>S) DRILLING OPERATIONS PLAN**

### **Hydrogen Sulfide Training:**

All regularly assigned personnel, contracted or employed by Apache Corporation will receive training from qualified instructor(s) in the following areas prior to commencing drilling possible hydrogen sulfide bearing formations in this well:

- The hazards and characteristics of hydrogen sulfide (H<sub>2</sub>S)
- The proper use and maintenance of personal protective equipment and life support systems.
- The proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing area, evacuation procedures & prevailing winds.
- The proper techniques for first aid and rescue procedures.

### **Supervisory personnel will be trained in the following areas:**

- The effects of H<sub>2</sub>S on metal components. If high tensile tubulars are to be utilized, personnel will be trained in their special maintenance requirements.
- Corrective action & shut-in procedures when drilling or reworking a well & blowout prevention / well control procedures.
- The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan

There will be an initial training session just prior to encountering a known or probable H<sub>2</sub>S zone (within 3 days or 500') and weekly H<sub>2</sub>S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H<sub>2</sub>S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received proper training.

## **H<sub>2</sub>S SAFETY EQUIPMENT AND SYSTEMS:**

### **Well Control Equipment that will be available & installed if H<sub>2</sub>S is encountered:**

- Flare Line with electronic igniter or continuous pilot.
- Choke manifold with a minimum of one remote choke.
- Blind rams & pipe rams to accommodate all pipe sizes with properly sized closing unit.
- Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head & flare gun with flares

### **Protective Equipment for Essential Personnel:**

- Mark II Survive-air 30 minute units located in dog house & at briefing areas, as indicated on wellsite diagram.

### **H<sub>2</sub>S Detection and Monitoring Equipment:**

- Two portable H<sub>2</sub>S monitors positioned on location for best coverage & response. These units have warning lights & audible sirens when H<sub>2</sub>S levels of 20 ppm are reached.
- One portable H<sub>2</sub>S monitor positioned near flare line.

### **H<sub>2</sub>S Visual Warning Systems:**

- Wind direction indicators are shown on wellsite diagram.
- Caution / Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used when appropriate.

### **Mud Program:**

- The Mud Program has been designed to minimize the volume of H<sub>2</sub>S circulated to the surface. Proper mud weights, safe drilling practices & the use of H<sub>2</sub>S scavengers will minimize hazards when penetrating H<sub>2</sub>S bearing zones.
- A mud-gas separator and H<sub>2</sub>S gas buster will be utilized as needed.

### **Metallurgy:**

- All drill strings, casing, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold & lines, & valves will be suitable for H<sub>2</sub>S service.
- All elastomers used for packing & seals shall be H<sub>2</sub>S trim.

### **Communication:**

- Cellular telephone and 2-way radio communications in company vehicles, rig floor and mud logging trailer.

# HYDROGEN SULFIDE (H<sub>2</sub>S) CONTINGENCY PLAN

**Assumed 100 ppm ROE = 3000'**

100 ppm H<sub>2</sub>S concentration shall trigger activation of this plan.

## Emergency Procedures

In the event of a release of gas containing H<sub>2</sub>S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with H<sub>2</sub>S monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operators and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the :
  - Detection of H<sub>2</sub>S, and
  - Measures for protection against the gas,
  - Equipment used for protection and emergency response.

## Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

### **Characteristics of H<sub>2</sub>S and SO<sub>2</sub>**

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H <sub>2</sub> S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO <sub>2</sub>	2.21 Air = 1	2 ppm	N/A	1000 ppm

## **Contacting Authorities**

Apache Corporation personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Apache's response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMER).

# WELL CONTROL EMERGENCY RESPONSE PLAN

## **I. GENERAL PHILOSOPHY**

Our objective is to ensure that during an emergency, a predetermined procedure is followed so that prompt decisions can be made based on accurate information.

The best way to handle an emergency is with an experienced organization set up for the sole purpose of solving the problem. The *Well Control Emergency Response Team* was organized to handle dangerous & expensive well control problems. The *Team* is structured such that each individual can contribute the most from his area of expertise. Key decision-makers are determined prior to an emergency to avoid confusion about who is in charge.

If the well is flowing uncontrolled at the surface or subsurface, *The Emergency Response Team* will be mobilized. The *Team* is customized for the people currently on the Apache staff. Staff changes may require a change in the plan.

## **II. EMERGENCY PROCEDURE ON DRILLING OR COMPLETION OPERATIONS**

- A. In the event of an emergency the *Drilling Foreman* or *Tool-Pusher* will immediately contact only one of the following starting with the first name listed:

Name	Office	Mobile	Home
Danny Laman – Drlg Superintendent	432-818-1022	432-634-0288	432-520-3528
Terry West – Drilling Engineer	432-818-1114	432-664-7254	
Bobby Smith – Drilling Manager	432-818-1020	432-556-7701	
Jeff Burt – EH&S Coordinator		432-631-9081	

*\*\*This one phone call will free the Drilling Foreman to devote his full time to securing the safety of personnel & equipment. This call will initiate the process to mobilize the Well Control Emergency Response Team. Apache maintains an Emergency Telephone Conference Room in the Houston office. This room is available for us by the Permian Region. The room has 50 separate telephone lines.*

- B. The Apache employee contacted by the Drilling Foreman will begin contacting the rest of the *Team*. If **Danny Laman** is out of contact, **Bob Lange** will be notified.
- C. If a member of the *Emergency Response Team* is away from the job, he must be available for call back. Telephone numbers should be left with secretaries or a key decision-maker.
- D. Apache's reporting procedure for spills or releases of oil or hazardous materials will be implemented when spills or releases have occurred or are probable.

### **EMERGENCY RESPONSE NUMBERS:**

SHERIFF DEPARTMENT	
Eddy County	575-887-7551
Lea County	575-396-3611
FIRE DEPARTMENT	
	911
Artesia	575-746-5050
Carlsbad	575-885-2111
Eunice	575-394-2111
Hobbs	575-397-9308
Jal	575-395-2221
Lovington	575-396-2359
HOSPITALS	
	911
Artesia Medical Emergency	575-746-5050
Carlsbad Medical Emergency	575-885-2111
Eunice Medical Emergency	575-394-2112
Hobbs Medical Emergency	575-397-9308
Jal Medical Emergency	575-395-2221
Lovington Medical Emergency	575-396-2359
AGENT NOTIFICATIONS	
Bureau of Land Management	575-393-3612
New Mexico Oil Conservation Division	575-393-6161

**EXHIBIT #7**

**WARNING**


**YOU ARE ENTERING AN H<sub>2</sub>S AREA  
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CHECK WITH APACHE CORPORATION**

**APACHE CORPORATION  
1-888-257-6840**



INTERIM RECLAMATION LAYOUT  
CROW FEDERAL #16H, #17H, #18H  
EXHIBIT #6

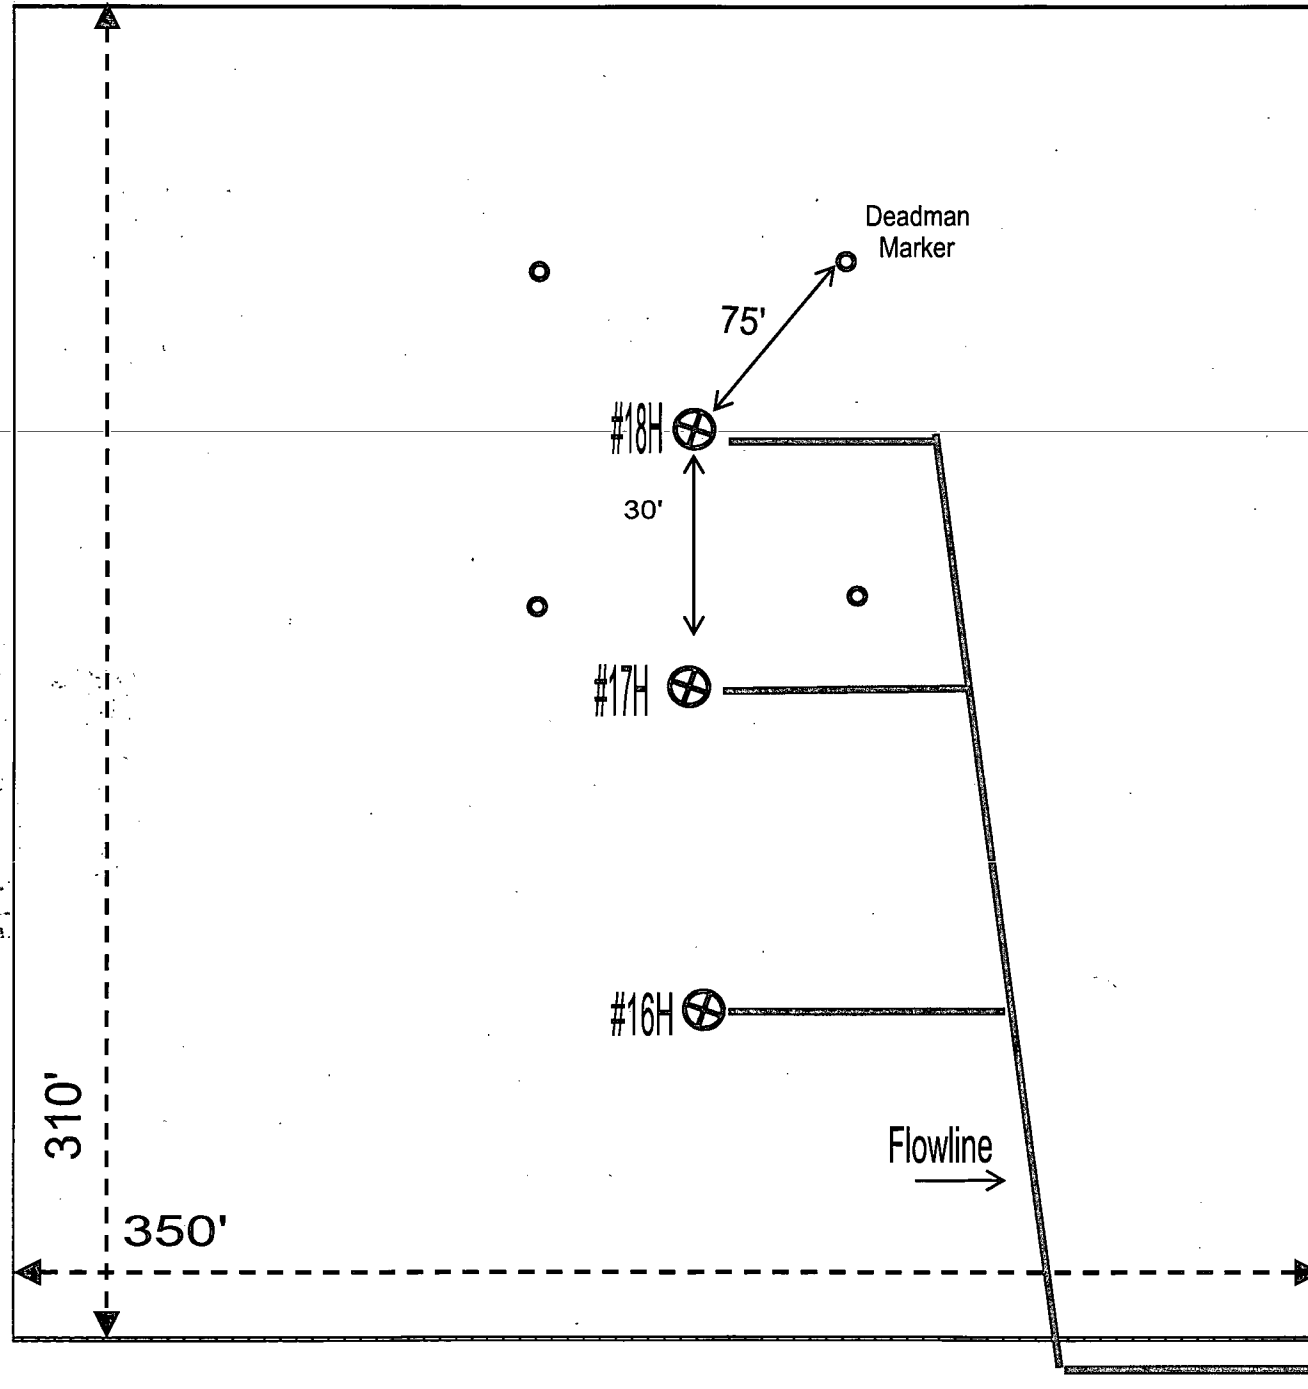

\*\* No reclamation  
due to location @  
bottom of existing  
caliche pit per  
Tanner Nygren

# PECOS DISTRICT CONDITIONS OF APPROVAL

<b>OPERATOR'S NAME:</b>	<b>APACHE CORPORATION</b>
<b>LEASE NO.:</b>	<b>NMLC-029426b</b>
<b>WELL NAME &amp; NO.:</b>	<b>Crow Federal 16H</b>
<b>SURFACE HOLE FOOTAGE:</b>	<b>1745' FSL &amp; 0110' FWL</b>
<b>BOTTOM HOLE FOOTAGE</b>	<b>1745' FSL &amp; 0330' FEL Sec 9, T. 17 S., R 31 E.</b>
<b>LOCATION:</b>	<b>Section 9, T. 17 S., R 31 E., NMPM</b>
<b>COUNTY:</b>	<b>Eddy County, New Mexico</b>

## TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Pipeline
  - Topsoil
  - Lesser Prairie-Chicken Timing Stipulations
  - Ground-level Abandoned Well Marker
- ☒ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
  - H2S requirements
  - Logging requirements
  - Casing requirement
  - Annular BOP test
  - Waste Material and Fluids
- ☒ **Production (Post Drilling)**
  - Well Structures & Facilities
- ☒ **Interim Reclamation**
- ☒ **Final Abandonment & Reclamation**