

HIGH CAVEKARST

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT


APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|--|---|---|
| 1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER | | 5. Lease Serial No. NMLC-065478B |
| 1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 6. If Indian, Allottee or Tribe Name N/A |
| 2. Name of Operator LIME ROCK RESOURCES II-A, L. P. | | 7. If Unit or CA Agreement, Name and No. N/A |
| 3a. Address 1111 BAGBY ST., SUITE 4600 HOUSTON, TX 77002 | 3b. Phone No. (include area code) 713 292-9528 | 8. Lease Name and Well No. FALCON 3 A FEDERAL 40 |
| 4. Location of Well (Report location clearly and in accordance with any State requirements.) At surface 1175' FNL & 250' FEL At proposed prod. zone 965' FNL & 330' FEL | | 9. API Well No. 30-015- 43754 |
| 14. Distance in miles and direction from nearest town or post office* 9 AIR MILES SE OF ARTESIA, NM | | 10. Field and Pool, or Exploratory RED LAKE; GLORIETA-YESO, NE |
| 15. Distance from proposed* location to nearest property or lease line, ft. SHL: 250' BHL: 330' (Also to nearest drig. unit line, if any) | 16. No. of acres in lease 642.88 | 11. Sec., T. R. M. or Blk. and Survey or Area LOT 13-18S-27E |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. SHL: 208' (EAU 12A) BHL: 17' (ditto) | 17. Spacing Unit dedicated to this well NENE | 12. County or Parish EDDY |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3,581.7' UNGRADED | 19. Proposed Depth TVD = 5230' & MD = 5244' | 13. State NM |
| 22. Approximate date work will start* 03/30/2016 | 20. BLM/BIA Bond No. on file NMB-000797 & NMB-000817 | 23. Estimated duration 1 MONTH |

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

| | | |
|---|--|--------------------|
| 25. Signature  | Name (Printed/Typed) BRIAN WOOD (PHONE: 505 466-8120) | Date 01/13/2016 |
|---|--|--------------------|

Title
CONSULTANT

(FAX: 505 466-9682)

Approved by (Signature) /s/George MacDonell

Date **APR 25 2016**

Title
FIELD MANAGER

CARLSBAD FIELD OFFICE

Application approval does not warrant or certify the conduct operations thereon.
Conditions of approval, if any, are attached.

those rights in the subject lease which would entitle the applicant to

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. States any false, fictitious or fraudulent statements

for any person knowingly and willfully to make to any department or agency of the United States any matter within its jurisdiction.

(Continued on page 2) -

*(Instructions on page 2)

Roswell Controlled Water Basin

**NM OIL CONSERVATION
ARTESIA DISTRICT**

MAY 03 2016

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

Approval Subject to General Requirements
& Special Stipulations Attached

closed loop system

Must be in compliance with NMOCD
Rule 5.9 prior to placing well on
production

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
511 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | |
|-----------------------------------|--|---|
| API Number 30-015-43754 | Pool Code 96836 | Pool Name Red Lake; Glorieta-Yeso Northeast |
| Property Code 308971 | Property Name FALCON 3A FEDERAL | Well Number 40 |
| OGRID No. 277558 | Operator Name LIME ROCK RESOURCES II-A, L.P. | Elevation 3581.7 |

Surface Location


| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|----------|-------------|-------------|---------|---------------|------------------|---------------|----------------|-------------|
| 1 | 3 | 18 S | 27 E | | 1175 | NORTH | 250 | EAST | EDDY |

Bottom Hole Location If Different From Surface

| UL or lot no. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|----------|-------------|-------------|---------|---------------|------------------|---------------|----------------|-------------|
| 1 | 3 | 18 S | 27 E | | 965 | NORTH | 330 | EAST | EDDY |

| | | | |
|---------------------------------|-----------------|--------------------|-----------|
| Dedicated Acres 39.47 | Joint or Infill | Consolidation Code | Order No. |
|---------------------------------|-----------------|--------------------|-----------|

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

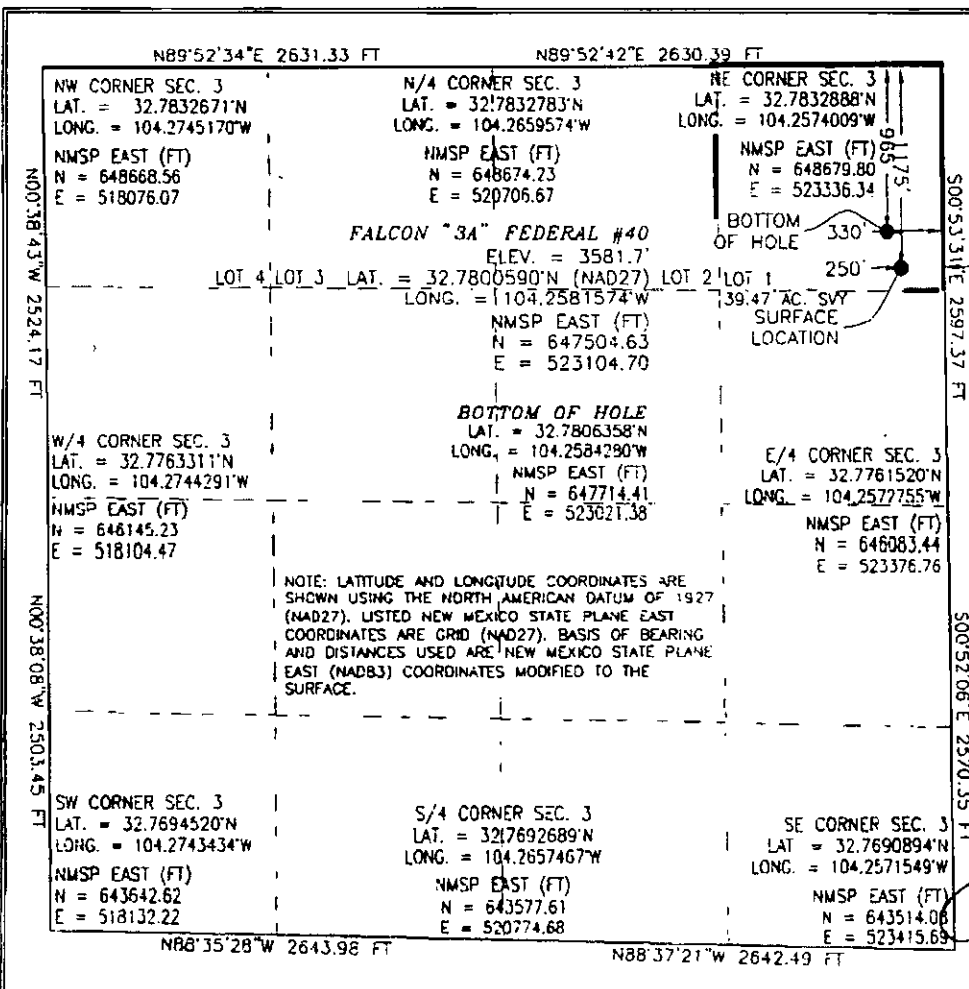

"OPERATOR CERTIFICATION"

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature: **Brian Wood** Date: **1-13-16**

Printed Name: **brian@permitswest.com**

E-mail Address:



"SURVEYOR CERTIFICATION"

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

APRIL 2, 2015
Date of Survey

Signature and Seal of Professional Surveyor
Certificate Number: **112797** P.A.M.112.0, PLS 12797


SURVEY NO. 3734

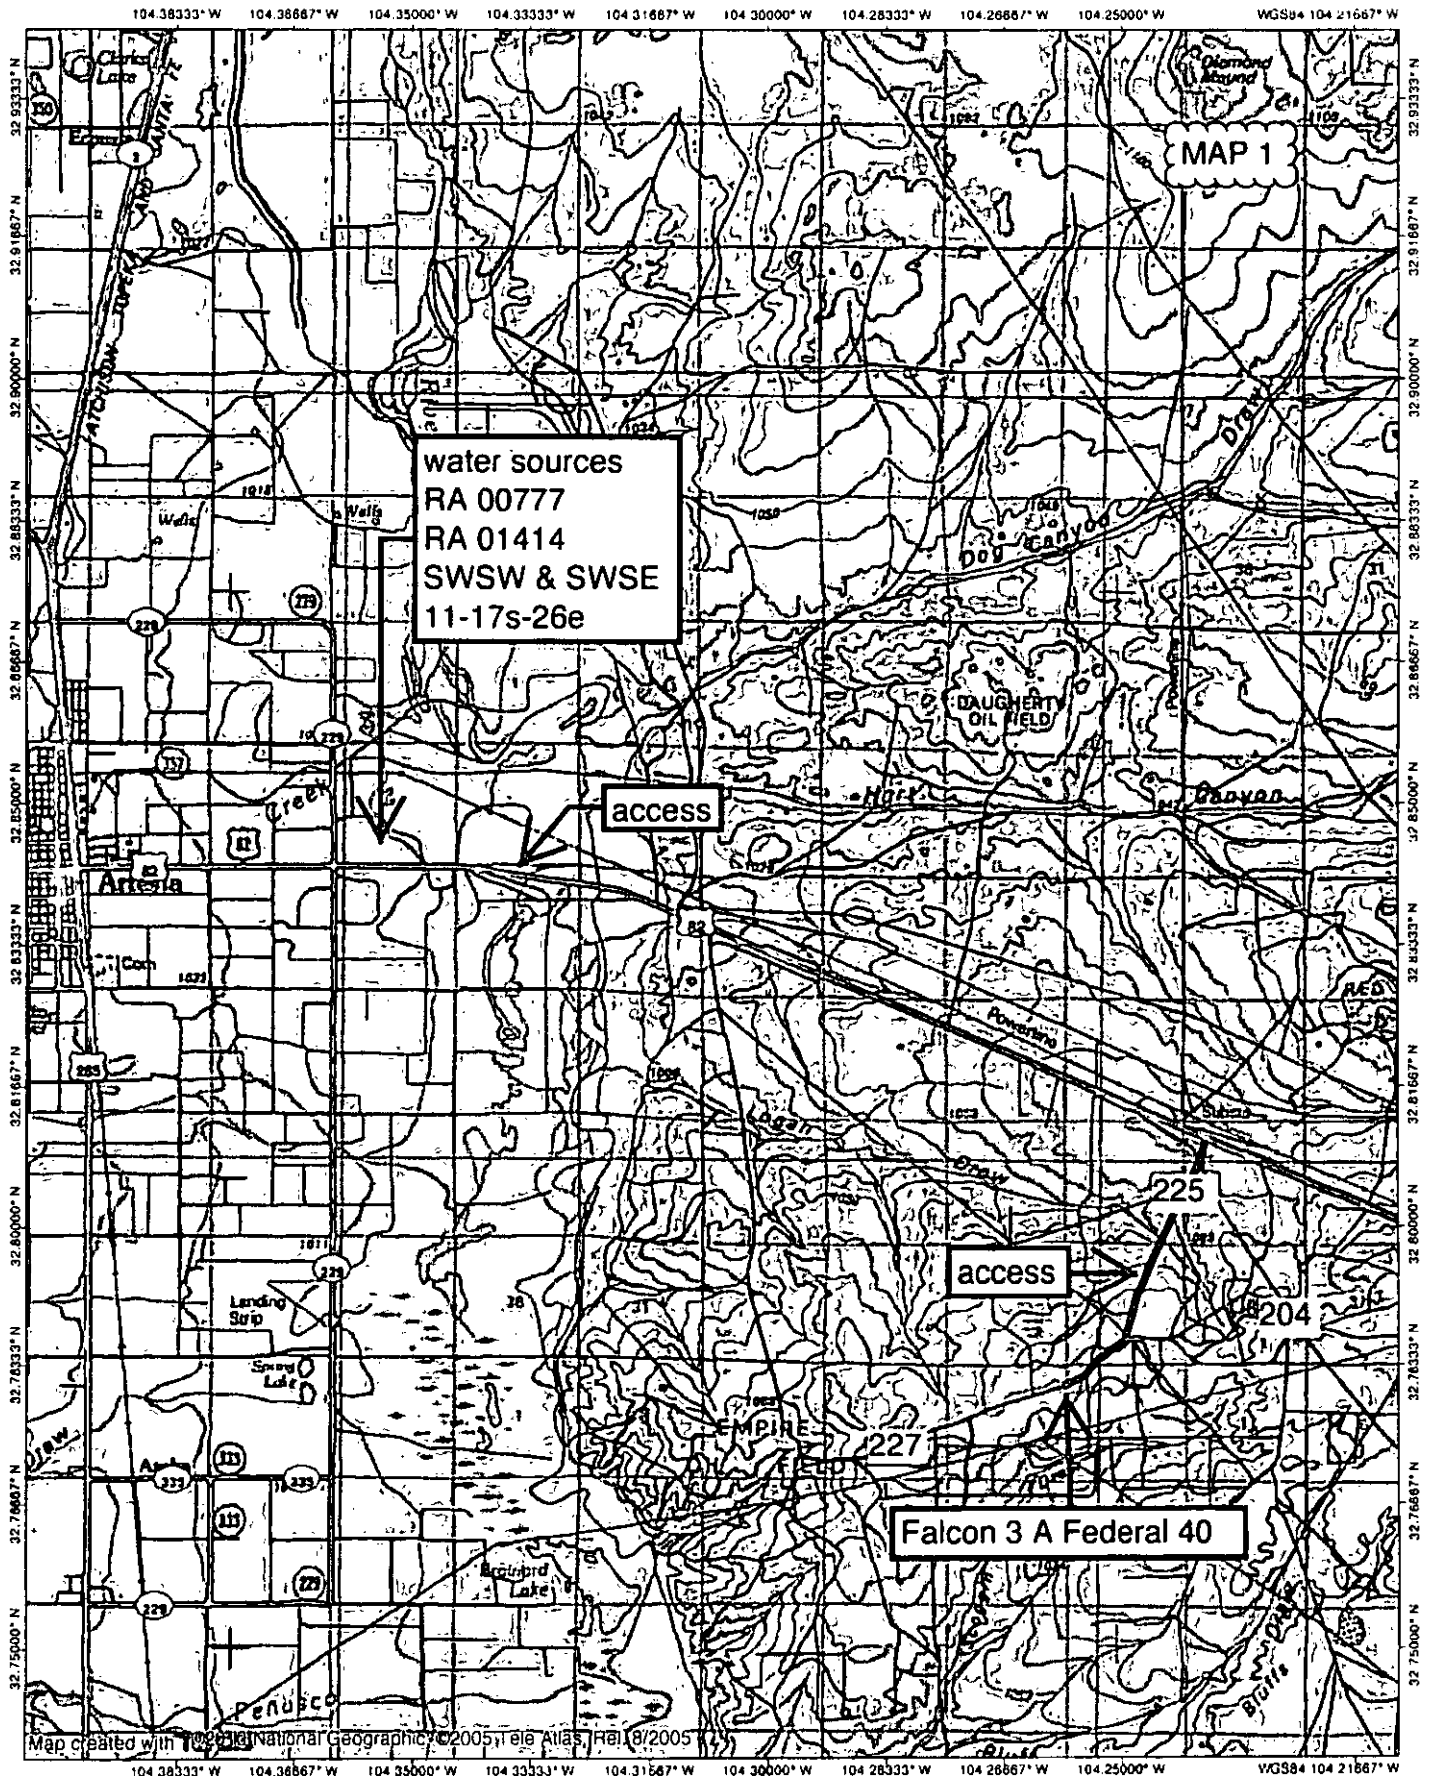

TN 41111

7.5°

07/20/13

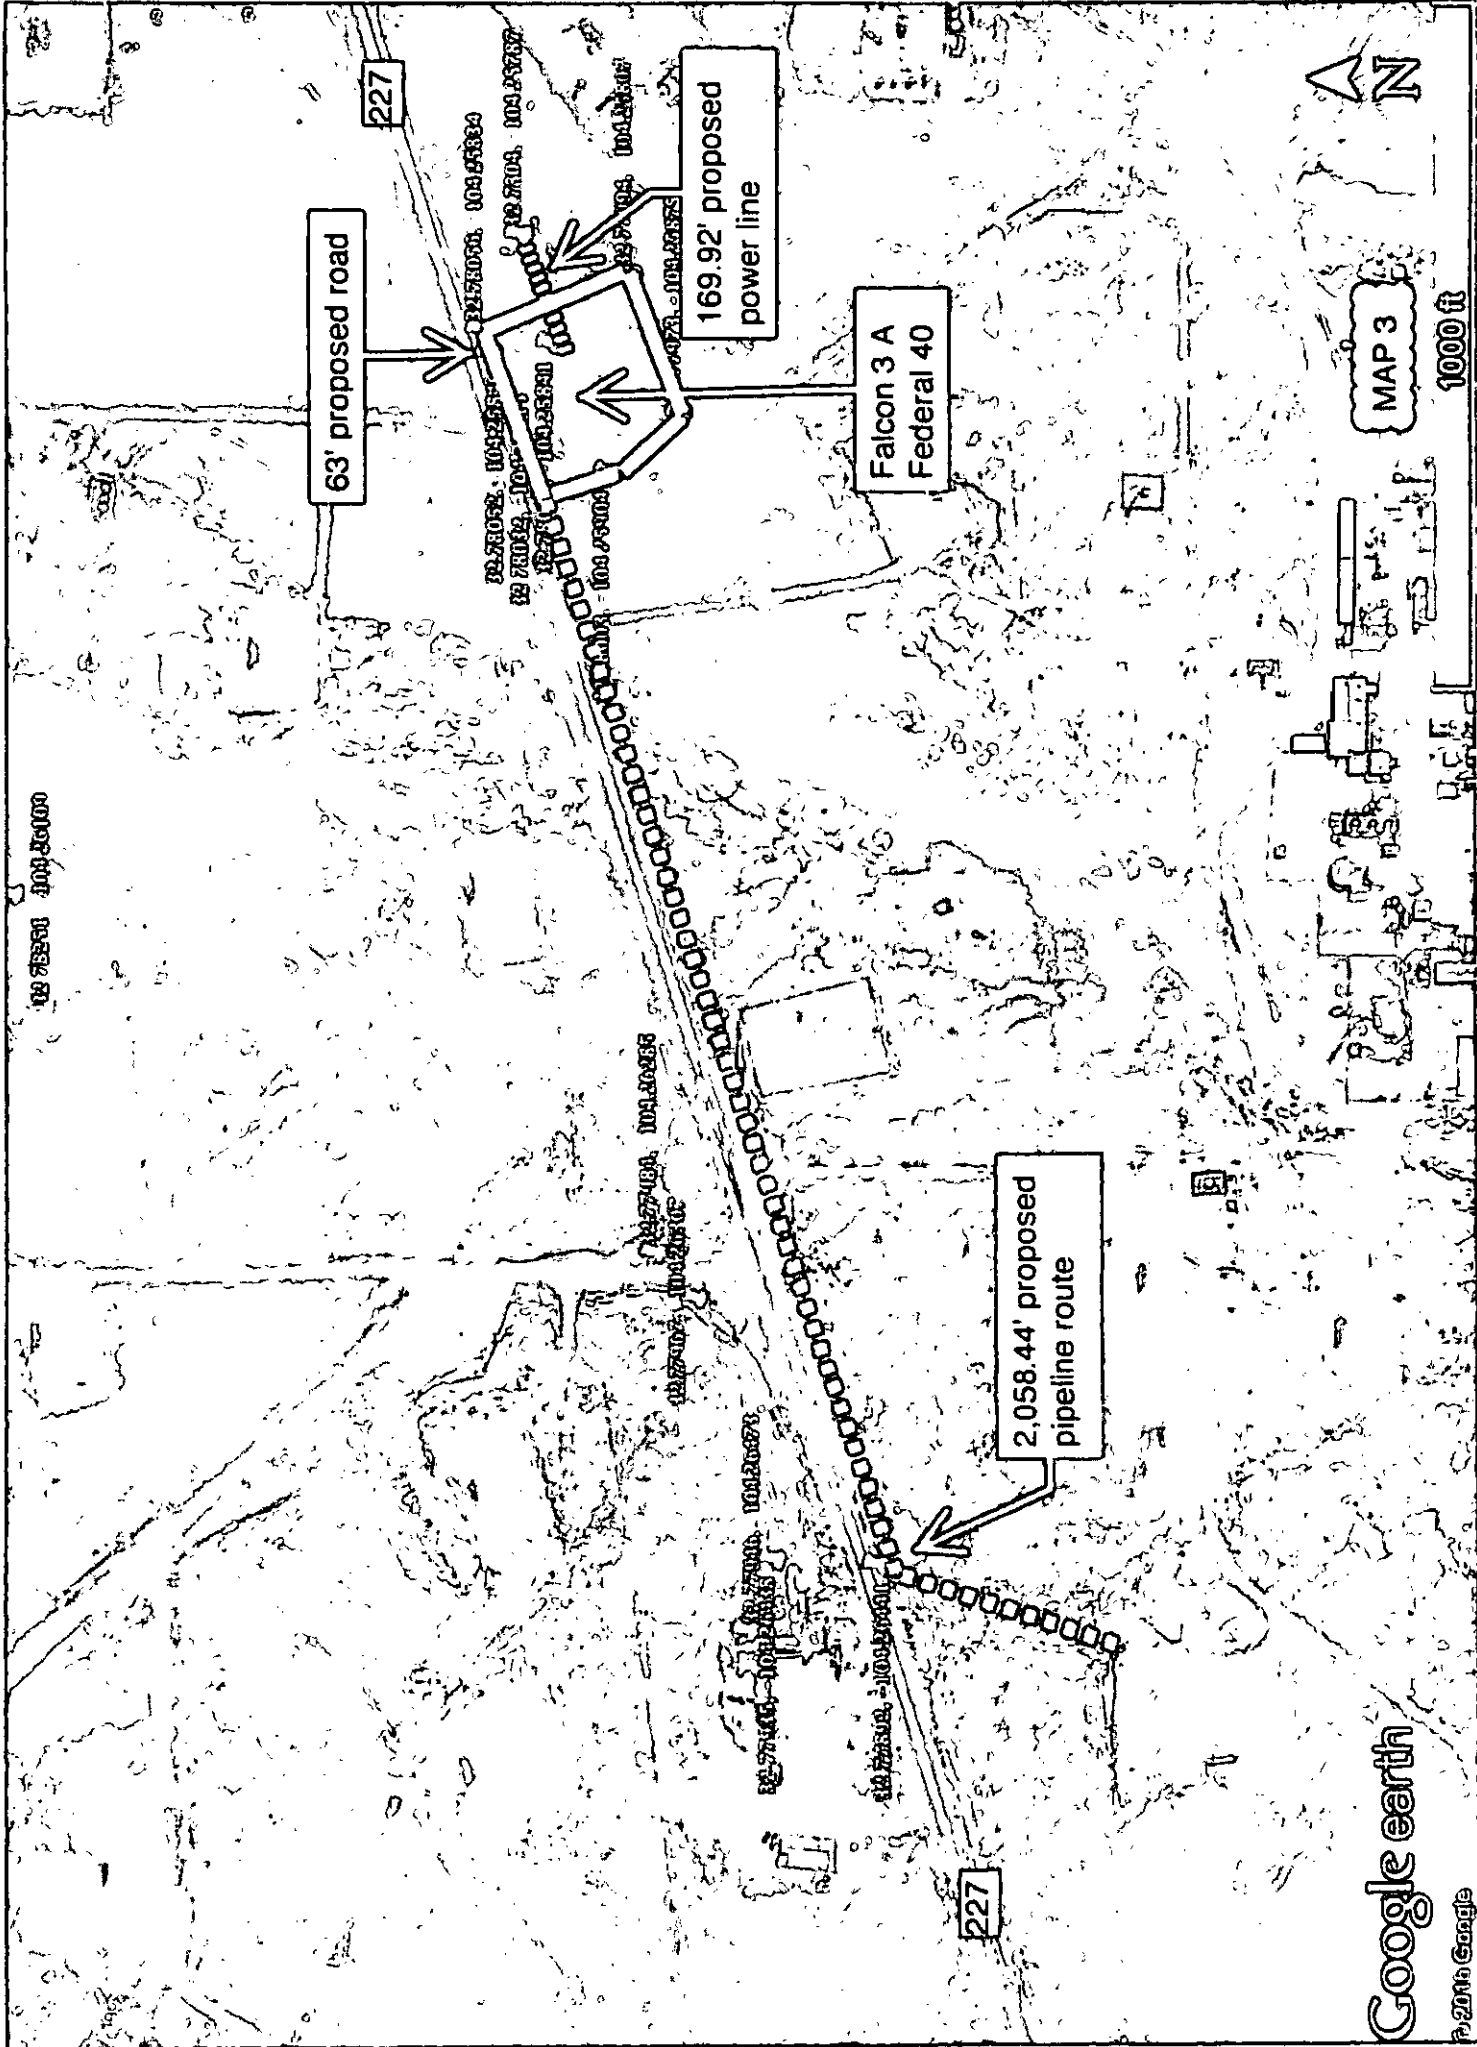


Google earth

© 2014 Google

SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
SITE MAP

MAP 4

NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27). LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD27). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES (NAD 83) MODIFIED TO THE SURFACE.

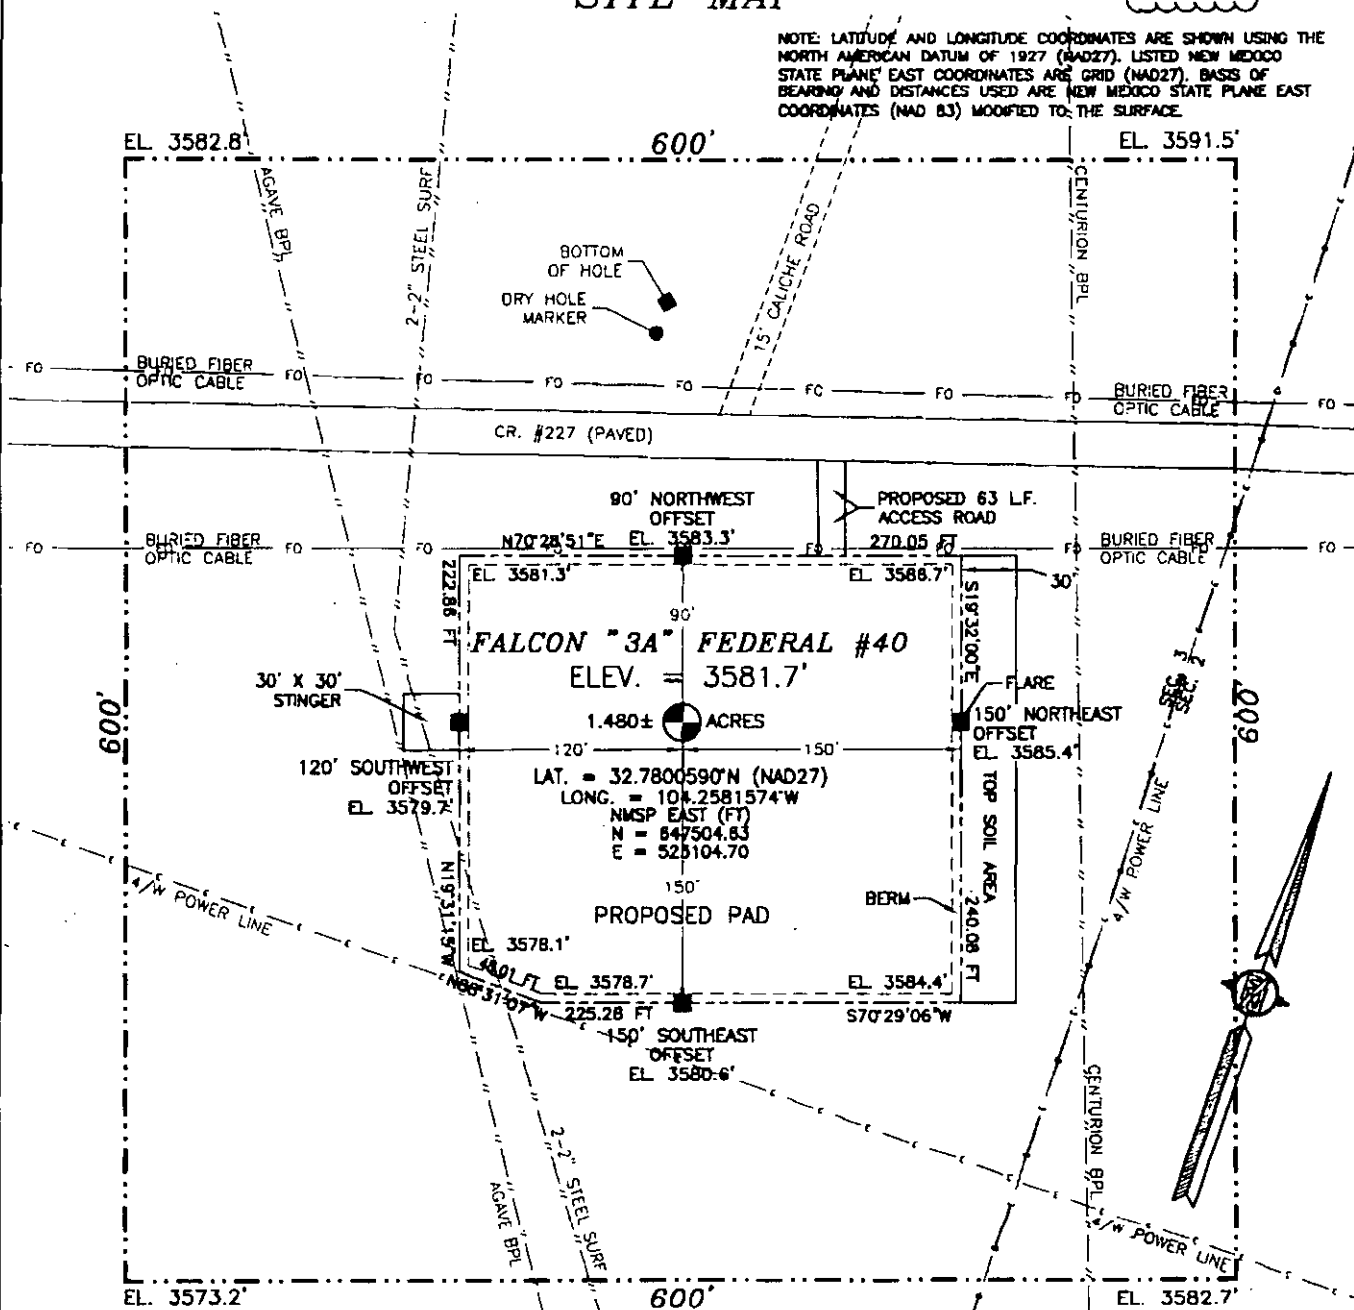

010 50 100 200

SCALE 1" = 100'

DIRECTIONS TO LOCATION

FROM CR. #225 (EMPIRE) AND CR. #227 (LITTLE DIAMOND) GO SOUTHWEST ON CR. #227 0.22 MILES TO A PROPOSED ROAD SURVEY AND FOLLOW FLAGS SOUTHEAST 63' TO THE NORTHEAST CORNER OF PROPOSED PAD FOR THIS LOCATION.

LIME ROCK RESOURCES II-A, L.P.
FALCON "3A" FEDERAL #40
LOCATED 1175 FT. FROM THE NORTH LINE
AND 250 FT. FROM THE EAST LINE OF
SECTION 3, TOWNSHIP 18 SOUTH,
RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

APRIL 2, 2015

SURVEY NO. 3734


MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO

(575) 234-3341

FLOWLINE PLAT
R-O-W FOR TWO 3" SDR 7 POLY SURFACE FLOWLINES (ONE GAS AND ONE PRODUCTION)
FROM FALCON "3A" FEDERAL #40 TO FALCON "3" FEDERAL BATTERY

MAP 5

LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF A PIPELINE CROSSING
SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
APRIL 2, 2015

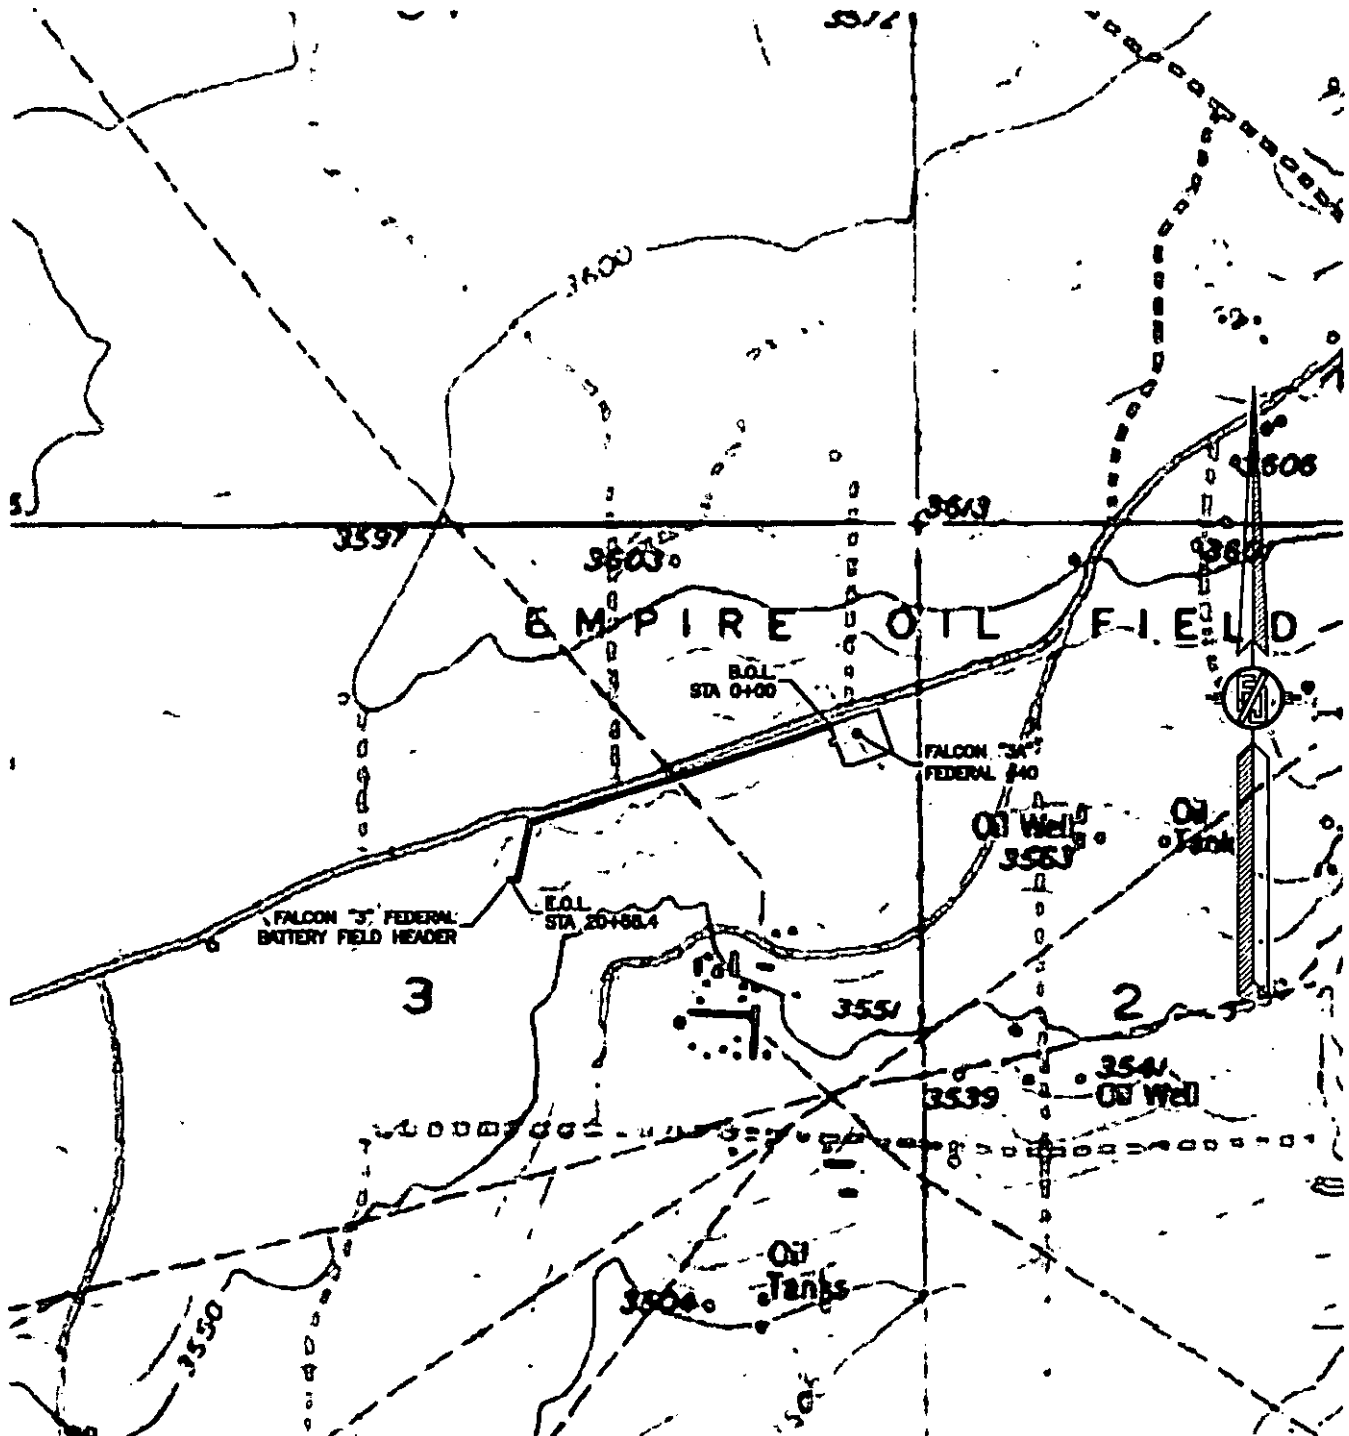


MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO SURVEY NO. 3734

FLOWLINE PLAT
R-O-W FOR TWO 3" SDR 7 POLY SURFACE FLOWLINES (ONE GAS AND ONE PRODUCTION)
FROM FALCON "3A" FEDERAL #40 TO FALCON "3" FEDERAL BATTERY

MAP 6

LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF A PIPELINE CROSSING
SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
APRIL 2, 2015

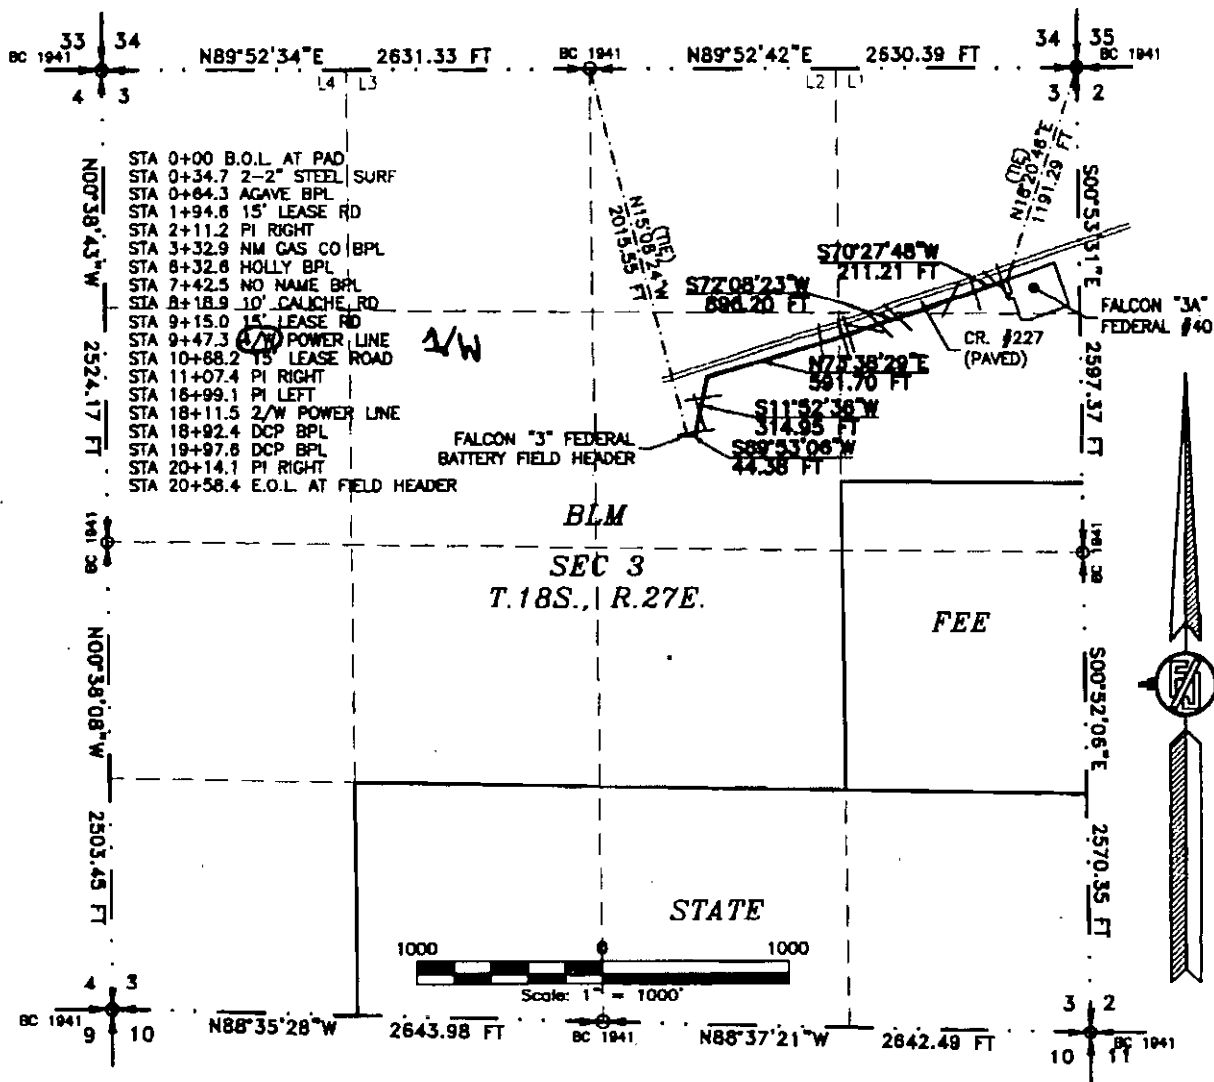

SURVEYOR CERTIFICATE

I, FILMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD,

NEW MEXICO, THIS _____ DAY OF APRIL 2015

MADRON SURVEYING, INC.
301 SOUTH CANAL
CARLSBAD, NEW MEXICO 88220
Phone (575) 234-3341

FILMON F. JARAMILLO PLS. 12797

SURVEY NO. 3734

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 **CARLSBAD, NEW MEXICO**

GENERAL NOTES

1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.

2.) BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

FLOWLINE PLAT
R-O-W FOR TWO 9" SDR 7 POLY SURFACE FLOWLINES (ONE GAS AND ONE PRODUCTION)
FROM FALCON "3A" FEDERAL #40 TO FALCON "S" FEDERAL BATTERY

MAP 7

LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF A PIPELINE CROSSING
SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
APRIL 2, 2015

DESCRIPTION

A STRIP OF LAND 30 FEET WIDE CROSSING BUREAU OF LAND MANAGEMENT LAND IN SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M., EDDY COUNTY, STATE OF NEW MEXICO AND BEING 15 FEET EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT WITHIN LOT 1 OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M., WHENCE THE NORTHEAST CORNER OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS N18°20'46"E, A DISTANCE OF 1191.29 FEET;
THENCE S70°27'48"W A DISTANCE OF 211.21 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE S72°08'23"W A DISTANCE OF 896.20 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE S73°38'29"W A DISTANCE OF 591.70 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE S11°52'36"W A DISTANCE OF 314.95 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE S89°53'06"W A DISTANCE OF 44.38 FEET THE TERMINUS OF THIS CENTERLINE SURVEY, WHENCE THE NORTH QUARTER CORNER OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS N15°08'24"W, A DISTANCE OF 2015.55 FEET;

SAID STRIP OF LAND BEING 2058.44 FEET OR 124.75 RODS IN LENGTH, CONTAINING 1.418 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS:

| | | | |
|-----------|--------------|------------|-------------|
| LOT 1 | 554.26 L.F. | 33.59 RODS | 0.382 ACRES |
| SE/4 NE/4 | 414.06 L.F. | 25.09 RODS | 0.285 ACRES |
| SW/4 NE/4 | 1090.12 L.F. | 66.07 RODS | 0.751 ACRES |

SURVEYOR CERTIFICATE

I, FILMON E. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD,

NEW MEXICO, THIS 9 DAY OF APRIL 2015

Filmon E. Jaramillo
FILMON E. JARAMILLO PLS 12797

MADRON SURVEYING, INC
301 SOUTH CANAL
CARLSBAD, NEW MEXICO 88220
Phone (575) 234-3341

SURVEY NO. 3734

MADRON SURVEYING, INC. CARLSBAD, NEW MEXICO


GENERAL NOTES

- 1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.
- 2.) BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

ELECTRIC LINE PLAT
ELECTRIC LINE TO CONNECT FALCON "3A" FEDERAL #40

LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF AN ELECTRIC LINE CROSSING
SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
APRIL 20, 2015

MAP 9

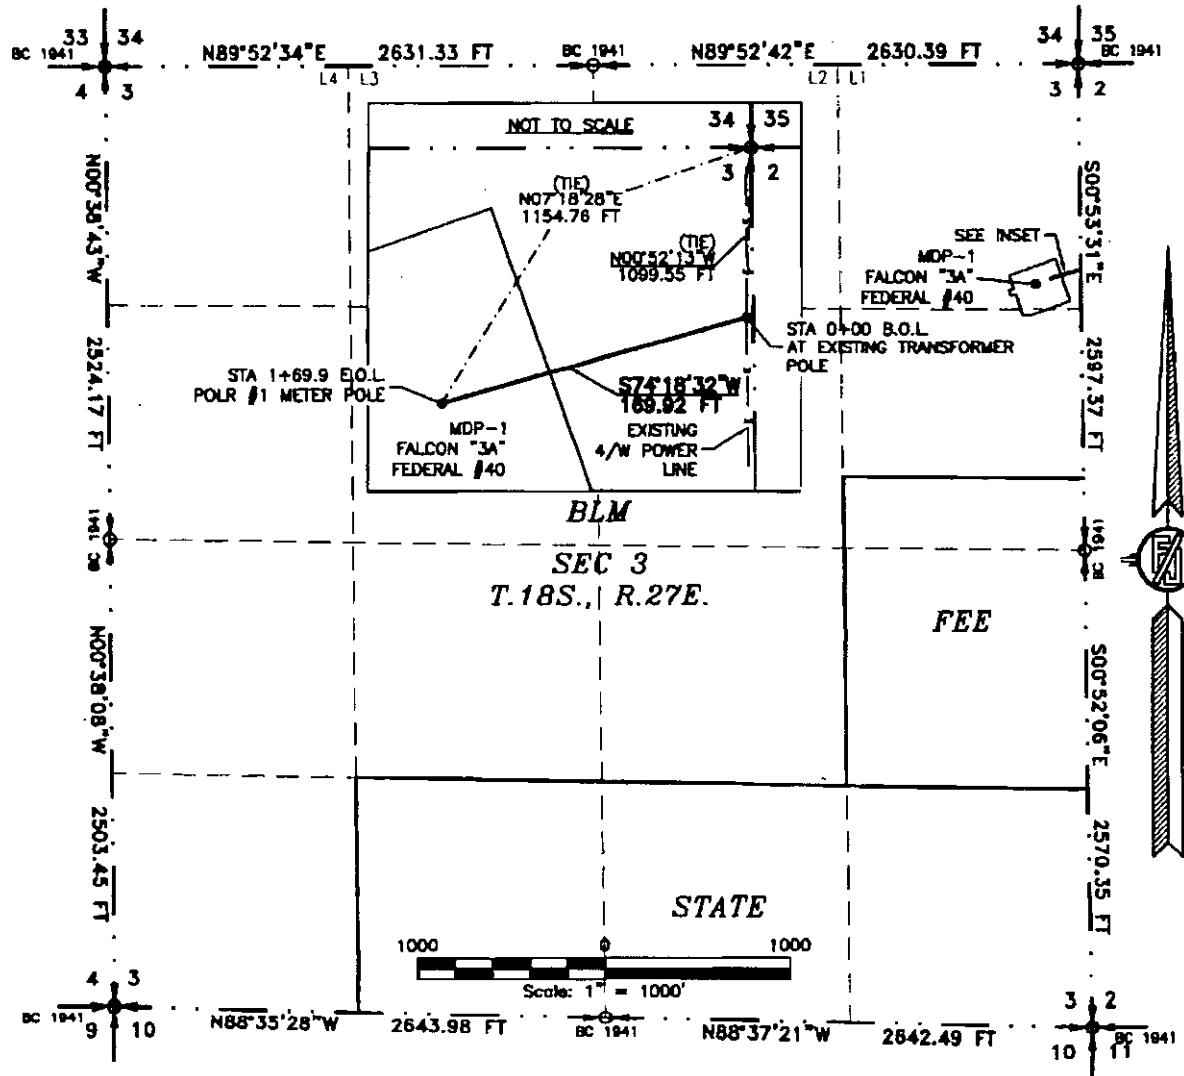

SEE NEXT SHEET (2-4) FOR DESCRIPTION

SURVEYOR CERTIFICATE

I, FILMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD, NEW MEXICO, THIS 20 DAY OF APRIL 2015

[Signature]
FILMON F. JARAMILLO PLS. 12797

MADRON SURVEYING, INC.
301 SOUTH CANAL
CARLSBAD, NEW MEXICO 88220
Phone (575) 234-3341

SURVEY NO. 3734

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO
(575) 234-3341

GENERAL NOTES

1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.

2.) BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

ELECTRIC LINE PLAT
ELECTRIC LINE TO CONNECT FALCON "3A" FEDERAL #40

MAP 10

LIME ROCK RESOURCES II-A, L.P.
CENTERLINE SURVEY OF AN ELECTRIC LINE CROSSING
SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
APRIL 20, 2015

DESCRIPTION

A STRIP OF LAND 30 FEET WIDE CROSSING BUREAU OF LAND MANAGEMENT LAND IN SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M., EDDY COUNTY, STATE OF NEW MEXICO AND BEING 15 FEET EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE SURVEY:

BEGINNING AT A POINT WITHIN LOT 1 OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M., WHENCE THE NORTHEAST CORNER OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS N00°52'13"W, A DISTANCE OF 1099.55 FEET;
THENCE S74°18'32"W A DISTANCE OF 169.92 FEET THE TERMINUS OF THIS CENTERLINE SURVEY, WHENCE THE NORTHEAST CORNER OF SAID SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M. BEARS N07°18'28"E, A DISTANCE OF 1154.76 FEET;

SAID STRIP OF LAND BEING 169.92 FEET OR 10.30 RODS IN LENGTH, CONTAINING 0.117 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS:

LOT 1 169.92 LF. 10.30 RODS 0.117 ACRES

SURVEYOR CERTIFICATE

I, FILIMON F. JARAMILLO, A NEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT MEET THE MINIMUM STANDARDS FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD,

NEW MEXICO, THIS 20 DAY OF APRIL 2015

FILIMON F. JARAMILLO P.S. 12797

MADRON SURVEYING, INC.
301 SOUTH CANAL
CARLSBAD, NEW MEXICO 88220
Phone (575) 234-3341

SURVEY NO. 3734

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO
(575) 234-3341

GENERAL NOTES

1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT.

2.) BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 1

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

Drilling Program

1. ESTIMATED TOPS

| <u>Name</u> | <u>TVD</u> | <u>MD</u> | <u>Content</u> |
|---------------|------------|-----------|---------------------|
| Tansill | 0' | 0' | --- |
| Yates | 50' | 50' | fresh water |
| Seven Rivers* | 351' | 351' | oil, gas, saltwater |
| Queen | 887' | 889' | oil, gas, saltwater |
| Grayburg | 1,398' | 1,404' | oil, gas, saltwater |
| San Andres | 1,623' | 1,631' | oil, gas |
| Glorieta | 3,020' | 3,034' | oil, gas |
| Yeso | 3,132' | 3,146' | oil, gas |
| Tubb | 4,530' | 4,543' | oil, gas |
| Abo** | 5,130' | 5,144' | oil, gas |
| Total Depth | 5,230' | 5,244' | --- |

*in which contingency string, if needed, will be set at 375'

** Abo will not be perforated. Extra depth needed for logs and pump.

2. NOTABLE ZONES

Water bearing strata were found at 565' in the Malco 2 (30-015-01208). That P&A well is 1,441' northwest. Closest (1,328' east) water well (RA 02996) does not have a completion report, but its proposed depth was 300'. Water had been reported between 145' and 150' in this former oil well (30-015-00739).

3. PRESSURE CONTROL

A 2,000 psi BOP stack and manifold system will be used. A typical 2,000 system is attached behind the directional plan. If the equipment changes, then a

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 2

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

Sundry Notice will be filed. System will meet Onshore Orders 2 (BOP) and 6 (H₂S) requirements.

The blowout preventer equipment (BOP) will consist of a 2000 psi rated, "XLT" type, National VARCO double ram preventer that will be tested to a maximum pressure of 2000 psi. The unit will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and drill pipe rams on bottom. The 2M BOP will be installed on the 8-5/8" surface casing and utilized continuously until total depth is reached. All casing strings will be tested as per Onshore Order #2. This also includes a thirty-day (30) test, should the rig still be operating on the same well in thirty days.

Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drilling logs.

The BOP equipment will consist of the following:

- Double ram with blind rams (top) and pipe rams (bottom),
- Drilling spool, or blowout preventer with 2 side outlets (choke side and kill side shall be at least 2" diameter),
- Kill line (2" minimum),
- At least 1 choke line valve (2" minimum),
- 2" diameter choke line,
- 2 kill valves, one of which will be a check valve (2" minimum),
- 1 choke which will be capable of remote operation,
- Pressure gauge on choke manifold,
- Upper Kelly cock valve with handle available,
- Safety valve and subs to fit all drill string connections in use,
- All BOPE connections subjected to well pressure will be flanged, welded, or clamped,
- A fill-up line above the uppermost preventer.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 3

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

4. CASING & CEMENT

| Type | Setting Depth | Hole | Casing | #/ft | Grade | Casing Thread | API | Age |
|------------|---------------|--------|--------|------|-------|---------------|-----|-----|
| Conductor | 40' | 26" | 20" | 91.5 | B | Weld | No | New |
| Surface | 350' | 11" | 8.625" | 24 | J-55 | S T & C | Yes | New |
| Production | 5244' | 7.875" | 5.5" | 17 | J-55 | L T & C | Yes | New |

All casing is designed with a minimum of:

Burst Safety Factor

1.18

Collapse Safety Factor

1.20

Tension Safety Factor

2.00

| casing | depth set | sacks cement | top | gallons per sack | density (ppg) | yield (cu ft per sack) | total cubic feet | % excess | blend |
|-----------------|-----------|--------------|-----|------------------|---------------|------------------------|------------------|-----------|-----------|
| conductor | 40' | N/A | GL | ready mix | ready mix | ready mix | ready mix | ready mix | ready mix |
| surface | 350' | 300 | GL | 6.2 | 14.8 | 1.35 | 405 | 200 | 1 |
| production lead | 5244' | 290 | GL | 9.8 | 12.8 | 1.903 | 551 | 80 | 2 |
| production tail | 5244' | 620 | GL | 6.2 | 14.8 | 1.33 | 824 | 50 | 3 |

Surface casing blend (1) will be Class C + ¼ pound/sack cello flake + 2% CaCl₂. Centralizers will be installed as required by Onshore Order 2.

Production casing lead blend (2) will be 35:65 poz Class C + 5% NaCl + 1/4 pound/sack cello flake + 5 pounds per sack LCM-1 + 0.2% R-3 + 6% gel.

Production casing tail blend (3) will be Class C + 0.6% R-3 + ¼ pound/sack cello flake.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 4

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

Cement volumes will be adjusted based on caliper log volumes and depths of casing and adjusted proportionately for depth changes of the multi stage tool if applicable.

A 13-3/8", 48#, H-40, ST&C, New, API contingency string will be set at 375' in a reamed 17-1/2" hole if circulation is lost in cave or karst (cave & karst potential to 350') and not regained. Contingency string will be cemented to the surface with 400 sacks (536 cubic feet) Class C + 1/4 pound per sack cello flake + 2% CaCl₂ mixed with 6.2 gallons per sack to yield 1.34 cubic feet per sack and 14.8 pounds per gallon. Excess >100%

Upon the setting of a 13-3/8" contingency casing string, a 13-5/8" x 13-3/8" weld on wellhead will be installed. A 13-3/8" to 11" adapter flange will be installed and the 11" XLT 2000 psi NOV double ram BOP/BOPE (Schematic attached) will be installed. The BOP will be tested against the casing to 70% of the internal yield pressure of the 13-3/8", 48#, H-40, ST&C (1211 psi) casing and held for 30 minutes before drilling out the 13-3/8" casing shoe. The formation will be drilled with a 10-3/4" bit approximately 50 feet past the 13-3/8" casing shoe into a competent formation and 8-5/8" casing will be set at approximately 425' (≥50' beyond the previous casing shoe) in the Seven Rivers and cemented with 410 sacks (549 cubic feet) Class C + 1/4 pound per sack cello flake + 2% CaCl₂ mixed with 6.2 gallons per sack to yield 1.34 cubic feet per sack and 14.8 pounds per gallon. Excess >125%

5. MUD PROGRAM

An electronic/mechanical mud monitor will with a minimum pit volume totalizer, stroke counter, and flow sensor will be used. All necessary mud products will be on site to handle any abnormal hole condition that could possibly be encountered during the drilling of this well. Circulation could be lost in the Grayburg and San Andres.

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 5

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

| Interval | 0' - 375' (if contingency string run) | 0' - 350' | 350' - 5094' | 5094' - TD |
|-----------|---------------------------------------|---------------|---|--|
| Type | fresh water | fresh water | brine | brine w/ gel & starch |
| weight | 8.5 - 9.2 | 8.5 - 9.2 | 9.9 - 10.2 | 9.9 - 10.2 |
| pH | 10 | 10 | 10 - 11.5 | 10 - 11.5 |
| WL | NC | NC | NC | 15 - 20 |
| viscosity | 28 - 34 | 28 - 34 | 30 - 32 | 32 - 35 |
| MC | NC | NC | NC | 1 |
| solids | NC | NC | <2% | <3% |
| pump rate | 300 - 350 gpm | 300 - 350 gpm | 350 - 400 gpm | 400 - 450 gpm |
| other | LCM as needed | LCM as needed | salt gel & MF as needed, pump high viscosity sweeps to control solids | salt gel, acid, & MF as needed; pump high viscosity sweeps to control solids |

6. CORES, TESTS, & LOGS

No core or drill stem test is planned. A triple combo with spectral GR - dual lateral log, micro spherical focused log, & spectral density log will be run after tagging total depth. Will log from total depth to surface. A dual spaced neutron log and compensated spectral natural GR log will be run from total depth to surface.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is $\approx 2,264$ psi. No H_2S is expected during the drilling phase. Nevertheless, H_2S monitoring equipment will be on the rig floor and air packs will be available before drilling out of the surface casing. The mud logger will be warned to use a gas trap to detect H_2S . If any H_2S is detected, then the mud

Lime Rock Resources II-A, L.P.

DRILL PLAN PAGE 6

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL


Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

weight will be increased and H₂S inhibitors will be added to control the gas. An H₂S drilling operations contingency plan is attached.

The well is located in a potential cave or karst area. Thus, lost circulation is possible down to 350'. See the contingency casing string and cement plan on Page 4.

8. OTHER INFORMATION

The anticipated spud date is upon approval. It is expected it will take ≈1 month to drill and complete the well.

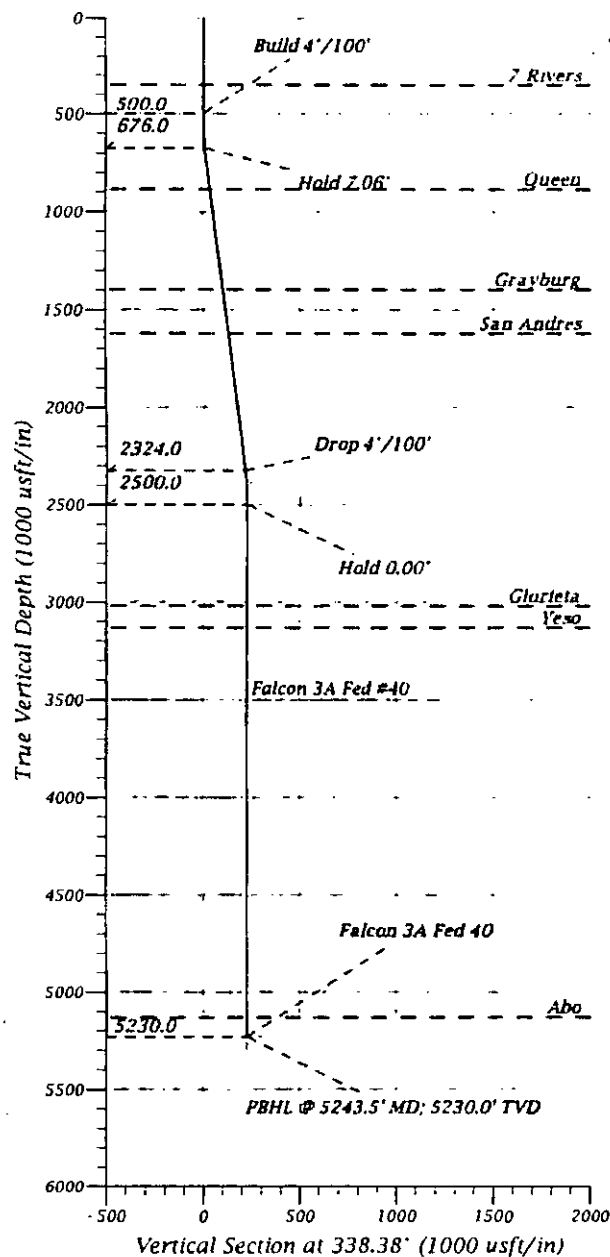
WELL DETAILS: #40


| <u>+N/-S</u> | <u>+E/-W</u> | <u>Ground Level:</u> | <u>RKB @ 3594.5usft</u> | <u>Latitude</u> | <u>Longitude</u> |
|-----------------|----------------|----------------------|-------------------------|------------------|-------------------|
| <u>Northing</u> | <u>Easting</u> | | | | |
| 647504.63 | 523104.70 | 3581.7 | | 32° 46' 48.212 N | 104° 15' 29.367 W |

DESIGN TARGET DETAILS


| <u>Name</u> | <u>TVD</u> | <u>+N/-S</u> | <u>+E/-W</u> | <u>Northing</u> | <u>Easting</u> |
|------------------|------------|--------------|--------------|-----------------|----------------|
| Falcon 3A Fed 40 | 5230.0 | 209.8 | -83.2 | 647714.41 | 523021.38 |

PROJECT DETAILS: Eddy County NM (NAD 27)

Geodetic System: US State Plane 1927 (Exact solution)
Datum: NAD 1927 (NADCON CONUS)
Ellipsoid: Clarke 1866
Zone: New Mexico East 3001
System Datum: Mean Sea Level

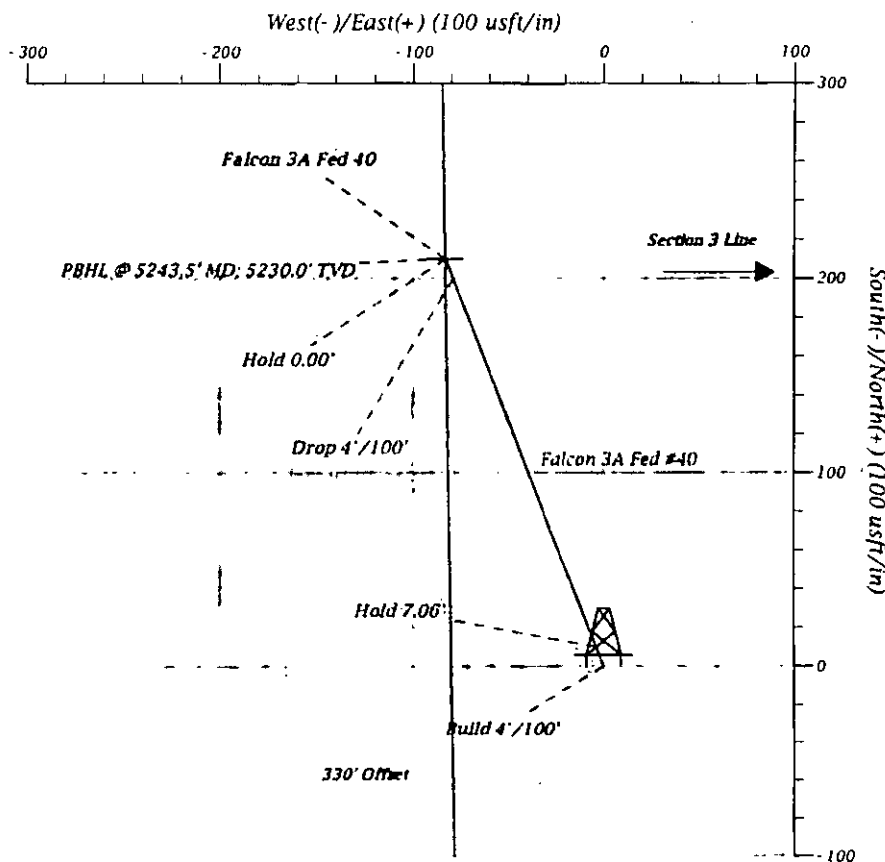
FORMATION TOP DETAILS

| <u>TVDPATH</u> | <u>MDPATH</u> | <u>FORMATION</u> |
|----------------|---------------|------------------|
| 351.0 | 351.0 | 7 Rivers |
| 887.0 | 889.1 | Queen |
| 1398.0 | 1404.0 | Grayburg |
| 1623.0 | 1630.7 | San Andres |
| 3020.0 | 3033.5 | Glorieta |
| 3132.0 | 3145.5 | Yeso |
| 5130.0 | 5143.5 | Abo |



To convert a Magnetic Direction to a True Direction, Add 7.47° East
Magnetic North is 7.47° East of True North (Magnetic Declination)

Section Plans

| <u>MD</u> | <u>Inc</u> | <u>Azi</u> | <u>TVD</u> | <u>+N/-S</u> | <u>+E/-W</u> | <u>Dleg</u> | <u>TFace</u> | <u>Vsect</u> | <u>Annotation</u> |
|-----------|------------|------------|------------|--------------|--------------|-------------|--------------|--------------|--------------------------------|
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.0 | Build 4' / 100' |
| 676.0 | 7.06 | 338.38 | 676.0 | 10.1 | -4.0 | 4.00 | 338.38 | 10.9 | Hold 2.06' |
| 2337.0 | 7.06 | 338.38 | 2324.0 | 199.8 | -79.2 | 0.00 | 0.00 | 214.9 | Drop 4' / 100' |
| 2513.5 | 0.00 | 0.00 | 2500.0 | 209.8 | -83.2 | 4.00 | 180.00 | 225.7 | Hold 0.00' |
| 5243.5 | 0.00 | 0.00 | 5230.0 | 209.8 | -83.2 | 0.00 | 0.00 | 225.7 | PBHL @ 5243.5' MD; 5230.0' TVD |



| | | | |
|-----------|---------------------------|------------------------------|-------------------|
| Database: | EDM 5000.1 Single User Db | Local Co-ordinate Reference: | Well #40 |
| Company: | Lime Rock Resources | TVD Reference: | RKB @ 3594.5usft |
| Project: | Eddy County NM (NAD 27) | MD Reference: | RKB @ 3594.5usft |
| Site: | Falcon 3A Fed | North Reference: | True |
| Well: | #40 | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Original Hole | | |
| Design: | Plan 1 | | |

| | | | |
|-------------|--------------------------------------|---------------|----------------|
| Project | Eddy County NM (NAD 27) | | |
| Map System: | US State Plane 1927 (Exact solution) | System Datum: | Mean Sea Level |
| Geo Datum: | NAD 1927 (NADCON CONUS) | | |
| Map Zone: | New Mexico East 3001 | | |

| | | | | |
|-----------------------|---------------|-----------------|------------|--------------------------|
| Site | Falcon 3A Fed | | | |
| Site Position: | Northings: | 648,497.95 usft | Latitude: | 32° 46' 58.046 N |
| From: Map | Easting: | 522,449.28 usft | Longitude: | 104° 15' 37.036 W |
| Position Uncertainty: | 0.0 usft | Slot Radius: | 13-3/16 " | Grid Convergence: 0.04 ° |

| | | | | |
|----------------------|----------|---------------------|------------|----------------------------|
| Well | #40 | | | |
| Well Position | +N/-S | -993.8 usft | Northings: | 647,504.63 usft |
| | +E/-W | 654.7 usft | Easting: | 523,104.70 usft |
| Position Uncertainty | 0.0 usft | Wellhead Elevation: | 0.0 usft | Ground Level: 3,581.7 usft |

| | | | | | |
|-----------|---------------|-------------|-----------------|---------------|---------------------|
| Wellbore | Original Hole | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | IGRF2015 | 12/31/2015 | 7.47 | 60.48 | 48,343 |

| | | | | |
|-------------------|----------------------------|-----------------|-----------------|------------------|
| Design | Plan 1 | | | |
| Audit Notes: | | | | |
| Version: | Phase: | PROTOTYPE | Tie On Depth: | 0.0 |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft) | Direction (°) |
| | 0.0 | 0.0 | 0.0 | 338.38 |

| Plan Sections | | | | | | | | | | |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|------------------------|-----------------------|---------|------------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | TFO (°) | Target |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 676.4 | 7.06 | 338.38 | 676.0 | 10.1 | -4.0 | 4.00 | 4.00 | 0.00 | 338.38 | |
| 2,337.0 | 7.06 | 338.38 | 2,324.0 | 199.8 | -79.2 | 0.00 | 0.00 | 0.00 | 0.00 | |
| 2,513.5 | 0.00 | 0.00 | 2,500.0 | 209.8 | -83.2 | 4.00 | -4.00 | 0.00 | 180.00 | |
| 5,243.5 | 0.00 | 0.00 | 5,230.0 | 209.8 | -83.2 | 0.00 | 0.00 | 0.00 | 0.00 | Falcon 3A Fed 40 |

| | | | |
|-----------|---------------------------|------------------------------|-------------------|
| Database: | EDM 5000.1 Single User Db | Local Co-ordinate Reference: | Well #40 |
| Company: | Lime Rock Resources | TVD Reference: | RKB @ 3594.5usft |
| Project: | Eddy County NM (NAD 27) | MD Reference: | RKB @ 3594.5usft |
| Site: | Falcon 3A Fed | North Reference: | True |
| Well: | #40 | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Original Hole | | |
| Design: | Plan 1 | | |

Planned Survey

| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 200.0 | 0.00 | 0.00 | 200.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 300.0 | 0.00 | 0.00 | 300.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 351.0 | 0.00 | 0.00 | 351.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 7 Rivers | | | | | | | | | |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 0.0 | 0.00 | 0.00 | 0.00 |
| Build 4°/100' | | | | | | | | | |
| 600.0 | 4.00 | 338.38 | 599.9 | 3.2 | -1.3 | 3.5 | 4.00 | 4.00 | 0.00 |
| 676.4 | 7.06 | 338.38 | 676.0 | 10.1 | -4.0 | 10.9 | 4.00 | 4.00 | 0.00 |
| Hold 7.06° | | | | | | | | | |
| 700.0 | 7.06 | 338.38 | 699.4 | 12.8 | -5.1 | 13.7 | 0.00 | 0.00 | 0.00 |
| 800.0 | 7.06 | 338.38 | 798.6 | 24.2 | -9.6 | 26.0 | 0.00 | 0.00 | 0.00 |
| 889.1 | 7.06 | 338.38 | 887.0 | 34.4 | -13.6 | 37.0 | 0.00 | 0.00 | 0.00 |
| Queen | | | | | | | | | |
| 900.0 | 7.06 | 338.38 | 897.9 | 35.6 | -14.1 | 38.3 | 0.00 | 0.00 | 0.00 |
| 1,000.0 | 7.06 | 338.38 | 997.1 | 47.0 | -18.6 | 50.6 | 0.00 | 0.00 | 0.00 |
| 1,100.0 | 7.06 | 338.38 | 1,096.3 | 58.5 | -23.2 | 62.9 | 0.00 | 0.00 | 0.00 |
| 1,200.0 | 7.06 | 338.38 | 1,195.6 | 69.9 | -27.7 | 75.2 | 0.00 | 0.00 | 0.00 |
| 1,300.0 | 7.06 | 338.38 | 1,294.8 | 81.3 | -32.2 | 87.5 | 0.00 | 0.00 | 0.00 |
| 1,400.0 | 7.06 | 338.38 | 1,394.1 | 92.7 | -36.8 | 99.7 | 0.00 | 0.00 | 0.00 |
| 1,404.0 | 7.06 | 338.38 | 1,398.0 | 93.2 | -36.9 | 100.2 | 0.00 | 0.00 | 0.00 |
| Grayburg | | | | | | | | | |
| 1,500.0 | 7.06 | 338.38 | 1,493.3 | 104.2 | -41.3 | 112.0 | 0.00 | 0.00 | 0.00 |
| 1,600.0 | 7.06 | 338.38 | 1,592.6 | 115.6 | -45.8 | 124.3 | 0.00 | 0.00 | 0.00 |
| 1,630.7 | 7.06 | 338.38 | 1,623.0 | 119.1 | -47.2 | 128.1 | 0.00 | 0.00 | 0.00 |
| San Andres | | | | | | | | | |
| 1,700.0 | 7.06 | 338.38 | 1,691.8 | 127.0 | -50.3 | 136.6 | 0.00 | 0.00 | 0.00 |
| 1,800.0 | 7.06 | 338.38 | 1,791.0 | 138.4 | -54.9 | 148.9 | 0.00 | 0.00 | 0.00 |
| 1,900.0 | 7.06 | 338.38 | 1,890.3 | 149.8 | -59.4 | 161.2 | 0.00 | 0.00 | 0.00 |
| 2,000.0 | 7.06 | 338.38 | 1,989.5 | 161.3 | -63.9 | 173.5 | 0.00 | 0.00 | 0.00 |
| 2,100.0 | 7.06 | 338.38 | 2,088.8 | 172.7 | -68.4 | 185.7 | 0.00 | 0.00 | 0.00 |
| 2,200.0 | 7.06 | 338.38 | 2,188.0 | 184.1 | -73.0 | 198.0 | 0.00 | 0.00 | 0.00 |
| 2,300.0 | 7.06 | 338.38 | 2,287.3 | 195.5 | -77.5 | 210.3 | 0.00 | 0.00 | 0.00 |
| 2,337.0 | 7.06 | 338.38 | 2,324.0 | 199.8 | -79.2 | 214.9 | 0.00 | 0.00 | 0.00 |
| Drop 4°/100' | | | | | | | | | |
| 2,400.0 | 4.54 | 338.38 | 2,386.6 | 205.7 | -81.5 | 221.2 | 4.00 | -4.00 | 0.00 |
| 2,500.0 | 0.54 | 338.38 | 2,486.5 | 209.8 | -83.1 | 225.7 | 4.00 | -4.00 | 0.00 |
| 2,513.5 | 0.00 | 0.00 | 2,500.0 | 209.8 | -83.2 | 225.7 | 4.00 | -4.00 | 0.00 |
| Hold 0.00° | | | | | | | | | |
| 2,600.0 | 0.00 | 0.00 | 2,586.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 2,700.0 | 0.00 | 0.00 | 2,686.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 2,800.0 | 0.00 | 0.00 | 2,786.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 2,900.0 | 0.00 | 0.00 | 2,886.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 3,000.0 | 0.00 | 0.00 | 2,986.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 3,033.5 | 0.00 | 0.00 | 3,020.0 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| Glorieta | | | | | | | | | |
| 3,100.0 | 0.00 | 0.00 | 3,086.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 3,145.5 | 0.00 | 0.00 | 3,132.0 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| Yeso | | | | | | | | | |
| 3,200.0 | 0.00 | 0.00 | 3,186.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |
| 3,300.0 | 0.00 | 0.00 | 3,286.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 |

| | | | |
|-----------|---------------------------|------------------------------|-------------------|
| Database: | EDM 5000.1 Single User Db | Local Co-ordinate Reference: | Well #40 |
| Company: | Lime Rock Resources | TVD Reference: | RKB @ 3594.5usft |
| Project: | Eddy County NM (NAD 27) | MD Reference: | RKB @ 3594.5usft |
| Site: | Falcon 3A Fed | North Reference: | True |
| Well: | #40 | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Original Hole | | |
| Design: | Plan 1 | | |


| Planned Survey | | | | | | | | | | |
|--------------------------------|-----------------|-------------|-----------------------|--------------|--------------|-------------------------|-------------------------|------------------------|-----------------------|--|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Vertical Section (usft) | Dogleg Rate (°/100usft) | Build Rate (°/100usft) | Turn Rate (°/100usft) | |
| 3,400.0 | 0.00 | 0.00 | 3,386.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 3,500.0 | 0.00 | 0.00 | 3,486.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 3,600.0 | 0.00 | 0.00 | 3,586.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 3,700.0 | 0.00 | 0.00 | 3,686.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 3,800.0 | 0.00 | 0.00 | 3,786.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 3,900.0 | 0.00 | 0.00 | 3,886.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,000.0 | 0.00 | 0.00 | 3,986.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,100.0 | 0.00 | 0.00 | 4,086.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,200.0 | 0.00 | 0.00 | 4,186.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,300.0 | 0.00 | 0.00 | 4,286.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,400.0 | 0.00 | 0.00 | 4,386.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,500.0 | 0.00 | 0.00 | 4,486.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,600.0 | 0.00 | 0.00 | 4,586.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,700.0 | 0.00 | 0.00 | 4,686.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,800.0 | 0.00 | 0.00 | 4,786.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 4,900.0 | 0.00 | 0.00 | 4,886.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 5,000.0 | 0.00 | 0.00 | 4,986.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 5,100.0 | 0.00 | 0.00 | 5,086.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 5,143.5 | 0.00 | 0.00 | 5,130.0 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| Abo | | | | | | | | | | |
| 5,200.0 | 0.00 | 0.00 | 5,186.5 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| 5,243.5 | 0.00 | 0.00 | 5,230.0 | 209.8 | -83.2 | 225.7 | 0.00 | 0.00 | 0.00 | |
| PBHL @ 5243.5' MD; 5230.0' TVD | | | | | | | | | | |

| Design Targets | | | | | | | | | | |
|---------------------------|---------------|--------------|------------|--------------|--------------|-----------------|----------------|------------------|-------------------|--|
| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | Longitude | |
| - hit/miss target | | | | | | | | | | |
| - Shape | | | | | | | | | | |
| Falcon 3A Fed 40 | 0.00 | 0.00 | 5,230.0 | 209.8 | -83.2 | 647,714.41 | 523,021.38 | 32° 46' 50.289 N | 104° 15' 30.341 W | |
| - plan hits target center | | | | | | | | | | |
| - Point | | | | | | | | | | |


| Formations | | | | | | |
|-----------------------|-----------------------|------------|-----------|---------|-------------------|--|
| Measured Depth (usft) | Vertical Depth (usft) | Name | Lithology | Dip (°) | Dip Direction (°) | |
| 351.0 | 351.0 | 7 Rivers | | 0.00 | | |
| 889.1 | 887.0 | Queen | | 0.00 | | |
| 1,404.0 | 1,398.0 | Grayburg | | 0.00 | | |
| 1,630.7 | 1,623.0 | San Andres | | 0.00 | | |
| 3,033.5 | 3,020.0 | Gloneta | | 0.00 | | |
| 3,145.5 | 3,132.0 | Yeso | | 0.00 | | |
| 5,143.5 | 5,130.0 | Abo | | 0.00 | | |

| | | | |
|-----------|---------------------------|------------------------------|-------------------|
| Database: | EDM 5000.1 Single User Db | Local Co-ordinate Reference: | Well #40 |
| Company: | Lime Rock Resources | TVD Reference: | RKB @ 3594.5usft |
| Project: | Eddy County NM (NAD 27) | MD Reference: | RKB @ 3594.5usft |
| Site: | Falcon 3A Fed | North Reference: | True |
| Well: | #40 | Survey Calculation Method: | Minimum Curvature |
| Wellbore: | Original Hole | | |
| Design: | Plan 1 | | |

| Plan Annotations | | | | |
|-----------------------------|-----------------------------|-------------------|-----------------|--------------------------------|
| Measured Depth (usft) | Vertical Depth (usft) | Local Coordinates | | Comment |
| | | +N/-S (usft) | +E/-W (usft) | |
| 500.0 | 500.0 | 0.0 | 0.0 | Build 4"/100' |
| 676.4 | 676.0 | 10.1 | -4.0 | Hold 7.06° |
| 2,337.0 | 2,324.0 | 199.8 | -79.2 | Drop 4"/100' |
| 2,513.5 | 2,500.0 | 209.8 | -83.2 | Hold 0.00° |
| 5,243.5 | 5,230.0 | 209.8 | -83.2 | PBHL @ 5243.5' MD; 5230.0' TVD |

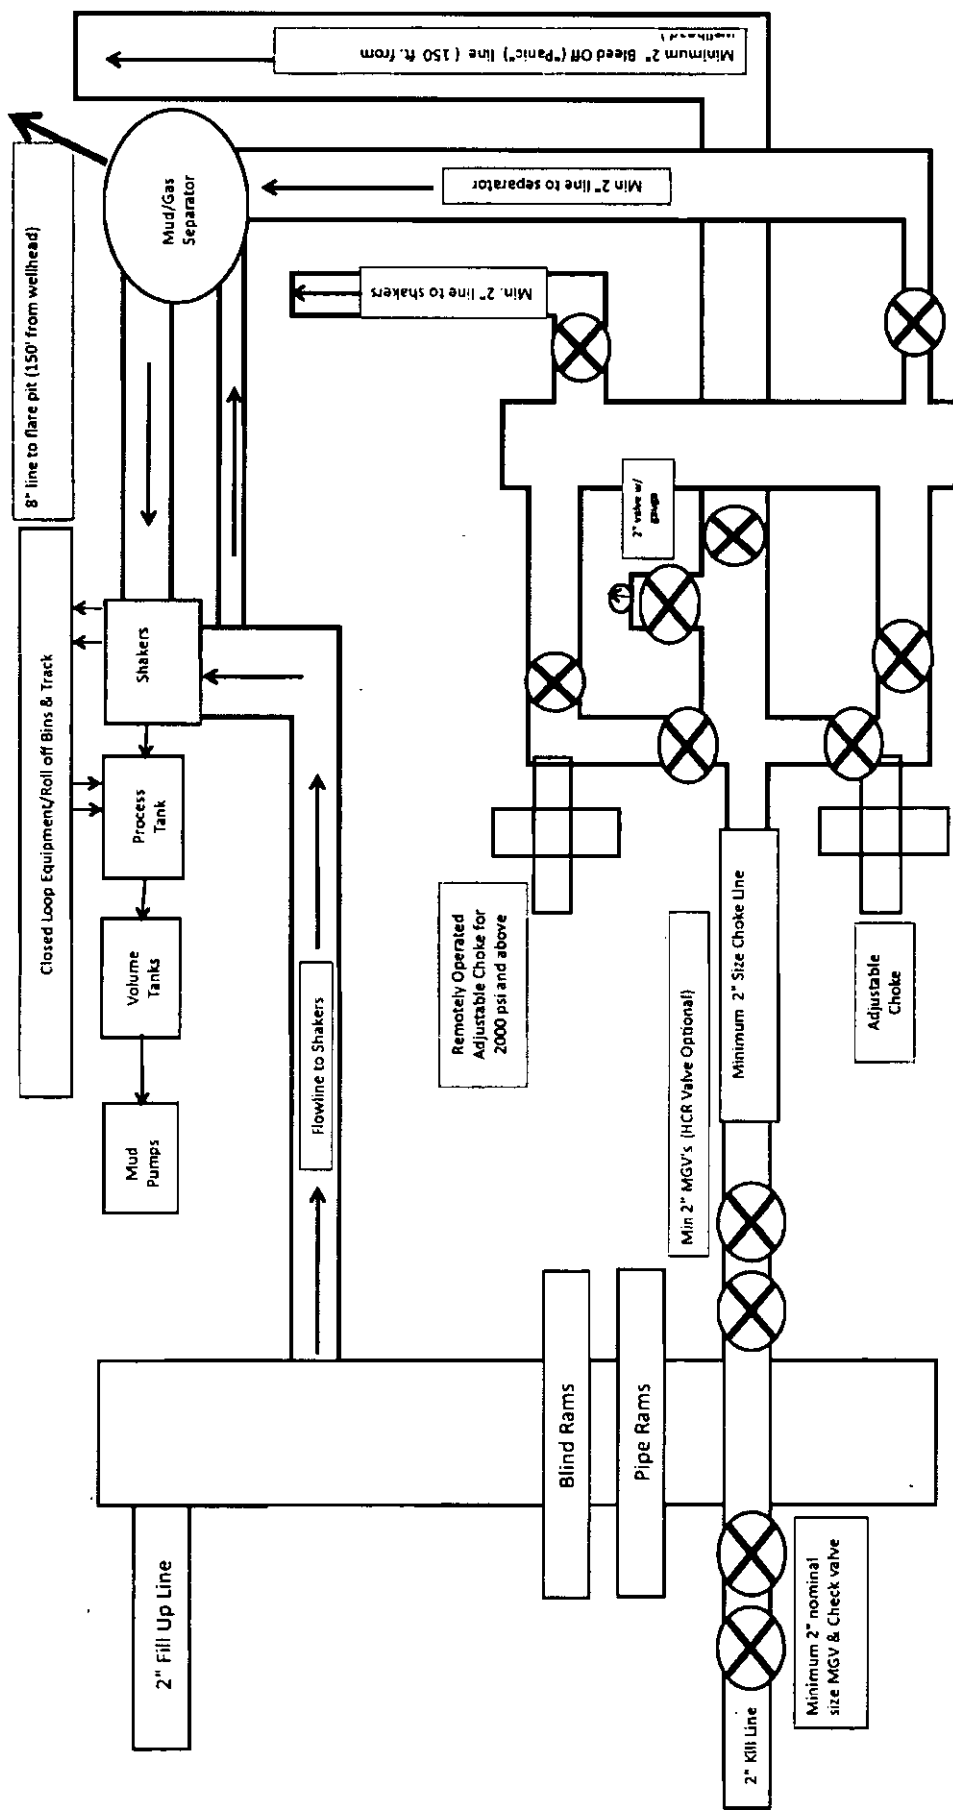

11" Minimum 2000 psi BOP and
Minimum 2000 psi BOPE System Schematic
W/ Closed Loop System Equipment

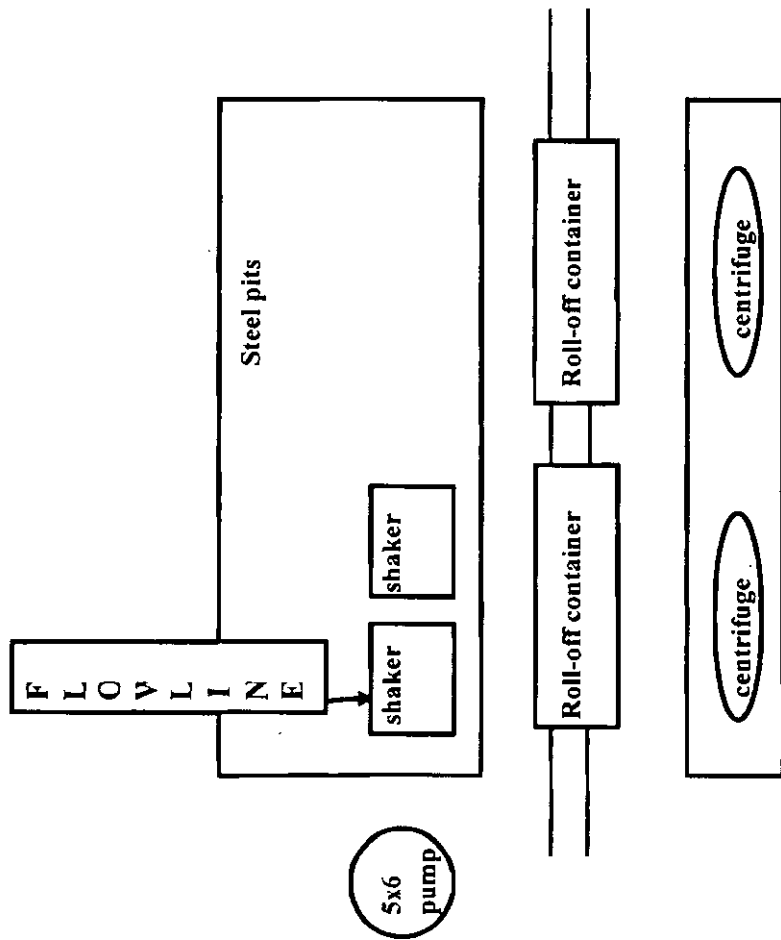

This will be maintained by 24 hour solids control personnel that stay on location.

Lime Rock Resources II-A, L.P.

Falcon 3 A Federal 40

Section 3, T. 18 S., R. 27 E., Eddy County, NM

Design: Closed Loop System with roll-off steel bins (pits)

CRI/HOBBS will supply (2) bins (100 bbl) volume, rails and transportation relating to the Close Loop System. Specification of the Closed Loop System is attached.

Contacts: Gary Wallace (432) 638-4076 Cell (575) 393-1079 Office

Scomi Oil Tool: Supervisor – Armando Soto (432) 553-7979 Hobbs, NM

Monitoring 24 Hour service

Equipment: Centrifuges – Derrick Brand
Rig Shakers – Brandt Brand
D-watering Unit
Air pumps on location for immediate remediation process
Layout of Close Loop System with bins, centrifuges and shakers attached.

Cuttings and associated liquids will be hauled to a State regulated third party disposal site (CRI or Controlled Recovery, Inc.). The disposal site permit is DFP = #R9166.

2- (250 bbl) tanks to hold fluid
2-CRI bins with track system
1-500 bbl frac tanks with fresh water
1-500 bbl frac tanks for brine water

Operations:

Closed Loop System equipment will be inspected daily by each tour and any necessary maintenance performed. Any leak in system will be repaired and/or contained immediately. OCD will be notified within 48 hours of any spill. Remediation process will start immediately.


Closure:

During drilling operations all liquids, drilling fluids and cuttings will be hauled off via CRI equipment to Disposal Facility Permit NM-01-0006.

Lime Rock's
Falcon 3 A Federal 40
rig diagram

NORTH

1" = 50'

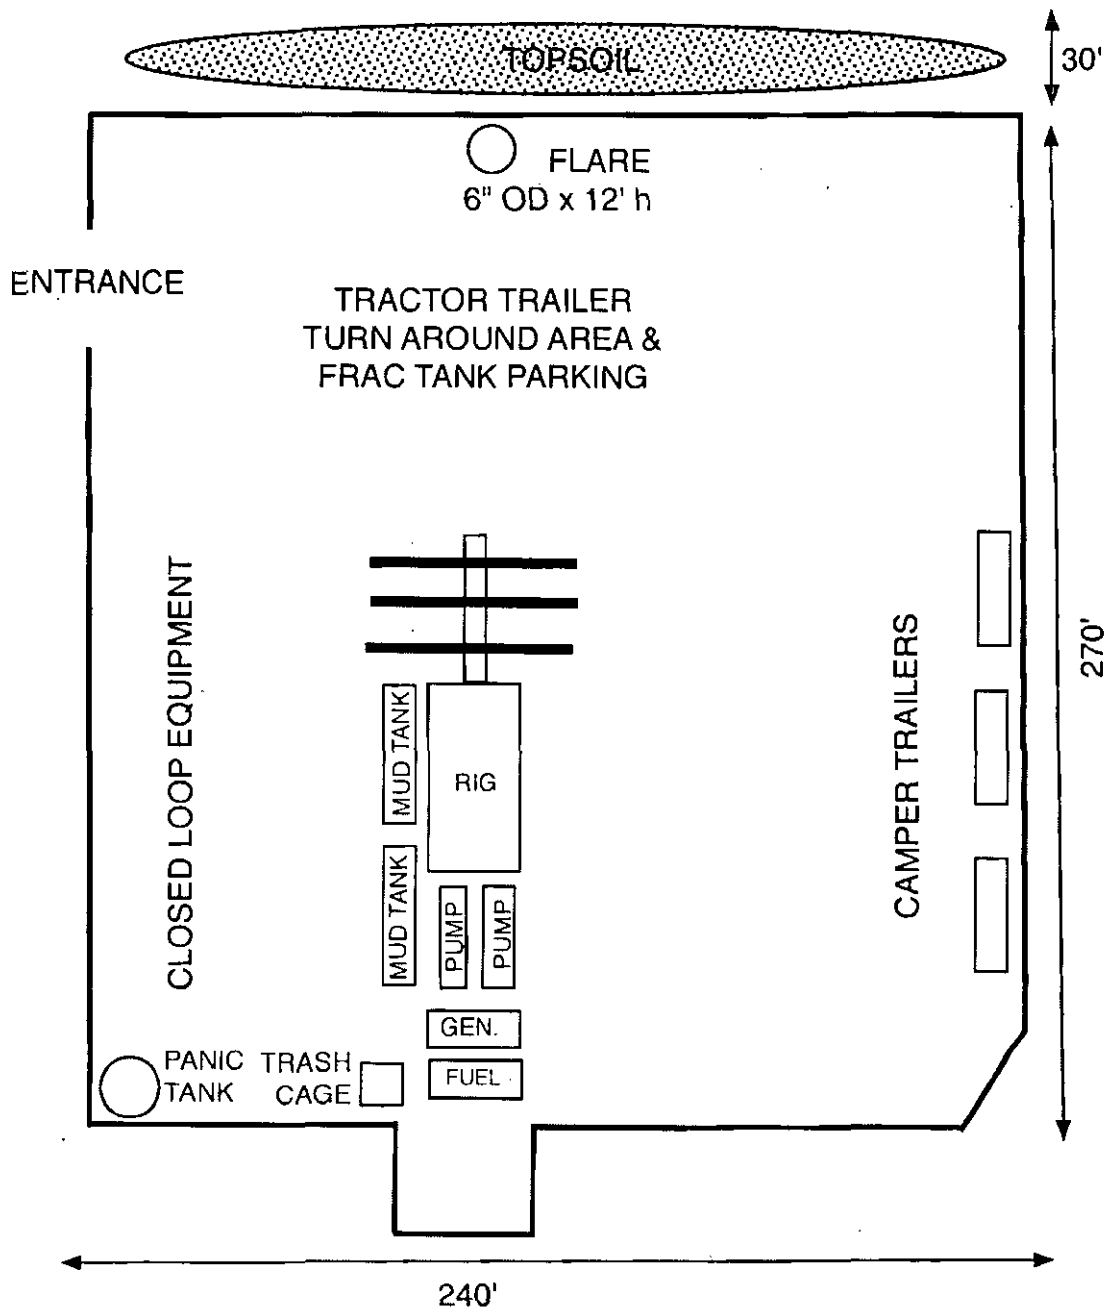

Hydrogen Sulfide Drilling Plan Summary

- A. All personnel will receive proper H2S training in accordance with Onshore Order 6 III.C.3.a.
- B. Briefing Area: two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment:

- Well control equipment
 - a. Flare line 150' from wellhead to be ignited by flare gun.
 - b. Choke manifold with a remotely operated choke.
 - c. Mud/gas separator
- Protective equipment for essential personnel.

Breathing apparatus:

- a. Rescue Packs (SCBA) — 1 unit will be placed at each breathing area, 2 will be stored in the safety trailer.
- b. Work/Escapes packs — 4 packs will be stored on the rig floor and contain sufficiently long air hoses as to not restrict work activity.
- c. Emergency Escape Packs — 4 packs will be stored in the doghouse for emergency evacuation.

Auxiliary Rescue Equipment:

- a. Stretcher
- b. Two OSHA full body harness
- c. 100 ft 5/8 inch OSHA approved rope
- d. 1-20# class ABC fire extinguisher

- H2S detection and monitoring equipment:

The stationary detector with three sensors will be placed in the upper dog house if equipped, set to visually alarm @ 10 ppm and audible @ 14 ppm. Calibrate a minimum of every 30 days or as needed. The sensors will be placed in the following places: Rig floor / Bell nipple / End of flow line or where well bore fluid is being discharged.
(Gas sample tubes will be stored in the safety trailer)

- Visual warning systems.

- a. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
- b. A colored condition flag will be on display, reflecting the current condition at the site at the time.
- c. Two wind socks will be placed in strategic locations, visible from all angles.

- Mud program:

The mud program has been designed to minimize the volume of H2S circulated to surface. The operator will have the necessary mud products to minimize hazards while drilling in H2S bearing zones.

- Metallurgy:

- a. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H₂S service.
- b. All elastomers used for packing and seals shall be H₂S trim.

■ **Communication:**

Communication will be via two-way radio in emergency and company vehicles. Cell phones and land lines where available.

H2S CONTINGENCY DRILLING PLAN EMERGENCY CONTACTS

| | | |
|---------------------------------|---------------------------------|--------------|
| <u>Company Offices</u> - | Lime Rock Houston Office | 713-292-9510 |
| | Answering Service (After Hours) | 713-292-9555 |
| | Artesia, NM Office | 575-748-9724 |
| | Roswell, NM | 575-623-8424 |

| KEY PERSONNEL | | | | | |
|-----------------|---------------------------------|-----------------|--------------|--------------|--------------|
| Name | Title | Location | Office # | Cell # | Home # |
| MIKE LOUDERMILK | OPERATIONS MANAGER | HOUSTON | 713-292-9526 | 832-331-7367 | SAME AS CELL |
| SPENCER COX | PRODUCTION ENGINEER | HOUSTON | 713-292-9528 | 432-254-5140 | SAME AS CELL |
| ERIC MCCLUSKY | PRODUCTION ENGINEER | HOUSTON | 713-360-5714 | 405-821-0534 | 832-491-3079 |
| JERRY SMITH | ASSISTANT PRODUCTION SUPERVISOR | ARTESIA | 575-748-9724 | 505-918-0556 | 575-746-2478 |
| MICHAEL BARRETT | PRODUCTION SUPERVISOR | ROSWELL | 575-623-8424 | 505-353-2644 | 575-623-4707 |
| GARY MCCELLAND | WELL SITE SUPERVISOR | ROTATES ON SITE | NA | 903-503-8997 | NA |
| DAVE WILLIAMSON | WELL SITE SUPERVISOR | ROTATES ON SITE | NA | 575-308-9980 | NA |

| Agency Call List | | |
|-------------------------|---|--------------|
| City | Agency or Office | Phone |
| Artesia | Ambulance | 911 |
| Artesia | State Police | 575-746-2703 |
| Artesia | Sheriff's Office | 575-746-9888 |
| Artesia | City Police | 575-746-2703 |
| Artesia | Fire Department | 575-746-2701 |
| Artesia | Local Emergency Planning Committee | 575-746-2122 |
| Artesia | New Mexico OCD District II | 575-748-1283 |
| Carlsbad | Ambulance | 911 |
| Carlsbad | State Police | 575-885-3137 |
| Carlsbad | Sheriff's Office | 575-887-7551 |
| Carlsbad | City Police | 575-885-2111 |
| Carlsbad | Fire Department | 575-885-2111 |
| Carlsbad | Local Emergency Planning Committee | 575-887-3798 |
| Carlsbad | US DOI Bureau of Land Management | 575-887-6544 |
| State Wide | New Mexico Emergency Response Commission ("NMERC") | 505-476-9600 |
| State Wide | NMERC 24 hour Number | 505-827-9126 |
| State Wide | New Mexico State Emergency Operations Center | 505-476-9635 |
| National | National Emergency Response Center (Washington, D.C.) | 800-424-8802 |

H2S CONTINGENCY DRILLING PLAN EMERGENCY CONTACTS

| Emergency Services | | | | |
|--|------------------------------------|------------------------------|----------------|------------------------|
| Name | Service | Location | Phone | Alternate |
| Boots & Coots International Well Control | Well Control | Houston / Odessa | 1-800-256-9688 | 281-931-8884 |
| Cudd Pressure Control | Well Control & Pumping | Odessa | 915-699-0139 | 915-563-3356 |
| Baker Hughes Inc. | Pumping Service | Artesia, Hobbs and Odessa | 575-746-2757 | SAME |
| Total Safety | Safety Equipment and Personnel | Artesia | 575-746-2847 | SAME |
| Cutter Oilfield Services | Drilling Systems Equipment | Midland | 432-488-6707 | SAME |
| Assurance Fire & Safety | Safety Equipment and Personnel | Artesia | 575-396-9702 | 575-441-2224 |
| Flight for Life | Emergency Helicopter Evacuation | Lubbock | 806-743-9911 | SAME |
| Aerocare | Emergency Helicopter Evacuation | Lubbock | 806-747-8923 | SAME |
| Med Flight Air Ambulance | Emergency Helicopter Evacuation | Albuquerque | 505-842-4433 | SAME |
| Artesia General Hospital | Emergency Medical Care | Artesia | 575-748-3333 | 702 North 13 Street |

H2S PAGE 5

NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27). LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD27). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES (NAD 83) MODIFIED TO THE SURFACE.

EL. 3582.8'

600'

EL. 3591.5'

highest ground

windsocks on rig floor & at mud tanks

2" STEEL SURF

AGAVE BPL

WARNING SIGNS & WINDSOCK

BOTTOM OF HOLE

DRY HOLE MARKER

ROAD

FO

CR. #227 (PAVED)

270.05 FT

PROPOSED 63 LF. ACCESS ROAD

90' NORTHWEST OFFSET

EL. 3583.3'

EL. 3581.3'

EL. 3586.7'

30'

51'32.00"E

FLARE

150' NORTH OFFSET

EL. 3585.4'

FLARE LINE (STRAIGHT) & FLARE >150'

TOP SOIL AREA

240.08 FT

BERM

EL. 3578.1'

EL. 3578.7'

EL. 3584.4'

57°29'06"W

150' SOUTHEAST

225.28 FT

PROPOSED PAD

120' SOUTHWEST OFFSET

EL. 3579.7'

30' X 30' STINGER

panic tank

90' FT

FALCON #3A

ELEV = 1.480 ±

FEDERAL #40

laydown (V-door) to NE

LAT. = 32.78005°

LONG. = 104.251374°W

NMSP EAST (FT)

N = 847504.83

E = 525104.70

PRIMARY safety briefing area >150' from well head

PRIMARY egress (exit) route

AGAVE BPL

STEEL SURF

4" W POWER LINE

EL. 3573.2'

600'

EL. 3582.7'

CENTURION BPL

4" W POWER LINE

prevailing wind
blows from SSW

APRIL 2, 2015



MADRON SURVEYING, INC.

301 SOUTH CANAL
(575) 214-3341

CARLSBAD, NEW MEXICO





Falcon 3A Federal #40
H2S Contingency Plan:
1 Mile Radius Map
Section 3, Township 18S, Range 27E
Eddy County, New Mexico



NAD 1927 New Mexico State Plane East
FPS 3001 Feet





Prepared by Permit West, Inc., June 17, 2015
for Lime Rock Resources S.A. L.P.

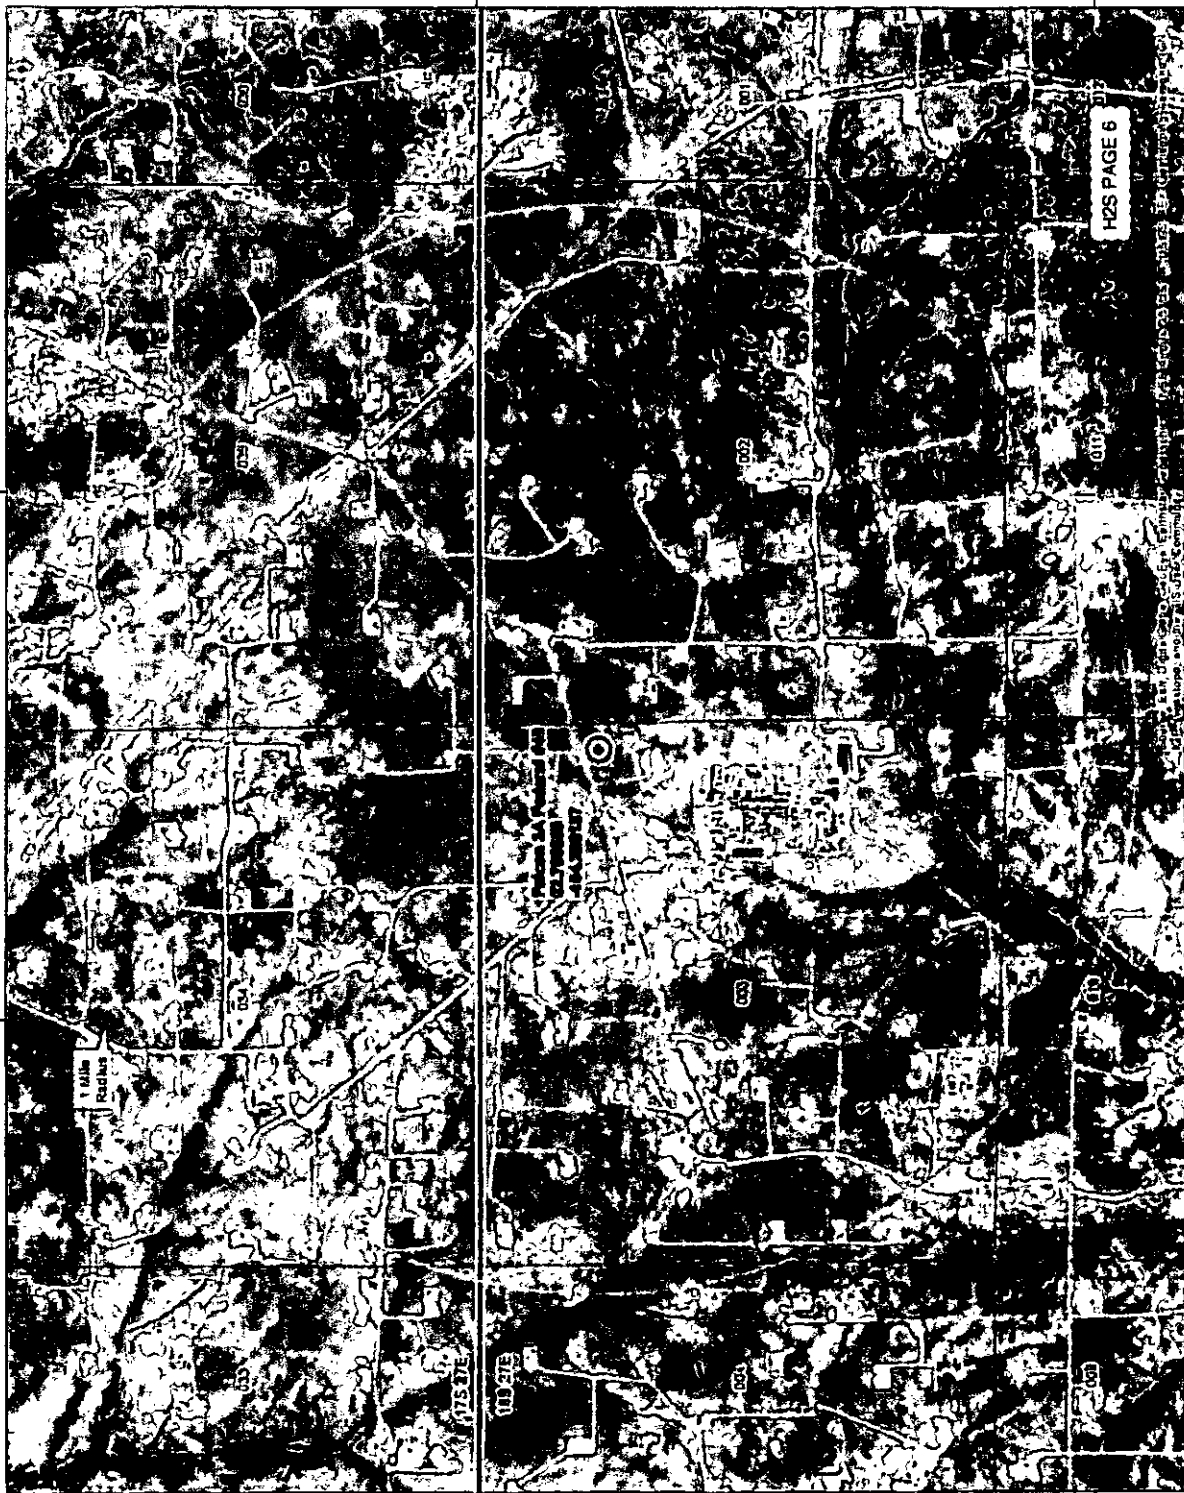

H2S PAGE 6





Falcon 3A Federal #40
H2S Contingency Plan:
2 Mile Radius Map
Section 3, Township 18S, Range 27E
Eddy County, New Mexico



NAD 1927 New Mexico State Plane East
EPS 3001 Feet




Prepared by Permits West, Inc., June 17, 2015
for Lime Rock Resources R.A., L.P.

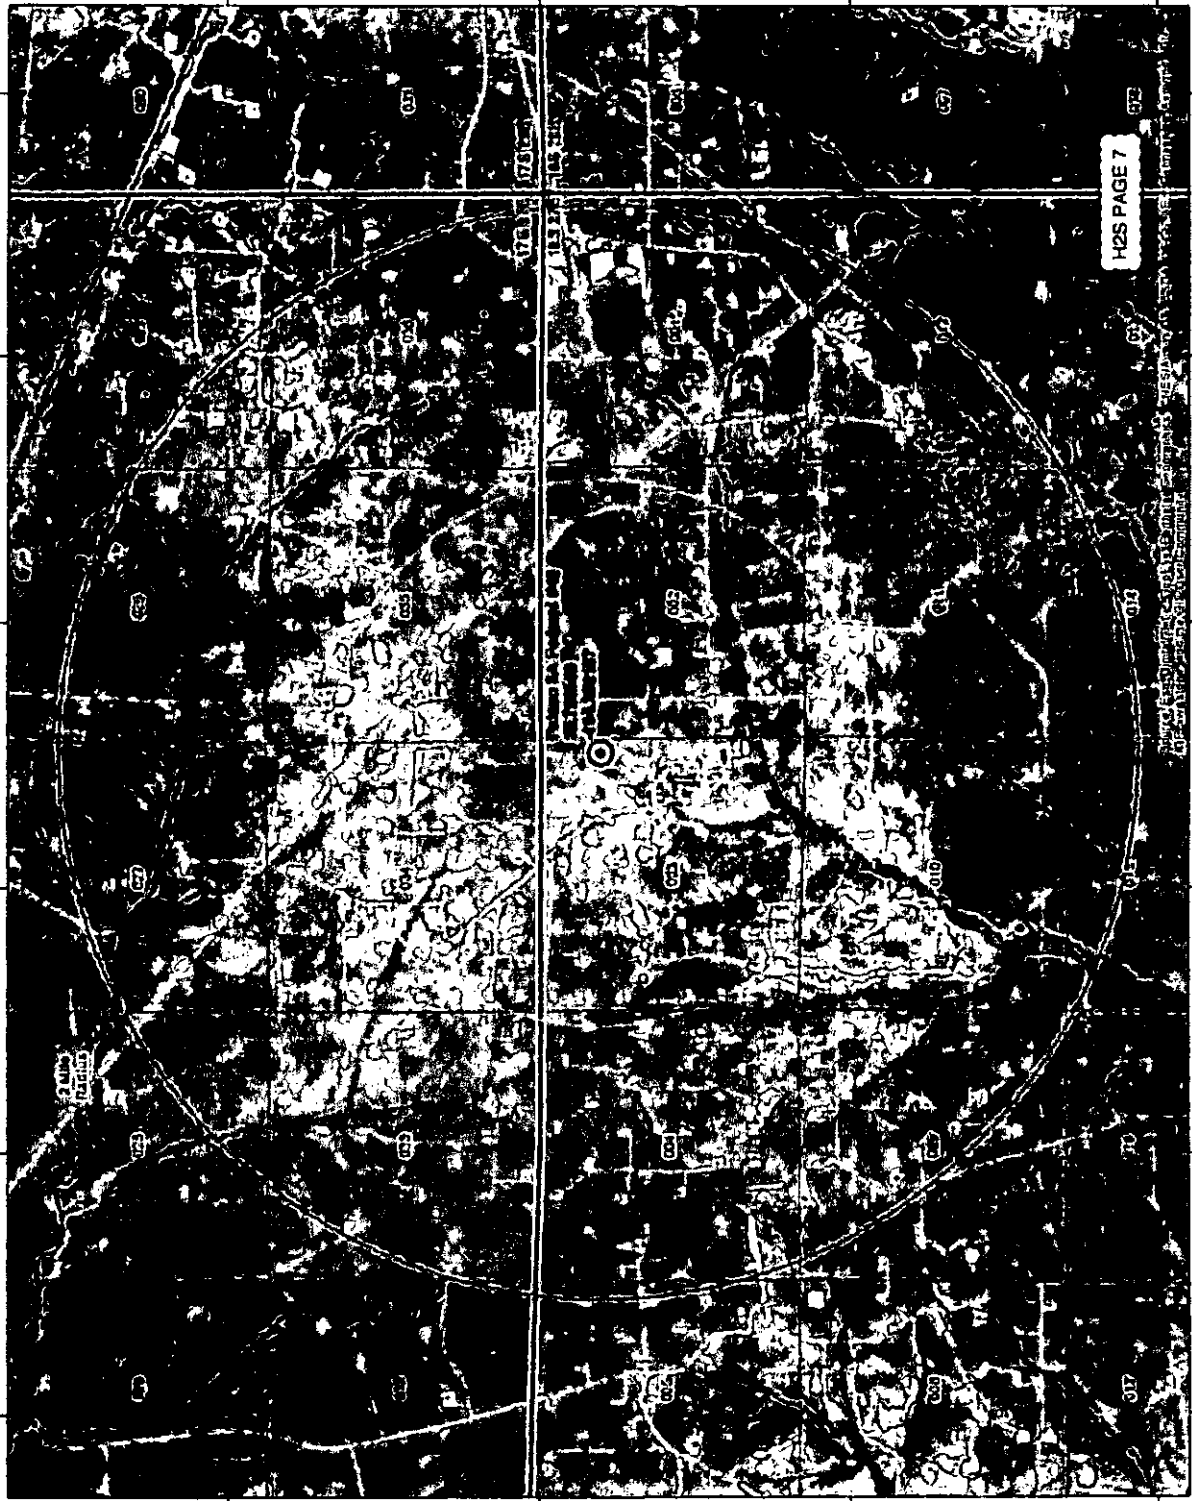

SECTION 3, TOWNSHIP 18 SOUTH, RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
SITE MAP

NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27). LISTED NEW MEXICO STATE PLANE EAST COORDINATES ARE GRID (NAD27). BASIS OF BEARING AND DISTANCES USED ARE NEW MEXICO STATE PLANE EAST COORDINATES (NAD 83) MODIFIED TO THE SURFACE.

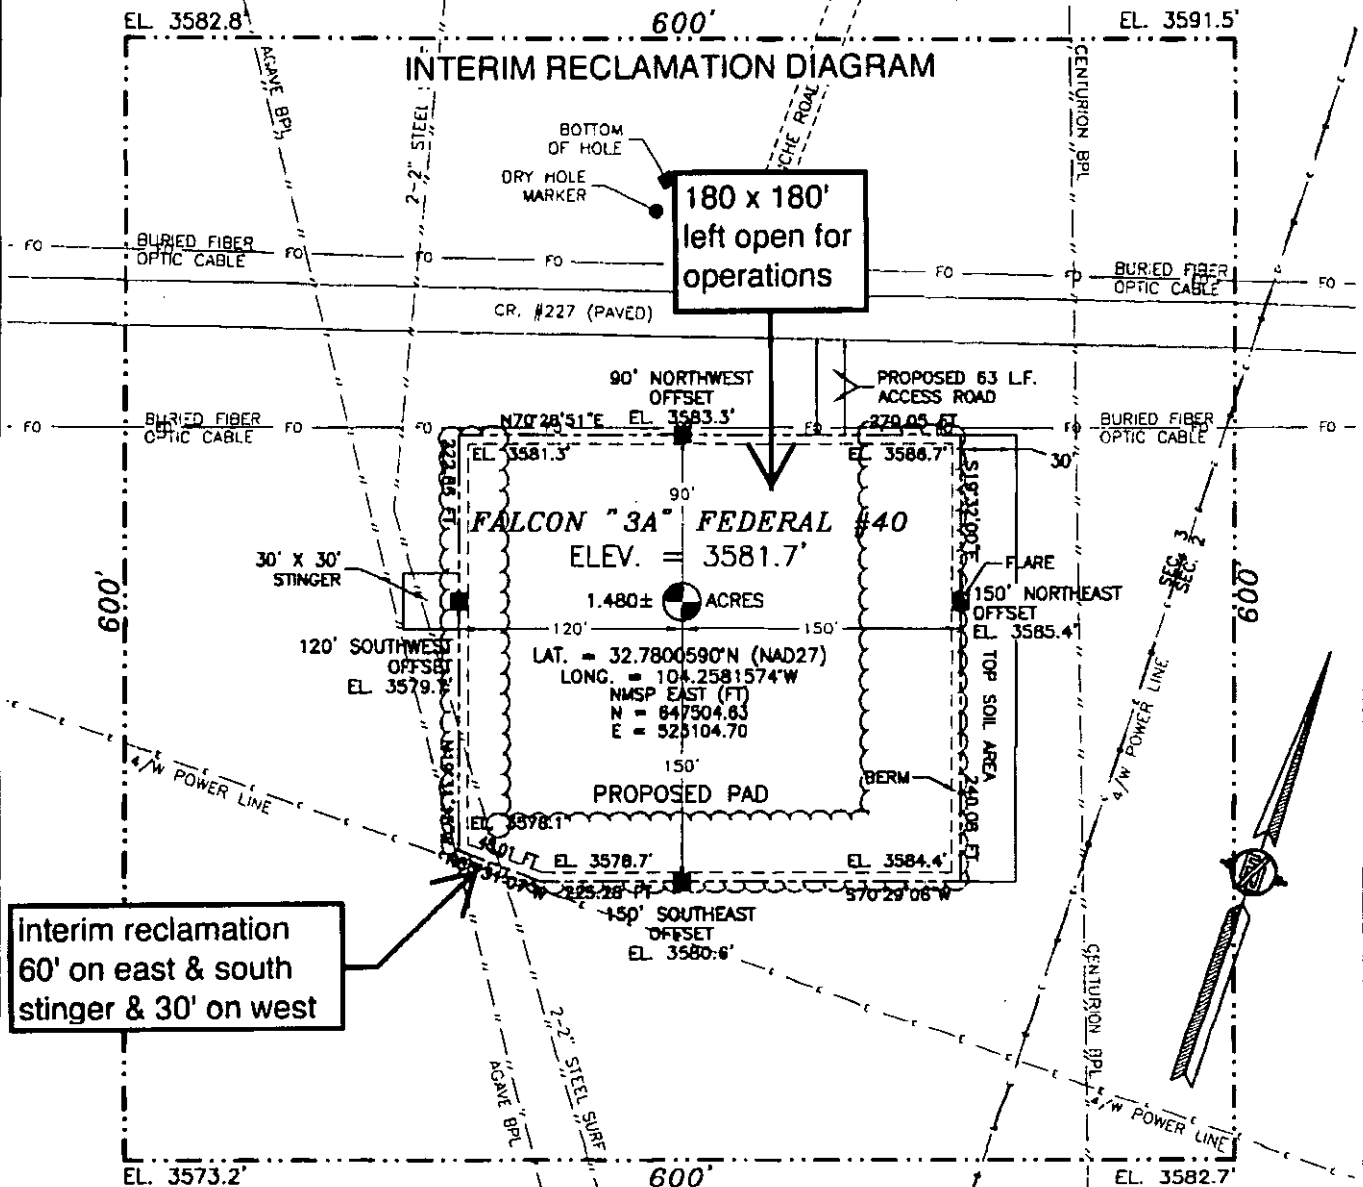

Interim reclamation
60' on east & south
stinger & 30' on west

010 50 100 200

SCALE 1" = 100'

DIRECTIONS TO LOCATION

FROM CR. #225 (EMPIRE) AND CR. #227 (LITTLE DIAMOND) GO
SOUTHWEST ON CR. #227 0.22 MILES TO A PROPOSED ROAD SURVEY
AND FOLLOW FLAGS SOUTHEAST 83' TO THE NORTHEAST CORNER OF
PROPOSED PAD FOR THIS LOCATION.

LIME ROCK RESOURCES II-A, L.P.
FALCON "3A" FEDERAL #40
LOCATED 1175 FT. FROM THE NORTH LINE
AND 250 FT. FROM THE EAST LINE OF
SECTION 3, TOWNSHIP 18 SOUTH,
RANGE 27 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

APRIL 2, 2015

SURVEY NO. 3734

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341 CARLSBAD, NEW MEXICO

Lime Rock Resources II-A, L.P.

SURFACE PLAN PAGE 1

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

Surface Use Plan

1. ROAD DIRECTIONS & DESCRIPTIONS (See MAPS 1 - 4)

From the center of Artesia...

Go East 9.3 miles on US 82 to the equivalent of Mile Post 116.8

Then turn right and go South 1/4 mile on paved County Road 204

Then turn right and go Southwest 2.1 miles on paved County Road 225

Then bear right and go Southwest 0.2 mile on County Road 227

Then turn left and go South 63' cross-country to the pad

Non-county roads will be maintained as needed to Gold Book standards. This includes pulling ditches, preserving the crown, and cleaning culverts. This will occur at least once a year, and more often as needed. Caliche will be hauled from Lime Rock's approved (HA-0258-0000) caliche pit on State land in NESE 36-17s-27e.

2. ROAD TO BE BUILT OR UPGRADED (See MAPS 3 & 4)

The 63' of new road will be crowned, have a 14' wide driving surface, and be surfaced with caliche. Maximum disturbed width = 20'. Maximum grade = 1%. Maximum cut or fill = 1'. No upgrade, culvert, cattle guard, or vehicle turn out is needed.

3. EXISTING WELLS (See MAP 2)

Existing oil, gas, water, injection, and P & A wells are within a mile. No disposal wells are within a mile radius.

Lime Rock Resources II-A, L.P.

SURFACE PLAN PAGE 2

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

4. PROPOSED PRODUCTION FACILITIES (See MAPS 3 - 10)

The only production equipment on the pad will be the pump jack. Two 3" O. D. poly surface pipelines (one gas and one production) will be laid 2,058.44' southwest to Lime Rock's existing header. Pipelines will operate at \approx 50 psi.

A 169.92' long overhead raptor safe power line will be built west to the pad.

5. WATER SUPPLY (See MAPS 1 - 4)

Water will be trucked from existing wells on private land between Artesia and Riverside.

6. CONSTRUCTION MATERIALS & METHODS

NM One Call (811) will be notified before construction starts. Topsoil and brush will be stockpiled east of the pad. V door will be to the northeast. Southwest corner of the pad will be trimmed. A closed loop drilling system will be used. Caliche will be bought and hauled from Lime Rock's approved (HA-0258-0000) caliche pit on State land in NESE 36-17s-27e.

An on pad berm (MAP 4) will surround the pad to prevent off site migration of soil. A geotextile fabric fence will be at the toe of the fill to prevent further migration. The fence bottom will be buried to prevent gaps.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to the Eddy County landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to CRI's state

Lime Rock Resources II-A, L.P.

SURFACE PLAN PAGE 3

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

approved (NM-01-0006) disposal site. Human waste will be disposed of in chemical toilets and hauled to the Artesia wastewater treatment plant.

8. ANCILLARY FACILITIES

There will be no airstrip or camp. Camper trailers will be on location for the company man, tool pusher, or mud logger.

9. WELL SITE LAYOUT

See Rig Diagram for depictions of the well pad, trash cage, access onto the location, parking, living facilities, and rig orientation.

10. RECLAMATION

Interim reclamation will consist of shrinking the pad $\approx 50\%$ by removing caliche and reclaiming 60' wide swaths on the east and south sides and the stinger and a 30' wide swath on the west side of the pad, leaving a $\approx 180'$ x $\approx 180'$ area around the pump jack. Disturbed areas will be contoured to match pre-construction grades. Soil and brush will be evenly spread over disturbed areas. Seeded areas will be ripped or harrowed. A BLM approved seed mix will be sown in a BLM approved manner. Enough stockpiled topsoil will be retained to cover the remainder of the pad when the well is plugged. Once the well is plugged, then the remainder of the pad will be similarly reclaimed. Noxious weeds will be controlled.

11. SURFACE OWNER

All construction will be on BLM.

Lime Rock Resources II-A, L.P.

SURFACE PLAN PAGE 4

Falcon 3 A Federal 40

SHL: 1175' FNL & 250' FEL

BHL: 965' FNL & 330' FEL

Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

12. OTHER INFORMATION

On site inspection was held with Paul Murphy (BLM) on March 12, 2015.


Boone conducted a records search with Hila Nelson June 18, 2015. Due to multiple previous archaeology surveys, it was determined that no further survey was needed.

Lime Rock Resources II-A, L.P.
Falcon 3 A Federal 40
SHL: 1175' FNL & 250' FEL
BHL: 965' FNL & 330' FEL
Sec. 3, T. 18 S., R. 27 E., Eddy County, NM

SURFACE PLAN PAGE 5

CERTIFICATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 12th day of January, 2016.

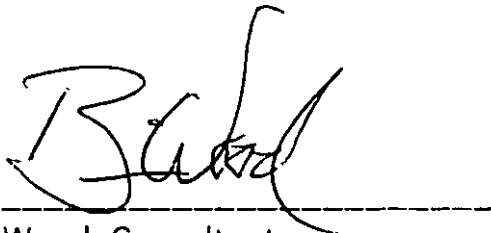

Brian Wood, Consultant
Permits West, Inc.

37 Verano Loop, Santa Fe, NM 87508

(505) 466-8120

FAX: (505) 466-9682

Cellular: (505) 699-2276

Field representative will be:

Spencer Cox, Production Engineer

Lime Rock Resources II-A, L.P.

1111 Bagby St., Suite 4600

Houston, TX 77002

Office: (713) 292-9528

Mobile: (432) 254-5140

FAX: (713) 292-9578

PECOS DISTRICT CONDITIONS OF APPROVAL

| | |
|-----------------------|-----------------------------------|
| OPERATOR'S NAME: | Lime Rock Resources II-A, L.P. |
| LEASE NO.: | NMLC065478B |
| WELL NAME & NO.: | 40-Falcon 3 A Federal |
| SURFACE HOLE FOOTAGE: | 1175'/N & 250'/E |
| BOTTOM HOLE FOOTAGE: | 965'/N & 330'/E |
| LOCATION: | Section 3, T.18 S., R.27 E., NMPM |
| COUNTY: | Eddy County, New Mexico |

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Avian Protection
 - Cave/Karst
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - H2S Requirements
 - High Cave/Karst
 - Logging Requirements
 - Waste Material and Fluids
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, siting valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

Powerlines:

Smaller powerlines will be routed around sinkholes and other karst features to avoid or lessen the possibility of encountering near surface voids and to minimize changes to runoff or possible leaks and spills from entering karst systems. Larger powerlines will adjust their pole spacing to avoid cave and karst features. The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction and no further construction will be done until clearance has been issued by the Authorized Officer. Special restoration stipulations or realignment may be required.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

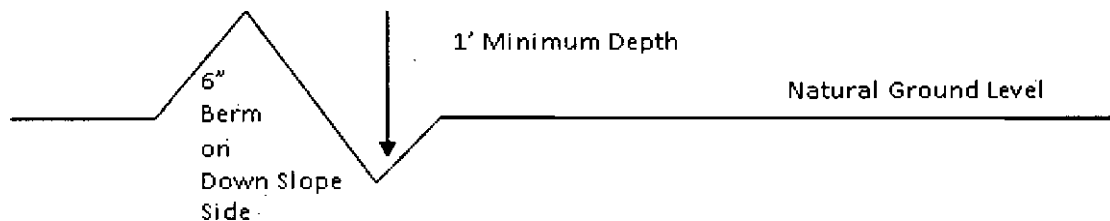

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattleguards

An appropriately sized cattleguard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattleguards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

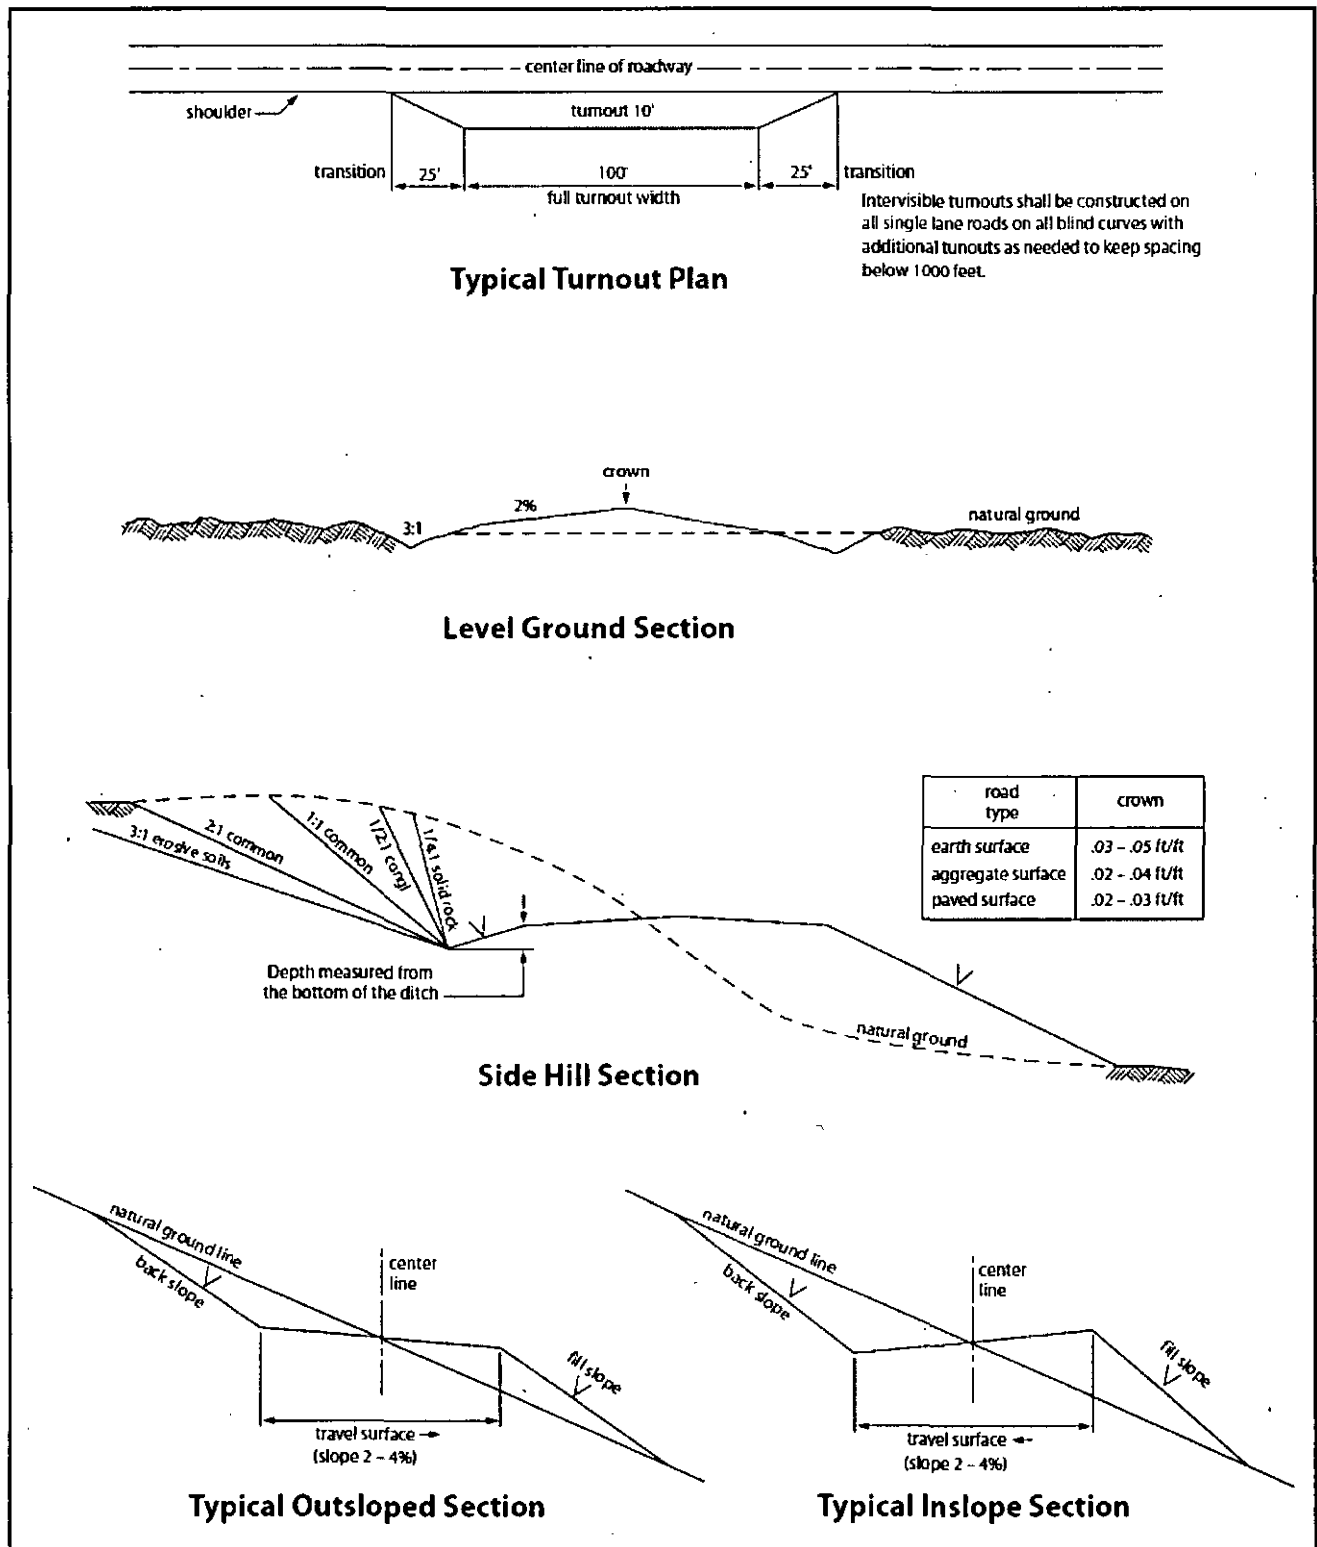


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. A Hydrogen Sulfide (H₂S) Drilling Plan shall be activated 500 feet prior to drilling into the **Queen** formation. **As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. **The record of the drilling rate along with the GR/N well log run from TD to surface shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the

driller's log. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

HIGH CAVE/KARST – OPERATOR HAS PROPOSED A CONTINGENCY CASING IF LOST CIRCULATION OCCURS WHILE DRILLING THE SURFACE HOLE. IF LOST CIRCULATION OCCURS WHILE DRILLING THE 7-7/8" HOLE, THE CEMENT PROGRAM FOR THE 5-1/2" CASING WILL NEED TO BE MODIFIED AND THE BLM IS TO BE CONTACTED PRIOR TO RUNNING THE CASING. A MINIMUM OF TWO CASING STRINGS CEMENTED TO SURFACE IS REQUIRED IN HIGH CAVE/KARST AREAS. THE CEMENT MUST BE IN A SOLID SHEATH THEREFORE, ONE INCH OPERATIONS WILL NOT BE PERMITTED. A DV TOOL WILL BE REQUIRED

Possibility of water flows in the Artesia Group.

Possibility of lost circulation in the Artesia Group and San Andres.

Contingency Surface Casing Plan:

1. The 13-3/8 inch contingency surface casing shall be set at approximately 375 feet and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Casing Plan without Contingency:

2. The 8-5/8 inch intermediate casing shall be set at approximately 350 feet and cemented to the surface. (If contingency casing is used set 8-5/8" casing 50 feet below 13-3/8" shoe.)
 - a. If cement does not circulate to the surface, the appropriate BLM office shall

be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
3. The minimum required fill of cement behind the **5-1/2 inch** production casing is:
- ☒ Cement to surface. If cement does not circulate, contact the appropriate BLM office.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

- 1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
- 2. **Contingency** - Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13-3/8 inch** surface casing shoe shall be **2000 (2M) psi**. Operator is approved to test against the casing for the contingency plan.
- 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **8-5/8 inch** surface casing shoe shall be **2000 (2M) psi**.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before

cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**.
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

MHH 040816

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the Grant and attachments, including stipulations, survey plat(s) and/or map(s), shall be on location during construction. BLM personnel may request to review a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, Holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC § 2601 *et seq.* (1982) with regard to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant (*see* 40 CFR, Part 702-799 and in particular, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193). Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the Authorized Officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. Holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. § 9601, *et seq.* or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, *et seq.*) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way Holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way Holder on the Right-of-Way. This provision applies without regard to whether a release is caused by Holder, its agent, or unrelated third parties.
4. Holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. Holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit

area:

- a. Activities of Holder including, but not limited to: construction, operation, maintenance, and termination of the facility;
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing
 - (2) Earth-disturbing and earth-moving work
 - (3) Blasting
 - (4) Vandalism and sabotage;
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of Holder, regardless of fault. Upon failure of Holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he/she deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of Holder. Such action by the Authorized Officer shall not relieve Holder of any responsibility as provided herein.

6. All construction and maintenance activity shall be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline shall be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline shall be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity shall be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation shall be allowed unless approved in writing by the Authorized Officer.

8. Holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline shall be "snaked" around hummocks and dunes rather than

suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within

the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines shall be less than or equal to 4 inches and a working pressure below 125 psi.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.

2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in

writing by the Authorized Officer.

5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and

any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by

drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 1 for Loamy Sites

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed shall be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed shall be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture shall be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed shall be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre shall be doubled. The seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

| <u>Species</u> | <u>lb/acre</u> |
|---|----------------|
| Plains lovegrass (<i>Eragrostis intermedia</i>) | 0.5 |
| Sand dropseed (<i>Sporobolus cryptandrus</i>) | 1.0 |
| Sideoats grama (<i>Bouteloua curtipendula</i>) | 5.0 |
| Plains bristlegrass (<i>Setaria macrostachya</i>) | 2.0 |

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

NMOCD CONDITION OF APPROVAL

The *New* Gas Capture Plan (GCP) notice is posted on the NMOCD website under Announcements. The Plan became effective May 1, 2016. A copy of the GCP form is included with the NOTICE and is also in our FORMS section under Unnumbered Forms. Please review filing dates for all applicable activities currently approved or pending and submit accordingly. Failure to file a GCP may jeopardize the operator's ability to obtain C-129 approval to flare gas after the initial 60-day completion period.