

NM OIL CONSERVATION

ARTESIA DISTRICT

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

JUN 06 2017

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
SHL: fee BHL: NMNM-117120

6. If Indian, Allottee or Tribe Name
N/A

1a. Type of work: ☒ DRILL ☐ REENTER

7. If Unit or CA Agreement, Name and No.
will comm. w/ fee lease

1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

8. Lease Name and Well No.
Zach McCormick Fed Com 226H **317797**

2. Name of Operator MATADOR PRODUCTION COMPANY

9. API Well No.
30-015- **44251**

3a. Address 5400 LBJ FREEWAY, SUITE 1500
DALLAS, TX 75240

3b. Phone No. (include area code)
228937
972 371 5241

10. Field and Pool or Exploratory
PERCE CROSS, WOLFCAMP, NM G
98220

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At surface 2414' FNL & 311' FEL 13-24S-28E

At proposed prod. zone 2311' FNL & 240' FEL 18-24S-29E

11. Sec., T. R. M. or Blk. and Survey or Area

SHL: SENE 13-24S-28E NMPM

BHL: SENE 18-24S-29E NMPM

14. Distance in miles and direction from nearest town or post office*
2 AIR MILES E OF MALAGA, NM

12. County or Parish
EDDY

13. State
NM

15. Distance from proposed*
location to nearest
property or lease line, ft.
(Also to nearest drig. unit line, if any)
SHL: 226'
BHL: 240'

16. No. of acres in lease
BLM lease = 520 acres
comm. area = 319.28 acres

17. Spacing Unit dedicated to this well
Lots 1 & 2, E2NW, & NE4 18-24S-29E

18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft.
SHL: 30' (Zach 206H)
BHL: 805' (ditto)

19. Proposed Depth
TVD: 10550' MD: 15438'

20. BLM/BIA Bond No. on file
BLM NMB-001079

21. Elevations (Show whether DF, KDB, RT, GL, etc.)
2954' UNGRADED

22. Approximate date work will start*
12/01/2016

23. Estimated duration
3 MONTHS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).

4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification
6. Such other site specific information and/or plans as may be required by the BLM.

25. Signature

Brian Wood

Name (Printed/Typed)

BRIAN WOOD (PHONE: 505 466-8120)

Date

08/15/2016

Title

CONSULTANT

(FAX: 505 466-9682)

Approved by (Signature)

Cody L. Layton

Name (Printed/Typed)

Cody L. Layton

Date

06/02/17

Title

for FIELD MANAGER

Office

BLM-CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS AND
SPECIAL STIPULATIONS
ATTACHED

mf

6-6-17 RuA

August 15, 2016

To Who it May Concern:

Matador Resources Company has a private surface owner agreement with Evelyn Kay Walker Faulk (P. O. Box 115, Malaga NM 88263) for the Zach McCormick Fed Com 226H well site, pipelines, production facility, and road in E2NE4 Section 13, T. 24 S., R. 28 E.; Eddy County, NM.

A handwritten signature in black ink, appearing to read "B. Wood". The signature is stylized with a large, looping initial "B" and a cursive "Wood".


Brian Wood

Operating Rights

Matador Production Company proposed this well to its partners and is negotiating a form of Joint Operating Agreement naming Matador Production Company as the Operator. Per our discussions with our partners, all parties are agreeable to name Matador Production Company as Operator for this well. Matador's partners include: Horned Frog Oil and Gas, LP, RSC Resources LP, Amy Flores, Marty Young, BucJag Investments, LLC, and COG.

Please let us know if you have any questions or concerns.

LOCATION & ELEVATION VERIFICATION MAP

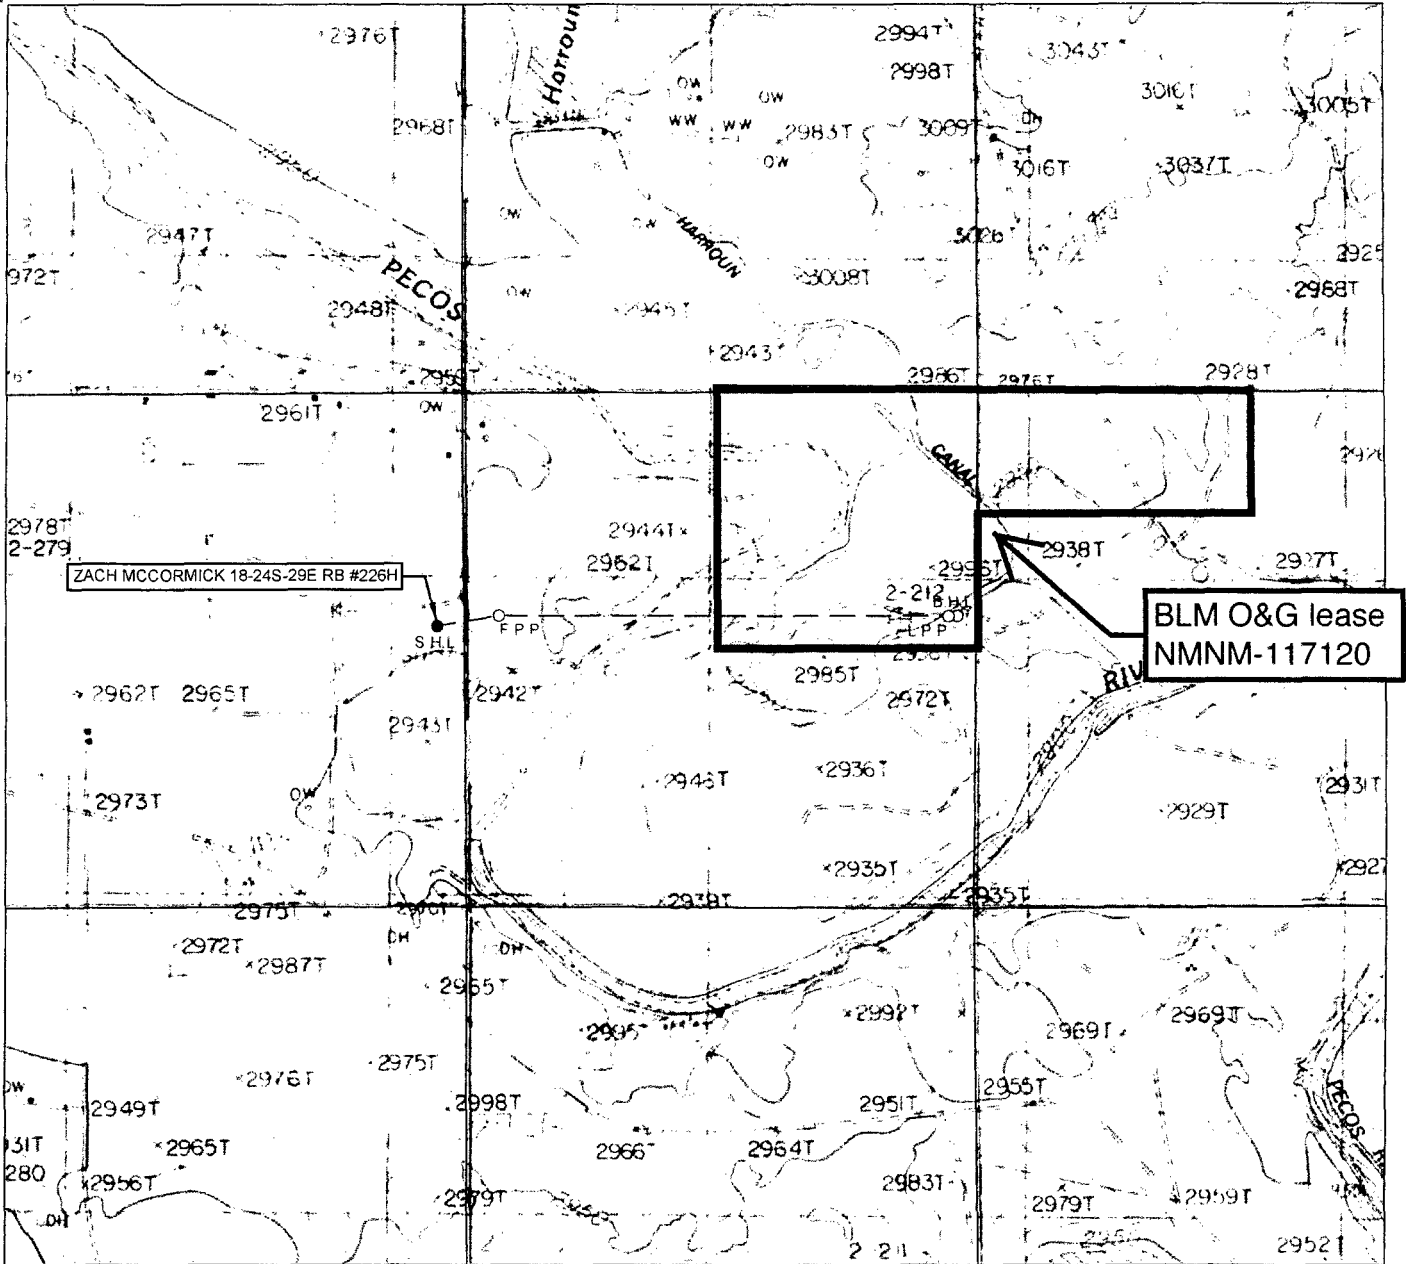

LEASE NAME & WELL NO.: ZACH MCCORMICK FEDERAL 18-24S-29E RB #226H

SECTION 13 TWP 24-S RGE 28-E SURVEY N.M.P.M.
 COUNTY EDDY STATE NM ELEVATION 2954'
 DESCRIPTION 2414' FNL & 311' FEL

LATITUDE N 32.2182597 LONGITUDE W 104.0327656



SCALE: 1" = 2000'
 0' 1000' 2000'

THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET.




TOPOGRAPHIC
 LOYALTY INNOVATION LEGACY

WWW.TOPOGRAPHIC.COM

0' 500' 1000'



SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

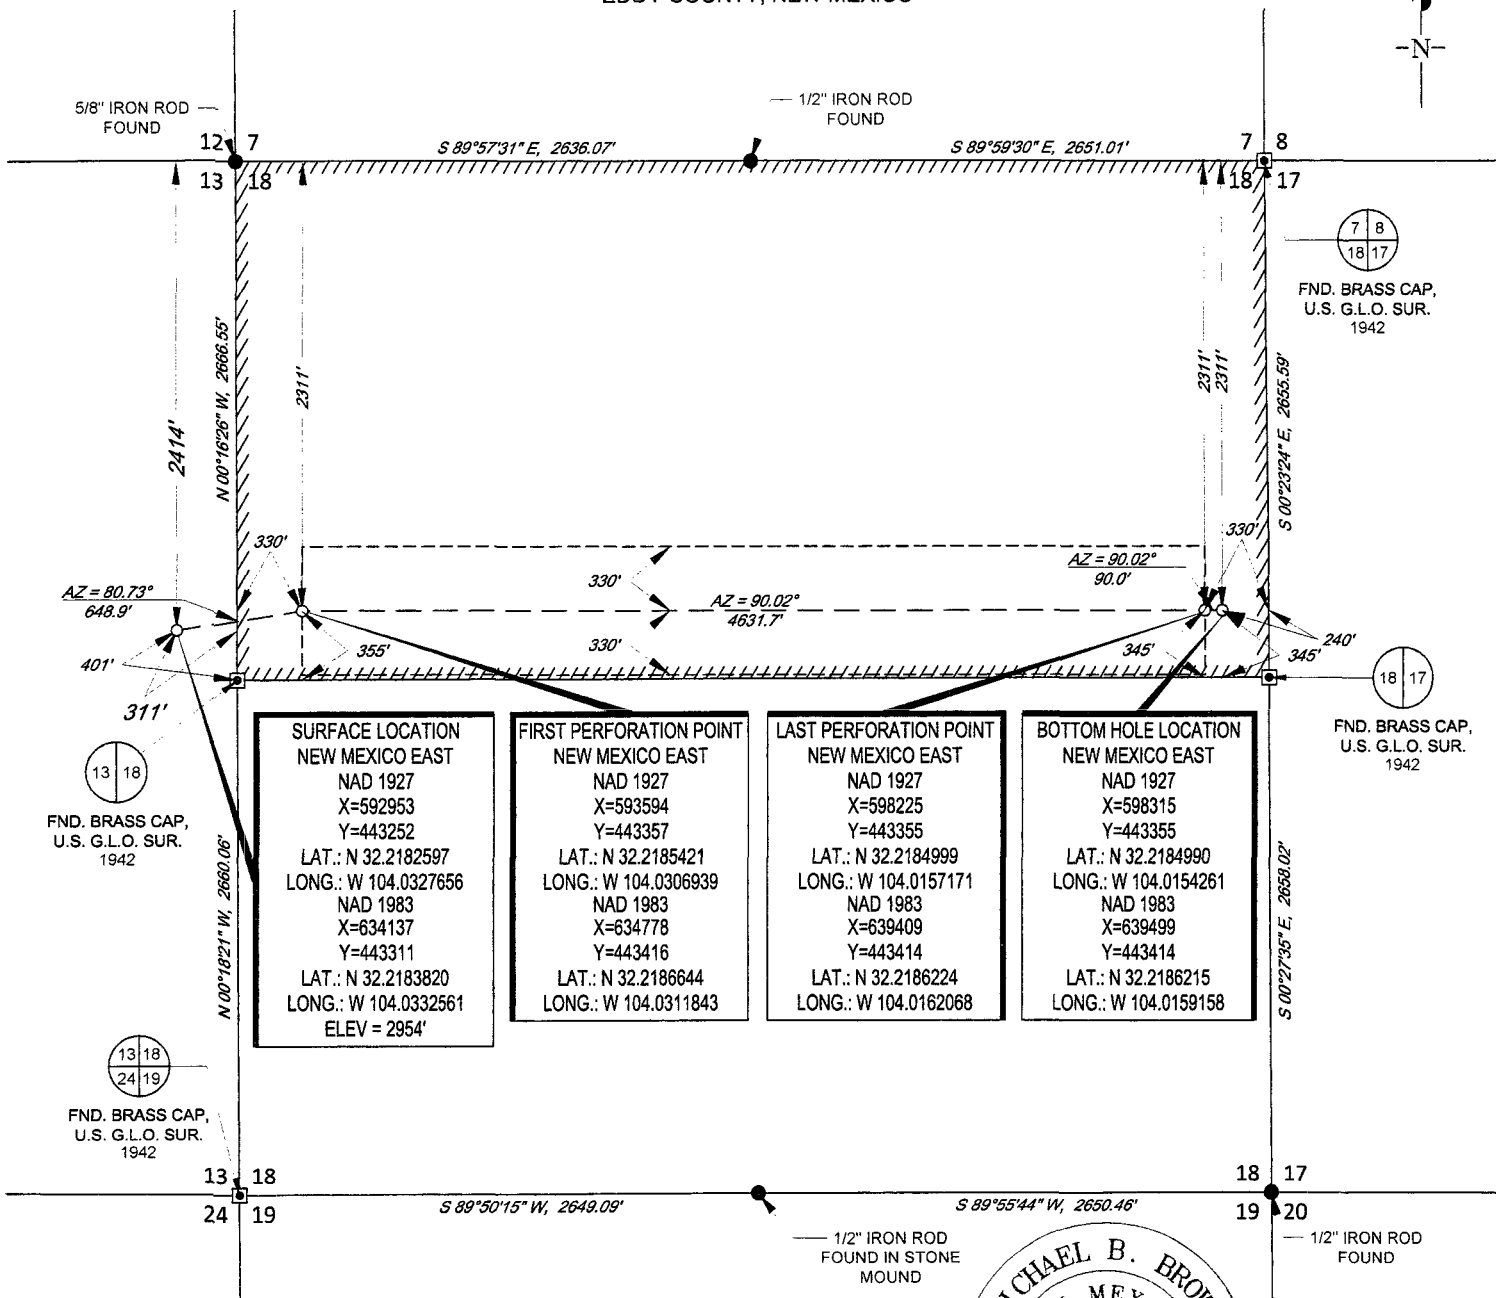

SECTION 13 TWP 24-S RGE 28-E SURVEY N.M.P.M.
COUNTY EDDY STATE NM
DESCRIPTION 2414' FNL & 311' FEL
DISTANCE & DIRECTION

AS OF THE DATE OF THE SURVEY, ALL ABOVE GROUND APPURTENANCES WITHIN 300' OF THE STAKED LOCATION ARE SHOWN HEREON.


~~•MAY-09:2046~~




TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

WWW.TOPOGRAPHIC.COM

104.11667° W 104.10000° W 104.08333° W 104.06667° W 104.05000° W 104.03333° W 104.01667° W 104.00000° W 103.98333° W WGS84 103.95000° W



12/18/15

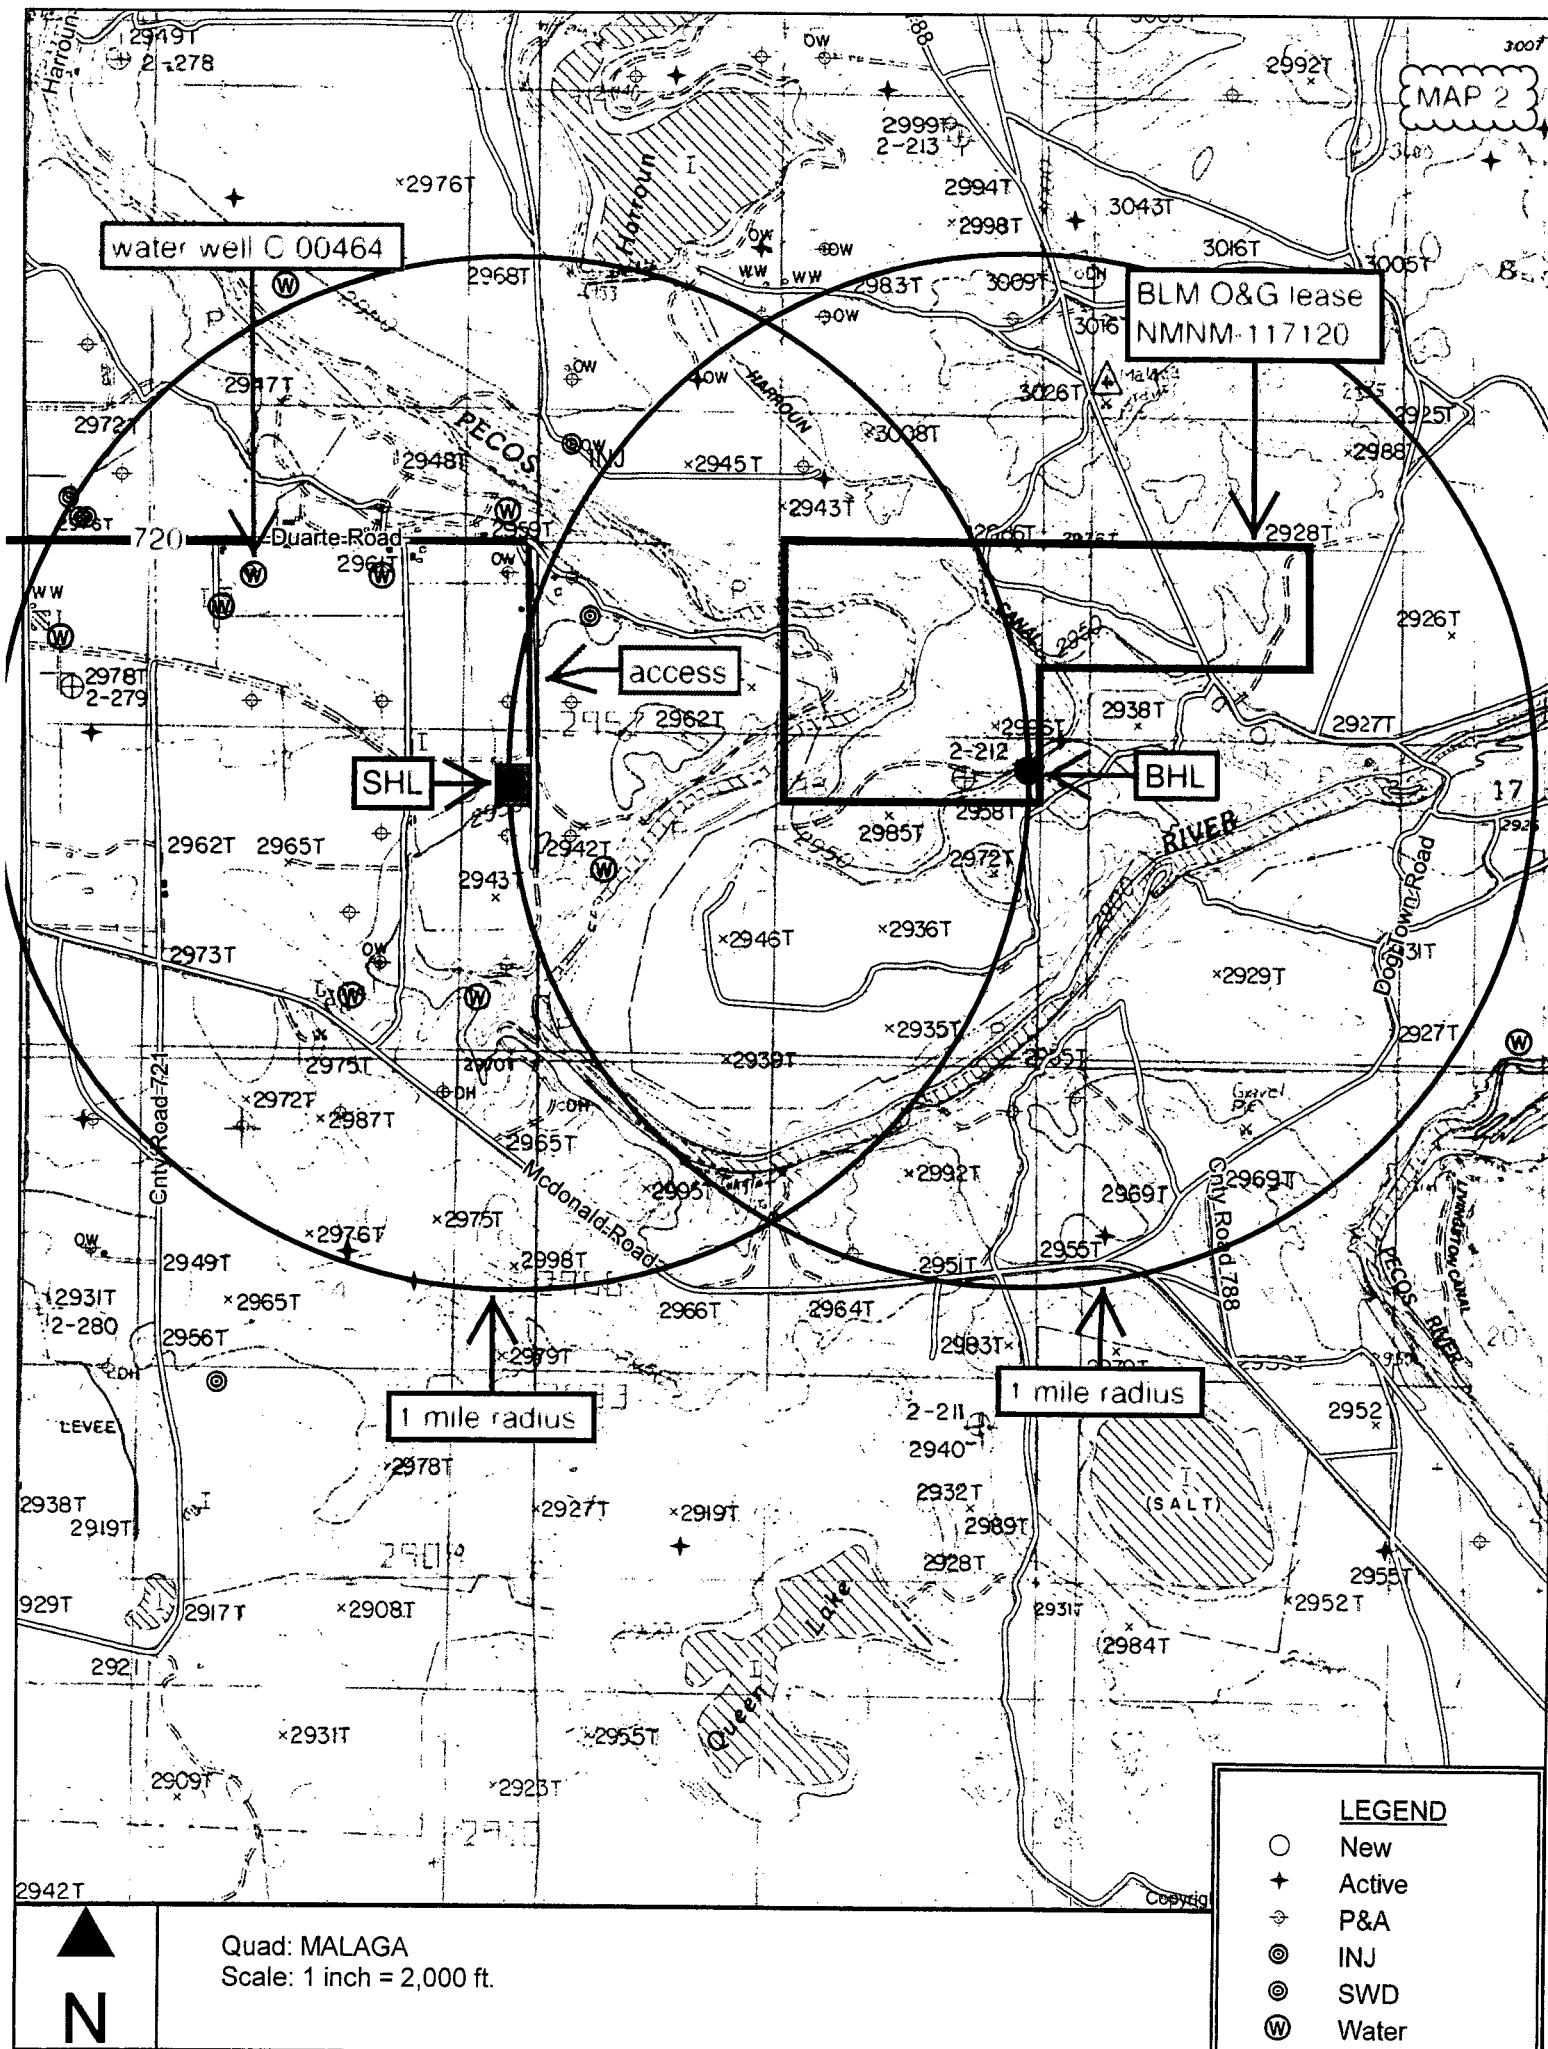

720

access

access

production facility

Zach McCormick Fed Com 226H

32.22007, -104.03313
32.22007, -104.03262

32.21902, -104.03255
32.21885, -104.03313

32.21885, -104.03374

32.21775, -104.03255
32.21775, -104.03374

MAP 3

1000 ft




Google earth



MAP 4

SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

DETAIL VIEW
SCALE: 1" = 100'

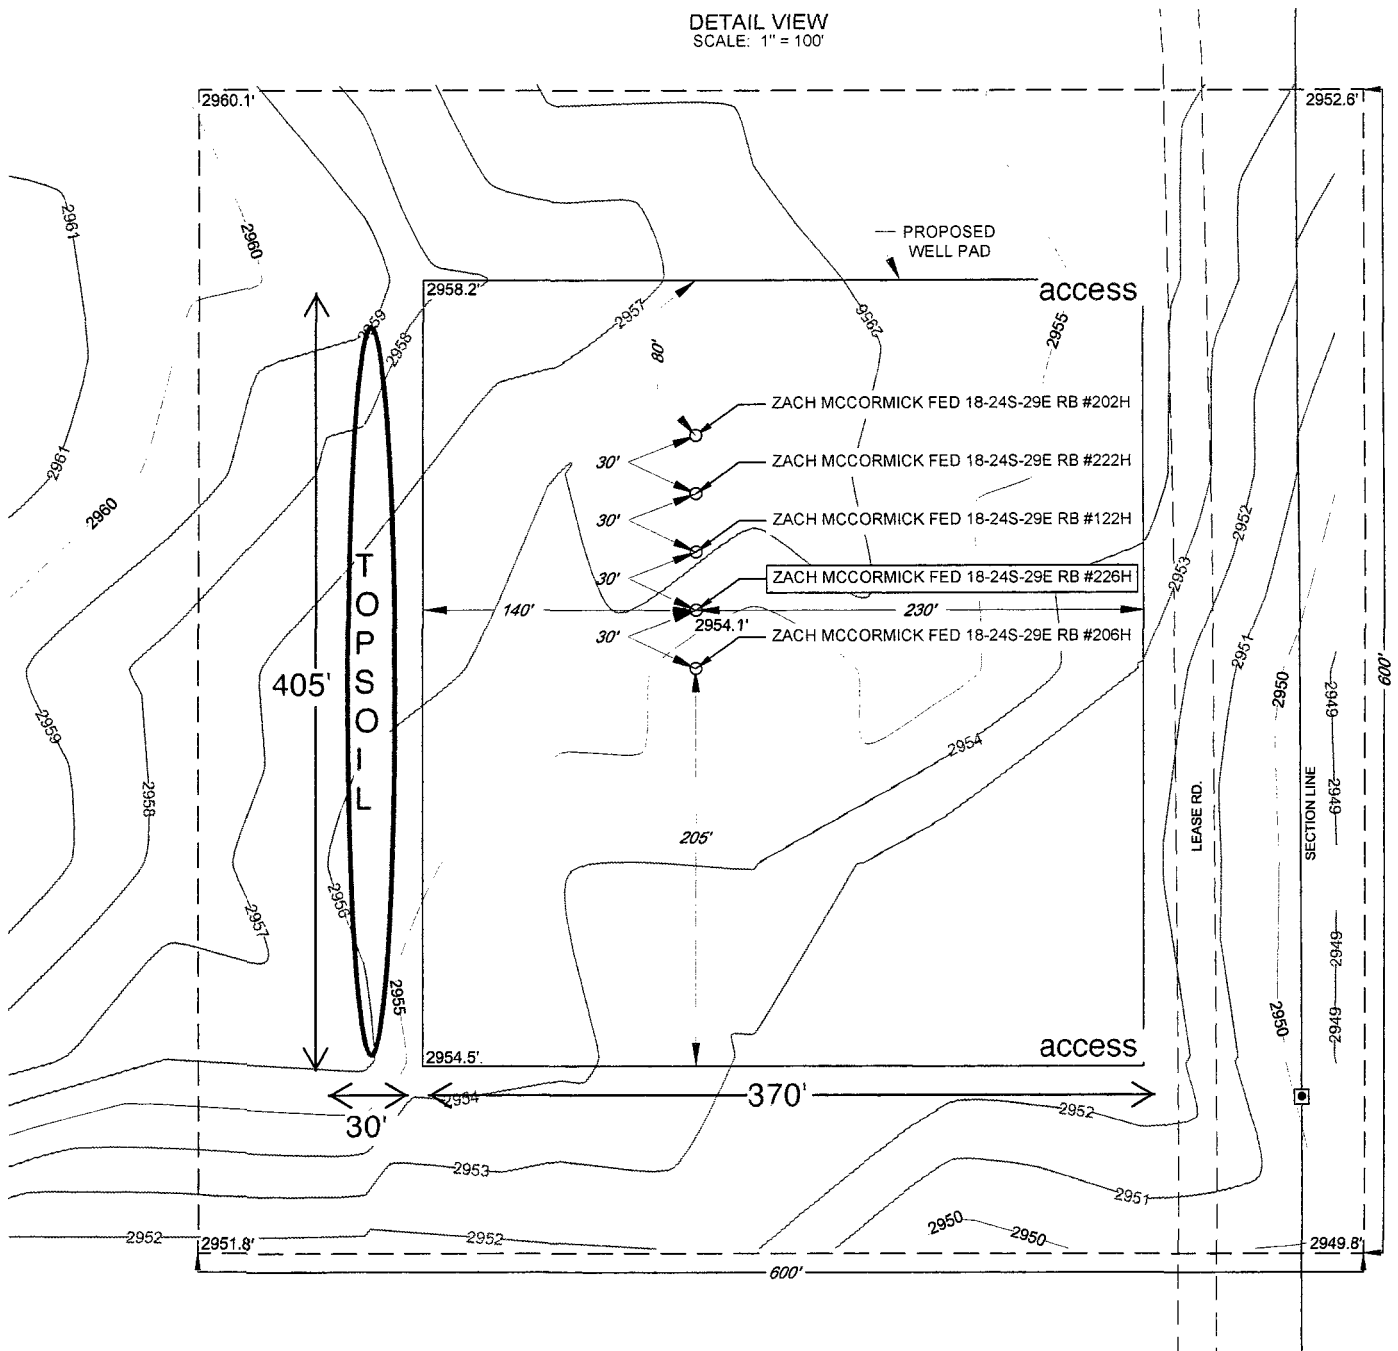

LEGEND

- EXISTING ROAD
- SECTION LINE
- ARCH SITE

LEASE NAME & WELL NO.: ZACH MCCORMICK FEDERAL 18-24S-29E RB #226H

#226H LATITUDE N 32.2182597 #226H LONGITUDE W 104.0327656

SCALE: 1" = 100'
0' 50' 100'

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER
MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY,
AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



WWW.TOPOGRAPHIC.COM


ORIGINAL DOCUMENT SIZE: 8.5" X 11"

SCALE: 1" = 200'

0' 100' 200'

SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO


MAP 5

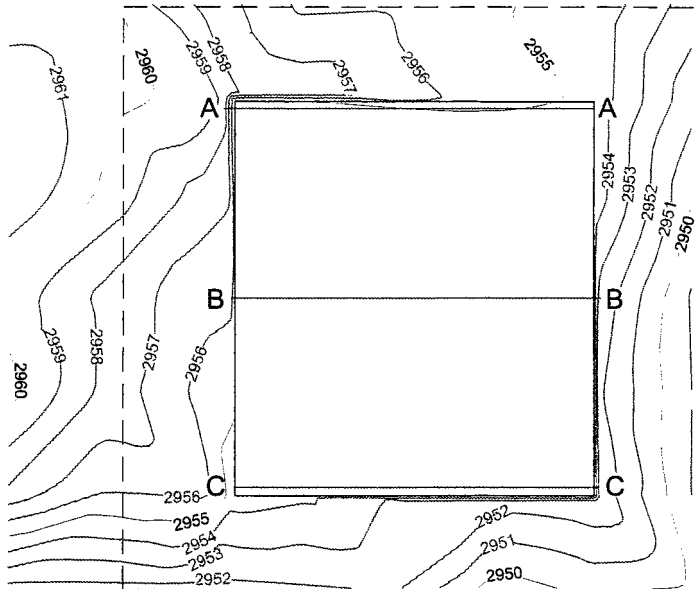

TOP OF PAD ELEVATION:
2954.8'

CUT SLOPE: 33.33% 3.00:1 18.43°
FILL SLOPE: 33.33% 3.00:1 18.43°
BALANCE TOLERANCE (C.Y.): 0.00
CUT SWELL FACTOR: 1.00
FILL SHRINK FACTOR: 1.00

PAD EARTHWORK VOLUMES
CUT: 91,390.2 C.F., 3,384.82 C.Y.
FILL: 91,390.2 C.F., 3,384.82 C.Y.
BALANCE IMPORT: 0.0 C.F., 0.00 C.Y.
AREA: 157182.9 SQ.FT., 3.608 ACRES

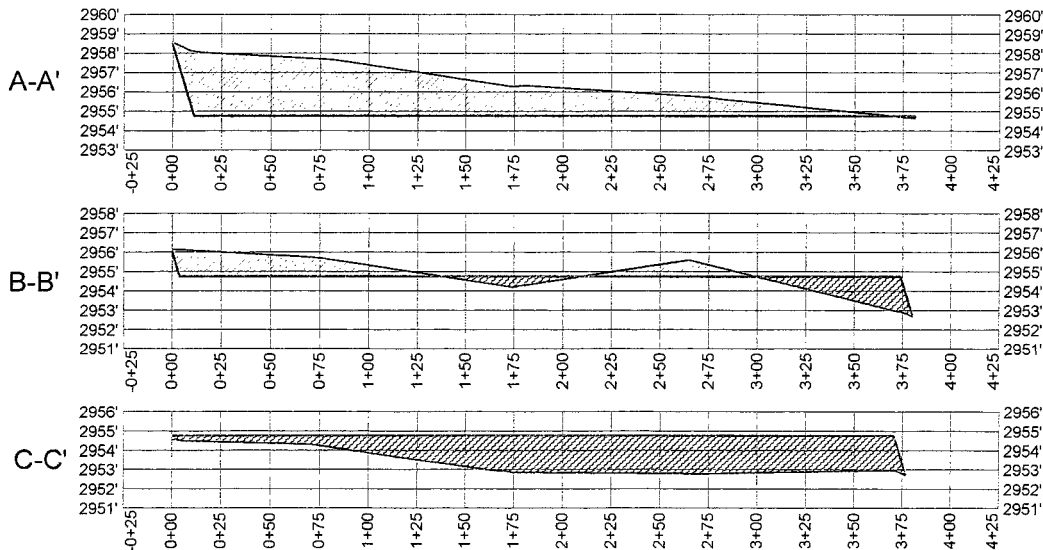

Horizontal Scale = 1:100
Vertical Scale = 1:5



TOPOGRAPHIC
LOYALTY INNOVATION LEGACY
1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7548
TEXAS FIRM REGISTRATION NO. 10042504
WWW.TOPOGRAPHIC.COM



Michael Blake Brown, P.S. No. 18329

MAY 10, 2016

Field note description of even date accompanies this plat.

ZACH MCCORMICK FED
18-24S-29E RB #202H
SURFACE PAD SITE PRO

REVISION:

INT	DATE

DATE: 05/10/16

FILE: 00 ZACH MCCORMICK FEDERAL 18-24S-29E RB 202H SURFACE PAD SITE PRO

DRAWN BY: MML

SHEET:


NOTES:

1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927
3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR RESOURCE COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.

SCALE: 1" = 1000'

SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO
PROPOSED 3.44 ACRE SITE

MAP 6

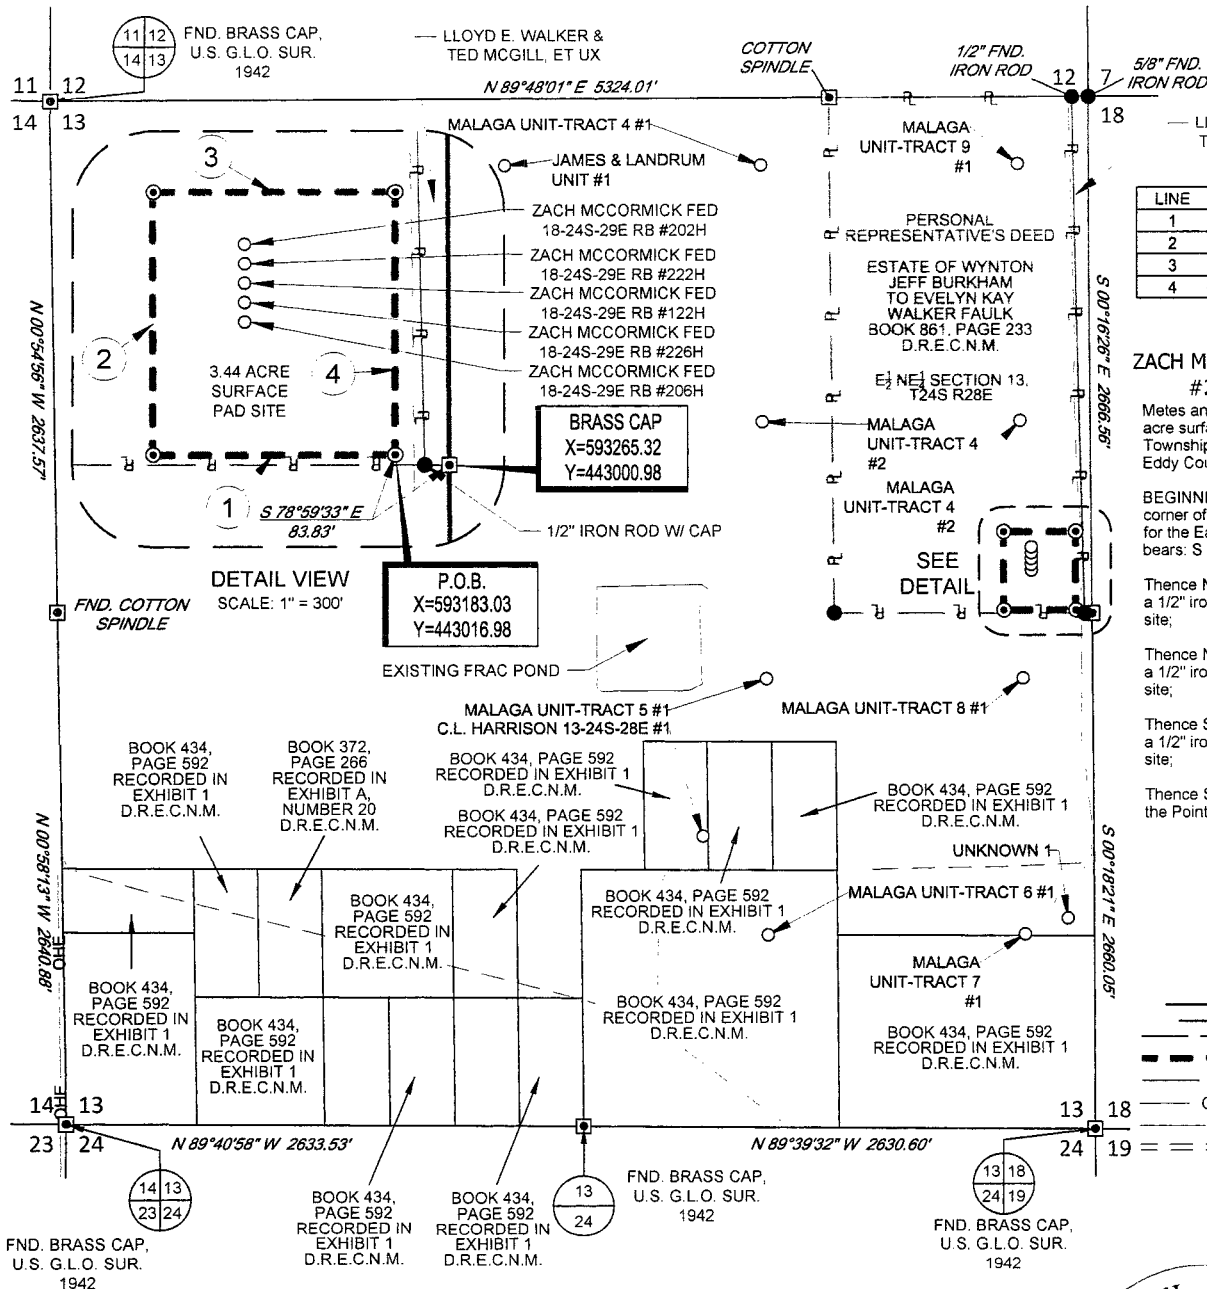

LINE	BEARING	DISTANCE
1	N 89°58'53" W	370.00'
2	N 00°01'07" E	405.00'
3	S 89°58'53" E	370.00'
4	S 00°01'07" W	405.00'

ZACH MCCORMICK FED 18-24S-29E RB #202H SURFACE PAD SITE

Meters and Bounds Description of a proposed 3.44 acre surface pad site located within Section 13, Township 24 South, Range 28 East, N.M.P.M., in Eddy County, New Mexico.

BEGINNING at a 1/2" iron rod set for the Southeast corner of this site, from whence a brass cap found for the East quarter corner of said Section 13, bears: S 78°59'33" E, a distance of 83.83 feet;

Thence N 89°58'53" W, a distance of 370.00 feet to a 1/2" iron rod set for the Southwest corner of this site;


Thence N 00°01'07" E, a distance of 405.00 feet to a 1/2" iron rod set for the Northwest corner of this site;

Thence S 89°58'53" E, a distance of 370.00 feet to a 1/2" iron rod set for the Northeast corner of this site;

Thence S 00°01'07" W, a distance of 405.00 feet to the Point of Beginning.

LEGEND

- SURVEY/SECTION LINE
- PROPOSED SITE
- BOUNDARY
- OHE OVERHEAD ELECTRIC
- FENCES
- ROAD WAY
- MONUMENT
- IRON ROD SET
- IRON ROD FOUND



Michael Blake Brown, P.S. No. 18329
May 9, 2016



1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7548
2903 NORTH BIG-SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

ZACH MCCORMICK FED
18-24S-29E RB #202H
SURFACE PAD SITE

REVISION:

INT DATE

DATE: 05/09/16

FILE: 80 ZACH MCCORMICK FED 18-24S-29E RB #202H SURFACE PAD SITE

DRAWN BY: GJU

SHEET:

NOTES:

1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927.
3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR PRODUCTION COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.
4. P.O.B. = POINT OF BEGINNING
5. D.R.E.C.N.M. = DEED RECORDS EDDY COUNTY NEW MEXICO

SCALE: 1" = 200'

0' 100' 200'

SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO



MAP 7



TOP OF PAD ELEVATION:
2954.1'

BALANCE TOLERANCE (C.Y.): 0.00
CUT SWELL FACTOR: 1.00
FILL SHRINK FACTOR: 1.00

PAD EARTHWORK VOLUMES
CUT 32,455.5 C.F., 1,202.05 C.Y.
FILL: 32,455.5 C.F., 1,202.05 C.Y.
BALANCE IMPORT: 0.0 C.F., 0.00 C.Y.
AREA: 70693.8 SQ.FT., 1.623 Acres

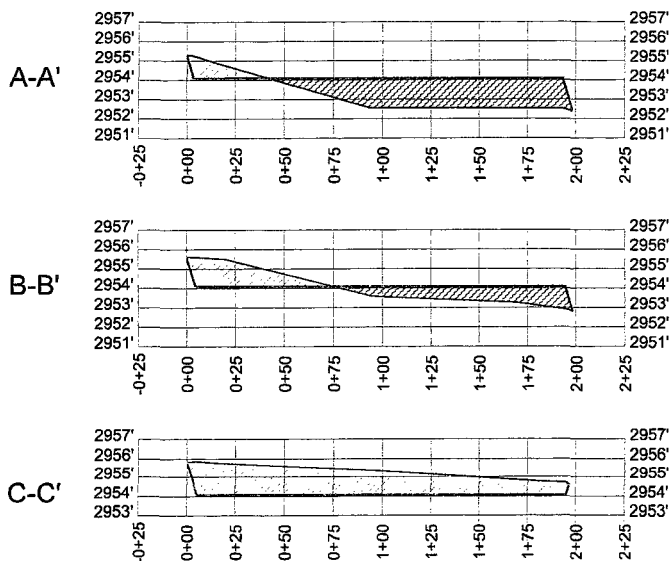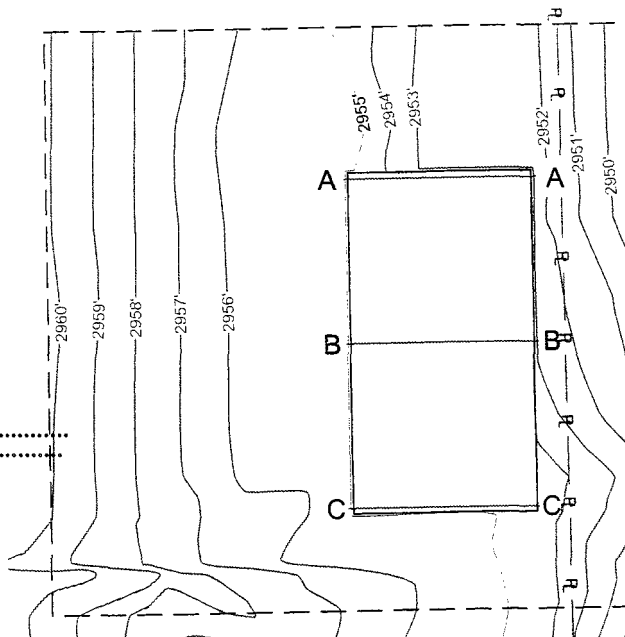

Horizontal Scale = 1:100
Vertical Scale = 1:5



Michael Blake Brown, P.S. No. 18329

MAY 10, 2016

Field note description of even date accompanies this plat.

ZACK McCORMICK FED
PRODUCTION FACILITY
SITE PROFILE

REVISION:

INT	DATE

DATE: 05/10/16

FILE: C:\ZACK McCORMICK FEDERAL PRODUCTION FACILITY SITE PRO

DRAWN BY: A.C.C.

SHEET :

NOTES:


1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927.
3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR RESOURCE COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.

SCALE: 1" = 1000'

0' 500' 1000'

SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO
PROPOSED 1.53 ACRE SITE

MAP 8

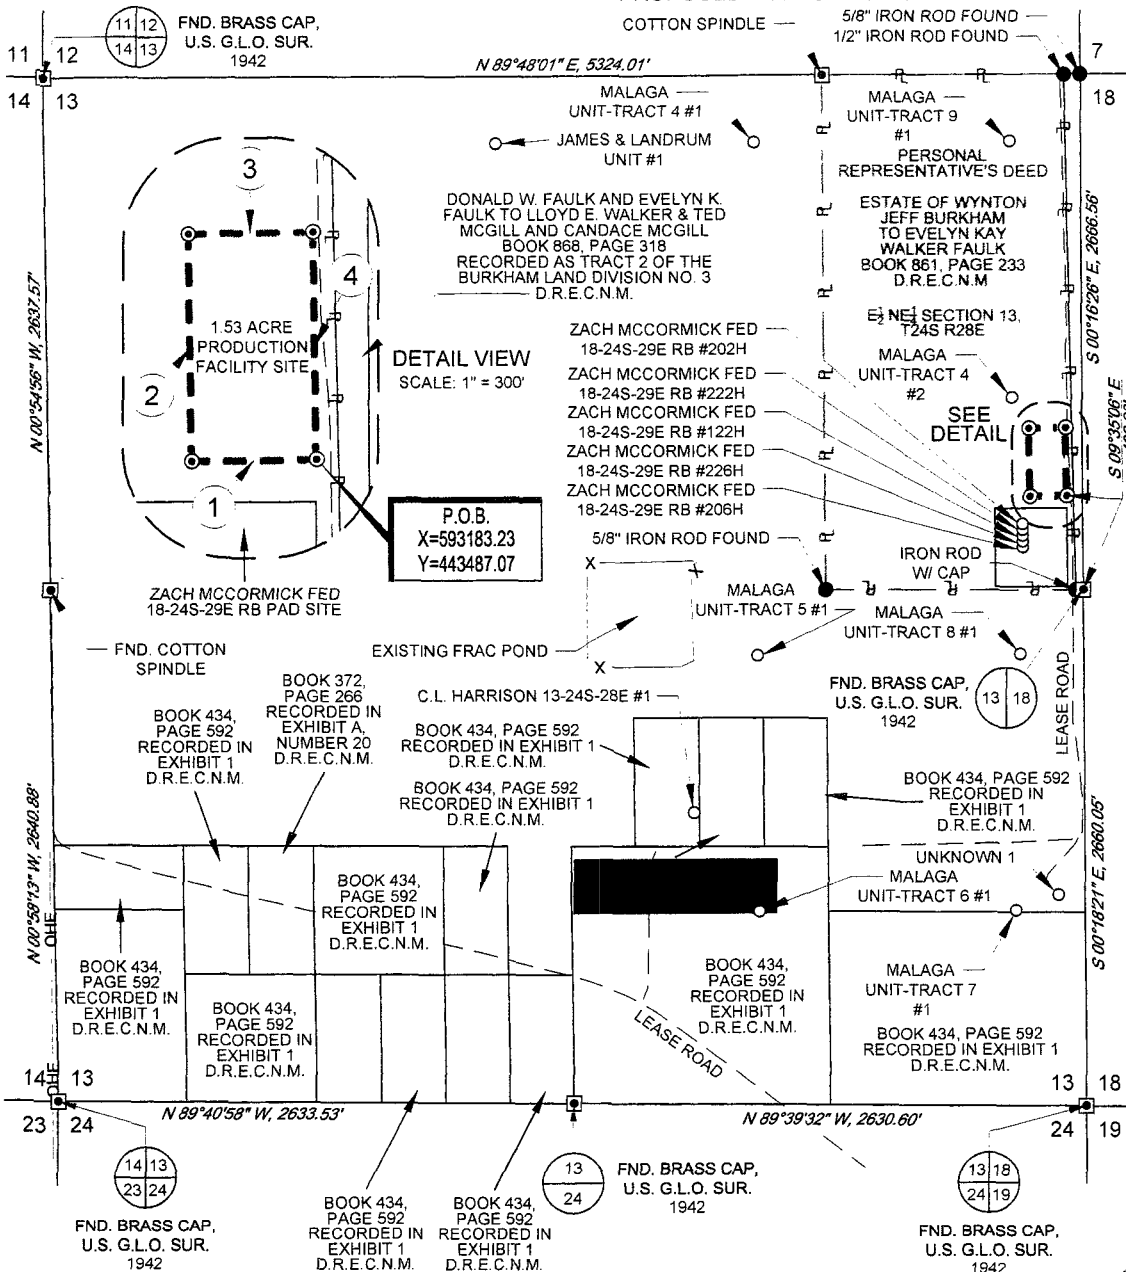

ZACK MCCORMICK FED
PRODUCTION FACILITY SITE

Mets and Bounds Description of a proposed 1.53 acre proposed facility site located within Section 13, Township 24 South, Range 28 East, N.M.P.M., in Eddy County, New Mexico.

BEGINNING at a 1/2" iron rod with cap set for the Southeast corner of this site, from whence a brass cap found for the East quarter corner of distance of 492.98 feet;

to a 1/2" iron rod with cap set for the Southwest corner of this site;

Thence to a 1/2" iron rod with cap set for the Northwest corner of this site;

Thence to a 1/2" iron rod with cap set for the Northeast corner of this site;


Thence to the Point of Beginning.

LEGEND

---	PROPOSED SITE
---	SURVEY/SECTION LINE
---	TRACT BORDER
---	ROAD WAY
---	EXISTING PIPELINE
●	IRON ROD SET
○	IRON ROD FOUND
■	MONUMENT

ZACK MCCORMICK FED
PRODUCTION FACILITY SITE

LINE	BEARING	DISTANCE
1		190.00'
2		360.00'
3		190.00'
4		350.00'



Michael Blake Brown, P.S. No. 18329
MAY 9, 2016

WWW.TOPOGRAPHIC.COM

ZACK MCCORMICK FED
PRODUCTION FACILITY
SITE

REVISION:

INT DATE

DATE: 05/09/16

FILE: 80_ZACH_MCCORMICK_FEDERAL_PRODUCTION_FACILITY_SITE

DRAWN BY: A.C.C.


SHEET:

NOTES:

1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927.
3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR PRODUCTION COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.
4. P.O.B. = POINT OF BEGINNING

Matador's
Zach McCormick Fed Com
Production Facility
SENE 13-24s-28e
Eddy County NM

MAP 9

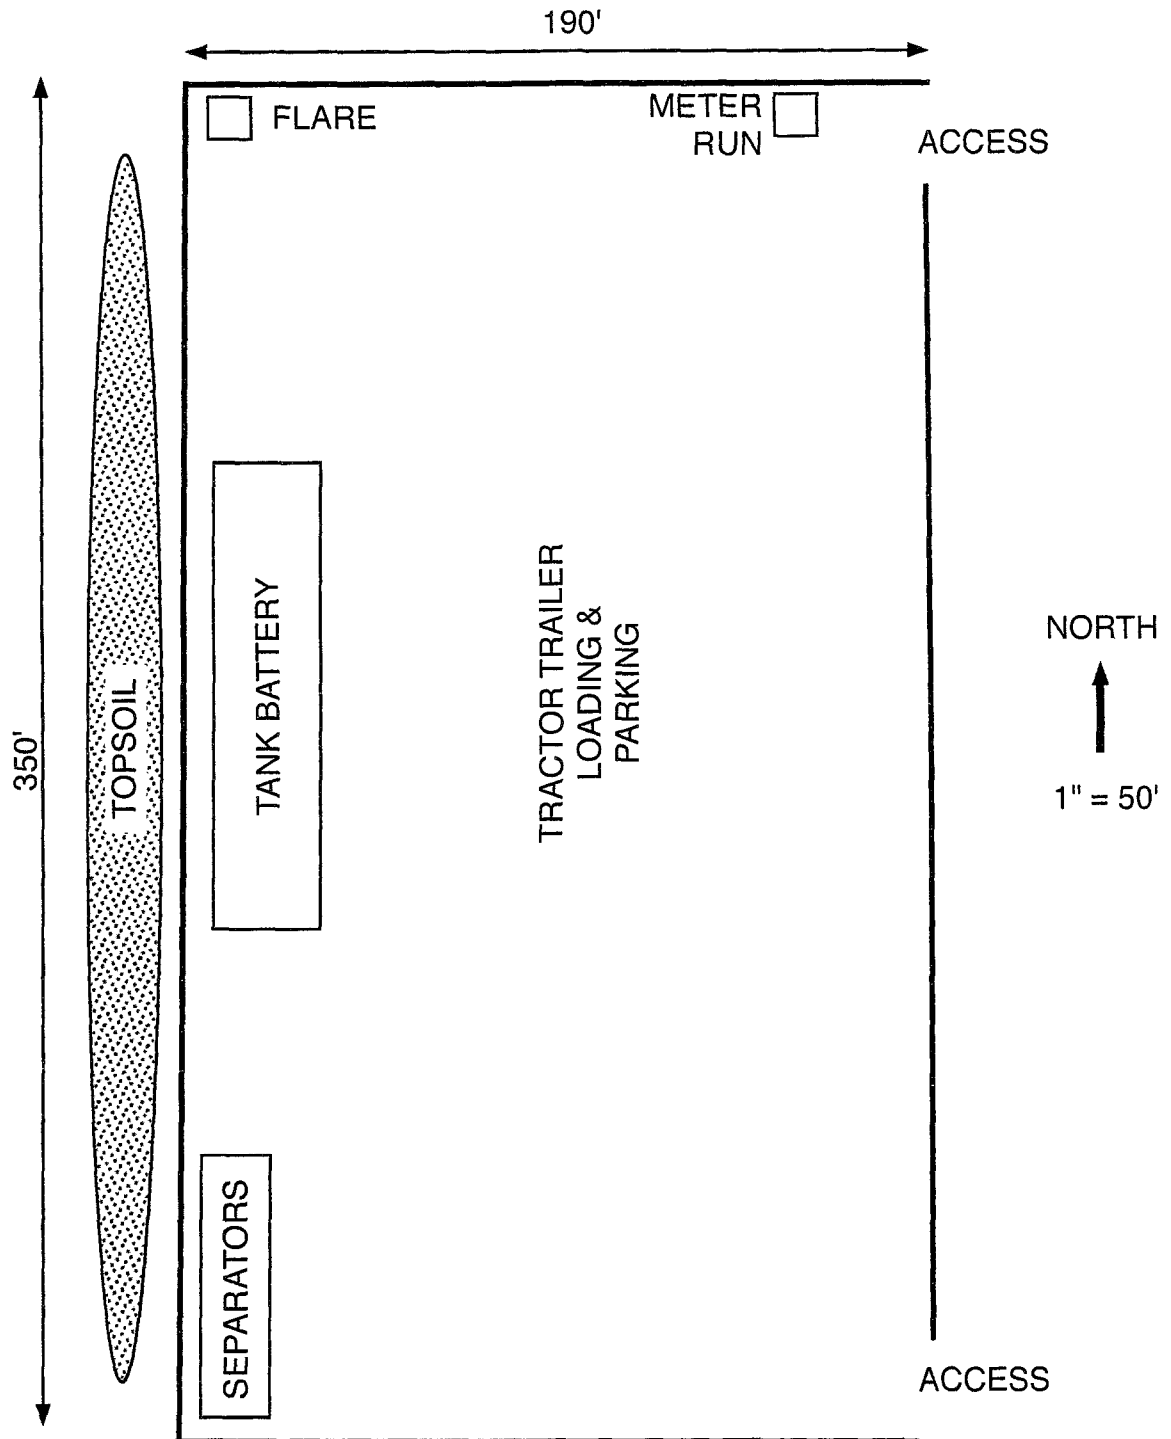

Matador Production Company
Zach McCormick Fed Com 226H

DRILL PLAN PAGE 1

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

Drilling Program

1. ESTIMATED TOPS

Formation Name	TVD	Bearing
Quaternary	GL	water
top of salt	808.5'	salt
Lamar/base of salt	2681.5'	barren
Bell Canyon	2731.5'	barren
Cherry Canyon	3661.5'	hydrocarbon
Brushy Canyon	4886.5'	hydrocarbon
Bone Spring Lime	6465.5'	hydrocarbon
1st Bone Spring Sand	7407.5'	hydrocarbon
2nd Bone Spring Carbonate	7720.5'	hydrocarbon
2nd Bone Spring Sand	8319.5'	hydrocarbon
3 rd Bone Spring Carbonate	8558.5'	hydrocarbon
3rd Bone Spring Sand	9274.5'	hydrocarbon
Wolfcamp	9632.5'	hydrocarbon
Wolfcamp X	9664.5'	hydrocarbon
Wolfcamp Y	9729.5'	hydrocarbon
Wolfcamp B	10323.5	hydrocarbon (& goal)
TVD (Wolfcamp B)	10550'	ditto
MD (Wolfcamp B)	15438'	ditto

2. NOTABLE ZONES

Closest water well (C 00750) is 888' southwest. Depth of well is 110'. Depth to water has not been reported to the State.

Matador Production Company

DRILL PLAN PAGE 2

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

3. PRESSURE CONTROL

A BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram and 1 annular preventer will be installed. The BOP will be used below surface casing to TD. See attached BOP and choke manifold diagrams.

An accumulator compliant with Onshore Order 2 for the pressure rating of the BOP stack will be present. Rotating head will be installed as needed.

Pressure tests will be conducted before drilling out from under all casing strings. BOP will be inspected and operated as recommended in Onshore Order 2. Kelly cock and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position.

A third party company will test the BOPs. Test pressures will be as follows: After surface casing is set and the BOP is nipped up, the BOP pressure tests will be made to 250 psi low and 2000 psi high. On the intermediate #1, pressure tests will be made to 250 psi low and 3000 psi high. On the intermediate #2, pressure tests will be made to 250 psi low and 7500 psi high. The annular preventer will be tested to 250 psi low and 1000 psi high on the surface casing, and 250 psi low and 1500 psi high on the intermediate #1 and #2 casing. In the case of running a speed head with landing mandrel for 9-5/8" and 7" casing the initial, after surface casing is set, BOP test pressures will be 250 psi low and 3000 psi high with wellhead seals tested to 5000 psi once the 9-5/8" casing has been landed and cemented. BOP will then be lifted to install the 'C-section' of the wellhead. Matador will nipple the BOP back up and the pressure tests will be made to 250 psi low and 7500 psi high and the annular will be tested to 250 psi low and 1500 psi high.

Matador requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. If the specific hose is not available, then one of equal or higher rating will be used.

Matador Production Company

DRILL PLAN PAGE 3

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

4. CASING & CEMENT

Hole will extend east of the last perforation to allow for pump installation.
All perforations will be $\geq 330'$ from the dedication perimeter.

Hole O. D.	Set @ (MD)	Casing O. D.	Age	Weight (lb/ft)	Grade	Thread Collar	Collapse	Burst	Tension
17.5"	650'	13.375"	New	54.5	J-55	BTC	1.125	1.125	1.8
12.25"	2750'	9.625"	New	40	J-55	BTC	1.125	1.125	1.8
8.75"	10795'	7"	New	29	P-110	BTC	1.125	1.125	1.8
6.125"	15438'	4.5"	New	13.5	P-110	BTC/TXP	1.125	1.125	1.8

Name	Type	Sacks	Yield	Cu. Ft.	Weight	Blend
Surface	Lead	240	1.82	436.8	12.8	Class C + Bentonite + 2% CaCl ₂ + 3% NaCl + LCM
	Tail	350	1.38	483	14.8	Class C + 5% NaCl + LCM
TOC = GL		100% Excess			Centralizers per Onshore Order 2.III.B.1f	
Intermediate	Lead	550	2.13	1171.5	12.6	Class C + Bentonite + 1% CaCl ₂ + 8% NaCl + LCM
	Tail	270	1.38	372.6	14.8	Class C + 5% NaCl + LCM
TOC = GL		100% Excess			2 on btm jt, 1 on 2nd jt, 1 every 4th jt to surface	
Intermediate 2	Lead	600	2.36	1416	11.5	TXI + Fluid Loss + Dispersant + Retarder + LCM
	Tail	300	1.38	414	13.2	TXI + Fluid Loss + Dispersant + Retarder + LCM
TOC = 1600'		35% Excess			2 on btm jt, 1 on 2nd jt, 1 every other jt to top of tail cement (500' above TOC)	
Production	Tail	570	1.17	666.9	15.8	Class H + Fluid Loss + Dispersant + Retarder + LCM
TOC = 9700'		10% Excess			2 on btm jt, 1 on 2nd jt, 1 every third jt to top of curve	

Matador Production Company

DRILL PLAN PAGE 4

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

5. MUD PROGRAM

An electronic Pason mud monitoring system satisfying the requirements of Onshore Order 1 will be used. All necessary mud products for weight addition and fluid loss control will be on location at all times. Mud program is subject to change due to hole conditions.

Name	Hole Size	Mud Weight	Visc	Fluid Loss	Type Mud
Surface	17.5"	8.30	28	NC	FW Spud Mud
Intermediate	12.25"	10.00	30-32	NC	Brine Water
Intermediate 2	8.75"	9.00	30-31	NC	FW/Cut Brine
Production	6.125"	12.50	50-60	<10	OBM

6. CORES, TESTS, & LOGS

No core or drill stem test is planned.

A 2-person mud-logging program will be used from $\approx 10800'$ to TD.

No electric logs are planned. GR will be collected through the MWD tools from intermediate casing to TD. CBL with CCL will be run as far as gravity will let it fall to TOC.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is ≈ 7500 psi. Expected bottom hole temperature is $\approx 170^\circ$ F.

In accordance with Onshore Order 6, Matador does not anticipate that there will be enough H_2S from the surface to the Bone Spring to meet the BLM's minimum requirements for the submission of an " H_2S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since Matador has an H_2S safety package on all wells, an " H_2S Drilling Operations Plan" is attached.

Matador Production Company

DRILL PLAN PAGE 5

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

8. OTHER INFORMATION

Anticipated spud date is upon approval. It is expected it will take $\approx$ 3 months to drill and complete the well.



Matador Resources

**Eddy County, New Mexico (NAD 27)
Zach McCormick Federal 18-24S-29E RB
#226H**

Wellbore #1

Plan: Design #1

Standard Planning Report

24 June, 2016



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Project	Eddy County, New Mexico (NAD 27)		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Well	#226H			
Well Position	+N/-S	443,252.08 usft	Northing:	443,252.08 usft
	+E/-W	592,953.19 usft	Easting:	592,953.19 usft
Position Uncertainty	0.00 usft		Wellhead Elevation:	0.00 usft
			Ground Level:	2,954.09 usft

Wellbore	Wellbore #1				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2016	6/22/2016	7.32	59.99	48,066

Design	Design #1				
Audit Notes:					
Version:	Phase:	PROTOTYPE		Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)	
	0.00	0.00	0.00	90.02	

Plan Sections

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00	
2,533.34	8.00	45.56	2,531.60	26.03	26.54	1.50	1.50	0.00	45.56	
4,612.79	8.00	45.56	4,590.82	228.66	233.17	0.00	0.00	0.00	0.00	
5,146.12	0.00	0.00	5,122.42	254.69	259.71	1.50	-1.50	0.00	180.00	VP - Zach McCormick
9,994.94	0.00	0.00	9,971.24	254.69	259.71	0.00	0.00	0.00	0.00	
10,794.94	80.00	100.65	10,535.49	167.19	725.02	10.00	10.00	0.00	100.65	
10,961.61	90.00	100.65	10,550.00	136.54	887.98	6.00	6.00	0.00	0.00	
11,316.07	90.00	90.02	10,550.00	103.64	1,240.41	3.00	0.00	-3.00	-90.00	
15,437.85	90.00	90.02	10,550.00	102.49	5,362.18	0.00	0.00	0.00	0.00	PBHL - Zach McCormick



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
KOP, 1.50°/100' Build									
2,100.00	1.50	45.56	2,099.99	0.92	0.93	0.93	1.50	1.50	0.00
2,200.00	3.00	45.56	2,199.91	3.67	3.74	3.74	1.50	1.50	0.00
2,300.00	4.50	45.56	2,299.69	8.24	8.41	8.40	1.50	1.50	0.00
2,400.00	6.00	45.56	2,399.27	14.65	14.94	14.93	1.50	1.50	0.00
2,500.00	7.50	45.56	2,498.57	22.88	23.33	23.32	1.50	1.50	0.00
2,533.34	8.00	45.56	2,531.60	26.03	26.54	26.53	1.50	1.50	0.00
Begin 8.00° Tangent									
2,600.00	8.00	45.56	2,597.62	32.52	33.16	33.15	0.00	0.00	0.00
2,700.00	8.00	45.56	2,696.65	42.27	43.10	43.09	0.00	0.00	0.00
2,800.00	8.00	45.56	2,795.67	52.01	53.04	53.02	0.00	0.00	0.00
2,900.00	8.00	45.56	2,894.70	61.76	62.97	62.95	0.00	0.00	0.00
3,000.00	8.00	45.56	2,993.73	71.50	72.91	72.89	0.00	0.00	0.00
3,100.00	8.00	45.56	3,092.75	81.25	82.85	82.82	0.00	0.00	0.00
3,200.00	8.00	45.56	3,191.78	90.99	92.78	92.75	0.00	0.00	0.00
3,300.00	8.00	45.56	3,290.81	100.74	102.72	102.69	0.00	0.00	0.00
3,400.00	8.00	45.56	3,389.83	110.48	112.66	112.62	0.00	0.00	0.00
3,500.00	8.00	45.56	3,488.86	120.23	122.59	122.55	0.00	0.00	0.00
3,600.00	8.00	45.56	3,587.89	129.97	132.53	132.48	0.00	0.00	0.00
3,700.00	8.00	45.56	3,686.91	139.71	142.47	142.42	0.00	0.00	0.00
3,800.00	8.00	45.56	3,785.94	149.46	152.40	152.35	0.00	0.00	0.00
3,900.00	8.00	45.56	3,884.97	159.20	162.34	162.28	0.00	0.00	0.00
4,000.00	8.00	45.56	3,984.00	168.95	172.28	172.22	0.00	0.00	0.00
4,100.00	8.00	45.56	4,083.02	178.69	182.21	182.15	0.00	0.00	0.00
4,200.00	8.00	45.56	4,182.05	188.44	192.15	192.08	0.00	0.00	0.00
4,300.00	8.00	45.56	4,281.08	198.18	202.09	202.02	0.00	0.00	0.00
4,400.00	8.00	45.56	4,380.10	207.93	212.02	211.95	0.00	0.00	0.00
4,500.00	8.00	45.56	4,479.13	217.67	221.96	221.88	0.00	0.00	0.00
4,600.00	8.00	45.56	4,578.16	227.42	231.90	231.82	0.00	0.00	0.00
4,612.79	8.00	45.56	4,590.82	228.66	233.17	233.09	0.00	0.00	0.00
Begin 1.50°/100' Drop									
4,700.00	6.69	45.56	4,677.31	236.47	241.13	241.04	1.50	-1.50	0.00



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,800.00	5.19	45.56	4,776.77	243.72	248.52	248.43	1.50	-1.50	0.00
4,900.00	3.69	45.56	4,876.47	249.14	254.05	253.96	1.50	-1.50	0.00
5,000.00	2.19	45.56	4,976.34	252.73	257.71	257.62	1.50	-1.50	0.00
5,100.00	0.69	45.56	5,076.30	254.49	259.51	259.42	1.50	-1.50	0.00
5,146.12	0.00	0.00	5,122.42	254.69	259.71	259.62	1.50	-1.50	-98.78
Begin Vertical Hold									
5,200.00	0.00	0.00	5,176.30	254.69	259.71	259.62	0.00	0.00	0.00
5,300.00	0.00	0.00	5,276.30	254.69	259.71	259.62	0.00	0.00	0.00
5,400.00	0.00	0.00	5,376.30	254.69	259.71	259.62	0.00	0.00	0.00
5,500.00	0.00	0.00	5,476.30	254.69	259.71	259.62	0.00	0.00	0.00
5,600.00	0.00	0.00	5,576.30	254.69	259.71	259.62	0.00	0.00	0.00
5,700.00	0.00	0.00	5,676.30	254.69	259.71	259.62	0.00	0.00	0.00
5,800.00	0.00	0.00	5,776.30	254.69	259.71	259.62	0.00	0.00	0.00
5,900.00	0.00	0.00	5,876.30	254.69	259.71	259.62	0.00	0.00	0.00
6,000.00	0.00	0.00	5,976.30	254.69	259.71	259.62	0.00	0.00	0.00
6,100.00	0.00	0.00	6,076.30	254.69	259.71	259.62	0.00	0.00	0.00
6,200.00	0.00	0.00	6,176.30	254.69	259.71	259.62	0.00	0.00	0.00
6,300.00	0.00	0.00	6,276.30	254.69	259.71	259.62	0.00	0.00	0.00
6,400.00	0.00	0.00	6,376.30	254.69	259.71	259.62	0.00	0.00	0.00
6,500.00	0.00	0.00	6,476.30	254.69	259.71	259.62	0.00	0.00	0.00
6,600.00	0.00	0.00	6,576.30	254.69	259.71	259.62	0.00	0.00	0.00
6,700.00	0.00	0.00	6,676.30	254.69	259.71	259.62	0.00	0.00	0.00
6,800.00	0.00	0.00	6,776.30	254.69	259.71	259.62	0.00	0.00	0.00
6,900.00	0.00	0.00	6,876.30	254.69	259.71	259.62	0.00	0.00	0.00
7,000.00	0.00	0.00	6,976.30	254.69	259.71	259.62	0.00	0.00	0.00
7,100.00	0.00	0.00	7,076.30	254.69	259.71	259.62	0.00	0.00	0.00
7,200.00	0.00	0.00	7,176.30	254.69	259.71	259.62	0.00	0.00	0.00
7,300.00	0.00	0.00	7,276.30	254.69	259.71	259.62	0.00	0.00	0.00
7,400.00	0.00	0.00	7,376.30	254.69	259.71	259.62	0.00	0.00	0.00
7,500.00	0.00	0.00	7,476.30	254.69	259.71	259.62	0.00	0.00	0.00
7,600.00	0.00	0.00	7,576.30	254.69	259.71	259.62	0.00	0.00	0.00
7,700.00	0.00	0.00	7,676.30	254.69	259.71	259.62	0.00	0.00	0.00
7,800.00	0.00	0.00	7,776.30	254.69	259.71	259.62	0.00	0.00	0.00
7,900.00	0.00	0.00	7,876.30	254.69	259.71	259.62	0.00	0.00	0.00
8,000.00	0.00	0.00	7,976.30	254.69	259.71	259.62	0.00	0.00	0.00
8,100.00	0.00	0.00	8,076.30	254.69	259.71	259.62	0.00	0.00	0.00
8,200.00	0.00	0.00	8,176.30	254.69	259.71	259.62	0.00	0.00	0.00
8,300.00	0.00	0.00	8,276.30	254.69	259.71	259.62	0.00	0.00	0.00
8,400.00	0.00	0.00	8,376.30	254.69	259.71	259.62	0.00	0.00	0.00
8,500.00	0.00	0.00	8,476.30	254.69	259.71	259.62	0.00	0.00	0.00
8,600.00	0.00	0.00	8,576.30	254.69	259.71	259.62	0.00	0.00	0.00
8,700.00	0.00	0.00	8,676.30	254.69	259.71	259.62	0.00	0.00	0.00
8,800.00	0.00	0.00	8,776.30	254.69	259.71	259.62	0.00	0.00	0.00
8,900.00	0.00	0.00	8,876.30	254.69	259.71	259.62	0.00	0.00	0.00
9,000.00	0.00	0.00	8,976.30	254.69	259.71	259.62	0.00	0.00	0.00
9,100.00	0.00	0.00	9,076.30	254.69	259.71	259.62	0.00	0.00	0.00
9,200.00	0.00	0.00	9,176.30	254.69	259.71	259.62	0.00	0.00	0.00
9,300.00	0.00	0.00	9,276.30	254.69	259.71	259.62	0.00	0.00	0.00
9,400.00	0.00	0.00	9,376.30	254.69	259.71	259.62	0.00	0.00	0.00
9,500.00	0.00	0.00	9,476.30	254.69	259.71	259.62	0.00	0.00	0.00
9,600.00	0.00	0.00	9,576.30	254.69	259.71	259.62	0.00	0.00	0.00
9,700.00	0.00	0.00	9,676.30	254.69	259.71	259.62	0.00	0.00	0.00
9,800.00	0.00	0.00	9,776.30	254.69	259.71	259.62	0.00	0.00	0.00
9,900.00	0.00	0.00	9,876.30	254.69	259.71	259.62	0.00	0.00	0.00



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
9,994.94	0.00	0.00	9,971.24	254.69	259.71	259.62	0.00	0.00	0.00
Begin 10.00°/100' Build									
10,000.00	0.51	100.65	9,976.30	254.68	259.73	259.64	10.00	10.00	0.00
10,050.00	5.51	100.65	10,026.22	254.20	262.30	262.22	10.00	10.00	0.00
10,100.00	10.51	100.65	10,075.71	252.91	269.15	269.06	10.00	10.00	0.00
10,150.00	15.51	100.65	10,124.41	250.84	280.20	280.11	10.00	10.00	0.00
10,200.00	20.51	100.65	10,171.95	247.98	295.39	295.30	10.00	10.00	0.00
10,250.00	25.51	100.65	10,217.96	244.37	314.59	314.50	10.00	10.00	0.00
10,300.00	30.51	100.65	10,262.09	240.03	337.65	337.57	10.00	10.00	0.00
10,350.00	35.51	100.65	10,304.01	235.00	364.41	364.33	10.00	10.00	0.00
10,400.00	40.51	100.65	10,343.39	229.31	394.66	394.58	10.00	10.00	0.00
10,450.00	45.51	100.65	10,379.94	223.01	428.16	428.09	10.00	10.00	0.00
10,500.00	50.51	100.65	10,413.39	216.15	464.67	464.60	10.00	10.00	0.00
10,550.00	55.51	100.65	10,443.46	208.77	503.91	503.83	10.00	10.00	0.00
10,600.00	60.51	100.65	10,469.95	200.93	545.57	545.50	10.00	10.00	0.00
10,650.00	65.51	100.65	10,492.63	192.70	589.34	589.27	10.00	10.00	0.00
10,700.00	70.51	100.65	10,511.35	184.14	634.89	634.82	10.00	10.00	0.00
10,750.00	75.51	100.65	10,525.96	175.30	681.87	681.81	10.00	10.00	0.00
10,794.94	80.00	100.65	10,535.49	167.19	725.02	724.96	10.00	10.00	0.00
Begin 6.00°/100' Build									
10,800.00	80.30	100.65	10,536.36	166.27	729.92	729.86	6.00	6.00	0.00
10,850.00	83.30	100.65	10,543.49	157.12	778.55	778.49	6.00	6.00	0.00
10,900.00	86.30	100.65	10,548.01	147.92	827.48	827.43	6.00	6.00	0.00
10,950.00	89.30	100.65	10,549.93	138.69	876.58	876.53	6.00	6.00	0.00
10,961.61	90.00	100.65	10,550.00	136.54	887.98	887.93	6.00	6.00	0.00
Begin 90° Lateral; Begin 3.00°/100' Turn									
11,000.00	90.00	99.50	10,550.00	129.83	925.78	925.74	3.00	0.00	-3.00
11,100.00	90.00	96.50	10,550.00	115.91	1,024.80	1,024.76	3.00	0.00	-3.00
11,200.00	90.00	93.50	10,550.00	107.20	1,124.41	1,124.37	3.00	0.00	-3.00
11,300.00	90.00	90.50	10,550.00	103.72	1,224.33	1,224.30	3.00	0.00	-3.00
11,316.07	90.00	90.02	10,550.00	103.64	1,240.41	1,240.37	3.00	0.00	-3.00
Hold 90.02° Azm									
11,400.00	90.00	90.02	10,550.00	103.62	1,324.33	1,324.30	0.00	0.00	0.00
11,500.00	90.00	90.02	10,550.00	103.59	1,424.33	1,424.30	0.00	0.00	0.00
11,600.00	90.00	90.02	10,550.00	103.57	1,524.33	1,524.30	0.00	0.00	0.00
11,700.00	90.00	90.02	10,550.00	103.54	1,624.33	1,624.30	0.00	0.00	0.00
11,800.00	90.00	90.02	10,550.00	103.51	1,724.33	1,724.30	0.00	0.00	0.00
11,900.00	90.00	90.02	10,550.00	103.48	1,824.33	1,824.30	0.00	0.00	0.00
12,000.00	90.00	90.02	10,550.00	103.45	1,924.33	1,924.30	0.00	0.00	0.00
12,100.00	90.00	90.02	10,550.00	103.43	2,024.33	2,024.30	0.00	0.00	0.00
12,200.00	90.00	90.02	10,550.00	103.40	2,124.33	2,124.30	0.00	0.00	0.00
12,300.00	90.00	90.02	10,550.00	103.37	2,224.33	2,224.30	0.00	0.00	0.00
12,400.00	90.00	90.02	10,550.00	103.34	2,324.33	2,324.30	0.00	0.00	0.00
12,500.00	90.00	90.02	10,550.00	103.31	2,424.33	2,424.30	0.00	0.00	0.00
12,600.00	90.00	90.02	10,550.00	103.29	2,524.33	2,524.30	0.00	0.00	0.00
12,700.00	90.00	90.02	10,550.00	103.26	2,624.33	2,624.30	0.00	0.00	0.00
12,800.00	90.00	90.02	10,550.00	103.23	2,724.33	2,724.30	0.00	0.00	0.00
12,900.00	90.00	90.02	10,550.00	103.20	2,824.33	2,824.30	0.00	0.00	0.00
13,000.00	90.00	90.02	10,550.00	103.17	2,924.33	2,924.30	0.00	0.00	0.00
13,100.00	90.00	90.02	10,550.00	103.15	3,024.33	3,024.30	0.00	0.00	0.00
13,200.00	90.00	90.02	10,550.00	103.12	3,124.33	3,124.30	0.00	0.00	0.00
13,300.00	90.00	90.02	10,550.00	103.09	3,224.33	3,224.30	0.00	0.00	0.00
13,400.00	90.00	90.02	10,550.00	103.06	3,324.33	3,324.30	0.00	0.00	0.00



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
13,500.00	90.00	90.02	10,550.00	103.03	3,424.33	3,424.30	0.00	0.00	0.00
13,600.00	90.00	90.02	10,550.00	103.00	3,524.33	3,524.30	0.00	0.00	0.00
13,700.00	90.00	90.02	10,550.00	102.98	3,624.33	3,624.30	0.00	0.00	0.00
13,800.00	90.00	90.02	10,550.00	102.95	3,724.33	3,724.30	0.00	0.00	0.00
13,900.00	90.00	90.02	10,550.00	102.92	3,824.33	3,824.30	0.00	0.00	0.00
14,000.00	90.00	90.02	10,550.00	102.89	3,924.33	3,924.30	0.00	0.00	0.00
14,100.00	90.00	90.02	10,550.00	102.86	4,024.33	4,024.30	0.00	0.00	0.00
14,200.00	90.00	90.02	10,550.00	102.84	4,124.33	4,124.30	0.00	0.00	0.00
14,300.00	90.00	90.02	10,550.00	102.81	4,224.33	4,224.30	0.00	0.00	0.00
14,400.00	90.00	90.02	10,550.00	102.78	4,324.33	4,324.30	0.00	0.00	0.00
14,500.00	90.00	90.02	10,550.00	102.75	4,424.33	4,424.30	0.00	0.00	0.00
14,600.00	90.00	90.02	10,550.00	102.72	4,524.33	4,524.30	0.00	0.00	0.00
14,700.00	90.00	90.02	10,550.00	102.70	4,624.33	4,624.30	0.00	0.00	0.00
14,800.00	90.00	90.02	10,550.00	102.67	4,724.33	4,724.30	0.00	0.00	0.00
14,900.00	90.00	90.02	10,550.00	102.64	4,824.33	4,824.30	0.00	0.00	0.00
15,000.00	90.00	90.02	10,550.00	102.61	4,924.33	4,924.30	0.00	0.00	0.00
15,100.00	90.00	90.02	10,550.00	102.58	5,024.33	5,024.30	0.00	0.00	0.00
15,200.00	90.00	90.02	10,550.00	102.56	5,124.33	5,124.30	0.00	0.00	0.00
15,300.00	90.00	90.02	10,550.00	102.53	5,224.33	5,224.30	0.00	0.00	0.00
15,400.00	90.00	90.02	10,550.00	102.50	5,324.33	5,324.30	0.00	0.00	0.00
15,437.85	90.00	90.02	10,550.00	102.49	5,362.18	5,362.14	0.00	0.00	0.00
PBHL									

Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
VP - Zach McCormick - plan hits target center - Point	0.00	0.00	5,122.42	254.69	259.71	443,506.77	593,212.90	32° 13' 8.248 N	104° 1' 54.925 W
PBHL - Zach McCormick - plan hits target center - Point	0.00	0.00	10,550.00	102.49	5,362.18	443,354.57	598,315.37	32° 13' 6.597 N	104° 0' 55.534 W

Casing Points

Measured Depth (usft)	Vertical Depth (usft)	Name	Casing Diameter (")	Hole Diameter (")
625.00	625.00	Surface Casing	10-3/4	12-1/4
2,800.00	2,795.67	9 5/8"	9-5/8	12-1/4
10,794.94	10,535.49	7"	7	7-1/2



Planning Report

Database: EDM 5000.1 Conroe DB
Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature



Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
810.09	810.09	Top of Salt		0.00	90.02
2,686.31	2,683.09	Lamar/Base of Salt		0.00	90.02
2,736.80	2,733.09	Bell Canyon		0.00	90.02
3,675.94	3,663.09	Cherry Canyon		0.00	90.02
4,911.64	4,888.09	Brushy Canyon		0.00	90.02
6,490.79	6,467.09	Bone Spring Lime		0.00	90.02
7,432.79	7,409.09	1st Bone Spring Sand		0.00	90.02
7,745.79	7,722.09	2nd Bone Spring Carbonate		0.00	90.02
8,344.79	8,321.09	2nd Bone Spring Sand		0.00	90.02
8,583.79	8,560.09	3rd Bone Spring Carbonate		0.00	90.02
9,299.79	9,276.09	3rd Bone Spring Sand		0.00	90.02
9,657.79	9,634.09	Wolfcamp		0.00	90.02
9,689.79	9,666.09	Wolfcamp X		0.00	90.02
9,754.79	9,731.09	Wolfcamp Y		0.00	90.02
10,376.34	10,325.09	Wolfcamp B		0.00	90.02

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
2,000.00	2,000.00	0.00	0.00	KOP, 1.50°/100' Build
2,533.34	2,531.60	26.03	26.54	Begin 8.00° Tangent
4,612.79	4,590.82	228.66	233.17	Begin 1.50°/100' Drop
5,146.12	5,122.42	254.69	259.71	Begin Vertical Hold
9,994.94	9,971.24	254.69	259.71	Begin 10.00°/100' Build
10,794.94	10,535.49	167.19	725.02	Begin 6.00°/100' Build
10,961.61	10,550.00	136.54	887.98	Begin 90° Lateral; Begin 3.00°/100' Turn
11,316.07	10,550.00	103.64	1,240.41	Hold 90.02° Azm
15,437.85	10,550.00	102.49	5,362.18	PBHL

ANNOTATIONS								
MD	Inc	Azi	TVD	+N/-S	+E/-W	VSect	Departure	Annotation
2000.00	0.00	0.00	2000.00	0.00	0.00	0.00	0.00	KOP, 1.50°/100' Build
2533.34	8.00	45.56	2531.60	26.03	26.54	26.03	37.17	Begin 8.00° Tangent
4612.79	8.00	45.56	4590.82	228.66	233.17	228.66	326.58	Begin 1.50°/100' Drop
5146.12	0.00	0.00	5122.42	254.69	259.71	254.69	363.75	Begin Vertical Hold
9994.94	0.00	0.00	9971.24	254.69	259.71	254.69	363.75	Begin 10.00°/100' Build
10794.94	80.00	100.65	10535.49	167.19	725.02	167.19	837.21	Begin 6.00°/100' Build
10961.61	90.00	100.65	10550.00	136.54	887.98	136.54	1003.04	Begin 90° Lateral; Begin 3.00°/100' Turn
11316.07	90.00	90.02	10550.00	103.64	1240.41	103.64	1357.50	Hold 90.02° Azm
15437.85	90.00	90.02	10550.00	102.49	5362.18	102.49	5479.28	PBHL

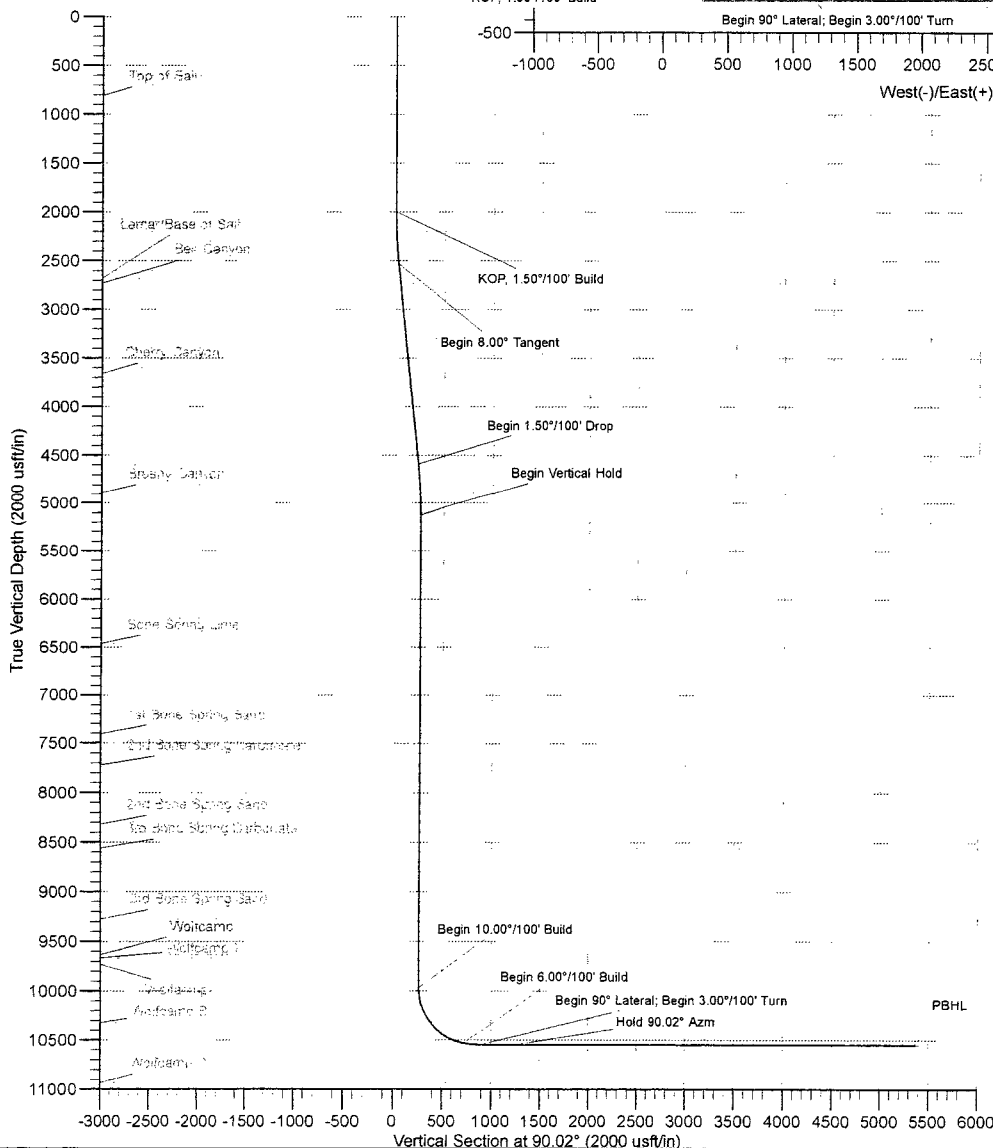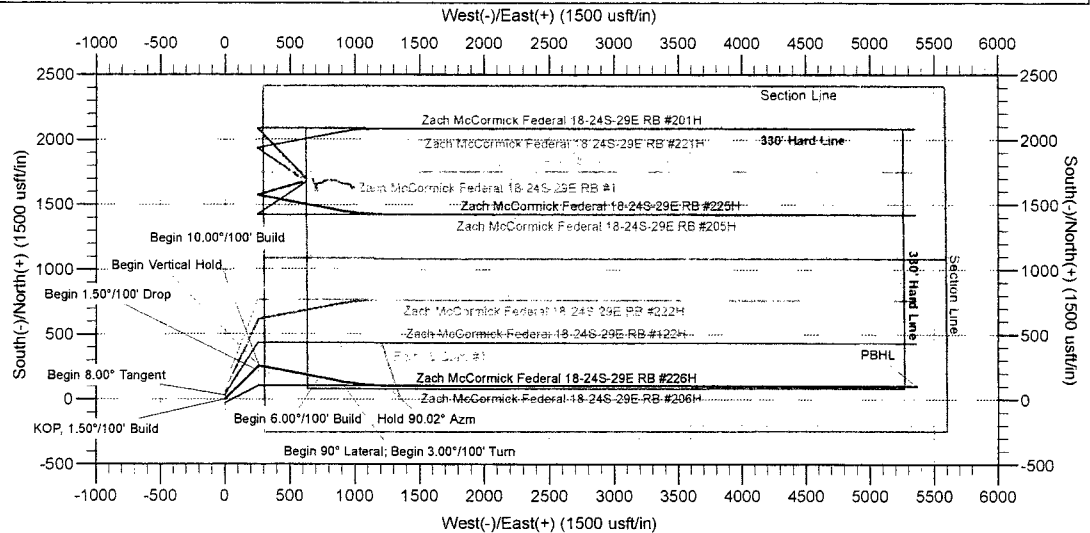


	Azimuths to Grid North: True North: -0.16° Magnetic North: 7.16° Magnetic Field Strength: 48065.6snT Dip Angle: 59.99° Date: 6/22/2016 Model: BGGM2016
US State Plane 1927 (Exact solution) New Mexico East 3001	
Created By: HLH Date: 13:18, June 24 2016 Plan: Design #1	



Company: Matador Resources
Site: Zach McCormick Federal 18-24S-29E RB
Well: #226H
Project: Eddy County, New Mexico (NAD 27)
Rig: Patterson 297

MS Energy Services.
WWW.MSENERGYSERVICES.COM



Azimuths to Grid North
True North: -0.16°
Magnetic North: 7.16°


Magnetic Field
Strength: 48065.6snT
Dip Angle: 59.99°
Date: 6/22/2016
Model: BGGM2016

US State Plane 1927 (Exact solution)
New Mexico East 3001

Created By: HLH
Date: 13:24, June 24 2016
Plan: Design #1

ANNOTATIONS

MD	Inc	Azi	TVD	+N/-S	+E/-W	Vsect	Departure	Annotation
2000.00	0.00	0.00	2000.00	0.00	0.00	0.00	0.00	KOP, 1.50°/100' Build
2533.34	8.00	45.56	2531.60	26.03	26.54	26.03	37.17	Begin 8.00° Tangent
4612.79	8.00	45.56	4590.82	228.66	233.17	228.66	326.58	Begin 1.50°/100' Drop
5146.12	0.00	0.00	5122.42	254.69	259.71	254.69	363.75	Begin Vertical Hold
9994.94	0.00	0.00	9971.24	254.69	259.71	254.69	363.75	Begin 10.00°/100' Build
10784.94	80.00	100.65	10535.49	167.19	725.02	167.19	837.21	Begin 6.00°/100' Build
10961.61	90.00	100.65	10550.00	136.54	887.98	136.54	1003.04	Begin 90° Lateral; Begin 3.00°/100' Turn
11316.07	90.00	90.02	10550.00	103.64	1240.41	103.64	1357.50	Hold 90.02° Azm
15437.85	90.00	90.02	10550.00	102.49	5362.18	102.49	5479.28	PBHL

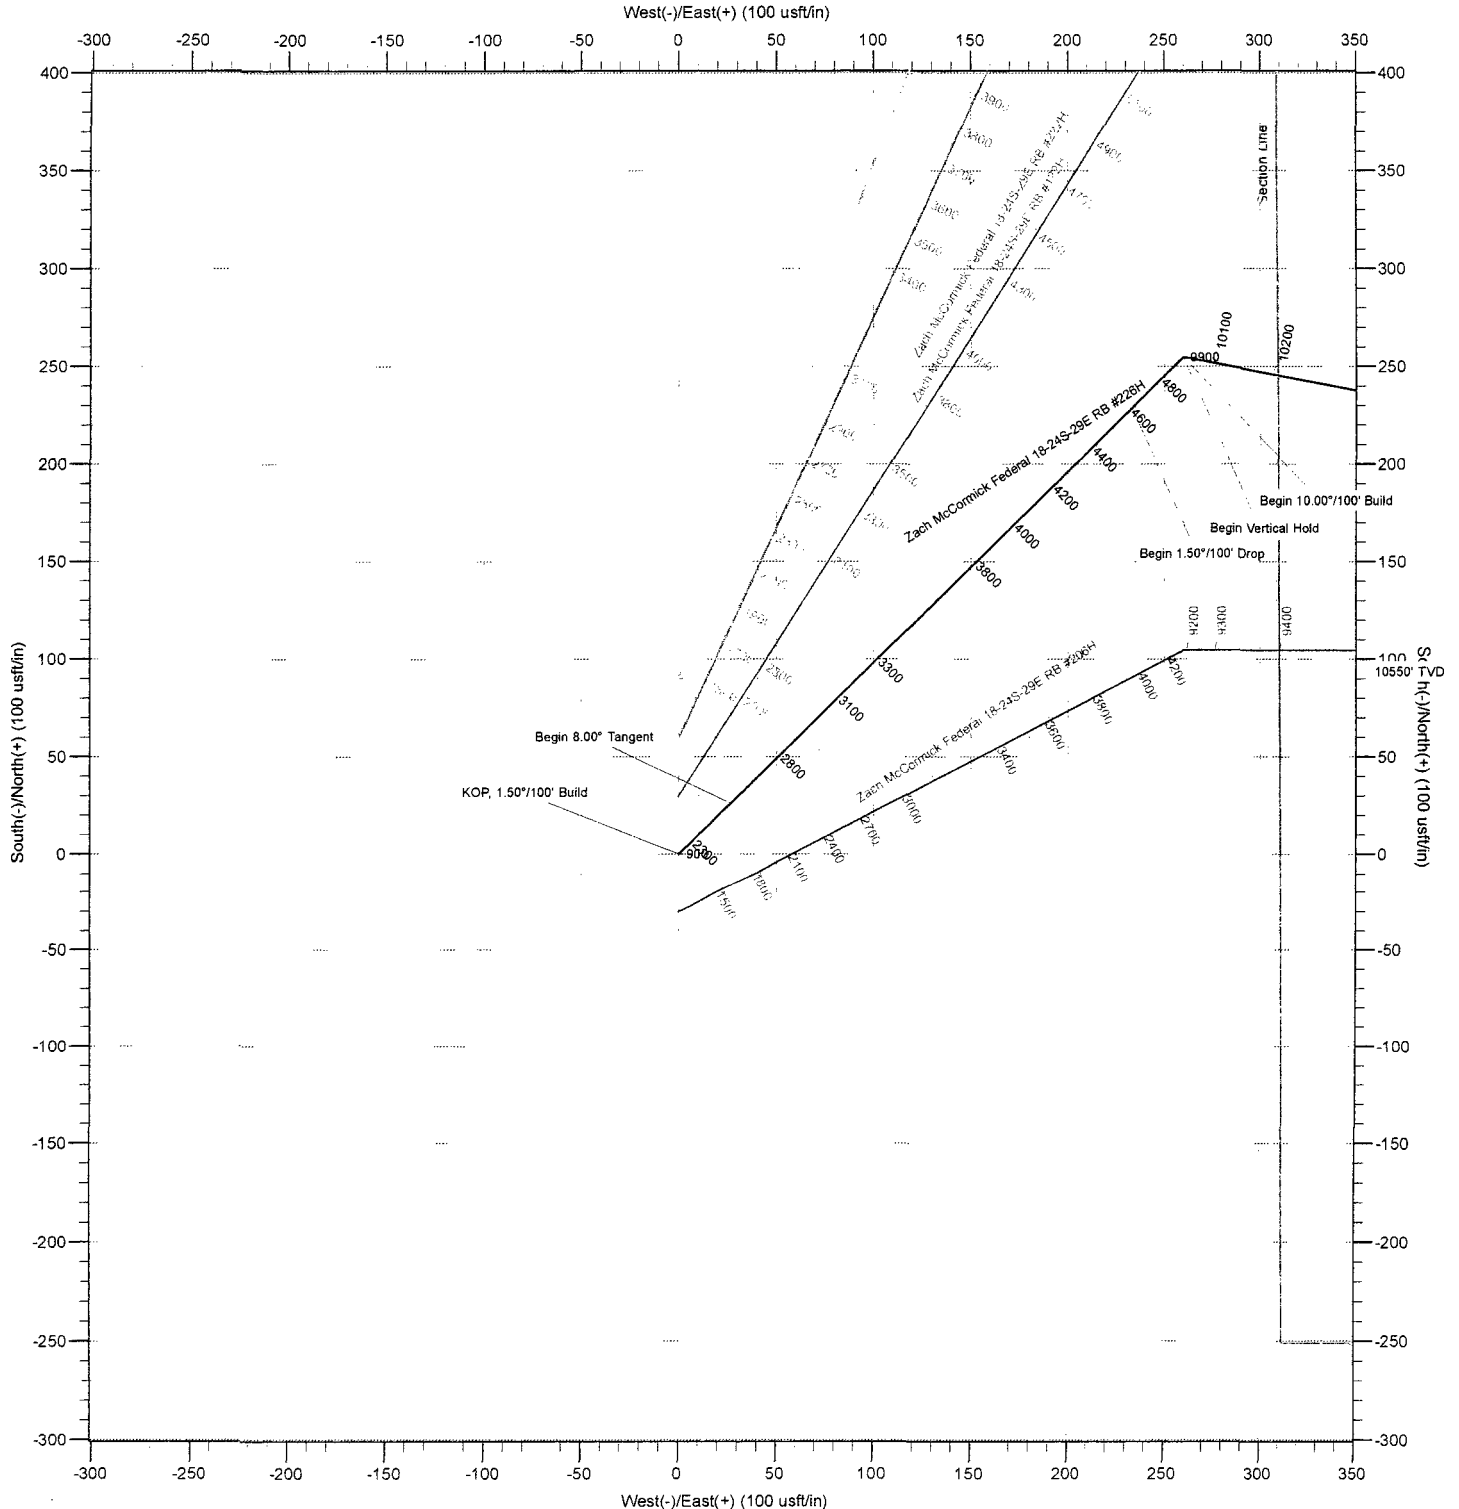



Matador Resources

**Eddy County, New Mexico (NAD 27)
Zach McCormick Federal 18-24S-29E
#226H**

**Wellbore #1
Design #1**

Anticollision Report

24 June, 2016



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Reference	Design #1
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria
Interpolation Method:	MD + Stations Interval 100.00usft
Depth Range:	Unlimited
Results Limited by:	Maximum center-center distance of 10,000.00 u
Warning Levels Evaluated at:	2.00 Sigma
Error Model:	ISCWSA
Scan Method:	Closest Approach 3D
Error Surface:	Elliptical Conic
Casing Method:	Not applied

Survey Tool Program **Date** 6/24/2016

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	15,437.85	Design #1 (Wellbore #1)	MWD	OWSG MWD - Standard

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Fort 18 Com						
#1 - 226H - Surveys	11,394.73	10,549.54	0.32	-82.72	0.004	Level 1, CC, ES, SF
Zach McCormick Federal 18-24S-29E RB						
#1 - Wellbore #1 - Surveys	5,356.47	5,331.97	1,420.50	1,382.97	37.843	CC, ES
#1 - Wellbore #1 - Surveys	11,400.00	10,608.36	1,561.86	1,479.11	18.875	SF
#121H - Wellbore #1 - Design #1	5,076.96	5,055.86	1,497.72	1,460.58	40.328	CC
#121H - Wellbore #1 - Design #1	8,000.00	7,993.00	1,500.28	1,442.94	26.164	ES
#121H - Wellbore #1 - Design #1	15,438.79	13,216.38	2,757.04	2,590.80	16.585	SF
#122H - Wellbore #1 - Design #1	1,000.00	1,002.29	29.90	23.18	4.453	CC, ES
#122H - Wellbore #1 - Design #1	7,900.00	7,905.38	180.27	123.64	3.183	SF
#201H - Wellbore #1 - Design #1	4,650.82	4,485.45	1,788.24	1,754.77	53.432	CC
#201H - Wellbore #1 - Design #1	4,700.00	4,533.78	1,788.50	1,754.65	52.845	ES
#201H - Wellbore #1 - Design #1	15,438.79	14,623.75	2,136.91	1,898.21	8.952	SF
#202H - Wellbore #1 - Design #1	1,000.00	1,001.41	89.87	83.16	13.389	CC, ES
#202H - Wellbore #1 - Design #1	15,438.79	14,666.94	1,042.06	862.60	5.807	SF
#205H - Wellbore #1 - Design #1	9,274.82	9,275.45	1,170.00	1,103.98	17.724	CC
#205H - Wellbore #1 - Design #1	9,400.00	9,393.77	1,170.41	1,103.65	17.532	ES
#205H - Wellbore #1 - Design #1	15,438.79	14,618.22	1,545.36	1,323.72	6.972	SF
#206H - Wellbore #1 - Design #1	1,331.50	1,331.85	26.63	17.56	2.937	CC
#206H - Wellbore #1 - Design #1	1,400.00	1,400.19	27.06	17.50	2.831	ES
#206H - Wellbore #1 - Design #1	9,300.00	9,289.72	150.42	84.04	2.266	SF
#221H - Wellbore #1 - Design #1	4,750.81	4,622.05	1,668.77	1,634.56	48.777	CC
#221H - Wellbore #1 - Design #1	10,000.00	9,998.39	1,680.03	1,608.47	23.477	ES
#221H - Wellbore #1 - Design #1	15,438.79	15,431.68	1,980.05	1,724.98	7.763	SF
#222H - Wellbore #1 - Design #1	1,000.00	1,001.73	59.93	53.22	8.927	CC, ES
#222H - Wellbore #1 - Design #1	15,438.79	15,465.63	660.00	400.12	2.540	SF
#225H - Wellbore #1 - Design #1	10,730.92	10,970.18	1,296.53	1,218.37	16.588	CC
#225H - Wellbore #1 - Design #1	15,438.79	15,430.62	1,320.04	1,064.87	5.173	ES, SF

Offset Design												Fort 18 Com - #1 - 226H - Surveys		Offset Site Error:		0.00 usft	
Survey Program: 111-GYRO-NS														Offset Well Error:		0.00 usft	
Reference		Offset		Semi Major Axis				Distance									
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning				

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Fort 18 Com - #1 - 226H - Surveys													Offset Site Error:	0.00 usft
Survey Program: 111-GYRO-NS													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)				Between Centres (usft)	Between Ellipses (usft)	
0.00	0.00	0.00	0.00	0.00	0.00	70.14	434.77	1,203.86	1,279.98					
100.00	100.00	93.12	93.11	0.13	0.14	70.17	434.13	1,204.08	1,279.95	1,279.69	0.27	4,788.246		
200.00	200.00	193.16	193.15	0.49	0.47	70.25	432.43	1,204.67	1,279.94	1,278.98	0.95	1,345.006		
300.00	300.00	293.17	293.13	0.84	0.83	70.35	430.50	1,205.35	1,279.92	1,278.24	1.68	763.887		
400.00	400.00	393.16	393.09	1.20	1.19	70.45	428.39	1,206.08	1,279.90	1,277.51	2.40	534.222		
500.00	500.00	493.14	493.05	1.56	1.55	70.55	426.14	1,206.86	1,279.89	1,276.77	3.12	410.822		
600.00	600.00	593.11	592.99	1.92	1.92	70.67	423.75	1,207.70	1,279.88	1,276.05	3.84	333.735		
700.00	700.00	693.08	692.92	2.28	2.26	70.78	421.28	1,208.56	1,279.88	1,275.34	4.54	282.009		
714.79	714.79	707.87	707.70	2.33	2.31	70.80	420.91	1,208.69	1,279.88	1,275.23	4.64	275.609		
800.00	800.00	793.03	792.83	2.64	2.62	70.91	418.49	1,209.53	1,279.88	1,274.63	5.25	243.686		
900.00	900.00	892.93	892.66	3.00	2.97	71.08	415.04	1,210.73	1,279.89	1,273.93	5.97	214.531		
1,000.00	1,000.00	992.78	992.41	3.35	3.33	71.27	410.93	1,212.16	1,279.92	1,273.24	6.68	191.609		
1,100.00	1,100.00	1,092.80	1,092.34	3.71	3.68	71.46	406.89	1,213.57	1,279.96	1,272.58	7.39	173.259		
1,200.00	1,200.00	1,192.79	1,192.27	4.07	4.03	71.63	403.45	1,214.77	1,280.01	1,271.92	8.10	158.097		
1,300.00	1,300.00	1,292.57	1,291.97	4.43	4.38	71.80	399.80	1,216.04	1,280.07	1,271.27	8.81	145.363		
1,400.00	1,400.00	1,392.36	1,391.67	4.79	4.73	72.00	395.60	1,217.50	1,280.16	1,270.64	9.52	134.512		
1,500.00	1,500.00	1,492.33	1,491.52	5.15	5.08	72.21	391.21	1,219.03	1,280.27	1,270.04	10.23	125.167		
1,600.00	1,600.00	1,592.44	1,591.55	5.50	5.43	72.39	387.34	1,220.38	1,280.37	1,269.43	10.94	117.046		
1,700.00	1,700.00	1,692.51	1,691.55	5.86	5.78	72.55	383.89	1,221.58	1,280.48	1,268.83	11.65	109.943		
1,800.00	1,800.00	1,792.44	1,791.42	6.22	6.13	72.71	380.60	1,222.72	1,280.59	1,268.24	12.35	103.661		
1,900.00	1,900.00	1,892.69	1,891.62	6.58	6.48	72.85	377.55	1,223.79	1,280.70	1,267.64	13.06	98.056		
2,000.00	2,000.00	1,992.89	1,991.79	6.94	6.83	72.96	375.24	1,224.59	1,280.79	1,267.02	13.77	93.028		
2,100.00	2,099.99	2,092.54	2,091.41	7.29	7.18	27.56	372.79	1,225.44	1,279.73	1,265.26	14.47	88.444		
2,200.00	2,199.91	2,191.83	2,190.65	7.65	7.52	27.81	369.68	1,226.53	1,276.40	1,261.23	15.17	84.138		
2,300.00	2,299.69	2,290.77	2,289.48	8.00	7.87	28.18	365.58	1,227.96	1,270.82	1,254.95	15.87	80.070		
2,400.00	2,399.27	2,389.53	2,388.11	8.36	8.22	28.66	360.68	1,229.66	1,263.05	1,246.48	16.57	76.207		
2,500.00	2,498.57	2,488.08	2,486.49	8.72	8.57	29.25	355.28	1,231.54	1,253.11	1,235.83	17.28	72.525		
2,533.34	2,531.60	2,529.18	2,519.17	8.84	8.72	29.47	353.42	1,232.19	1,249.32	1,231.78	17.54	71.215		
2,600.00	2,597.62	2,586.47	2,584.70	9.09	8.92	29.87	349.63	1,233.51	1,241.54	1,223.56	17.98	69.047		
2,700.00	2,696.65	2,685.46	2,683.52	9.46	9.27	30.46	344.09	1,235.44	1,229.96	1,211.27	18.69	65.800		
2,800.00	2,795.67	2,784.74	2,782.65	9.83	9.63	31.04	339.11	1,237.17	1,218.46	1,199.05	19.41	62.777		
2,900.00	2,894.70	2,884.15	2,881.96	10.21	9.99	31.60	334.70	1,238.71	1,207.01	1,186.88	20.13	59.965		
3,000.00	2,993.73	2,983.78	2,981.51	10.59	10.34	32.14	330.90	1,240.03	1,195.61	1,174.77	20.84	57.378		
3,100.00	3,092.75	3,083.01	3,080.67	10.97	10.69	32.67	327.65	1,241.16	1,184.24	1,162.70	21.55	54.960		
3,200.00	3,191.78	3,182.06	3,179.67	11.36	11.03	33.19	324.58	1,242.23	1,172.95	1,150.69	22.26	52.696		
3,300.00	3,290.81	3,281.14	3,278.70	11.74	11.38	33.72	321.68	1,243.24	1,161.74	1,138.76	22.97	50.572		
3,400.00	3,389.83	3,379.50	3,377.01	12.13	11.72	34.25	318.72	1,244.27	1,150.63	1,126.95	23.68	48.581		
3,500.00	3,488.86	3,477.97	3,475.42	12.52	12.07	34.81	315.60	1,245.36	1,139.65	1,115.26	24.40	46.709		
3,600.00	3,587.89	3,577.03	3,574.43	12.92	12.41	35.38	312.41	1,246.47	1,128.80	1,103.68	25.12	44.941		
3,700.00	3,686.91	3,676.45	3,673.80	13.31	12.76	35.95	309.48	1,247.49	1,118.00	1,092.17	25.84	43.271		
3,800.00	3,785.94	3,775.92	3,773.23	13.71	13.11	36.51	306.84	1,248.41	1,107.26	1,080.70	26.56	41.690		
3,900.00	3,884.97	3,874.83	3,872.11	14.11	13.45	37.08	304.40	1,249.26	1,096.59	1,069.31	27.28	40.198		
4,000.00	3,984.00	3,973.67	3,970.91	14.50	13.80	37.65	301.95	1,250.11	1,086.03	1,058.03	28.00	38.785		
4,100.00	4,083.02	4,072.51	4,069.72	14.90	14.14	38.23	299.51	1,250.96	1,075.57	1,046.85	28.73	37.443		
4,200.00	4,182.05	4,171.34	4,168.52	15.30	14.49	38.83	297.07	1,251.81	1,065.24	1,035.78	29.45	36.168		
4,300.00	4,281.08	4,270.18	4,267.32	15.71	14.83	39.44	294.62	1,252.66	1,055.02	1,024.84	30.18	34.957		
4,400.00	4,380.10	4,369.02	4,366.13	16.11	15.18	40.06	292.18	1,253.51	1,044.92	1,014.01	30.91	33.804		
4,500.00	4,479.13	4,467.86	4,464.93	16.51	15.53	40.69	289.74	1,254.37	1,034.94	1,003.30	31.64	32.708		
4,600.00	4,578.16	4,566.76	4,563.81	16.91	15.87	41.33	287.30	1,255.22	1,025.10	992.72	32.38	31.663		
4,612.79	4,590.82	4,579.43	4,576.47	16.97	15.92	41.42	286.99	1,255.32	1,023.85	991.38	32.47	31.533		
4,700.00	4,677.31	4,665.99	4,663.00	17.31	16.22	41.87	284.91	1,256.05	1,016.10	982.99	33.11	30.691		
4,800.00	4,776.77	4,765.56	4,762.54	17.70	16.57	42.33	282.59	1,256.86	1,009.11	975.28	33.83	29.825		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Fort 18 Com - #1 - 226H - Surveys													Offset Site Error:	0.00 usft
Survey Program: 111-GYRO-NS													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,900.00	4,876.47	4,865.40	4,862.35	18.08	16.92	42.70	280.34	1,257.64	1,004.10	969.54	34.55	29.058		
5,000.00	4,976.34	4,965.45	4,962.37	18.44	17.27	43.00	278.17	1,258.39	1,001.03	965.76	35.27	28.383		
5,100.00	5,076.30	5,065.63	5,062.53	18.79	17.62	43.20	276.08	1,259.12	999.87	963.89	35.97	27.794		
5,111.19	5,087.50	5,076.85	5,073.74	18.83	17.66	43.22	275.85	1,259.20	999.86	963.80	36.05	27.733		
5,146.12	5,122.42	5,111.86	5,108.75	18.95	17.78	88.83	275.14	1,259.45	999.97	963.67	36.30	27.550		
5,200.00	5,176.30	5,165.87	5,162.75	19.13	17.97	88.89	274.07	1,259.82	1,000.32	963.65	36.67	27.278		
5,300.00	5,276.30	5,266.13	5,262.98	19.47	18.31	89.00	272.14	1,260.49	1,000.96	963.59	37.37	26.786		
5,400.00	5,376.30	5,366.38	5,363.22	19.81	18.66	89.11	270.30	1,261.13	1,001.57	963.50	38.07	26.312		
5,500.00	5,476.30	5,466.64	5,463.46	20.16	19.01	89.21	268.54	1,261.75	1,002.15	963.39	38.76	25.853		
5,600.00	5,576.30	5,566.91	5,563.71	20.50	19.36	89.30	266.86	1,262.33	1,002.71	963.25	39.46	25.411		
5,700.00	5,676.30	5,666.84	5,663.63	20.84	19.71	89.40	265.21	1,262.91	1,003.27	963.11	40.16	24.984		
5,800.00	5,776.30	5,766.82	5,763.59	21.18	20.06	89.49	263.56	1,263.48	1,003.83	962.97	40.85	24.571		
5,900.00	5,876.30	5,866.81	5,863.56	21.53	20.41	89.59	261.92	1,264.05	1,004.39	962.84	41.55	24.172		
6,000.00	5,976.30	5,966.79	5,963.53	21.87	20.75	89.68	260.27	1,264.63	1,004.95	962.70	42.25	23.786		
6,100.00	6,076.30	6,066.78	6,063.50	22.22	21.10	89.78	258.62	1,265.20	1,005.52	962.57	42.95	23.413		
6,200.00	6,176.30	6,166.76	6,163.47	22.56	21.45	89.87	256.97	1,265.78	1,006.09	962.44	43.65	23.051		
6,300.00	6,276.30	6,266.74	6,263.44	22.91	21.80	89.96	255.32	1,266.35	1,006.66	962.32	44.34	22.701		
6,400.00	6,376.30	6,366.73	6,363.41	23.25	22.14	90.06	253.68	1,266.92	1,007.23	962.19	45.04	22.362		
6,500.00	6,476.30	6,466.71	6,463.38	23.60	22.49	90.15	252.03	1,267.50	1,007.81	962.07	45.74	22.032		
6,600.00	6,576.30	6,566.70	6,563.35	23.95	22.84	90.24	250.38	1,268.07	1,008.39	961.95	46.44	21.713		
6,700.00	6,676.30	6,666.68	6,663.32	24.29	23.19	90.34	248.73	1,268.64	1,008.97	961.83	47.14	21.403		
6,800.00	6,776.30	6,766.67	6,763.29	24.64	23.54	90.43	247.09	1,269.22	1,009.56	961.72	47.84	21.102		
6,900.00	6,876.30	6,866.63	6,863.23	24.99	23.88	90.54	245.16	1,269.89	1,010.26	961.72	48.54	20.813		
7,000.00	6,976.30	6,966.82	6,963.39	25.34	24.23	90.68	242.75	1,270.73	1,011.14	961.90	49.24	20.536		
7,100.00	7,076.30	7,066.99	7,063.51	25.68	24.57	90.84	239.86	1,271.73	1,012.20	962.27	49.94	20.270		
7,200.00	7,176.30	7,166.92	7,163.47	26.03	24.92	91.03	236.50	1,272.91	1,013.45	962.82	50.64	20.015		
7,300.00	7,276.30	7,266.91	7,263.44	26.38	25.26	91.24	232.65	1,274.24	1,014.90	963.56	51.33	19.770		
7,400.00	7,376.30	7,366.93	7,363.44	26.73	25.60	91.49	228.19	1,275.80	1,016.61	964.58	52.03	19.540		
7,500.00	7,476.30	7,466.96	7,463.44	27.08	25.95	91.77	223.29	1,277.51	1,018.42	965.68	52.74	19.311		
7,600.00	7,576.30	7,566.98	7,563.44	27.43	26.30	91.99	219.27	1,278.91	1,019.96	966.52	53.44	19.086		
7,700.00	7,676.30	7,666.99	7,663.44	27.78	26.64	92.26	214.40	1,280.60	1,021.90	967.77	54.13	18.877		
7,800.00	7,776.30	7,766.99	7,763.44	28.13	26.99	92.54	209.27	1,282.39	1,023.88	969.04	54.84	18.669		
7,900.00	7,876.30	7,866.99	7,863.44	28.48	27.35	92.81	204.47	1,284.06	1,025.75	970.20	55.55	18.465		
8,000.00	7,976.30	7,966.99	7,963.44	28.83	27.70	93.06	199.87	1,285.66	1,027.61	971.36	56.25	18.268		
8,100.00	8,076.30	8,066.99	8,063.44	29.18	28.05	93.32	195.04	1,287.34	1,029.53	972.57	56.96	18.073		
8,200.00	8,176.30	8,166.99	8,163.44	29.53	28.42	93.55	190.93	1,288.77	1,031.15	973.47	57.68	17.877		
8,300.00	8,276.30	8,266.99	8,263.44	29.88	28.77	93.73	187.58	1,289.94	1,032.51	974.13	58.39	17.684		
8,400.00	8,376.30	8,366.99	8,363.44	30.23	29.13	93.90	184.30	1,291.08	1,033.87	974.77	59.09	17.496		
8,500.00	8,476.30	8,466.99	8,463.44	30.58	29.48	94.07	181.27	1,292.14	1,035.11	975.31	59.80	17.309		
8,600.00	8,576.30	8,566.99	8,563.44	30.94	29.84	94.21	178.57	1,293.08	1,036.23	975.72	60.51	17.125		
8,700.00	8,676.30	8,666.99	8,663.44	31.29	30.19	94.34	176.14	1,293.93	1,037.25	976.03	61.21	16.945		
8,800.00	8,776.30	8,766.99	8,763.44	31.64	30.54	94.47	173.82	1,294.73	1,038.23	976.31	61.92	16.767		
8,900.00	8,876.30	8,866.99	8,863.44	31.99	30.90	94.59	171.62	1,295.50	1,039.16	976.53	62.62	16.593		
9,000.00	8,976.30	8,966.99	8,963.44	32.34	31.25	94.70	169.52	1,296.23	1,040.07	976.74	63.33	16.424		
9,100.00	9,076.30	9,066.99	9,063.44	32.70	31.59	94.83	167.08	1,297.08	1,041.14	977.11	64.03	16.261		
9,200.00	9,176.30	9,166.99	9,163.44	33.05	31.93	94.98	164.17	1,298.09	1,042.42	977.70	64.73	16.105		
9,300.00	9,276.30	9,266.99	9,263.44	33.40	32.28	95.16	160.81	1,299.26	1,043.92	978.50	65.42	15.956		
9,400.00	9,376.30	9,366.99	9,363.44	33.75	32.62	95.36	156.98	1,300.60	1,045.64	979.52	66.12	15.814		
9,500.00	9,476.30	9,466.99	9,463.44	34.11	32.96	95.59	152.72	1,302.08	1,047.56	980.74	66.82	15.677		
9,600.00	9,576.30	9,566.99	9,563.44	34.46	33.31	95.83	148.11	1,303.69	1,049.66	982.14	67.52	15.545		
9,700.00	9,676.30	9,666.99	9,663.44	34.81	33.67	96.08	143.27	1,305.37	1,051.81	983.57	68.24	15.414		
9,800.00	9,776.30	9,766.99	9,763.44	35.16	34.03	96.31	138.86	1,306.91	1,053.77	984.82	68.95	15.283		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Fort 18 Com - #1 - 226H - Surveys													Offset Site Error:	0.00 usft
Survey Program: 111-GYRO-NS													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
9,900.00	9,876.30	9,857.47	9,851.64	35.52	34.39	96.52	134.93	1,308.28	1,055.53	985.87	69.67	15.151		
9,994.94	9,971.24	9,954.49	9,948.60	35.85	34.73	96.69	131.63	1,309.43	1,057.02	986.68	70.35	15.026		
10,000.00	9,976.30	9,959.67	9,953.77	35.87	34.74	-3.95	131.46	1,309.48	1,057.07	986.69	70.38	15.019		
10,050.00	10,026.22	10,003.80	9,997.86	36.04	34.90	-3.88	129.60	1,310.13	1,055.43	984.72	70.71	14.927		
10,100.00	10,075.71	10,050.49	10,044.50	36.22	35.06	-3.83	127.42	1,310.89	1,049.55	978.51	71.04	14.774		
10,150.00	10,124.41	10,099.99	10,093.93	36.41	35.24	-3.81	125.01	1,311.73	1,039.44	968.06	71.38	14.562		
10,200.00	10,171.95	10,148.40	10,142.28	36.59	35.41	-3.84	122.70	1,312.53	1,025.08	953.37	71.71	14.294		
10,250.00	10,217.96	10,195.36	10,189.18	36.79	35.57	-3.93	120.52	1,313.29	1,006.59	934.56	72.03	13.974		
10,300.00	10,262.09	10,240.50	10,234.26	36.98	35.73	-4.07	118.47	1,314.01	984.11	911.77	72.34	13.604		
10,350.00	10,304.01	10,282.55	10,276.27	37.19	35.88	-4.29	116.54	1,314.68	957.85	885.22	72.62	13.189		
10,400.00	10,343.39	10,322.47	10,316.14	37.40	36.02	-4.58	114.70	1,315.32	927.99	855.10	72.89	12.731		
10,450.00	10,379.94	10,359.66	10,353.28	37.62	36.15	-5.00	112.97	1,315.92	894.77	821.63	73.13	12.235		
10,500.00	10,413.39	10,393.84	10,387.42	37.86	36.27	-5.56	111.37	1,316.48	858.43	785.08	73.35	11.703		
10,550.00	10,443.46	10,424.75	10,418.30	38.12	36.38	-6.34	109.92	1,316.99	819.26	745.72	73.54	11.140		
10,600.00	10,469.95	10,452.16	10,445.67	38.40	36.48	-7.45	108.62	1,317.44	777.56	703.85	73.71	10.549		
10,650.00	10,492.63	10,475.86	10,469.34	38.71	36.56	-9.09	107.49	1,317.83	733.64	659.79	73.84	9.935		
10,700.00	10,511.35	10,495.66	10,489.12	39.03	36.63	-11.62	106.54	1,318.16	687.83	613.88	73.95	9.301		
10,750.00	10,525.96	10,511.42	10,504.85	39.39	36.69	-15.88	105.79	1,318.42	640.50	566.46	74.03	8.651		
10,794.94	10,535.49	10,522.02	10,515.44	39.73	36.72	-22.83	105.28	1,318.60	596.95	522.86	74.09	8.058		
10,800.00	10,536.36	10,523.01	10,516.43	39.77	36.73	-23.55	105.23	1,318.62	592.00	517.91	74.09	7.990		
10,850.00	10,543.49	10,531.36	10,524.77	40.17	36.76	-33.00	104.82	1,318.76	542.86	468.74	74.12	7.324		
10,900.00	10,548.01	10,537.14	10,530.54	40.60	36.78	-48.92	104.55	1,318.86	493.40	419.26	74.14	6.655		
10,950.00	10,549.93	10,540.32	10,533.72	41.06	36.79	-73.23	104.39	1,318.91	443.76	369.61	74.15	5.985		
10,961.61	10,550.00	10,540.69	10,534.08	41.16	36.79	-79.59	104.37	1,318.92	432.22	358.08	74.15	5.829		
11,000.00	10,550.00	10,541.65	10,535.04	41.53	36.79	-78.80	104.33	1,318.93	394.05	319.91	74.14	5.315		
11,100.00	10,550.00	10,543.99	10,537.38	42.59	36.80	-75.68	104.21	1,318.97	294.46	220.31	74.15	3.971		
11,200.00	10,550.00	10,546.09	10,539.48	43.75	36.81	-68.65	104.11	1,319.01	194.66	120.49	74.16	2.625		
11,300.00	10,550.00	10,547.94	10,541.33	45.03	36.81	-35.47	104.02	1,319.04	94.72	20.53	74.19	1.277 Level 3		
11,316.07	10,550.00	10,548.21	10,541.60	45.24	36.82	-16.44	104.01	1,319.04	78.65	4.46	74.19	1.060 Level 2		
11,394.73	10,550.00	10,549.54	10,542.93	46.31	36.82	-92.78	103.95	1,319.07	0.32	-82.72	83.04	0.004 Level 1, CC, ES, SF		
11,400.00	10,550.00	10,549.63	10,543.02	46.39	36.82	-108.19	103.94	1,319.07	5.28	-68.94	74.22	0.071 Level 1		
11,500.00	10,550.00	10,551.32	10,544.70	47.83	36.83	-172.49	103.86	1,319.10	105.25	31.03	74.23	1.418 Level 3		
11,600.00	10,550.00	10,553.01	10,546.39	49.35	36.83	-177.46	103.78	1,319.12	205.24	130.99	74.25	2.764		
11,700.00	10,550.00	10,554.70	10,548.08	50.94	36.84	-179.20	103.69	1,319.15	305.23	230.96	74.27	4.110		
11,800.00	10,550.00	10,556.40	10,549.77	52.60	36.84	179.92	103.61	1,319.18	405.21	330.92	74.29	5.454		
11,900.00	10,550.00	10,558.09	10,551.46	54.31	36.85	179.38	103.53	1,319.21	505.20	430.88	74.32	6.798		
12,000.00	10,550.00	10,559.78	10,553.16	56.08	36.86	179.02	103.45	1,319.24	605.18	530.84	74.34	8.140		
12,100.00	10,550.00	10,561.48	10,554.85	57.89	36.86	178.77	103.37	1,319.27	705.17	630.80	74.37	9.482		
12,200.00	10,550.00	10,563.18	10,556.55	59.75	36.87	178.57	103.28	1,319.30	805.15	730.75	74.40	10.822		
12,300.00	10,550.00	10,564.88	10,558.24	61.65	36.87	178.42	103.20	1,319.32	905.14	830.71	74.43	12.161		
12,400.00	10,550.00	10,566.58	10,559.94	63.58	36.88	178.30	103.12	1,319.35	1,005.13	930.67	74.46	13.499		
12,500.00	10,550.00	10,568.28	10,561.64	65.54	36.89	178.20	103.04	1,319.38	1,105.11	1,030.62	74.49	14.836		
12,600.00	10,550.00	10,569.98	10,563.34	67.54	36.89	178.12	102.95	1,319.41	1,205.10	1,130.58	74.52	16.171		
12,700.00	10,550.00	10,571.68	10,565.04	69.56	36.90	178.05	102.87	1,319.44	1,305.08	1,230.53	74.55	17.505		
12,800.00	10,550.00	10,573.39	10,566.74	71.61	36.90	177.99	102.79	1,319.47	1,405.07	1,330.48	74.59	18.838		
12,900.00	10,550.00	10,575.09	10,568.44	73.67	36.91	177.94	102.70	1,319.50	1,505.05	1,430.43	74.62	20.169		
13,000.00	10,550.00	10,576.80	10,570.15	75.77	36.92	177.89	102.62	1,319.53	1,605.04	1,530.38	74.66	21.499		
13,100.00	10,550.00	10,578.51	10,571.85	77.88	36.92	177.85	102.54	1,319.56	1,705.02	1,630.33	74.69	22.827		
13,200.00	10,550.00	10,580.22	10,573.56	80.00	36.93	177.82	102.45	1,319.58	1,805.01	1,730.28	74.73	24.153		
13,300.00	10,550.00	10,581.93	10,575.27	82.15	36.93	177.78	102.37	1,319.61	1,905.00	1,830.22	74.77	25.478		
13,400.00	10,550.00	10,583.64	10,576.98	84.31	36.94	177.76	102.29	1,319.64	2,004.98	1,930.17	74.81	26.801		
13,500.00	10,550.00	10,585.35	10,578.69	86.48	36.95	177.73	102.20	1,319.67	2,104.97	2,030.12	74.85	28.122		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Fort 18 Com - #1 - 226H - Surveys													Offset Site Error: 0.00 usft	
Survey Program: 111-GYRO-NS													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance						Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,600.00	10,550.00	10,587.06	10,580.40	88.67	36.95	177.70	102.12	1,319.70	2,204.95	2,130.06	74.89	29.441		
13,700.00	10,550.00	10,588.78	10,582.11	90.87	36.96	177.68	102.04	1,319.73	2,304.94	2,230.00	74.94	30.759		
13,800.00	10,550.00	10,590.49	10,583.82	93.07	36.96	177.66	101.95	1,319.76	2,404.92	2,329.94	74.98	32.074		
13,900.00	10,550.00	10,592.21	10,585.54	95.29	36.97	177.64	101.87	1,319.79	2,504.91	2,429.88	75.02	33.388		
14,000.00	10,550.00	10,593.93	10,587.25	97.52	36.98	177.63	101.78	1,319.82	2,604.89	2,529.82	75.07	34.699		
14,100.00	10,550.00	10,595.65	10,588.97	99.76	36.98	177.61	101.70	1,319.85	2,704.88	2,629.76	75.12	36.009		
14,200.00	10,550.00	10,597.37	10,590.69	102.01	36.99	177.60	101.62	1,319.88	2,804.87	2,729.70	75.16	37.316		
14,300.00	10,550.00	10,599.09	10,592.41	104.27	36.99	177.58	101.53	1,319.91	2,904.85	2,829.64	75.21	38.622		
14,400.00	10,550.00	10,600.81	10,594.13	106.53	37.00	177.57	101.45	1,319.94	3,004.84	2,929.57	75.26	39.925		
14,500.00	10,550.00	10,602.54	10,595.85	108.80	37.01	177.56	101.36	1,319.96	3,104.82	3,029.51	75.31	41.226		
14,600.00	10,550.00	10,604.26	10,597.57	111.07	37.01	177.55	101.28	1,319.99	3,204.81	3,129.44	75.36	42.524		
14,700.00	10,550.00	10,605.99	10,599.30	113.36	37.02	177.53	101.19	1,320.02	3,304.79	3,229.38	75.42	43.820		
14,800.00	10,550.00	10,607.72	10,601.02	115.64	37.02	177.52	101.11	1,320.05	3,404.78	3,329.31	75.47	45.114		
14,900.00	10,550.00	10,609.44	10,602.75	117.94	37.03	177.51	101.03	1,320.08	3,504.76	3,429.24	75.52	46.406		
15,000.00	10,550.00	10,611.17	10,604.48	120.24	37.04	177.51	100.94	1,320.11	3,604.75	3,529.17	75.58	47.695		
15,100.00	10,550.00	10,612.91	10,606.21	122.54	37.04	177.50	100.86	1,320.14	3,704.73	3,629.10	75.64	48.981		
15,200.00	10,550.00	10,614.64	10,607.94	124.85	37.05	177.49	100.77	1,320.17	3,804.72	3,729.03	75.69	50.265		
15,300.00	10,550.00	10,616.37	10,609.67	127.16	37.06	177.48	100.69	1,320.20	3,904.70	3,828.95	75.75	51.547		
15,400.00	10,550.00	10,618.11	10,611.40	129.48	37.06	177.47	100.60	1,320.23	4,004.69	3,928.88	75.81	52.826		
15,437.85	10,550.00	10,618.76	10,612.05	130.35	37.06	177.47	100.57	1,320.24	4,042.53	3,966.70	75.83	53.309		
15,438.79	10,550.00	10,618.78	10,612.07	130.37	37.06	177.47	100.57	1,320.24	4,043.47	3,964.83	78.64	51.418		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #1 - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 125-GYRO-NS													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	0.00	0.00	0.00	0.00	21.88	1,699.92	682.81	1,831.93					
100.00	100.00	95.61	95.61	0.13	0.13	21.88	1,699.97	682.77	1,831.96	1,831.70	0.26	7,091.694		
200.00	200.00	191.23	191.23	0.49	0.40	21.88	1,700.13	682.82	1,832.13	1,831.24	0.89	2,060.732		
300.00	300.00	296.24	296.24	0.84	0.77	21.88	1,700.32	682.96	1,832.36	1,830.74	1.61	1,134.593		
400.00	400.00	399.39	399.39	1.20	1.13	21.87	1,700.48	682.67	1,832.39	1,830.06	2.33	785.349		
500.00	500.00	516.37	516.36	1.56	1.54	21.86	1,699.95	681.83	1,831.69	1,828.59	3.10	590.968		
600.00	600.00	617.11	617.09	1.92	1.89	21.85	1,698.98	681.17	1,830.55	1,826.74	3.81	480.571		
700.00	700.00	718.03	718.01	2.28	2.24	21.85	1,697.91	680.70	1,829.39	1,824.87	4.52	404.727		
800.00	800.00	809.38	809.35	2.64	2.56	21.85	1,697.06	680.48	1,828.45	1,823.25	5.20	351.783		
900.00	900.00	903.60	903.57	3.00	2.89	21.87	1,696.43	680.89	1,827.98	1,822.10	5.89	310.598		
1,000.00	1,000.00	1,002.55	1,002.52	3.35	3.24	21.90	1,695.74	681.71	1,827.64	1,821.05	6.59	277.356		
1,100.00	1,100.00	1,097.26	1,097.22	3.71	3.57	21.93	1,695.22	682.62	1,827.49	1,820.21	7.28	251.075		
1,107.77	1,107.77	1,104.72	1,104.68	3.74	3.59	21.94	1,695.18	682.70	1,827.49	1,820.16	7.33	249.230		
1,200.00	1,200.00	1,195.22	1,195.17	4.07	3.91	21.97	1,694.86	683.72	1,827.57	1,819.59	7.98	229.049		
1,300.00	1,300.00	1,304.45	1,304.39	4.43	4.29	22.00	1,694.53	684.65	1,827.63	1,818.92	8.72	209.623		
1,400.00	1,400.00	1,416.44	1,416.38	4.79	4.68	21.99	1,693.74	684.08	1,826.77	1,817.31	9.47	192.930		
1,500.00	1,500.00	1,527.15	1,527.08	5.15	5.07	21.96	1,692.73	682.56	1,825.41	1,815.20	10.21	178.721		
1,600.00	1,600.00	1,624.02	1,623.93	5.50	5.41	21.94	1,691.52	681.39	1,823.81	1,812.90	10.91	167.148		
1,700.00	1,700.00	1,725.05	1,724.95	5.86	5.76	21.93	1,690.24	680.48	1,822.29	1,810.67	11.62	156.779		
1,800.00	1,800.00	1,825.77	1,825.65	6.22	6.11	21.91	1,688.95	679.38	1,820.70	1,808.37	12.33	147.613		
1,900.00	1,900.00	1,926.94	1,926.81	6.58	6.47	21.90	1,687.61	678.33	1,819.08	1,806.03	13.05	139.426		
2,000.00	2,000.00	2,047.52	2,047.35	6.94	6.89	21.93	1,684.83	678.43	1,817.00	1,803.17	13.83	131.427		
2,100.00	2,099.99	2,160.74	2,160.45	7.29	7.29	-23.55	1,679.93	680.67	1,812.51	1,797.93	14.58	124.353		
2,200.00	2,199.91	2,269.38	2,268.90	7.65	7.67	-23.49	1,674.33	683.70	1,805.18	1,789.87	15.31	117.919		
2,300.00	2,299.69	2,404.02	2,403.02	8.00	8.14	-23.35	1,664.59	690.25	1,794.35	1,778.23	16.13	111.277		
2,400.00	2,399.27	2,489.81	2,488.39	8.36	8.45	-23.32	1,657.46	694.70	1,780.28	1,763.50	16.79	106.046		
2,500.00	2,498.57	2,569.40	2,567.77	8.72	8.73	-23.38	1,652.31	697.47	1,764.86	1,747.44	17.43	101.258		
2,533.34	2,531.60	2,596.26	2,594.58	8.84	8.82	-23.42	1,650.89	698.16	1,759.44	1,741.80	17.64	99.716		
2,600.00	2,597.62	2,649.36	2,647.61	9.09	9.01	-23.45	1,648.47	699.37	1,748.69	1,730.62	18.07	96.771		
2,700.00	2,696.65	2,740.50	2,738.67	9.46	9.33	-23.53	1,645.06	700.89	1,733.11	1,714.36	18.75	92.448		
2,800.00	2,795.67	2,824.25	2,822.38	9.83	9.62	-23.62	1,642.61	702.03	1,718.16	1,698.76	19.40	88.561		
2,900.00	2,894.70	2,920.46	2,918.55	10.21	9.95	-23.74	1,640.38	703.35	1,703.77	1,683.68	20.10	84.778		
3,000.00	2,993.73	3,020.85	3,018.90	10.59	10.31	-23.85	1,638.04	704.74	1,689.39	1,668.58	20.81	81.189		
3,100.00	3,092.75	3,118.97	3,116.99	10.97	10.65	-23.98	1,635.83	705.78	1,674.97	1,653.46	21.51	77.858		
3,200.00	3,191.78	3,216.35	3,214.35	11.36	10.99	-24.11	1,633.72	706.88	1,660.66	1,638.44	22.22	74.747		
3,300.00	3,290.81	3,313.25	3,311.22	11.74	11.33	-24.24	1,631.75	708.05	1,646.50	1,623.58	22.92	71.836		
3,400.00	3,389.83	3,417.74	3,415.68	12.13	11.69	-24.39	1,629.46	709.23	1,632.19	1,608.54	23.65	69.018		
3,500.00	3,488.86	3,516.47	3,514.38	12.52	12.04	-24.53	1,627.21	710.12	1,617.72	1,593.36	24.36	66.409		
3,600.00	3,587.89	3,611.95	3,609.83	12.92	12.37	-24.69	1,625.33	710.67	1,603.42	1,578.36	25.06	63.977		
3,700.00	3,686.91	3,711.00	3,708.87	13.31	12.72	-24.85	1,623.50	711.14	1,589.23	1,563.45	25.78	61.654		
3,800.00	3,785.94	3,809.63	3,807.48	13.71	13.07	-25.03	1,621.66	711.48	1,574.98	1,548.49	26.49	59.454		
3,900.00	3,884.97	3,903.29	3,901.13	14.11	13.39	-25.21	1,620.22	711.56	1,560.96	1,533.77	27.19	57.408		
4,000.00	3,984.00	4,000.03	3,997.86	14.50	13.73	-25.41	1,619.00	711.69	1,547.22	1,519.32	27.90	55.455		
4,100.00	4,083.02	4,100.37	4,098.20	14.90	14.09	-25.61	1,617.70	711.95	1,533.53	1,504.91	28.62	53.578		
4,200.00	4,182.05	4,197.56	4,195.38	15.30	14.43	-25.82	1,616.54	711.86	1,519.82	1,490.49	29.34	51.809		
4,300.00	4,281.08	4,294.82	4,292.63	15.71	14.77	-26.04	1,615.55	711.66	1,506.26	1,476.21	30.05	50.126		
4,400.00	4,380.10	4,395.71	4,393.52	16.11	15.12	-26.27	1,614.50	711.60	1,492.75	1,461.97	30.78	48.505		
4,500.00	4,479.13	4,495.32	4,493.12	16.51	15.47	-26.49	1,613.27	711.67	1,479.12	1,447.62	31.50	46.960		
4,600.00	4,578.16	4,596.04	4,593.83	16.91	15.82	-26.73	1,612.04	711.44	1,465.43	1,433.21	32.22	45.477		
4,612.79	4,590.82	4,608.58	4,606.37	16.97	15.87	-26.76	1,611.89	711.39	1,463.68	1,431.36	32.32	45.294		
4,700.00	4,677.31	4,692.73	4,690.51	17.31	16.16	-26.87	1,610.93	711.14	1,452.70	1,419.76	32.94	44.105		
4,800.00	4,776.77	4,791.62	4,789.40	17.70	16.51	-26.98	1,609.89	710.83	1,442.36	1,408.71	33.65	42.859		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #1 - Wellbore #1 - Surveys													Offset Site Error:	0.00 usft
Survey Program: 125-GYRO-NS													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
4,900.00	4,876.47	4,894.19	4,891.96	18.08	16.87	-27.07	1,608.71	710.63	1,434.31	1,399.94	34.38	41.725		
5,000.00	4,976.34	4,996.90	4,994.66	18.44	17.23	-27.13	1,607.43	709.91	1,428.33	1,393.24	35.09	40.701		
5,100.00	5,076.30	5,098.89	5,096.64	18.79	17.58	-27.17	1,605.98	709.07	1,424.49	1,388.69	35.80	39.786		
5,146.12	5,122.42	5,145.87	5,143.61	18.95	17.75	18.38	1,605.32	708.57	1,423.47	1,387.34	36.13	39.399		
5,200.00	5,176.30	5,198.98	5,196.71	19.13	17.93	18.37	1,604.60	707.90	1,422.56	1,386.06	36.50	38.969		
5,300.00	5,276.30	5,296.42	5,294.14	19.47	18.27	18.33	1,603.47	706.47	1,421.00	1,383.80	37.20	38.200		
5,356.47	5,332.77	5,331.97	5,329.68	19.67	18.40	18.31	1,603.29	705.91	1,420.50	1,382.97	37.54	37.843 CC, ES		
5,400.00	5,376.30	5,350.00	5,347.70	19.81	18.46	18.29	1,603.54	705.64	1,420.88	1,383.12	37.76	37.628		
5,500.00	5,476.30	5,434.47	5,432.12	20.16	18.75	18.21	1,606.33	704.32	1,423.48	1,385.08	38.40	37.066		
5,600.00	5,576.30	5,536.72	5,534.30	20.50	19.10	18.11	1,609.81	702.96	1,426.30	1,387.19	39.11	36.470		
5,700.00	5,676.30	5,630.95	5,628.47	20.84	19.43	18.03	1,612.94	701.75	1,429.07	1,389.28	39.79	35.919		
5,800.00	5,776.30	5,698.67	5,696.09	21.18	19.66	17.94	1,616.48	700.64	1,433.47	1,393.12	40.35	35.523		
5,900.00	5,876.30	5,805.64	5,802.84	21.53	20.03	17.79	1,623.02	698.79	1,438.77	1,397.69	41.08	35.023		
6,000.00	5,976.30	5,908.03	5,905.06	21.87	20.39	17.66	1,628.64	697.08	1,443.50	1,401.71	41.79	34.543		
6,100.00	6,076.30	6,004.76	6,001.64	22.22	20.72	17.56	1,633.90	696.08	1,448.37	1,405.90	42.47	34.101		
6,200.00	6,176.30	6,100.59	6,097.34	22.56	21.05	17.48	1,639.03	695.69	1,453.35	1,410.20	43.15	33.679		
6,300.00	6,276.30	6,199.25	6,195.85	22.91	21.39	17.47	1,644.15	696.98	1,458.70	1,414.85	43.84	33.270		
6,400.00	6,376.30	6,274.37	6,270.79	23.25	21.65	17.54	1,648.08	700.18	1,464.94	1,420.51	44.43	32.974		
6,500.00	6,476.30	6,384.71	6,380.83	23.60	22.03	17.68	1,653.96	705.75	1,471.55	1,426.37	45.17	32.575		
6,600.00	6,576.30	6,462.35	6,458.23	23.95	22.30	17.81	1,657.99	710.45	1,478.39	1,432.63	45.76	32.306		
6,700.00	6,676.30	6,619.93	6,615.06	24.29	22.85	18.27	1,662.88	724.64	1,484.09	1,437.37	46.72	31.766		
6,800.00	6,776.30	6,732.28	6,727.11	24.64	23.24	18.55	1,664.31	732.83	1,487.61	1,440.15	47.47	31.341		
6,900.00	6,876.30	6,835.66	6,830.32	24.99	23.60	18.75	1,665.36	738.46	1,490.31	1,442.13	48.18	30.933		
7,000.00	6,976.30	6,919.18	6,913.68	25.34	23.89	18.92	1,666.47	743.70	1,493.63	1,444.81	48.82	30.597		
7,100.00	7,076.30	6,993.58	6,987.89	25.68	24.15	19.06	1,668.65	748.30	1,498.43	1,449.02	49.41	30.329		
7,200.00	7,176.30	7,063.99	7,058.05	26.03	24.40	19.21	1,671.75	753.42	1,505.02	1,455.05	49.96	30.122		
7,300.00	7,276.30	7,154.19	7,147.77	26.38	24.71	19.42	1,676.99	761.08	1,513.29	1,462.68	50.61	29.900		
7,400.00	7,376.30	7,273.25	7,266.17	26.73	25.13	19.73	1,682.92	772.03	1,521.11	1,469.70	51.41	29.588		
7,500.00	7,476.30	7,408.83	7,400.97	27.08	25.61	20.21	1,688.58	786.33	1,526.43	1,474.16	52.27	29.200		
7,600.00	7,576.30	7,521.80	7,513.32	27.43	26.01	20.61	1,686.41	798.03	1,530.75	1,477.72	53.03	28.866		
7,700.00	7,676.30	7,614.84	7,605.56	27.78	26.34	21.04	1,685.78	810.21	1,534.82	1,481.11	53.71	28.578		
7,800.00	7,776.30	7,713.11	7,702.85	28.13	26.69	21.53	1,685.22	824.03	1,539.43	1,485.02	54.41	28.296		
7,900.00	7,876.30	7,820.04	7,808.80	28.48	27.07	22.04	1,684.38	838.44	1,543.73	1,488.59	55.14	27.996		
8,000.00	7,976.30	7,985.16	7,972.64	28.83	27.66	22.78	1,679.85	858.29	1,545.76	1,489.69	56.07	27.568		
8,100.00	8,076.30	8,093.14	8,079.85	29.18	28.04	23.26	1,674.72	870.13	1,545.69	1,488.89	56.80	27.212		
8,143.31	8,119.61	8,130.09	8,116.52	29.33	28.17	23.43	1,672.79	874.26	1,545.54	1,488.44	57.09	27.071		
8,200.00	8,176.30	8,163.61	8,149.72	29.53	28.29	23.60	1,671.23	878.59	1,546.01	1,488.59	57.42	26.923		
8,300.00	8,276.30	8,272.19	8,257.30	29.88	28.68	24.14	1,666.67	892.59	1,547.42	1,489.25	58.16	26.605		
8,400.00	8,376.30	8,350.96	8,335.41	30.23	28.97	24.51	1,663.56	902.20	1,548.91	1,490.11	58.80	26.341		
8,500.00	8,476.30	8,446.16	8,429.88	30.58	29.31	24.94	1,661.07	913.74	1,551.63	1,492.13	59.50	26.080		
8,600.00	8,576.30	8,565.07	8,548.06	30.94	29.73	25.41	1,658.21	926.51	1,554.07	1,493.80	60.27	25.785		
8,700.00	8,676.30	8,651.03	8,633.70	31.29	30.04	25.68	1,656.68	933.82	1,556.14	1,495.21	60.93	25.540		
8,800.00	8,776.30	8,768.15	8,750.57	31.64	30.45	25.95	1,655.18	941.25	1,557.68	1,495.99	61.69	25.249		
8,900.00	8,876.30	8,849.09	8,831.32	31.99	30.73	26.14	1,654.70	947.74	1,560.06	1,497.73	62.33	25.028		
9,000.00	8,976.30	8,964.21	8,946.10	32.34	31.14	26.45	1,653.11	955.40	1,562.15	1,499.06	63.09	24.760		
9,100.00	9,076.30	9,080.40	9,062.08	32.70	31.55	26.69	1,651.33	961.96	1,563.29	1,499.45	63.84	24.486		
9,200.00	9,176.30	9,200.59	9,182.20	33.05	31.96	26.85	1,649.37	965.86	1,563.28	1,498.68	64.60	24.199		
9,300.00	9,276.30	9,337.55	9,319.10	33.40	32.44	26.96	1,645.95	967.34	1,561.55	1,496.17	65.38	23.885		
9,400.00	9,376.30	9,444.91	9,426.37	33.75	32.82	27.05	1,641.74	967.90	1,558.29	1,492.20	66.09	23.578		
9,500.00	9,476.30	9,539.18	9,520.57	34.11	33.14	27.13	1,637.80	968.31	1,554.78	1,488.00	66.79	23.280		
9,600.00	9,576.30	9,603.29	9,584.64	34.46	33.37	27.19	1,636.01	969.39	1,553.01	1,485.59	67.42	23.035		
9,640.07	9,616.37	9,631.94	9,613.28	34.60	33.47	27.22	1,635.51	970.09	1,552.84	1,485.16	67.67	22.946		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MVD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #1 - Wellbore #1 - Surveys													Offset Site Error:	0 00 usft
Survey Program: 125-GYRO-NS													Offset Well Error:	0 00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
9,700.00	9,676.30	9,666.70	9,648.02	34.81	33.59	27.26	1,635.35	971.01	1,553.33	1,485.31	68.02	22.836		
9,800.00	9,776.30	9,758.84	9,740.12	35.16	33.91	27.32	1,636.42	973.56	1,555.59	1,486.90	68.70	22.644		
9,900.00	9,876.30	9,869.34	9,850.59	35.52	34.29	27.40	1,637.01	976.31	1,557.19	1,487.76	69.44	22.426		
9,994.94	9,971.24	9,961.93	9,943.15	35.85	34.61	27.47	1,637.40	978.70	1,558.67	1,488.58	70.10	22.236		
10,000.00	9,976.30	9,967.29	9,948.50	35.87	34.63	-73.17	1,637.42	978.85	1,558.75	1,488.61	70.13	22.225		
10,050.00	10,026.22	10,021.25	10,002.44	36.04	34.82	-73.22	1,637.50	980.45	1,558.74	1,488.25	70.49	22.112		
10,100.00	10,075.71	10,078.67	10,059.83	36.22	35.02	-73.58	1,637.30	982.08	1,557.23	1,486.36	70.87	21.973		
10,150.00	10,124.41	10,127.68	10,108.82	36.41	35.19	-74.19	1,637.00	983.46	1,554.41	1,483.19	71.22	21.825		
10,200.00	10,171.95	10,182.49	10,163.62	36.59	35.38	-75.13	1,636.63	984.87	1,550.41	1,478.81	71.60	21.655		
10,250.00	10,217.96	10,228.90	10,210.01	36.79	35.54	-76.24	1,636.24	985.98	1,545.35	1,473.40	71.95	21.478		
10,300.00	10,262.09	10,275.23	10,256.33	36.98	35.71	-77.57	1,635.94	986.99	1,539.55	1,467.24	72.31	21.291		
10,350.00	10,304.01	10,331.30	10,312.38	37.19	35.90	-79.31	1,635.35	987.90	1,532.92	1,460.22	72.70	21.086		
10,400.00	10,343.39	10,385.46	10,366.53	37.40	36.09	-81.26	1,634.49	988.29	1,525.65	1,452.56	73.09	20.874		
10,450.00	10,379.94	10,436.33	10,417.39	37.62	36.27	-83.33	1,633.29	988.16	1,517.94	1,444.46	73.48	20.659		
10,500.00	10,413.39	10,470.80	10,451.85	37.86	36.39	-85.06	1,632.33	988.00	1,510.36	1,436.51	73.85	20.452		
10,550.00	10,443.46	10,507.02	10,488.05	38.12	36.51	-86.88	1,631.29	987.78	1,503.32	1,429.08	74.24	20.249		
10,600.00	10,469.95	10,542.75	10,523.77	38.40	36.64	-88.68	1,630.12	987.33	1,496.98	1,422.33	74.65	20.053		
10,650.00	10,492.63	10,568.06	10,549.05	38.71	36.73	-90.09	1,629.21	986.89	1,491.69	1,416.62	75.07	19.871		
10,700.00	10,511.35	10,585.63	10,566.61	39.03	36.79	-91.11	1,628.59	986.51	1,487.78	1,412.28	75.50	19.706		
10,750.00	10,525.96	10,598.28	10,579.25	39.39	36.83	-91.81	1,628.15	986.24	1,485.46	1,409.51	75.94	19.560		
10,791.46	10,534.88	10,605.39	10,586.34	39.70	36.86	-92.14	1,627.91	986.08	1,484.84	1,408.52	76.32	19.455		
10,794.94	10,535.49	10,605.86	10,586.82	39.73	36.86	-92.16	1,627.89	986.07	1,484.85	1,408.49	76.36	19.447		
10,800.00	10,536.36	10,606.52	10,587.48	39.77	36.86	-92.18	1,627.87	986.05	1,484.87	1,408.47	76.40	19.435		
10,850.00	10,543.49	10,611.83	10,592.79	40.17	36.88	-92.31	1,627.70	985.93	1,486.05	1,409.18	76.87	19.331		
10,900.00	10,548.01	10,614.94	10,595.89	40.60	36.89	-92.26	1,627.60	985.86	1,489.00	1,411.64	77.36	19.248		
10,950.00	10,549.93	10,615.84	10,596.79	41.06	36.89	-92.01	1,627.57	985.84	1,493.72	1,415.87	77.85	19.187		
10,961.61	10,550.00	10,615.74	10,596.69	41.16	36.89	-91.92	1,627.57	985.84	1,495.07	1,417.10	77.97	19.176		
11,000.00	10,550.00	10,615.19	10,596.14	41.53	36.89	-91.90	1,627.59	985.85	1,499.77	1,421.42	78.35	19.141		
11,100.00	10,550.00	10,613.67	10,594.62	42.59	36.89	-91.82	1,627.64	985.89	1,512.98	1,433.57	79.41	19.053		
11,200.00	10,550.00	10,612.01	10,592.96	43.75	36.88	-91.75	1,627.69	985.93	1,527.48	1,446.97	80.51	18.972		
11,300.00	10,550.00	10,610.23	10,591.18	45.03	36.87	-91.67	1,627.75	985.97	1,543.20	1,461.56	81.63	18.904		
11,316.07	10,550.00	10,609.93	10,590.88	45.24	36.87	-91.65	1,627.76	985.97	1,545.83	1,464.02	81.81	18.895		
11,400.00	10,550.00	10,608.36	10,589.32	46.39	36.87	-91.59	1,627.81	986.01	1,561.86	1,479.11	82.75	18.875 SF		
11,500.00	10,550.00	10,606.51	10,587.47	47.83	36.86	-91.52	1,627.87	986.05	1,586.56	1,502.72	83.83	18.925		
11,600.00	10,550.00	10,604.68	10,585.64	49.35	36.85	-91.46	1,627.93	986.09	1,617.06	1,532.20	84.86	19.056		
11,700.00	10,550.00	10,602.85	10,583.81	50.94	36.85	-91.39	1,627.99	986.13	1,653.07	1,567.25	85.82	19.262		
11,800.00	10,550.00	10,601.04	10,582.01	52.60	36.84	-91.32	1,628.05	986.18	1,694.21	1,607.51	86.70	19.542		
11,900.00	10,550.00	10,599.19	10,580.15	54.31	36.83	-91.25	1,628.12	986.22	1,740.13	1,652.64	87.49	19.889		
12,000.00	10,550.00	10,597.26	10,578.23	56.08	36.83	-91.18	1,628.18	986.26	1,790.47	1,702.26	88.20	20.300		
12,100.00	10,550.00	10,595.35	10,576.32	57.89	36.82	-91.11	1,628.25	986.30	1,844.85	1,756.02	88.83	20.768		
12,200.00	10,550.00	10,593.46	10,574.43	59.75	36.81	-91.03	1,628.31	986.34	1,902.93	1,813.55	89.38	21.290		
12,300.00	10,550.00	10,591.58	10,572.55	61.65	36.81	-90.96	1,628.38	986.39	1,964.39	1,874.53	89.86	21.861		
12,400.00	10,550.00	10,589.71	10,570.68	63.58	36.80	-90.89	1,628.44	986.43	2,028.92	1,938.64	90.28	22.475		
12,500.00	10,550.00	10,587.85	10,568.83	65.54	36.80	-90.82	1,628.51	986.47	2,096.23	2,005.59	90.63	23.129		
12,600.00	10,550.00	10,586.01	10,566.99	67.54	36.79	-90.75	1,628.57	986.51	2,166.06	2,075.12	90.94	23.819		
12,700.00	10,550.00	10,584.19	10,565.17	69.56	36.78	-90.69	1,628.64	986.55	2,238.18	2,146.98	91.20	24.541		
12,800.00	10,550.00	10,582.38	10,563.35	71.61	36.78	-90.62	1,628.70	986.59	2,312.38	2,220.96	91.42	25.294		
12,900.00	10,550.00	10,580.58	10,561.56	73.67	36.77	-90.55	1,628.76	986.62	2,388.46	2,296.85	91.61	26.072		
13,000.00	10,550.00	10,578.79	10,559.77	75.77	36.76	-90.48	1,628.83	986.66	2,466.24	2,374.48	91.77	26.875		
13,100.00	10,550.00	10,577.01	10,558.00	77.88	36.76	-90.42	1,628.89	986.70	2,545.58	2,453.68	91.90	27.700		
13,200.00	10,550.00	10,575.25	10,556.24	80.00	36.75	-90.35	1,628.95	986.74	2,626.33	2,534.32	92.01	28.544		
13,300.00	10,550.00	10,575.00	10,555.99	82.15	36.75	-90.34	1,628.96	986.74	2,708.36	2,616.25	92.11	29.405		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #1 - Wellbore #1 - Surveys												Offset Site Error:	0.00 usft
Survey Program: 125-GYRO-NS												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
13,400.00	10,550.00	10,572.29	10,553.28	84.31	36.74	-90.24	1,629.06	986.80	2,791.56	2,699.38	92.18	30.284	
13,500.00	10,550.00	10,570.89	10,551.87	86.48	36.74	-90.19	1,629.11	986.83	2,875.83	2,783.58	92.24	31.177	
13,600.00	10,550.00	10,569.52	10,550.51	88.67	36.73	-90.14	1,629.16	986.86	2,961.07	2,868.78	92.29	32.083	
13,700.00	10,550.00	10,568.18	10,549.18	90.87	36.73	-90.09	1,629.21	986.88	3,047.22	2,954.88	92.34	33.001	
13,800.00	10,550.00	10,566.89	10,547.88	93.07	36.72	-90.04	1,629.25	986.91	3,134.18	3,041.81	92.37	33.930	
13,900.00	10,550.00	10,565.62	10,546.61	95.29	36.72	-89.99	1,629.30	986.93	3,221.91	3,129.51	92.40	34.869	
14,000.00	10,550.00	10,564.38	10,545.38	97.52	36.71	-89.94	1,629.34	986.96	3,310.32	3,217.90	92.42	35.818	
14,100.00	10,550.00	10,563.18	10,544.17	99.76	36.71	-89.90	1,629.39	986.98	3,399.38	3,306.94	92.44	36.775	
14,200.00	10,550.00	10,562.00	10,543.00	102.01	36.71	-89.85	1,629.43	987.00	3,489.03	3,396.58	92.45	37.739	
14,300.00	10,550.00	10,560.85	10,541.85	104.27	36.70	-89.81	1,629.47	987.02	3,579.23	3,486.77	92.46	38.710	
14,400.00	10,550.00	10,559.73	10,540.73	106.53	36.70	-89.77	1,629.51	987.04	3,669.94	3,577.47	92.47	39.688	
14,500.00	10,550.00	10,558.64	10,539.64	108.80	36.69	-89.73	1,629.55	987.06	3,761.11	3,668.64	92.48	40.672	
14,600.00	10,550.00	10,557.57	10,538.57	111.07	36.69	-89.69	1,629.59	987.08	3,852.73	3,760.25	92.48	41.660	
14,700.00	10,550.00	10,556.52	10,537.52	113.36	36.69	-89.65	1,629.63	987.10	3,944.75	3,852.27	92.48	42.654	
14,800.00	10,550.00	10,555.50	10,536.50	115.64	36.68	-89.61	1,629.66	987.12	4,037.15	3,944.67	92.49	43.652	
14,900.00	10,550.00	10,554.50	10,535.51	117.94	36.68	-89.57	1,629.70	987.14	4,129.90	4,037.42	92.49	44.654	
15,000.00	10,550.00	10,553.00	10,531.01	120.24	36.66	-89.40	1,629.86	987.21	4,222.99	4,130.51	92.48	45.665	
15,100.00	10,550.00	10,550.00	10,531.01	122.54	36.66	-89.40	1,629.86	987.21	4,316.38	4,223.90	92.48	46.673	
15,200.00	10,550.00	10,550.00	10,531.01	124.85	36.66	-89.40	1,629.86	987.21	4,410.07	4,317.58	92.49	47.683	
15,300.00	10,550.00	10,550.00	10,531.01	127.16	36.66	-89.40	1,629.86	987.21	4,504.02	4,411.53	92.49	48.696	
15,400.00	10,550.00	10,550.00	10,531.01	129.48	36.66	-89.40	1,629.86	987.21	4,598.23	4,505.73	92.50	49.712	
15,437.85	10,550.00	10,550.00	10,531.01	130.35	36.66	-89.40	1,629.86	987.21	4,633.95	4,541.45	92.50	50.097	
15,438.79	10,550.00	10,550.00	10,531.01	130.37	36.66	-89.40	1,629.86	987.21	4,634.84	4,540.60	94.24	49.181	



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #121H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
0.00	0.00	1.24	-1.24	0.00	0.00	20.99	1,703.52	653.46	1,824.55				
100.00	100.00	101.24	98.76	0.13	0.13	20.99	1,703.52	653.46	1,824.55	1,824.29	0.26	7,045.686	
200.00	200.00	201.24	198.76	0.49	0.49	20.99	1,703.52	653.46	1,824.55	1,823.58	0.98	1,869.603	
300.00	300.00	301.24	298.76	0.84	0.85	20.99	1,703.52	653.46	1,824.55	1,822.86	1.69	1,077.801	
400.00	400.00	401.24	398.76	1.20	1.21	20.99	1,703.52	653.46	1,824.55	1,822.14	2.41	757.142	
500.00	500.00	501.24	498.76	1.56	1.57	20.99	1,703.52	653.46	1,824.55	1,821.43	3.13	583.533	
600.00	600.00	601.24	598.76	1.92	1.92	20.99	1,703.52	653.46	1,824.55	1,820.71	3.84	474.689	
700.00	700.00	701.24	698.76	2.28	2.28	20.99	1,703.52	653.46	1,824.55	1,819.99	4.56	400.067	
800.00	800.00	801.24	798.76	2.64	2.64	20.99	1,703.52	653.46	1,824.55	1,819.27	5.28	345.719	
900.00	900.00	901.24	898.76	3.00	3.00	20.99	1,703.52	653.46	1,824.55	1,818.56	5.99	304.371	
1,000.00	1,000.00	1,001.24	998.76	3.35	3.36	20.99	1,703.52	653.46	1,824.55	1,817.84	6.71	271.857	
1,100.00	1,100.00	1,101.24	1,098.76	3.71	3.72	20.99	1,703.52	653.46	1,824.55	1,817.12	7.43	245.619	
1,200.00	1,200.00	1,201.24	1,198.76	4.07	4.07	20.99	1,703.52	653.46	1,824.55	1,816.41	8.15	224.000	
1,300.00	1,300.00	1,301.24	1,298.76	4.43	4.43	20.99	1,703.52	653.46	1,824.55	1,815.69	8.86	205.878	
1,400.00	1,400.00	1,401.24	1,398.76	4.79	4.79	20.99	1,703.52	653.46	1,824.55	1,814.97	9.58	190.470	
1,500.00	1,500.00	1,498.76	1,498.76	5.15	5.14	20.99	1,703.52	653.46	1,824.55	1,814.26	10.29	177.360	
1,600.00	1,600.00	1,611.34	1,611.32	5.50	5.54	20.94	1,703.73	651.85	1,824.21	1,813.17	11.04	165.234	
1,700.00	1,700.00	1,723.88	1,723.76	5.86	5.93	20.79	1,704.35	646.95	1,823.18	1,811.39	11.79	154.672	
1,800.00	1,800.00	1,828.42	1,828.05	6.22	6.29	20.57	1,705.24	639.96	1,821.61	1,809.10	12.51	145.600	
1,900.00	1,900.00	1,928.18	1,927.57	6.58	6.64	20.36	1,706.12	633.05	1,820.01	1,806.79	13.22	137.661	
2,000.00	2,000.00	2,027.94	2,027.08	6.94	7.00	20.14	1,707.01	626.15	1,818.44	1,804.51	13.93	130.511	
2,100.00	2,099.99	2,127.62	2,126.53	7.29	7.35	-25.66	1,707.89	619.25	1,815.72	1,801.07	14.64	123.984	
2,200.00	2,199.91	2,227.13	2,225.79	7.65	7.71	-25.97	1,708.76	612.37	1,810.67	1,795.32	15.36	117.917	
2,300.00	2,299.69	2,326.39	2,324.81	8.00	8.07	-26.32	1,709.64	605.50	1,803.32	1,787.25	16.07	112.236	
2,400.00	2,399.27	2,425.33	2,423.50	8.36	8.43	-26.73	1,710.51	598.65	1,793.69	1,776.91	16.78	106.896	
2,500.00	2,498.57	2,523.88	2,521.82	8.72	8.78	-27.20	1,711.39	591.83	1,781.81	1,764.32	17.49	101.859	
2,533.34	2,531.60	2,556.64	2,554.50	8.84	8.90	-27.37	1,711.67	589.57	1,777.35	1,759.62	17.73	100.238	
2,600.00	2,597.62	2,622.09	2,619.79	9.09	9.14	-27.65	1,712.25	585.04	1,768.22	1,750.01	18.21	97.118	
2,700.00	2,696.65	2,720.27	2,717.73	9.46	9.50	-28.08	1,713.12	578.25	1,754.60	1,735.68	18.92	92.727	
2,800.00	2,795.67	2,818.46	2,815.68	9.83	9.86	-28.52	1,713.99	571.45	1,741.08	1,721.44	19.64	88.647	
2,900.00	2,894.70	2,922.09	2,919.01	10.21	10.24	-29.01	1,714.99	563.61	1,727.56	1,707.18	20.38	84.759	
3,000.00	2,993.73	3,027.41	3,023.77	10.59	10.63	-29.60	1,716.35	552.92	1,713.74	1,692.61	21.14	81.074	
3,100.00	3,092.75	3,130.59	3,126.08	10.97	11.03	-30.29	1,718.04	539.70	1,699.71	1,677.81	21.90	77.628	
3,200.00	3,191.78	3,227.45	3,222.00	11.36	11.40	-30.98	1,719.75	526.33	1,685.76	1,663.12	22.64	74.462	
3,300.00	3,290.81	3,324.31	3,317.92	11.74	11.78	-31.68	1,721.45	512.96	1,672.07	1,648.68	23.39	71.496	
3,400.00	3,389.83	3,421.18	3,413.84	12.13	12.16	-32.39	1,723.16	499.59	1,658.64	1,634.50	24.14	68.712	
3,500.00	3,488.86	3,518.04	3,509.76	12.52	12.54	-33.11	1,724.87	486.21	1,645.47	1,620.58	24.89	66.097	
3,600.00	3,587.89	3,614.90	3,605.68	12.92	12.93	-33.84	1,726.57	472.84	1,632.58	1,606.93	25.65	63.638	
3,700.00	3,686.91	3,711.76	3,701.60	13.31	13.31	-34.58	1,728.28	459.47	1,619.96	1,593.55	26.42	61.322	
3,800.00	3,785.94	3,808.63	3,797.52	13.71	13.70	-35.33	1,729.99	446.10	1,607.63	1,580.45	27.18	59.140	
3,900.00	3,884.97	3,905.49	3,893.44	14.11	14.09	-36.10	1,731.69	432.72	1,595.60	1,567.64	27.95	57.081	
4,000.00	3,984.00	4,002.35	3,989.36	14.50	14.47	-36.87	1,733.40	419.35	1,583.86	1,555.13	28.73	55.138	
4,100.00	4,083.02	4,100.78	4,085.28	14.90	14.87	-37.66	1,735.11	405.98	1,572.42	1,542.91	29.51	53.289	
4,200.00	4,182.05	4,203.92	4,181.20	15.30	15.29	-38.46	1,736.81	392.61	1,561.30	1,530.99	30.31	51.510	
4,300.00	4,281.08	4,307.06	4,277.12	15.71	15.70	-39.26	1,738.52	379.24	1,550.49	1,519.38	31.12	49.828	
4,400.00	4,380.10	4,389.81	4,373.05	16.11	16.04	-40.08	1,740.23	365.86	1,540.01	1,508.17	31.84	48.362	
4,500.00	4,479.13	4,486.67	4,468.97	16.51	16.43	-40.91	1,741.93	352.49	1,529.87	1,497.24	32.63	46.886	
4,600.00	4,578.16	4,583.53	4,564.89	16.91	16.83	-41.75	1,743.64	339.12	1,520.06	1,486.64	33.42	45.487	
4,612.79	4,590.82	4,604.08	4,577.15	16.97	16.91	-41.86	1,743.86	337.41	1,518.83	1,485.28	33.55	45.269	
4,700.00	4,677.31	4,680.61	4,661.02	17.31	17.22	-42.50	1,745.35	325.72	1,511.33	1,477.12	34.21	44.184	
4,800.00	4,776.77	4,778.21	4,757.67	17.70	17.62	-43.21	1,747.07	312.24	1,504.81	1,469.82	34.99	43.008	
4,900.00	4,876.47	4,876.27	4,854.77	18.08	18.02	-43.88	1,748.80	298.71	1,500.46	1,464.69	35.77	41.950	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #121H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
5,000.00	4,976.34	4,976.12	4,953.67	18.44	18.43	-44.51	1,750.54	285.06	1,498.21	1,461.67	36.54	40.997	
5,076.96	5,053.26	5,055.86	5,032.83	18.71	18.75	-44.93	1,751.75	275.54	1,497.72	1,460.58	37.14	40.328 CC	
5,100.00	5,076.30	5,079.84	5,056.68	18.79	18.84	-45.04	1,752.08	272.99	1,497.76	1,460.44	37.32	40.138	
5,146.12	5,122.42	5,127.99	5,104.59	18.95	19.03	0.33	1,752.67	268.34	1,498.10	1,460.44	37.66	39.776	
5,200.00	5,176.30	5,184.40	5,160.80	19.13	19.24	0.15	1,753.27	263.64	1,498.66	1,460.59	38.07	39.370	
5,300.00	5,276.30	5,289.41	5,265.61	19.47	19.63	-0.10	1,754.11	257.10	1,499.45	1,460.65	38.80	38.645	
5,400.00	5,376.30	5,394.71	5,370.84	19.81	20.01	-0.24	1,754.58	253.42	1,499.91	1,460.39	39.52	37.953	
5,500.00	5,476.30	5,501.06	5,475.06	20.16	20.37	-0.27	1,754.69	252.54	1,500.02	1,459.79	40.23	37.290	
5,600.00	5,576.30	5,601.06	5,575.06	20.50	20.70	-0.27	1,754.69	252.54	1,500.02	1,459.11	40.91	36.670	
5,700.00	5,676.30	5,701.06	5,675.06	20.84	21.03	-0.27	1,754.69	252.54	1,500.02	1,458.43	41.59	36.069	
5,800.00	5,776.30	5,801.06	5,775.06	21.18	21.37	-0.27	1,754.69	252.54	1,500.02	1,457.75	42.27	35.486	
5,900.00	5,876.30	5,901.06	5,875.06	21.53	21.70	-0.27	1,754.69	252.54	1,500.02	1,457.06	42.95	34.921	
6,000.00	5,976.30	6,001.06	5,975.06	21.87	22.04	-0.27	1,754.69	252.54	1,500.02	1,456.38	43.64	34.373	
6,100.00	6,076.30	6,101.06	6,075.06	22.22	22.38	-0.27	1,754.69	252.54	1,500.02	1,455.69	44.33	33.841	
6,200.00	6,176.30	6,201.06	6,175.06	22.56	22.72	-0.27	1,754.69	252.54	1,500.02	1,455.01	45.01	33.324	
6,300.00	6,276.30	6,301.06	6,275.06	22.91	23.05	-0.27	1,754.69	252.54	1,500.02	1,454.32	45.70	32.823	
6,400.00	6,376.30	6,401.06	6,375.06	23.25	23.39	-0.27	1,754.69	252.54	1,500.02	1,453.63	46.39	32.335	
6,500.00	6,476.30	6,501.06	6,475.06	23.60	23.73	-0.27	1,754.69	252.54	1,500.02	1,452.94	47.08	31.861	
6,600.00	6,576.30	6,601.06	6,575.06	23.95	24.07	-0.27	1,754.69	252.54	1,500.02	1,452.25	47.77	31.401	
6,700.00	6,676.30	6,701.06	6,675.06	24.29	24.41	-0.27	1,754.69	252.54	1,500.02	1,451.56	48.46	30.953	
6,800.00	6,776.30	6,801.06	6,775.06	24.64	24.75	-0.27	1,754.69	252.54	1,500.02	1,450.87	49.15	30.517	
6,900.00	6,876.30	6,901.06	6,875.06	24.99	25.10	-0.27	1,754.69	252.54	1,500.02	1,450.17	49.85	30.093	
7,000.00	6,976.30	7,001.06	6,975.06	25.34	25.44	-0.27	1,754.69	252.54	1,500.02	1,449.48	50.54	29.680	
7,100.00	7,076.30	7,101.06	7,075.06	25.68	25.78	-0.27	1,754.69	252.54	1,500.02	1,448.79	51.23	29.278	
7,200.00	7,176.30	7,201.06	7,175.06	26.03	26.12	-0.27	1,754.69	252.54	1,500.02	1,448.09	51.93	28.887	
7,300.00	7,276.30	7,301.06	7,275.06	26.38	26.47	-0.27	1,754.69	252.54	1,500.02	1,447.40	52.62	28.505	
7,400.00	7,376.30	7,401.06	7,375.06	26.73	26.81	-0.27	1,754.69	252.54	1,500.02	1,446.70	53.32	28.133	
7,500.00	7,476.30	7,501.06	7,475.06	27.08	27.15	-0.27	1,754.69	252.54	1,500.02	1,446.00	54.01	27.770	
7,600.00	7,576.30	7,601.06	7,575.06	27.43	27.50	-0.27	1,754.69	252.54	1,500.02	1,445.31	54.71	27.417	
7,700.00	7,676.30	7,701.06	7,675.06	27.78	27.84	-0.27	1,754.69	252.54	1,500.02	1,444.61	55.41	27.072	
7,800.00	7,776.30	7,799.05	7,775.17	28.13	28.18	-0.27	1,754.69	252.60	1,500.02	1,443.92	56.10	26.739	
7,886.29	7,862.59	7,885.66	7,861.35	28.43	28.44	0.02	1,754.69	260.35	1,500.00	1,443.34	56.66	26.473	
7,900.00	7,876.30	7,899.13	7,874.61	28.48	28.48	0.12	1,754.69	262.73	1,500.00	1,443.25	56.75	26.432	
8,000.00	7,976.30	7,993.00	7,964.96	28.83	28.72	1.07	1,754.67	287.81	1,500.28	1,442.94	57.34	26.164 ES	
8,100.00	8,076.30	8,076.84	8,041.24	29.18	28.91	2.39	1,754.66	322.41	1,501.66	1,443.78	57.88	25.943	
8,200.00	8,176.30	8,149.21	8,102.43	29.53	29.07	3.86	1,754.64	360.96	1,505.12	1,446.76	58.36	25.791	
8,300.00	8,276.30	8,210.45	8,150.08	29.88	29.20	5.32	1,754.63	399.39	1,511.60	1,452.85	58.75	25.729	
8,400.00	8,376.30	8,261.85	8,186.71	30.23	29.33	6.68	1,754.61	435.42	1,521.88	1,462.85	59.03	25.783	
8,500.00	8,476.30	8,300.00	8,211.73	30.58	29.42	7.76	1,754.60	464.21	1,536.52	1,477.39	59.13	25.985	
8,600.00	8,576.30	8,341.23	8,236.56	30.94	29.54	8.99	1,754.58	497.11	1,555.84	1,496.70	59.14	26.309	
8,700.00	8,676.30	8,371.94	8,253.48	31.29	29.64	9.95	1,754.57	522.74	1,580.05	1,521.10	58.95	26.802	
8,800.00	8,776.30	8,400.00	8,267.71	31.64	29.74	10.84	1,754.56	546.92	1,609.20	1,550.57	58.62	27.449	
8,900.00	8,876.30	8,420.68	8,277.44	31.99	29.82	11.51	1,754.56	565.17	1,643.18	1,585.06	58.13	28.269	
9,000.00	8,976.30	8,450.00	8,290.09	32.34	29.93	12.48	1,754.54	591.61	1,681.94	1,624.33	57.60	29.199	
9,100.00	9,076.30	8,450.00	8,290.09	32.70	29.93	12.48	1,754.54	591.61	1,725.08	1,668.35	56.73	30.407	
9,200.00	9,176.30	8,472.23	8,298.77	33.05	30.03	13.22	1,754.53	612.08	1,772.45	1,716.44	56.01	31.645	
9,300.00	9,276.30	8,485.48	8,303.56	33.40	30.09	13.67	1,754.53	624.43	1,823.83	1,768.67	55.16	33.066	
9,400.00	9,376.30	8,500.00	8,308.48	33.75	30.16	14.16	1,754.52	638.09	1,878.90	1,824.61	54.29	34.609	
9,500.00	9,476.30	8,500.00	8,308.48	34.11	30.16	14.16	1,754.52	638.09	1,937.42	1,884.14	53.27	36.369	
9,600.00	9,576.30	8,517.34	8,313.91	34.46	30.25	14.75	1,754.52	654.56	1,998.97	1,946.54	52.43	38.124	
9,700.00	9,676.30	8,525.93	8,316.41	34.81	30.29	15.04	1,754.51	662.78	2,063.46	2,011.94	51.52	40.050	
9,800.00	9,776.30	8,550.00	8,322.76	35.16	30.41	15.87	1,754.50	685.99	2,130.81	2,080.02	50.78	41.958	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #121H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
9,900.00	9,876.30	8,550.00	8,322.76	35.52	30.41	15.87	1,754.50	685.99	2,200.18	2,150.34	49.84	44.141	
9,994.94	9,971.24	8,550.00	8,322.76	35.85	30.41	15.87	1,754.50	685.99	2,268.16	2,219.18	48.99	46.300	
10,000.00	9,976.30	8,550.00	8,322.76	35.87	30.41	-84.25	1,754.50	685.99	2,271.84	2,222.90	48.94	46.417	
10,050.00	10,026.22	8,550.00	8,322.76	36.04	30.41	-79.00	1,754.50	685.99	2,308.24	2,259.73	48.51	47.587	
10,100.00	10,075.71	8,550.00	8,322.76	36.22	30.41	-73.86	1,754.50	685.99	2,344.58	2,296.49	48.09	48.758	
10,150.00	10,124.41	8,550.00	8,322.76	36.41	30.41	-68.94	1,754.50	685.99	2,380.59	2,332.90	47.69	49.921	
10,200.00	10,171.95	8,550.00	8,322.76	36.59	30.41	-64.34	1,754.50	685.99	2,416.01	2,368.70	47.31	51.064	
10,250.00	10,217.96	8,573.26	8,327.96	36.79	30.55	-59.67	1,754.49	708.66	2,450.14	2,402.96	47.18	51.932	
10,300.00	10,262.09	8,580.38	8,329.37	36.98	30.59	-55.79	1,754.49	715.64	2,483.36	2,436.43	46.93	52.920	
10,350.00	10,304.01	8,600.00	8,332.80	37.19	30.70	-52.19	1,754.48	734.96	2,515.33	2,468.52	46.81	53.733	
10,400.00	10,343.39	8,600.00	8,332.80	37.40	30.70	-49.26	1,754.48	734.96	2,545.47	2,498.90	46.57	54.656	
10,450.00	10,379.94	8,600.00	8,332.80	37.62	30.70	-46.69	1,754.48	734.96	2,573.96	2,527.58	46.38	55.497	
10,500.00	10,413.39	8,600.00	8,332.80	37.86	30.70	-44.44	1,754.48	734.96	2,600.62	2,554.38	46.24	56.242	
10,550.00	10,443.46	8,622.52	8,335.92	38.12	30.85	-42.39	1,754.47	757.25	2,624.86	2,578.54	46.32	56.664	
10,600.00	10,469.95	8,650.00	8,338.54	38.40	31.02	-40.67	1,754.46	784.61	2,647.30	2,600.82	46.48	56.953	
10,650.00	10,492.63	8,650.00	8,338.54	38.71	31.02	-39.30	1,754.46	784.61	2,666.83	2,620.32	46.51	57.340	
10,700.00	10,511.35	8,650.00	8,338.54	39.03	31.02	-38.16	1,754.46	784.61	2,684.04	2,637.44	46.60	57.594	
10,750.00	10,525.96	8,650.00	8,338.54	39.39	31.02	-37.21	1,754.46	784.61	2,698.83	2,652.07	46.76	57.712	
10,794.94	10,535.49	8,670.27	8,339.63	39.73	31.16	-36.55	1,754.45	804.85	2,709.64	2,662.55	47.09	57.545	
10,800.00	10,536.36	8,671.29	8,339.66	39.77	31.17	-36.51	1,754.45	805.87	2,710.74	2,663.62	47.12	57.531	
10,850.00	10,543.49	8,690.92	8,340.00	40.17	31.30	-36.18	1,754.44	825.50	2,720.94	2,673.43	47.51	57.271	
10,900.00	10,548.01	8,693.60	8,340.00	40.60	31.32	-35.88	1,754.44	828.17	2,729.61	2,681.75	47.86	57.036	
10,950.00	10,549.93	8,742.70	8,340.00	41.06	31.71	-35.76	1,754.42	877.27	2,736.59	2,688.07	48.52	56.404	
10,961.61	10,550.00	8,754.10	8,340.00	41.16	31.81	-35.75	1,754.42	888.68	2,737.91	2,689.23	48.68	56.246	
11,000.00	10,550.00	8,808.09	8,340.00	41.53	32.26	-35.96	1,754.40	926.48	2,741.87	2,692.56	49.31	55.604	
11,100.00	10,550.00	8,909.07	8,340.00	42.59	33.25	-36.39	1,754.36	1,025.51	2,750.11	2,699.27	50.84	54.096	
11,200.00	10,550.00	9,009.46	8,340.00	43.75	34.38	-36.66	1,754.31	1,125.12	2,755.29	2,702.83	52.46	52.523	
11,300.00	10,550.00	9,109.53	8,340.00	45.03	35.63	-36.77	1,754.27	1,225.05	2,757.35	2,703.19	54.15	50.918	
11,316.07	10,550.00	9,106.54	8,340.00	45.24	35.59	-36.77	1,754.26	1,241.12	2,757.38	2,703.12	54.26	50.818	
11,400.00	10,550.00	9,209.53	8,340.00	46.39	37.00	-36.77	1,754.23	1,325.05	2,757.38	2,701.45	55.93	49.302	
11,500.00	10,550.00	9,309.53	8,340.00	47.83	38.48	-36.77	1,754.18	1,425.05	2,757.37	2,699.54	57.82	47.686	
11,600.00	10,550.00	9,409.53	8,340.00	49.35	40.05	-36.77	1,754.14	1,525.05	2,757.36	2,697.53	59.83	46.088	
11,700.00	10,550.00	9,509.53	8,340.00	50.94	41.70	-36.77	1,754.10	1,625.05	2,757.35	2,695.42	61.93	44.523	
11,800.00	10,550.00	9,609.53	8,340.00	52.60	43.42	-36.77	1,754.05	1,725.05	2,757.34	2,693.22	64.12	43.001	
11,900.00	10,550.00	9,709.53	8,340.00	54.31	45.21	-36.77	1,754.01	1,825.05	2,757.33	2,690.94	66.39	41.531	
12,000.00	10,550.00	9,809.53	8,340.00	56.08	47.05	-36.77	1,753.97	1,925.05	2,757.32	2,688.59	68.73	40.116	
12,100.00	10,550.00	9,909.53	8,340.00	57.89	48.94	-36.77	1,753.93	2,025.05	2,757.31	2,686.17	71.14	38.760	
12,200.00	10,550.00	10,009.53	8,340.00	59.75	50.88	-36.77	1,753.88	2,125.05	2,757.30	2,683.70	73.60	37.463	
12,300.00	10,550.00	10,109.53	8,340.00	61.65	52.86	-36.77	1,753.84	2,225.05	2,757.29	2,681.18	76.12	36.225	
12,400.00	10,550.00	10,209.53	8,340.00	63.58	54.88	-36.77	1,753.80	2,325.05	2,757.29	2,678.61	78.68	35.045	
12,500.00	10,550.00	10,309.53	8,340.00	65.54	56.93	-36.77	1,753.75	2,425.05	2,757.28	2,675.99	81.28	33.922	
12,600.00	10,550.00	10,409.53	8,340.00	67.54	59.00	-36.77	1,753.71	2,525.05	2,757.27	2,673.34	83.93	32.854	
12,700.00	10,550.00	10,509.53	8,340.00	69.56	61.10	-36.77	1,753.67	2,625.05	2,757.26	2,670.65	86.60	31.837	
12,800.00	10,550.00	10,609.53	8,340.00	71.61	63.23	-36.77	1,753.62	2,725.05	2,757.25	2,667.94	89.31	30.871	
12,900.00	10,550.00	10,709.53	8,340.00	73.67	65.37	-36.77	1,753.58	2,825.05	2,757.24	2,665.19	92.05	29.953	
13,000.00	10,550.00	10,809.53	8,340.00	75.77	67.54	-36.77	1,753.54	2,925.05	2,757.23	2,662.41	94.82	29.079	
13,100.00	10,550.00	10,909.53	8,340.00	77.88	69.72	-36.77	1,753.49	3,025.05	2,757.22	2,659.61	97.61	28.248	
13,200.00	10,550.00	11,009.53	8,340.00	80.00	71.92	-36.77	1,753.45	3,125.05	2,757.21	2,656.79	100.42	27.456	
13,300.00	10,550.00	11,109.53	8,340.00	82.15	74.13	-36.77	1,753.41	3,225.05	2,757.20	2,653.95	103.25	26.703	
13,400.00	10,550.00	11,209.53	8,340.00	84.31	76.35	-36.77	1,753.36	3,325.05	2,757.19	2,651.09	106.11	25.985	
13,500.00	10,550.00	11,309.53	8,340.00	86.48	78.59	-36.77	1,753.32	3,425.05	2,757.19	2,648.21	108.98	25.301	
13,600.00	10,550.00	11,409.53	8,340.00	88.67	80.83	-36.77	1,753.28	3,525.05	2,757.18	2,645.32	111.86	24.648	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #121H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
13,700.00	10,550.00	11,509.53	8,340.00	90.87	83.09	-36.76	1,753.23	3,625.05	2,757.17	2,642.41	114.76	24.026		
13,800.00	10,550.00	11,609.53	8,340.00	93.07	85.36	-36.76	1,753.19	3,725.05	2,757.16	2,639.49	117.67	23.431		
13,900.00	10,550.00	11,709.53	8,340.00	95.29	87.63	-36.76	1,753.15	3,825.05	2,757.15	2,636.55	120.60	22.862		
14,000.00	10,550.00	11,809.53	8,340.00	97.52	89.91	-36.76	1,753.11	3,925.05	2,757.14	2,633.60	123.54	22.318		
14,100.00	10,550.00	11,909.53	8,340.00	99.76	92.20	-36.76	1,753.06	4,025.05	2,757.13	2,630.64	126.49	21.798		
14,200.00	10,550.00	12,009.53	8,340.00	102.01	94.50	-36.76	1,753.02	4,125.05	2,757.12	2,627.68	129.45	21.299		
14,300.00	10,550.00	12,109.53	8,340.00	104.27	96.80	-36.76	1,752.98	4,225.05	2,757.11	2,624.70	132.42	20.822		
14,400.00	10,550.00	12,209.53	8,340.00	106.53	99.11	-36.76	1,752.93	4,325.05	2,757.10	2,621.71	135.39	20.364		
14,500.00	10,550.00	12,309.53	8,340.00	108.80	101.42	-36.76	1,752.89	4,425.05	2,757.10	2,618.72	138.38	19.924		
14,600.00	10,550.00	12,409.53	8,340.00	111.07	103.74	-36.76	1,752.85	4,525.05	2,757.09	2,615.71	141.37	19.502		
14,700.00	10,550.00	12,509.53	8,340.00	113.36	106.07	-36.76	1,752.80	4,625.05	2,757.08	2,612.70	144.38	19.097		
14,800.00	10,550.00	12,609.53	8,340.00	115.64	108.39	-36.76	1,752.76	4,725.05	2,757.07	2,609.68	147.38	18.707		
14,900.00	10,550.00	12,709.53	8,340.00	117.94	110.72	-36.76	1,752.72	4,825.05	2,757.06	2,606.66	150.40	18.332		
15,000.00	10,550.00	12,809.53	8,340.00	120.24	113.06	-36.76	1,752.67	4,925.05	2,757.05	2,603.63	153.42	17.971		
15,100.00	10,550.00	12,909.53	8,340.00	122.54	115.40	-36.76	1,752.63	5,025.05	2,757.04	2,600.59	156.45	17.623		
15,200.00	10,550.00	13,009.53	8,340.00	124.85	117.74	-36.76	1,752.59	5,125.05	2,757.03	2,597.55	159.48	17.288		
15,300.00	10,550.00	13,109.53	8,340.00	127.16	120.09	-36.76	1,752.54	5,225.05	2,757.02	2,594.51	162.52	16.964		
15,400.00	10,550.00	13,190.47	8,340.00	129.48	121.99	-36.76	1,752.50	5,325.05	2,757.01	2,591.75	165.27	16.682		
15,425.84	10,550.00	13,216.31	8,340.00	130.08	122.60	-36.76	1,752.49	5,350.88	2,757.01	2,590.96	166.05	16.603		
15,437.85	10,550.00	13,216.38	8,340.00	130.35	122.60	-36.76	1,752.49	5,350.95	2,757.04	2,590.80	166.23	16.585		
15,438.79	10,550.00	13,216.38	8,340.00	130.37	122.60	-36.76	1,752.49	5,350.95	2,757.04	2,590.80	166.24	16.585 SF		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #122H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
0.00	0.00	2.29	2.29	0.00	0.00	-0.06	29.90	-0.03	29.90				
100.00	100.00	102.29	102.29	0.13	0.14	-0.06	29.90	-0.03	29.90	29.64	0.26	113.808	
200.00	200.00	202.29	202.29	0.49	0.49	-0.06	29.90	-0.03	29.90	28.92	0.98	30.521	
300.00	300.00	302.29	302.29	0.84	0.85	-0.06	29.90	-0.03	29.90	28.20	1.70	17.623	
400.00	400.00	402.29	402.29	1.20	1.21	-0.06	29.90	-0.03	29.90	27.49	2.41	12.388	
500.00	500.00	502.29	502.29	1.56	1.57	-0.06	29.90	-0.03	29.90	26.77	3.13	9.551	
600.00	600.00	602.29	602.29	1.92	1.93	-0.06	29.90	-0.03	29.90	26.05	3.85	7.771	
700.00	700.00	702.29	702.29	2.28	2.29	-0.06	29.90	-0.03	29.90	25.34	4.56	6.551	
800.00	800.00	802.29	802.29	2.64	2.64	-0.06	29.90	-0.03	29.90	24.62	5.28	5.661	
900.00	900.00	902.29	902.29	3.00	3.00	-0.06	29.90	-0.03	29.90	23.90	6.00	4.985	
1,000.00	1,000.00	1,002.29	1,002.29	3.35	3.36	-0.06	29.90	-0.03	29.90	23.18	6.72	4.453 CC, ES	
1,100.00	1,100.00	1,101.60	1,101.58	3.71	3.72	1.29	31.04	0.70	31.05	23.63	7.43	4.181	
1,200.00	1,200.00	1,200.78	1,200.69	4.07	4.07	4.68	34.34	2.81	34.50	26.36	8.14	4.240	
1,300.00	1,300.00	1,300.01	1,299.72	4.43	4.43	8.93	39.70	6.24	40.27	31.42	8.84	4.553	
1,400.00	1,400.00	1,400.23	1,399.23	4.79	4.79	12.36	45.56	9.99	46.74	37.18	9.56	4.890	
1,500.00	1,500.00	1,500.47	1,498.74	5.15	5.15	14.95	51.42	13.73	53.34	43.07	10.27	5.192	
1,600.00	1,600.00	1,600.72	1,598.26	5.50	5.51	16.97	57.29	17.48	60.03	49.04	10.99	5.462	
1,700.00	1,700.00	1,700.96	1,697.77	5.86	5.88	18.59	63.15	21.23	66.77	55.07	11.71	5.703	
1,800.00	1,800.00	1,801.20	1,797.28	6.22	6.24	19.90	69.01	24.98	73.56	61.14	12.43	5.920	
1,900.00	1,900.00	1,901.45	1,896.80	6.58	6.61	20.99	74.87	28.73	80.38	67.24	13.14	6.116	
2,000.00	2,000.00	2,001.69	1,996.31	6.94	6.98	21.92	80.73	32.48	87.23	73.37	13.86	6.293	
2,100.00	2,099.99	2,101.86	2,095.90	7.29	7.35	-23.14	86.60	36.23	92.89	78.31	14.58	6.373	
2,200.00	2,199.91	2,201.91	2,195.60	7.65	7.72	-23.30	92.47	39.99	96.15	80.86	15.29	6.289	
2,300.00	2,299.69	2,301.93	2,295.34	8.00	8.08	-24.08	98.35	43.75	97.02	81.01	16.01	6.062	
2,400.00	2,399.27	2,401.97	2,395.06	8.36	8.45	-25.53	104.22	47.50	95.53	78.81	16.72	5.712	
2,500.00	2,498.57	2,497.89	2,494.67	8.72	8.81	-27.77	110.09	51.26	91.78	74.35	17.43	5.266	
2,533.34	2,531.60	2,531.15	2,527.85	8.84	8.93	-28.74	112.05	-52.51	90.06	72.39	17.67	5.096	
2,600.00	2,597.62	2,602.37	2,594.17	9.09	9.19	-30.86	115.95	55.01	86.43	68.26	18.17	4.756	
2,700.00	2,696.65	2,702.64	2,693.66	9.46	9.57	-34.39	121.82	58.75	81.24	62.34	18.90	4.298	
2,800.00	2,795.67	2,802.91	2,793.15	9.83	9.94	-38.39	127.68	62.50	76.40	56.76	19.64	3.890	
2,900.00	2,894.70	2,896.07	2,891.87	10.21	10.28	-42.75	133.73	66.37	72.23	51.87	20.36	3.548	
3,000.00	2,993.73	2,994.38	2,989.73	10.59	10.65	-46.57	141.56	71.38	70.36	49.27	21.08	3.337	
3,027.09	3,020.55	3,021.04	3,016.23	10.69	10.76	-47.43	144.05	72.97	70.27	48.99	21.28	3.302	
3,100.00	3,092.75	3,092.83	3,087.47	10.97	11.03	-49.32	151.53	77.76	70.87	49.06	21.81	3.250	
3,200.00	3,191.78	3,207.57	3,186.10	11.36	11.48	-51.16	163.15	85.19	72.99	50.37	22.62	3.226	
3,300.00	3,290.81	3,307.62	3,285.08	11.74	11.88	-52.86	174.86	92.68	75.23	51.84	23.39	3.216	
3,400.00	3,389.83	3,392.33	3,384.06	12.13	12.21	-54.46	186.58	100.18	77.54	53.43	24.11	3.216	
3,500.00	3,488.86	3,507.72	3,483.04	12.52	12.67	-55.96	198.30	107.67	79.90	54.95	24.95	3.203	
3,600.00	3,587.89	3,607.77	3,582.02	12.92	13.07	-57.38	210.02	115.16	82.32	56.59	25.73	3.199	
3,700.00	3,686.91	3,707.82	3,680.99	13.31	13.47	-58.72	221.74	122.66	84.78	58.26	26.52	3.197	
3,800.00	3,785.94	3,807.87	3,779.97	13.71	13.87	-59.98	233.46	130.15	87.29	59.98	27.31	3.196	
3,900.00	3,884.97	3,907.92	3,878.95	14.11	14.27	-61.17	245.18	137.65	89.83	61.73	28.10	3.197	
4,000.00	3,984.00	4,007.97	3,977.93	14.50	14.67	-62.29	256.90	145.14	92.42	63.52	28.90	3.198	
4,100.00	4,083.02	4,108.02	4,076.90	14.90	15.07	-63.35	268.61	152.64	95.03	65.34	29.70	3.200	
4,200.00	4,182.05	4,191.94	4,175.88	15.30	15.41	-64.36	280.33	160.13	97.68	67.24	30.44	3.209	
4,300.00	4,281.08	4,291.89	4,274.86	15.71	15.81	-65.31	292.05	167.63	100.36	69.12	31.24	3.213	
4,400.00	4,380.10	4,408.16	4,373.84	16.11	16.28	-66.21	303.77	175.12	103.06	70.95	32.11	3.210	
4,500.00	4,479.13	4,491.79	4,472.82	16.51	16.62	-67.07	315.49	182.62	105.78	72.93	32.85	3.220	
4,600.00	4,578.16	4,608.26	4,571.79	16.91	17.10	-67.88	327.21	190.11	108.53	74.81	33.72	3.218	
4,612.79	4,590.82	4,604.52	4,584.45	16.97	17.08	-67.98	328.71	191.07	108.89	75.12	33.76	3.225	
4,700.00	4,677.31	4,691.68	4,670.77	17.31	17.44	-68.21	338.93	197.61	111.67	77.21	34.46	3.241	
4,800.00	4,776.77	4,791.58	4,769.69	17.70	17.84	-67.36	350.64	205.10	115.78	80.57	35.22	3.288	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #122H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)				Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	
4,900.00	4,876.47	4,891.36	4,868.50	18.08	18.25	-65.44	362.34	212.58	120.99	85.05	3.366			
5,000.00	4,976.34	4,990.95	4,967.12	18.44	18.65	-62.65	374.01	220.05	127.52	90.89	3.481			
5,100.00	5,076.30	5,109.72	5,065.49	18.79	19.14	-59.22	385.66	227.49	135.65	98.29	3.631			
5,146.12	5,122.42	5,135.99	5,110.75	18.95	19.25	-11.92	391.02	230.92	140.03	102.46	3.727			
5,200.00	5,176.30	5,189.34	5,163.59	19.13	19.47	-9.86	397.28	234.92	145.50	107.59	3.838			
5,300.00	5,276.30	5,289.92	5,263.22	19.47	19.87	-6.44	408.81	242.30	155.86	117.30	4.042			
5,400.00	5,376.30	5,392.70	5,365.34	19.81	20.28	-3.89	418.61	248.57	164.83	125.58	4.199			
5,500.00	5,476.30	5,496.03	5,468.28	20.16	20.67	-2.11	426.13	253.38	171.87	131.92	4.303			
5,600.00	5,576.30	5,599.78	5,571.85	20.50	21.05	-0.98	431.32	256.69	176.78	136.15	4.351			
5,700.00	5,676.30	5,703.79	5,675.80	20.84	21.42	-0.39	434.14	258.50	179.47	138.17	4.345			
5,800.00	5,776.30	5,806.59	5,778.59	21.18	21.77	-0.27	434.69	258.85	180.00	138.03	4.288			
5,900.00	5,876.30	5,906.59	5,878.59	21.53	22.10	-0.27	434.69	258.85	180.00	137.33	4.219			
6,000.00	5,976.30	6,006.59	5,978.59	21.87	22.44	-0.27	434.69	258.85	180.00	136.64	4.151			
6,100.00	6,076.30	6,106.59	6,078.59	22.22	22.77	-0.27	434.69	258.85	180.00	135.94	4.085			
6,200.00	6,176.30	6,206.59	6,178.59	22.56	23.11	-0.27	434.69	258.85	180.00	135.25	4.022			
6,300.00	6,276.30	6,306.59	6,278.59	22.91	23.44	-0.27	434.69	258.85	180.00	134.55	3.960			
6,400.00	6,376.30	6,406.59	6,378.59	23.25	23.78	-0.27	434.69	258.85	180.00	133.85	3.900			
6,500.00	6,476.30	6,506.59	6,478.59	23.60	24.12	-0.27	434.69	258.85	180.00	133.15	3.842			
6,600.00	6,576.30	6,606.59	6,578.59	23.95	24.46	-0.27	434.69	258.85	180.00	132.46	3.786			
6,700.00	6,676.30	6,706.59	6,678.59	24.29	24.80	-0.27	434.69	258.85	180.00	131.76	3.731			
6,800.00	6,776.30	6,806.59	6,778.59	24.64	25.14	-0.27	434.69	258.85	180.00	131.06	3.678			
6,900.00	6,876.30	6,906.59	6,878.59	24.99	25.48	-0.27	434.69	258.85	180.00	130.36	3.626			
7,000.00	6,976.30	7,006.59	6,978.59	25.34	25.82	-0.27	434.69	258.85	180.00	129.66	3.575			
7,100.00	7,076.30	7,106.59	7,078.59	25.68	26.16	-0.27	434.69	258.85	180.00	128.95	3.526			
7,200.00	7,176.30	7,206.59	7,178.59	26.03	26.50	-0.27	434.69	258.85	180.00	128.25	3.478			
7,300.00	7,276.30	7,306.59	7,278.59	26.38	26.85	-0.27	434.69	258.85	180.00	127.55	3.432			
7,400.00	7,376.30	7,406.59	7,378.59	26.73	27.19	-0.27	434.69	258.85	180.00	126.85	3.386			
7,500.00	7,476.30	7,506.59	7,478.59	27.08	27.53	-0.27	434.69	258.85	180.00	126.15	3.342			
7,600.00	7,576.30	7,606.59	7,578.59	27.43	27.87	-0.27	434.69	258.85	180.00	125.44	3.299			
7,700.00	7,676.30	7,706.59	7,678.59	27.78	28.22	-0.27	434.69	258.85	180.00	124.74	3.257			
7,800.00	7,776.30	7,806.60	7,778.61	28.13	28.56	-0.24	434.69	258.97	180.00	124.04	3.216			
7,821.16	7,797.46	7,827.76	7,799.75	28.20	28.64	0.02	434.69	259.78	180.00	123.89	3.208			
7,900.00	7,876.30	7,905.38	7,876.71	28.48	28.91	3.10	434.69	269.44	180.27	123.64	3.183 SF			
8,000.00	7,976.30	7,998.00	7,965.78	28.83	29.27	10.92	434.67	294.42	183.75	126.55	3.212			
8,100.00	8,076.30	8,080.78	8,041.09	29.18	29.61	20.96	434.66	328.64	196.34	139.14	3.433			
8,200.00	8,176.30	8,152.37	8,101.66	29.53	29.93	30.74	434.64	366.71	223.05	167.18	3.992			
8,300.00	8,276.30	8,213.09	8,148.98	29.88	30.22	38.87	434.63	404.72	264.96	211.67	4.971			
8,400.00	8,376.30	8,264.17	8,185.48	30.23	30.48	45.12	434.61	440.41	319.87	269.71	6.376			
8,500.00	8,476.30	8,307.08	8,213.59	30.58	30.71	49.83	434.60	472.82	384.72	337.64	8.173			
8,600.00	8,576.30	8,350.00	8,239.21	30.94	30.97	53.99	434.58	507.25	456.97	412.19	10.207			
8,700.00	8,676.30	8,373.94	8,252.36	31.29	31.13	56.09	434.57	527.26	534.43	492.56	12.763			
8,800.00	8,776.30	8,400.00	8,265.70	31.64	31.30	58.18	434.56	549.64	616.01	576.20	15.473			
8,900.00	8,876.30	8,422.73	8,276.50	31.99	31.46	59.87	434.56	569.63	700.66	662.57	18.395			
9,000.00	8,976.30	8,450.00	8,288.40	32.34	31.66	61.73	434.55	594.17	787.77	750.76	21.284			
9,100.00	9,076.30	8,450.00	8,288.40	32.70	31.66	61.73	434.55	594.17	876.71	841.73	25.063			
9,200.00	9,176.30	8,474.44	8,298.05	33.05	31.85	63.26	434.54	616.62	966.99	932.62	28.133			
9,300.00	9,276.30	8,500.00	8,307.12	33.40	32.05	64.72	434.53	640.51	1,058.82	1,024.85	31.188			
9,400.00	9,376.30	8,500.00	8,307.12	33.75	32.05	64.72	434.53	640.51	1,151.26	1,118.46	32.79			
9,500.00	9,476.30	8,500.00	8,307.12	34.11	32.05	64.72	434.53	640.51	1,244.87	1,213.02	31.85			
9,600.00	9,576.30	8,519.80	8,313.41	34.46	32.22	65.77	434.52	659.28	1,338.91	1,307.24	31.67			
9,700.00	9,676.30	8,528.44	8,315.95	34.81	32.29	66.21	434.51	667.55	1,433.69	1,402.43	31.25			
9,800.00	9,776.30	8,550.00	8,321.74	35.16	32.48	67.24	434.50	688.31	1,529.20	1,497.93	31.27			

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #122H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
9,900.00	9,876.30	8,550.00	8,321.74	35.52	32.48	67.24	434.50	688.31	1,624.75	1,593.96	30.80	52.757		
9,994.94	9,971.24	8,550.00	8,321.74	35.85	32.48	67.24	434.50	688.31	1,715.94	1,685.50	30.44	56.376		
10,000.00	9,976.30	8,550.00	8,321.74	35.87	32.48	-32.44	434.50	688.31	1,720.81	1,690.39	30.42	56.569		
10,050.00	10,026.22	8,550.00	8,321.74	36.04	32.48	-25.06	434.50	688.31	1,768.34	1,738.13	30.22	58.517		
10,100.00	10,075.71	8,550.00	8,321.74	36.22	32.48	-20.29	434.50	688.31	1,814.70	1,784.72	29.98	60.539		
10,150.00	10,124.41	8,550.00	8,321.74	36.41	32.48	-17.02	434.50	688.31	1,859.62	1,829.92	29.70	62.615		
10,200.00	10,171.95	8,569.43	8,326.29	36.59	32.66	-14.62	434.50	707.20	1,902.45	1,872.67	29.78	63.886		
10,250.00	10,217.96	8,576.00	8,327.68	36.79	32.72	-12.91	434.49	713.62	1,943.50	1,913.94	29.57	65.732		
10,300.00	10,262.09	8,600.00	8,332.14	36.98	32.94	-11.62	434.48	737.20	1,982.68	1,953.03	29.65	66.860		
10,350.00	10,304.01	8,600.00	8,332.14	37.19	32.94	-10.61	434.48	737.20	2,018.93	1,989.65	29.28	68.957		
10,400.00	10,343.39	8,600.00	8,332.14	37.40	32.94	-9.79	434.48	737.20	2,052.75	2,023.85	28.91	71.010		
10,450.00	10,379.94	8,600.00	8,332.14	37.62	32.94	-9.13	434.48	737.20	2,084.02	2,055.47	28.55	72.989		
10,500.00	10,413.39	8,600.00	8,332.14	37.86	32.94	-8.60	434.48	737.20	2,112.60	2,084.38	28.22	74.862		
10,550.00	10,443.46	8,625.27	8,335.76	38.12	33.19	-8.25	434.47	762.21	2,137.70	2,109.43	28.27	75.626		
10,600.00	10,469.95	8,650.00	8,338.23	38.40	33.43	-7.99	434.46	786.82	2,160.26	2,131.96	28.30	76.325		
10,650.00	10,492.63	8,650.00	8,338.23	38.71	33.43	-7.71	434.46	786.82	2,179.17	2,151.13	28.04	77.730		
10,700.00	10,511.35	8,650.00	8,338.23	39.03	33.43	-7.49	434.46	786.82	2,195.03	2,167.21	27.82	78.894		
10,750.00	10,525.96	8,650.00	8,338.23	39.39	33.43	-7.32	434.46	786.82	2,207.80	2,180.13	27.67	79.781		
10,794.94	10,535.49	8,672.99	8,339.58	39.73	33.67	-7.31	434.45	809.76	2,216.02	2,188.21	27.81	79.697		
10,800.00	10,536.36	8,674.01	8,339.61	39.77	33.68	-7.30	434.45	810.78	2,216.80	2,189.00	27.81	79.726		
10,850.00	10,543.49	8,695.04	8,340.00	40.17	33.89	-7.34	434.44	831.81	2,223.78	2,195.84	27.94	79.582		
10,900.00	10,548.01	8,695.04	8,340.00	40.60	33.89	-7.31	434.44	831.81	2,228.80	2,200.84	27.96	79.717		
10,950.00	10,549.93	8,739.93	8,340.00	41.06	34.39	-7.49	434.42	876.70	2,231.90	2,203.55	28.35	78.719		
10,961.61	10,550.00	8,751.34	8,340.00	41.16	34.52	-7.54	434.42	888.11	2,232.25	2,203.80	28.45	78.453		
11,000.00	10,550.00	8,789.15	8,340.00	41.53	34.95	-7.73	434.40	925.91	2,233.16	2,204.37	28.79	77.569		
11,100.00	10,550.00	8,888.17	8,340.00	42.59	36.17	-8.14	434.36	1,024.94	2,235.09	2,205.40	29.70	75.266		
11,200.00	10,550.00	8,987.78	8,340.00	43.75	37.52	-8.40	434.32	1,124.55	2,236.34	2,205.72	30.62	73.033		
11,300.00	10,550.00	9,087.71	8,340.00	45.03	38.98	-8.50	434.27	1,224.48	2,236.85	2,205.30	31.55	70.906		
11,316.07	10,550.00	9,103.78	8,340.00	45.24	39.22	-8.50	434.27	1,240.55	2,236.86	2,205.17	31.69	70.578		
11,400.00	10,550.00	9,187.71	8,340.00	46.39	40.53	-8.50	434.23	1,324.48	2,236.86	2,204.37	32.49	68.853		
11,500.00	10,550.00	9,287.71	8,340.00	47.83	42.16	-8.50	434.19	1,424.48	2,236.86	2,203.37	33.49	66.797		
11,600.00	10,550.00	9,387.71	8,340.00	49.35	43.87	-8.50	434.14	1,524.48	2,236.85	2,202.31	34.54	64.755		
11,700.00	10,550.00	9,487.71	8,340.00	50.94	45.64	-8.50	434.10	1,624.48	2,236.85	2,201.20	35.65	62.746		
11,800.00	10,550.00	9,587.71	8,340.00	52.60	47.47	-8.50	434.06	1,724.48	2,236.85	2,200.05	36.80	60.782		
11,900.00	10,550.00	9,687.71	8,340.00	54.31	49.35	-8.50	434.01	1,824.48	2,236.85	2,198.85	37.99	58.873		
12,000.00	10,550.00	9,787.71	8,340.00	56.08	51.28	-8.50	433.97	1,924.48	2,236.84	2,197.62	39.23	57.025		
12,100.00	10,550.00	9,887.71	8,340.00	57.89	53.25	-8.50	433.93	2,024.48	2,236.84	2,196.35	40.49	55.243		
12,200.00	10,550.00	9,987.71	8,340.00	59.75	55.25	-8.50	433.89	2,124.48	2,236.84	2,195.05	41.79	53.529		
12,300.00	10,550.00	10,087.71	8,340.00	61.65	57.29	-8.50	433.84	2,224.48	2,236.84	2,193.72	43.11	51.883		
12,400.00	10,550.00	10,187.71	8,340.00	63.58	59.35	-8.50	433.80	2,324.48	2,236.84	2,192.37	44.46	50.307		
12,500.00	10,550.00	10,287.71	8,340.00	65.54	61.45	-8.50	433.76	2,424.48	2,236.83	2,190.99	45.84	48.798		
12,600.00	10,550.00	10,387.71	8,340.00	67.54	63.56	-8.49	433.71	2,524.48	2,236.83	2,189.60	47.24	47.355		
12,700.00	10,550.00	10,487.71	8,340.00	69.56	65.70	-8.49	433.67	2,624.48	2,236.83	2,188.18	48.65	45.976		
12,800.00	10,550.00	10,587.71	8,340.00	71.61	67.85	-8.49	433.63	2,724.48	2,236.83	2,186.74	50.09	44.660		
12,900.00	10,550.00	10,687.71	8,340.00	73.67	70.03	-8.49	433.58	2,824.48	2,236.82	2,185.29	51.54	43.402		
13,000.00	10,550.00	10,787.71	8,340.00	75.77	72.22	-8.49	433.54	2,924.48	2,236.82	2,183.82	53.00	42.201		
13,100.00	10,550.00	10,887.71	8,340.00	77.88	74.42	-8.49	433.50	3,024.48	2,236.82	2,182.34	54.48	41.054		
13,200.00	10,550.00	10,987.71	8,340.00	80.00	76.64	-8.49	433.45	3,124.48	2,236.82	2,180.84	55.98	39.959		
13,300.00	10,550.00	11,087.71	8,340.00	82.15	78.87	-8.49	433.41	3,224.48	2,236.82	2,179.33	57.48	38.912		
13,400.00	10,550.00	11,187.71	8,340.00	84.31	81.11	-8.49	433.37	3,324.48	2,236.81	2,177.81	59.00	37.912		
13,500.00	10,550.00	11,287.71	8,340.00	86.48	83.36	-8.49	433.32	3,424.48	2,236.81	2,176.28	60.53	36.955		
13,600.00	10,550.00	11,387.71	8,340.00	88.67	85.62	-8.49	433.28	3,524.48	2,236.81	2,174.74	62.06	36.040		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #122H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Tooface (")	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
13,700.00	10,550.00	11,487.71	8,340.00	90.87	87.89	-8.49	433.24	3,624.48	2,236.81	2,173.20	63.61	35.165	
13,800.00	10,550.00	11,587.71	8,340.00	93.07	90.17	-8.49	433.20	3,724.48	2,236.80	2,171.64	65.16	34.326	
13,900.00	10,550.00	11,687.71	8,340.00	95.29	92.45	-8.49	433.15	3,824.48	2,236.80	2,170.08	66.72	33.523	
14,000.00	10,550.00	11,787.71	8,340.00	97.52	94.75	-8.49	433.11	3,924.48	2,236.80	2,168.51	68.29	32.753	
14,100.00	10,550.00	11,887.71	8,340.00	99.76	97.04	-8.49	433.07	4,024.48	2,236.80	2,166.93	69.87	32.015	
14,200.00	10,550.00	11,987.71	8,340.00	102.01	99.35	-8.49	433.02	4,124.48	2,236.79	2,165.35	71.45	31.306	
14,300.00	10,550.00	12,087.71	8,340.00	104.27	101.66	-8.49	432.98	4,224.48	2,236.79	2,163.76	73.04	30.626	
14,400.00	10,550.00	12,187.71	8,340.00	106.53	103.97	-8.49	432.94	4,324.48	2,236.79	2,162.16	74.63	29.972	
14,500.00	10,550.00	12,287.71	8,340.00	108.80	106.29	-8.49	432.89	4,424.48	2,236.79	2,160.56	76.23	29.344	
14,600.00	10,550.00	12,387.71	8,340.00	111.07	108.62	-8.49	432.85	4,524.48	2,236.79	2,158.96	77.83	28.740	
14,700.00	10,550.00	12,487.71	8,340.00	113.36	110.95	-8.49	432.81	4,624.48	2,236.78	2,157.35	79.44	28.158	
14,800.00	10,550.00	12,587.71	8,340.00	115.64	113.28	-8.49	432.76	4,724.48	2,236.78	2,155.73	81.05	27.598	
14,900.00	10,550.00	12,687.71	8,340.00	117.94	115.62	-8.49	432.72	4,824.48	2,236.78	2,154.12	82.66	27.059	
15,000.00	10,550.00	12,787.71	8,340.00	120.24	117.96	-8.49	432.68	4,924.48	2,236.78	2,152.49	84.28	26.539	
15,100.00	10,550.00	12,887.71	8,340.00	122.54	120.30	-8.49	432.63	5,024.48	2,236.77	2,150.87	85.91	26.038	
15,200.00	10,550.00	12,987.71	8,340.00	124.85	122.65	-8.48	432.59	5,124.48	2,236.77	2,149.24	87.53	25.554	
15,300.00	10,550.00	13,087.71	8,340.00	127.16	125.00	-8.48	432.55	5,224.48	2,236.77	2,147.61	89.16	25.087	
15,400.00	10,550.00	13,187.71	8,340.00	129.48	127.35	-8.48	432.51	5,324.48	2,236.77	2,145.97	90.79	24.636	
15,436.35	10,550.00	13,224.06	8,340.00	130.32	128.20	-8.48	432.49	5,360.83	2,236.77	2,145.38	91.39	24.476	
15,437.85	10,550.00	13,223.16	8,340.00	130.35	128.18	-8.48	432.49	5,359.93	2,236.77	2,145.38	91.39	24.476	
15,438.79	10,550.00	13,223.16	8,340.00	130.37	128.18	-8.48	432.49	5,359.93	2,236.77	2,145.38	91.39	24.476	



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #201H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
0.00	0.00	1.39	-1.39	0.00	0.00	20.10	1,703.52	623.44	1,814.02				
100.00	100.00	101.39	98.61	0.13	0.13	20.10	1,703.52	623.44	1,814.02	0.26	6,990.488		
200.00	200.00	201.39	198.61	0.49	0.49	20.10	1,703.52	623.44	1,814.02	0.98	1,857.785		
300.00	300.00	301.39	298.61	0.84	0.85	20.10	1,703.52	623.44	1,814.02	1.69	1,071.238		
400.00	400.00	401.39	398.61	1.20	1.21	20.10	1,703.52	623.44	1,814.02	2.41	752.602		
500.00	500.00	501.39	498.61	1.56	1.57	20.10	1,703.52	623.44	1,814.02	3.13	580.064		
600.00	600.00	601.39	598.61	1.92	1.92	20.10	1,703.52	623.44	1,814.02	3.84	471.883		
700.00	700.00	701.39	698.61	2.28	2.28	20.10	1,703.52	623.44	1,814.02	4.56	397.710		
800.00	800.00	801.39	798.61	2.64	2.64	20.10	1,703.52	623.44	1,814.02	5.28	343.688		
900.00	900.00	901.39	898.61	3.00	3.00	20.10	1,703.52	623.44	1,814.02	6.00	302.586		
1,000.00	1,000.00	1,001.39	998.61	3.35	3.36	20.10	1,703.52	623.44	1,814.02	6.71	270.265		
1,100.00	1,100.00	1,101.39	1,098.61	3.71	3.72	20.10	1,703.52	623.44	1,814.02	7.43	244.183		
1,107.18	1,107.18	1,105.79	1,105.79	3.74	3.73	20.10	1,703.52	623.44	1,814.02	7.47	242.827		
1,200.00	1,200.00	1,190.57	1,190.57	4.07	4.04	20.10	1,703.66	623.30	1,814.12	8.11	223.797		
1,300.00	1,300.00	1,273.40	1,273.38	4.43	4.33	20.05	1,704.91	622.09	1,815.04	8.76	207.249		
1,400.00	1,400.00	1,356.13	1,356.03	4.79	4.62	19.95	1,707.45	619.63	1,816.90	9.41	193.100		
1,500.00	1,500.00	1,438.66	1,438.39	5.15	4.92	19.80	1,711.26	615.94	1,819.73	10.06	180.883		
1,600.00	1,600.00	1,520.92	1,520.34	5.50	5.21	19.60	1,716.33	611.03	1,823.53	10.71	170.236		
1,700.00	1,700.00	1,602.84	1,601.79	5.86	5.51	19.35	1,722.63	604.92	1,828.32	11.36	160.897		
1,800.00	1,800.00	1,685.80	1,682.47	6.22	5.82	19.06	1,730.13	597.64	1,834.13	12.02	152.571		
1,900.00	1,900.00	1,783.23	1,780.54	6.58	6.19	18.67	1,740.03	588.05	1,840.50	12.74	144.430		
2,000.00	2,000.00	1,882.25	1,878.60	6.94	6.56	18.29	1,749.92	578.46	1,846.96	13.47	137.066		
2,100.00	2,099.99	1,981.27	1,976.65	7.29	6.95	-27.63	1,759.82	568.87	1,852.34	14.21	130.381		
2,200.00	2,199.91	2,080.22	2,074.64	7.65	7.33	-28.04	1,769.71	559.28	1,855.50	14.94	124.199		
2,300.00	2,299.69	2,179.04	2,172.50	8.00	7.72	-28.49	1,779.58	549.71	1,856.47	15.68	118.432		
2,400.00	2,399.27	2,277.65	2,270.15	8.36	8.11	-29.01	1,789.44	540.16	1,855.27	16.41	113.035		
2,500.00	2,498.57	2,376.00	2,367.54	8.72	8.50	-29.57	1,799.27	530.63	1,851.95	17.15	107.966		
2,533.34	2,531.60	2,408.71	2,399.94	8.84	8.63	-29.77	1,802.53	527.46	1,850.37	17.40	106.342		
2,600.00	2,597.62	2,474.09	2,464.68	9.09	8.89	-30.16	1,809.07	521.13	1,847.03	17.89	103.216		
2,700.00	2,696.65	2,572.17	2,561.80	9.46	9.29	-30.73	1,818.87	511.63	1,842.18	18.64	98.835		
2,800.00	2,795.67	2,670.24	2,658.92	9.83	9.68	-31.31	1,828.67	502.13	1,837.53	19.39	94.786		
2,900.00	2,894.70	2,768.32	2,756.04	10.21	10.08	-31.90	1,838.47	492.63	1,833.07	20.14	91.037		
3,000.00	2,993.73	2,866.39	2,853.16	10.59	10.47	-32.48	1,848.27	483.13	1,828.81	20.89	87.558		
3,100.00	3,092.75	2,964.47	2,950.28	10.97	10.87	-33.07	1,858.07	473.63	1,824.75	21.64	84.322		
3,200.00	3,191.78	3,062.54	3,047.40	11.36	11.27	-33.66	1,867.87	464.13	1,820.89	22.40	81.306		
3,300.00	3,290.81	3,160.61	3,144.52	11.74	11.67	-34.26	1,877.67	454.63	1,817.23	23.15	78.490		
3,400.00	3,389.83	3,258.69	3,241.64	12.13	12.07	-34.85	1,887.47	445.13	1,813.78	23.91	75.857		
3,500.00	3,488.86	3,356.76	3,338.76	12.52	12.47	-35.45	1,897.27	435.63	1,810.53	24.67	73.390		
3,600.00	3,587.89	3,454.84	3,435.88	12.92	12.88	-36.05	1,907.08	426.13	1,807.48	25.43	71.076		
3,700.00	3,686.91	3,552.91	3,533.00	13.31	13.28	-36.65	1,916.88	416.63	1,804.64	26.19	68.901		
3,800.00	3,785.94	3,650.99	3,630.12	13.71	13.68	-37.26	1,926.68	407.13	1,802.01	26.95	66.854		
3,900.00	3,884.97	3,749.06	3,727.24	14.11	14.08	-37.86	1,936.48	397.63	1,799.59	27.72	64.925		
4,000.00	3,984.00	3,847.14	3,824.36	14.50	14.49	-38.47	1,946.28	388.13	1,797.37	28.48	63.106		
4,100.00	4,083.02	3,945.21	3,921.48	14.90	14.89	-39.07	1,956.08	378.63	1,795.36	29.25	61.387		
4,200.00	4,182.05	4,043.28	4,018.60	15.30	15.30	-39.68	1,965.88	369.13	1,793.57	30.01	59.762		
4,300.00	4,281.08	4,141.36	4,115.72	15.71	15.70	-40.29	1,975.68	359.63	1,791.98	30.78	58.223		
4,400.00	4,380.10	4,239.43	4,212.84	16.11	16.11	-40.91	1,985.48	350.13	1,790.61	31.54	56.765		
4,500.00	4,479.13	4,337.51	4,309.96	16.51	16.51	-41.52	1,995.28	340.63	1,789.45	32.31	55.381		
4,600.00	4,578.16	4,435.58	4,407.08	16.91	16.92	-42.13	2,005.08	331.13	1,788.50	33.08	54.068		
4,612.79	4,590.82	4,448.12	4,419.50	16.97	16.97	-42.21	2,006.34	329.92	1,788.40	33.18	53.905		
4,650.82	4,628.51	4,485.45	4,456.46	17.12	17.12	-42.44	2,010.07	326.30	1,788.24	33.47	53.432 CC		
4,700.00	4,677.31	4,533.78	4,504.33	17.31	17.33	-42.72	2,014.90	321.62	1,788.50	33.84	52.845 ES		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #201H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,800.00	4,776.77	4,632.29	4,601.87	17.70	17.73	-43.29	2,024.74	312.08	1,790.58	1,755.98	34.60	51.744		
4,900.00	4,876.47	4,731.02	4,699.64	18.08	18.14	-43.81	2,034.61	302.52	1,794.72	1,759.36	35.36	50.757		
5,000.00	4,976.34	4,829.92	4,797.58	18.44	18.55	-44.30	2,044.49	292.94	1,800.86	1,764.75	36.11	49.878		
5,100.00	5,076.30	4,928.91	4,895.61	18.79	18.96	-44.75	2,054.38	283.35	1,808.95	1,772.11	36.84	49.097		
5,146.12	5,122.42	4,979.39	4,945.61	18.95	19.17	0.60	2,059.41	278.48	1,813.32	1,776.12	37.21	48.739		
5,200.00	5,176.30	5,060.37	5,025.95	19.13	19.50	0.37	2,066.68	271.43	1,818.14	1,780.42	37.72	48.202		
5,300.00	5,276.30	5,211.67	5,176.55	19.47	20.08	0.05	2,076.97	261.45	1,824.93	1,786.29	38.64	47.228		
5,400.00	5,376.30	5,363.87	5,328.51	19.81	20.63	-0.13	2,083.00	255.61	1,828.90	1,789.39	39.51	46.286		
5,500.00	5,476.30	5,510.30	5,474.91	20.16	21.13	-0.18	2,084.70	253.96	1,830.02	1,789.70	40.32	45.386		
5,600.00	5,576.30	5,610.30	5,574.91	20.50	21.45	-0.18	2,084.70	253.96	1,830.02	1,789.01	41.01	44.629		
5,700.00	5,676.30	5,710.30	5,674.91	20.84	21.78	-0.18	2,084.70	253.96	1,830.02	1,788.33	41.69	43.895		
5,800.00	5,776.30	5,810.30	5,774.91	21.18	22.11	-0.18	2,084.70	253.96	1,830.02	1,787.64	42.38	43.184		
5,900.00	5,876.30	5,910.30	5,874.91	21.53	22.44	-0.18	2,084.70	253.96	1,830.02	1,786.96	43.06	42.495		
6,000.00	5,976.30	6,010.30	5,974.91	21.87	22.77	-0.18	2,084.70	253.96	1,830.02	1,786.27	43.75	41.827		
6,100.00	6,076.30	6,110.30	6,074.91	22.22	23.10	-0.18	2,084.70	253.96	1,830.02	1,785.58	44.44	41.178		
6,200.00	6,176.30	6,210.30	6,174.91	22.56	23.43	-0.18	2,084.70	253.96	1,830.02	1,784.89	45.13	40.549		
6,300.00	6,276.30	6,310.30	6,274.91	22.91	23.76	-0.18	2,084.70	253.96	1,830.02	1,784.20	45.82	39.937		
6,400.00	6,376.30	6,410.30	6,374.91	23.25	24.10	-0.18	2,084.70	253.96	1,830.02	1,783.51	46.51	39.343		
6,500.00	6,476.30	6,510.30	6,474.91	23.60	24.43	-0.18	2,084.70	253.96	1,830.02	1,782.81	47.21	38.766		
6,600.00	6,576.30	6,610.30	6,574.91	23.95	24.76	-0.18	2,084.70	253.96	1,830.02	1,782.12	47.90	38.205		
6,700.00	6,676.30	6,710.30	6,674.91	24.29	25.10	-0.18	2,084.70	253.96	1,830.02	1,781.43	48.59	37.660		
6,800.00	6,776.30	6,810.30	6,774.91	24.64	25.44	-0.18	2,084.70	253.96	1,830.02	1,780.73	49.29	37.129		
6,900.00	6,876.30	6,910.30	6,874.91	24.99	25.77	-0.18	2,084.70	253.96	1,830.02	1,780.04	49.98	36.613		
7,000.00	6,976.30	7,010.30	6,974.91	25.34	26.11	-0.18	2,084.70	253.96	1,830.02	1,779.34	50.68	36.110		
7,100.00	7,076.30	7,110.30	7,074.91	25.68	26.45	-0.18	2,084.70	253.96	1,830.02	1,778.65	51.37	35.621		
7,200.00	7,176.30	7,210.30	7,174.91	26.03	26.79	-0.18	2,084.70	253.96	1,830.02	1,777.95	52.07	35.144		
7,300.00	7,276.30	7,310.30	7,274.91	26.38	27.12	-0.18	2,084.70	253.96	1,830.02	1,777.25	52.77	34.680		
7,400.00	7,376.30	7,410.30	7,374.91	26.73	27.46	-0.18	2,084.70	253.96	1,830.02	1,776.55	53.47	34.227		
7,500.00	7,476.30	7,510.30	7,474.91	27.08	27.80	-0.18	2,084.70	253.96	1,830.02	1,775.85	54.17	33.786		
7,600.00	7,576.30	7,610.30	7,574.91	27.43	28.14	-0.18	2,084.70	253.96	1,830.02	1,775.16	54.86	33.356		
7,700.00	7,676.30	7,710.30	7,674.91	27.78	28.48	-0.18	2,084.70	253.96	1,830.02	1,774.46	55.56	32.936		
7,800.00	7,776.30	7,810.30	7,774.91	28.13	28.83	-0.18	2,084.70	253.96	1,830.02	1,773.76	56.26	32.526		
7,900.00	7,876.30	7,910.30	7,874.91	28.48	29.17	-0.18	2,084.70	253.96	1,830.02	1,773.06	56.96	32.126		
8,000.00	7,976.30	8,010.30	7,974.91	28.83	29.51	-0.18	2,084.70	253.96	1,830.02	1,772.36	57.66	31.736		
8,100.00	8,076.30	8,110.30	8,074.91	29.18	29.85	-0.18	2,084.70	253.96	1,830.02	1,771.66	58.36	31.355		
8,200.00	8,176.30	8,210.30	8,174.91	29.53	30.19	-0.18	2,084.70	253.96	1,830.02	1,770.95	59.07	30.983		
8,300.00	8,276.30	8,310.30	8,274.91	29.88	30.54	-0.18	2,084.70	253.96	1,830.02	1,770.25	59.77	30.619		
8,400.00	8,376.30	8,410.30	8,374.91	30.23	30.88	-0.18	2,084.70	253.96	1,830.02	1,769.55	60.47	30.263		
8,500.00	8,476.30	8,510.30	8,474.91	30.58	31.22	-0.18	2,084.70	253.96	1,830.02	1,768.85	61.17	29.916		
8,600.00	8,576.30	8,610.30	8,574.91	30.94	31.57	-0.18	2,084.70	253.96	1,830.02	1,768.14	61.88	29.576		
8,700.00	8,676.30	8,710.30	8,674.91	31.29	31.91	-0.18	2,084.70	253.96	1,830.02	1,767.44	62.58	29.244		
8,800.00	8,776.30	8,810.30	8,774.91	31.64	32.26	-0.18	2,084.70	253.96	1,830.02	1,766.74	63.28	28.919		
8,900.00	8,876.30	8,910.30	8,874.91	31.99	32.60	-0.18	2,084.70	253.96	1,830.02	1,766.03	63.99	28.601		
9,000.00	8,976.30	9,010.30	8,974.91	32.34	32.95	-0.18	2,084.70	253.96	1,830.02	1,765.33	64.69	28.289		
9,100.00	9,076.30	9,110.30	9,074.91	32.70	33.29	-0.18	2,084.70	253.96	1,830.02	1,764.63	65.39	27.985		
9,200.00	9,176.30	9,210.40	9,175.01	33.05	33.64	-0.18	2,084.70	254.03	1,830.02	1,763.92	66.10	27.687		
9,277.66	9,253.96	9,288.28	9,252.57	33.32	33.88	0.02	2,084.70	260.50	1,830.01	1,763.39	66.62	27.469		
9,300.00	9,276.30	9,310.23	9,274.20	33.40	33.94	0.14	2,084.70	264.22	1,830.01	1,763.25	66.77	27.409		
9,400.00	9,376.30	9,403.87	9,364.31	33.75	34.19	0.93	2,084.68	289.28	1,830.27	1,762.87	67.39	27.158		
9,500.00	9,476.30	9,487.51	9,440.41	34.11	34.38	2.01	2,084.67	323.81	1,831.43	1,763.45	67.98	26.940		
9,600.00	9,576.30	9,559.73	9,501.48	34.46	34.51	3.21	2,084.65	362.27	1,834.31	1,765.79	68.52	26.771		
9,700.00	9,676.30	9,620.88	9,549.07	34.81	34.62	4.40	2,084.64	400.63	1,839.67	1,770.68	68.99	26.666		

CC - Min centre to center distance or covergent point, SF - min separation factor. ES - min ellipse separation



Anticollision Report



Company: Matador Resources
 Project: Eddy County, New Mexico (NAD 27)
 Reference Site: Zach McCormick Federal 18-24S-29E RB
 Site Error: 0.00 usft
 Reference Well: #226H
 Well Error: 0.00 usft
 Reference Wellbore: Wellbore #1
 Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
 TVD Reference: WELL @ 2983.09usft (Patterson 297)
 MD Reference: WELL @ 2983.09usft (Patterson 297)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 2.00 sigma
 Database: EDM 5000.1 Conroe DB
 Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #201H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)			
9,800.00	9,776.30	9,672.22	9,585.68	35.16	34.70	5.52	2,084.62	436.60	1,848.17	1,778.80	69.37	26.642	
9,900.00	9,876.30	9,715.28	9,613.80	35.52	34.77	6.53	2,084.61	469.19	1,860.28	1,790.65	69.64	26.714	
9,994.94	9,971.24	9,750.00	9,634.65	35.85	34.83	7.39	2,084.59	496.95	1,875.42	1,805.65	69.77	26.878	
10,000.00	9,976.30	9,750.00	9,634.65	35.87	34.83	-93.17	2,084.59	496.95	1,876.33	1,806.56	69.77	26.894	
10,050.00	10,026.22	9,768.70	9,645.17	36.04	34.87	-91.73	2,084.59	512.42	1,886.01	1,816.20	69.80	27.019	
10,100.00	10,075.71	9,786.39	9,654.65	36.22	34.90	-90.21	2,084.58	527.35	1,896.79	1,826.97	69.82	27.169	
10,150.00	10,124.41	9,800.00	9,661.62	36.41	34.93	-88.70	2,084.58	539.03	1,908.53	1,838.74	69.79	27.348	
10,200.00	10,171.95	9,823.08	9,672.81	36.59	34.99	-86.93	2,084.57	559.22	1,921.05	1,851.23	69.82	27.515	
10,250.00	10,217.96	9,850.00	9,684.83	36.79	35.06	-85.07	2,084.56	583.30	1,934.23	1,864.36	69.87	27.684	
10,300.00	10,262.09	9,861.11	9,689.45	36.98	35.10	-83.47	2,084.55	593.40	1,947.82	1,878.00	69.82	27.898	
10,350.00	10,304.01	9,880.51	9,697.06	37.19	35.16	-81.73	2,084.55	611.25	1,961.75	1,891.91	69.84	28.090	
10,400.00	10,343.39	9,900.00	9,704.09	37.40	35.23	-80.00	2,084.54	629.43	1,975.83	1,905.96	69.87	28.278	
10,450.00	10,379.94	9,919.90	9,710.62	37.62	35.31	-78.31	2,084.53	648.22	1,989.93	1,919.99	69.94	28.452	
10,500.00	10,413.39	9,950.00	9,719.25	37.86	35.43	-76.57	2,084.52	677.06	2,003.95	1,933.84	70.11	28.583	
10,550.00	10,443.46	9,950.00	9,719.25	38.12	35.43	-75.19	2,084.52	677.06	2,017.64	1,947.53	70.11	28.777	
10,600.00	10,469.95	9,980.06	9,726.35	38.40	35.58	-73.63	2,084.50	706.26	2,030.89	1,960.52	70.38	28.857	
10,650.00	10,492.63	10,001.63	9,730.49	38.71	35.68	-72.24	2,084.49	727.42	2,043.69	1,973.07	70.63	28.935	
10,700.00	10,511.35	10,026.36	9,734.47	39.03	35.82	-70.95	2,084.48	751.83	2,055.82	1,984.85	70.97	28.968	
10,750.00	10,525.96	10,050.00	9,737.68	39.39	35.95	-69.80	2,084.47	775.26	2,067.09	1,995.73	71.36	28.968	
10,794.94	10,535.49	10,076.91	9,740.63	39.73	36.12	-68.89	2,084.46	802.01	2,076.41	2,004.60	71.81	28.916	
10,800.00	10,536.36	10,079.62	9,740.89	39.77	36.13	-68.83	2,084.46	804.70	2,077.41	2,005.55	71.86	28.909	
10,850.00	10,543.49	10,100.00	9,742.56	40.17	36.26	-68.28	2,084.45	825.01	2,087.11	2,014.76	72.35	28.848	
10,900.00	10,548.01	10,133.01	9,744.35	40.60	36.48	-67.79	2,084.44	857.97	2,096.35	2,023.37	72.98	28.726	
10,950.00	10,549.93	10,159.70	9,744.96	41.06	36.67	-67.33	2,084.43	884.65	2,105.16	2,031.56	73.60	28.602	
10,961.61	10,550.00	10,168.29	9,745.00	41.16	36.73	-67.24	2,084.42	893.25	2,107.14	2,033.37	73.77	28.564	
11,000.00	10,550.00	10,201.68	9,745.00	41.53	36.98	-67.37	2,084.41	926.63	2,113.33	2,038.95	74.38	28.412	
11,100.00	10,550.00	10,300.70	9,745.00	42.59	37.81	-67.66	2,084.37	1,025.65	2,126.17	2,049.96	76.21	27.899	
11,200.00	10,550.00	10,400.31	9,745.00	43.75	38.79	-67.84	2,084.32	1,125.26	2,134.19	2,055.94	78.25	27.274	
11,300.00	10,550.00	10,500.24	9,745.00	45.03	39.89	-67.91	2,084.28	1,225.19	2,137.39	2,056.91	80.48	26.558	
11,316.07	10,550.00	10,516.31	9,745.00	45.24	40.08	-67.92	2,084.27	1,241.26	2,137.45	2,056.59	80.86	26.434	
11,400.00	10,550.00	10,600.24	9,745.00	46.39	41.10	-67.92	2,084.24	1,325.19	2,137.43	2,054.55	82.88	25.789	
11,500.00	10,550.00	10,700.24	9,745.00	47.83	42.42	-67.92	2,084.19	1,425.19	2,137.42	2,051.96	85.46	25.011	
11,600.00	10,550.00	10,800.24	9,745.00	49.35	43.83	-67.92	2,084.15	1,525.19	2,137.40	2,049.21	88.20	24.234	
11,700.00	10,550.00	10,900.24	9,745.00	50.94	45.33	-67.92	2,084.11	1,625.19	2,137.39	2,046.31	91.08	23.468	
11,800.00	10,550.00	11,000.24	9,745.00	52.60	46.90	-67.92	2,084.06	1,725.19	2,137.38	2,043.29	94.09	22.717	
11,900.00	10,550.00	11,100.24	9,745.00	54.31	48.55	-67.91	2,084.02	1,825.19	2,137.36	2,040.14	97.22	21.985	
12,000.00	10,550.00	11,200.24	9,745.00	56.08	50.25	-67.91	2,083.98	1,925.19	2,137.35	2,036.89	100.46	21.276	
12,100.00	10,550.00	11,300.24	9,745.00	57.89	52.02	-67.91	2,083.93	2,025.19	2,137.33	2,033.54	103.79	20.592	
12,200.00	10,550.00	11,400.24	9,745.00	59.75	53.83	-67.91	2,083.89	2,125.19	2,137.32	2,030.10	107.22	19.935	
12,300.00	10,550.00	11,500.24	9,745.00	61.65	55.69	-67.91	2,083.84	2,225.19	2,137.31	2,026.58	110.72	19.304	
12,400.00	10,550.00	11,600.24	9,745.00	63.58	57.59	-67.91	2,083.80	2,325.19	2,137.29	2,022.99	114.30	18.699	
12,500.00	10,550.00	11,700.24	9,745.00	65.54	59.53	-67.91	2,083.76	2,425.19	2,137.28	2,019.34	117.94	18.122	
12,600.00	10,550.00	11,800.24	9,745.00	67.54	61.51	-67.91	2,083.71	2,525.19	2,137.26	2,015.62	121.64	17.570	
12,700.00	10,550.00	11,900.24	9,745.00	69.56	63.51	-67.91	2,083.67	2,625.19	2,137.25	2,011.85	125.40	17.043	
12,800.00	10,550.00	12,000.24	9,745.00	71.61	65.55	-67.91	2,083.63	2,725.19	2,137.23	2,008.03	129.21	16.541	
12,900.00	10,550.00	12,100.24	9,745.00	73.67	67.61	-67.91	2,083.58	2,825.19	2,137.22	2,004.16	133.06	16.062	
13,000.00	10,550.00	12,200.24	9,745.00	75.77	69.69	-67.91	2,083.54	2,925.19	2,137.21	2,000.25	136.96	15.605	
13,100.00	10,550.00	12,300.24	9,745.00	77.88	71.80	-67.91	2,083.50	3,025.19	2,137.19	1,996.30	140.89	15.169	
13,200.00	10,550.00	12,400.24	9,745.00	80.00	73.92	-67.91	2,083.45	3,125.19	2,137.18	1,992.32	144.86	14.753	
13,300.00	10,550.00	12,500.24	9,745.00	82.15	76.06	-67.91	2,083.41	3,225.19	2,137.16	1,988.30	148.86	14.357	
13,400.00	10,550.00	12,600.24	9,745.00	84.31	78.22	-67.91	2,083.37	3,325.19	2,137.15	1,984.26	152.89	13.978	
13,500.00	10,550.00	12,700.24	9,745.00	86.48	80.39	-67.91	2,083.32	3,425.19	2,137.13	1,980.18	156.95	13.617	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #201H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,600.00	10,550.00	12,800.24	9,745.00	88.67	82.58	-67.91	2,083.28	3,525.19	2,137.12	1,976.09	161.03	13.271		
13,700.00	10,550.00	12,900.24	9,745.00	90.87	84.78	-67.91	2,083.24	3,625.19	2,137.11	1,971.97	165.14	12.941		
13,800.00	10,550.00	13,000.24	9,745.00	93.07	86.99	-67.91	2,083.19	3,725.19	2,137.09	1,967.82	169.27	12.625		
13,900.00	10,550.00	13,100.24	9,745.00	95.29	89.22	-67.91	2,083.15	3,825.19	2,137.08	1,963.66	173.42	12.323		
14,000.00	10,550.00	13,200.24	9,745.00	97.52	91.45	-67.91	2,083.11	3,925.19	2,137.06	1,959.48	177.59	12.034		
14,100.00	10,550.00	13,300.24	9,745.00	99.76	93.69	-67.91	2,083.06	4,025.19	2,137.05	1,955.28	181.77	11.757		
14,200.00	10,550.00	13,400.24	9,745.00	102.01	95.94	-67.91	2,083.02	4,125.19	2,137.03	1,951.06	185.98	11.491		
14,300.00	10,550.00	13,500.24	9,745.00	104.27	98.20	-67.91	2,082.98	4,225.19	2,137.02	1,946.83	190.19	11.236		
14,400.00	10,550.00	13,600.24	9,745.00	106.53	100.47	-67.91	2,082.93	4,325.19	2,137.01	1,942.58	194.42	10.991		
14,500.00	10,550.00	13,700.24	9,745.00	108.80	102.75	-67.91	2,082.89	4,425.19	2,136.99	1,938.32	198.67	10.757		
14,600.00	10,550.00	13,800.24	9,745.00	111.07	105.03	-67.91	2,082.85	4,525.19	2,136.98	1,934.05	202.93	10.531		
14,700.00	10,550.00	13,900.24	9,745.00	113.36	107.31	-67.91	2,082.80	4,625.19	2,136.96	1,929.77	207.20	10.314		
14,800.00	10,550.00	14,000.24	9,745.00	115.64	109.61	-67.91	2,082.76	4,725.19	2,136.95	1,925.47	211.48	10.105		
14,900.00	10,550.00	14,100.24	9,745.00	117.94	111.91	-67.91	2,082.72	4,825.19	2,136.94	1,921.17	215.77	9.904		
15,000.00	10,550.00	14,200.24	9,745.00	120.24	114.21	-67.91	2,082.67	4,925.19	2,136.92	1,916.85	220.07	9.710		
15,100.00	10,550.00	14,300.24	9,745.00	122.54	116.52	-67.91	2,082.63	5,025.19	2,136.91	1,912.53	224.38	9.524		
15,200.00	10,550.00	14,400.24	9,745.00	124.85	118.83	-67.91	2,082.59	5,125.19	2,136.89	1,908.20	228.69	9.344		
15,300.00	10,550.00	14,500.24	9,745.00	127.16	121.15	-67.91	2,082.54	5,225.19	2,136.88	1,903.86	233.02	9.170		
15,400.00	10,550.00	14,600.24	9,745.00	129.48	123.47	-67.91	2,082.50	5,325.19	2,136.86	1,899.51	237.35	9.003		
15,424.12	10,550.00	14,624.36	9,745.00	130.04	124.03	-67.91	2,082.49	5,349.31	2,136.86	1,898.46	238.40	8.963		
15,437.85	10,550.00	14,623.75	9,745.00	130.35	124.02	-67.91	2,082.49	5,348.70	2,136.91	1,898.21	238.69	8.952		
15,438.79	10,550.00	14,623.75	9,745.00	130.37	124.02	-67.91	2,082.49	5,348.70	2,136.91	1,898.21	238.71	8.952 SF		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #202H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	1.41	1.41	0.00	0.00	-0.03	89.87	-0.05	89.87					
100.00	100.00	101.41	101.41	0.13	0.13	-0.03	89.87	-0.05	89.87	89.61	0.26	346.227		
200.00	200.00	201.41	201.41	0.49	0.49	-0.03	89.87	-0.05	89.87	88.89	0.98	92.032		
300.00	300.00	301.41	301.41	0.84	0.85	-0.03	89.87	-0.05	89.87	88.18	1.69	53.069		
400.00	400.00	401.41	401.41	1.20	1.21	-0.03	89.87	-0.05	89.87	87.46	2.41	37.284		
500.00	500.00	501.41	501.41	1.56	1.57	-0.03	89.87	-0.05	89.87	86.74	3.13	28.737		
600.00	600.00	601.41	601.41	1.92	1.92	-0.03	89.87	-0.05	89.87	86.03	3.84	23.378		
700.00	700.00	701.41	701.41	2.28	2.28	-0.03	89.87	-0.05	89.87	85.31	4.56	19.703		
800.00	800.00	801.41	801.41	2.64	2.64	-0.03	89.87	-0.05	89.87	84.59	5.28	17.027		
900.00	900.00	901.41	901.41	3.00	3.00	-0.03	89.87	-0.05	89.87	83.87	6.00	14.991		
1,000.00	1,000.00	1,001.41	1,001.41	3.35	3.36	-0.03	89.87	-0.05	89.87	83.16	6.71	13.389 CC, ES		
1,100.00	1,100.00	1,099.21	1,099.20	3.71	3.71	0.26	91.07	0.41	91.10	83.68	7.42	12.278		
1,200.00	1,200.00	1,196.90	1,196.82	4.07	4.06	1.06	94.61	1.76	94.74	86.61	8.12	11.662		
1,300.00	1,300.00	1,294.34	1,294.05	4.43	4.41	2.27	100.46	3.99	100.81	91.99	8.82	11.426		
1,400.00	1,400.00	1,391.40	1,390.72	4.79	4.76	3.73	108.59	7.09	109.35	99.83	9.51	11.492		
1,500.00	1,500.00	1,487.95	1,486.63	5.15	5.11	5.30	118.95	11.04	120.37	110.18	10.20	11.803		
1,600.00	1,600.00	1,585.60	1,583.36	5.50	5.48	6.85	131.40	15.79	133.57	122.68	10.89	12.262		
1,700.00	1,700.00	1,684.63	1,681.43	5.86	5.85	8.16	144.28	20.70	147.12	135.51	11.60	12.678		
1,800.00	1,800.00	1,783.66	1,779.49	6.22	6.23	9.25	157.16	25.61	160.73	148.41	12.32	13.049		
1,900.00	1,900.00	1,882.68	1,877.55	6.58	6.62	10.18	170.03	30.52	174.39	161.36	13.03	13.382		
2,000.00	2,000.00	1,981.71	1,975.62	6.94	7.01	10.96	182.91	35.43	188.09	174.34	13.75	13.682		
2,100.00	2,099.99	2,080.89	2,073.83	7.29	7.40	-34.02	195.81	40.35	200.74	186.28	14.46	13.882		
2,200.00	2,199.91	2,180.34	2,172.31	7.65	7.79	-33.91	208.74	45.28	211.24	196.07	15.17	13.920		
2,300.00	2,299.69	2,279.98	2,270.98	8.00	8.19	-34.21	221.70	50.22	219.59	203.69	15.89	13.816		
2,400.00	2,399.27	2,379.74	2,369.77	8.36	8.59	-34.87	234.67	55.16	225.79	209.17	16.62	13.588		
2,500.00	2,498.57	2,479.56	2,468.63	8.72	8.99	-35.89	247.65	60.11	229.91	212.56	17.34	13.255		
2,533.34	2,531.60	2,512.84	2,501.58	8.84	9.12	-36.31	251.98	61.76	230.83	213.24	17.59	13.124		
2,600.00	2,597.62	2,579.39	2,567.48	9.09	9.39	-37.20	260.63	65.06	232.48	214.40	18.08	12.859		
2,700.00	2,696.65	2,679.21	2,666.33	9.46	9.79	-38.52	273.61	70.01	235.06	216.24	18.82	12.492		
2,800.00	2,795.67	2,779.04	2,765.18	9.83	10.20	-39.80	286.59	74.96	237.75	218.19	19.56	12.155		
2,900.00	2,894.70	2,878.86	2,864.03	10.21	10.60	-41.05	299.58	79.91	240.57	220.26	20.31	11.847		
3,000.00	2,993.73	2,974.17	2,958.31	10.59	11.00	-42.17	312.64	84.89	244.22	223.22	21.01	11.625		
3,100.00	3,092.75	3,068.13	3,050.89	10.97	11.39	-43.07	327.61	90.60	250.25	228.56	21.69	11.538		
3,200.00	3,191.78	3,161.83	3,142.80	11.36	11.80	-43.76	344.65	97.10	258.65	236.29	22.36	11.565		
3,300.00	3,290.81	3,255.50	3,234.20	11.74	12.23	-44.24	363.79	104.40	269.38	246.34	23.03	11.694		
3,400.00	3,389.83	3,354.79	3,330.85	12.13	12.68	-44.63	385.05	112.51	281.13	257.33	23.80	11.811		
3,500.00	3,488.86	3,454.08	3,427.49	12.52	13.14	-44.99	406.31	120.62	292.90	268.33	24.57	11.919		
3,600.00	3,587.89	3,553.37	3,524.14	12.92	13.61	-45.32	427.58	128.72	304.68	279.33	25.35	12.020		
3,700.00	3,686.91	3,652.66	3,620.78	13.31	14.07	-45.63	448.84	136.83	316.47	290.35	26.12	12.114		
3,800.00	3,785.94	3,751.95	3,717.43	13.71	14.54	-45.92	470.11	144.94	328.27	301.36	26.90	12.202		
3,900.00	3,884.97	3,851.24	3,814.08	14.11	15.01	-46.18	491.37	153.05	340.07	312.39	27.68	12.284		
4,000.00	3,984.00	3,950.52	3,910.72	14.50	15.48	-46.43	512.63	161.16	351.88	323.41	28.47	12.361		
4,100.00	4,083.02	4,049.81	4,007.37	14.90	15.96	-46.66	533.90	169.26	363.70	334.45	29.25	12.433		
4,200.00	4,182.05	4,149.10	4,104.01	15.30	16.43	-46.88	555.16	177.37	375.52	345.48	30.04	12.501		
4,300.00	4,281.08	4,248.39	4,200.66	15.71	16.91	-47.08	576.42	185.48	387.35	356.52	30.83	12.565		
4,400.00	4,380.10	4,347.68	4,297.31	16.11	17.39	-47.28	597.69	193.59	399.18	367.56	31.62	12.625		
4,500.00	4,479.13	4,446.97	4,393.95	16.51	17.86	-47.46	618.95	201.70	411.02	378.61	32.41	12.682		
4,600.00	4,578.16	4,546.26	4,490.60	16.91	18.34	-47.63	640.21	209.81	422.86	389.65	33.20	12.736		
4,612.79	4,590.82	4,558.95	4,502.95	16.97	18.41	-47.65	642.93	210.84	424.37	391.07	33.30	12.742		
4,700.00	4,677.31	4,645.47	4,587.17	17.31	18.83	-47.81	661.46	217.91	435.36	401.37	33.99	12.809		
4,800.00	4,776.77	4,751.78	4,690.78	17.70	19.34	-47.79	683.68	226.38	449.11	414.26	34.85	12.887		
4,900.00	4,876.47	4,863.12	4,799.92	18.08	19.85	-47.65	704.23	234.22	462.15	426.42	35.73	12.934		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #202H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
5,000.00	4,976.34	4,974.97	4,910.17	18.44	20.34	-47.39	721.88	240.95	474.29	437.71	36.57	12.968	
5,100.00	5,076.30	5,087.32	5,021.41	18.79	20.81	-47.04	736.56	246.55	485.52	448.15	37.37	12.991	
5,146.12	5,122.42	5,139.30	5,073.02	18.95	21.02	-1.29	742.32	248.74	490.39	452.67	37.73	12.999	
5,200.00	5,176.30	5,200.18	5,133.57	19.13	21.26	-1.01	748.23	250.99	495.59	457.46	38.13	12.997	
5,300.00	5,276.30	5,313.64	5,246.65	19.47	21.67	-0.62	756.83	254.27	503.13	464.27	38.86	12.948	
5,400.00	5,376.30	5,427.55	5,360.41	19.81	22.07	-0.38	762.31	256.36	507.92	468.37	39.56	12.841	
5,500.00	5,476.30	5,541.72	5,474.54	20.16	22.44	-0.28	764.61	257.24	509.94	469.71	40.22	12.678	
5,600.00	5,576.30	5,644.89	5,577.71	20.50	22.76	-0.27	764.69	257.27	510.01	469.11	40.90	12.469	
5,700.00	5,676.30	5,744.89	5,677.71	20.84	23.06	-0.27	764.69	257.27	510.01	468.42	41.59	12.264	
5,800.00	5,776.30	5,844.89	5,777.71	21.18	23.37	-0.27	764.69	257.27	510.01	467.73	42.27	12.064	
5,900.00	5,876.30	5,944.89	5,877.71	21.53	23.68	-0.27	764.69	257.27	510.01	467.04	42.96	11.871	
6,000.00	5,976.30	6,044.89	5,977.71	21.87	24.00	-0.27	764.69	257.27	510.01	466.36	43.65	11.684	
6,100.00	6,076.30	6,144.89	6,077.71	22.22	24.31	-0.27	764.69	257.27	510.01	465.66	44.34	11.502	
6,200.00	6,176.30	6,244.89	6,177.71	22.56	24.63	-0.27	764.69	257.27	510.01	464.97	45.03	11.325	
6,300.00	6,276.30	6,344.89	6,277.71	22.91	24.94	-0.27	764.69	257.27	510.01	464.28	45.72	11.154	
6,400.00	6,376.30	6,444.89	6,377.71	23.25	25.26	-0.27	764.69	257.27	510.01	463.59	46.42	10.988	
6,500.00	6,476.30	6,544.89	6,477.71	23.60	25.58	-0.27	764.69	257.27	510.01	462.90	47.11	10.826	
6,600.00	6,576.30	6,644.89	6,577.71	23.95	25.90	-0.27	764.69	257.27	510.01	462.20	47.80	10.669	
6,700.00	6,676.30	6,744.89	6,677.71	24.29	26.22	-0.27	764.69	257.27	510.01	461.51	48.50	10.516	
6,800.00	6,776.30	6,844.89	6,777.71	24.64	26.54	-0.27	764.69	257.27	510.01	460.81	49.19	10.367	
6,900.00	6,876.30	6,944.89	6,877.71	24.99	26.86	-0.27	764.69	257.27	510.01	460.12	49.89	10.223	
7,000.00	6,976.30	7,044.89	6,977.71	25.34	27.18	-0.27	764.69	257.27	510.01	459.42	50.59	10.082	
7,100.00	7,076.30	7,144.89	7,077.71	25.68	27.51	-0.27	764.69	257.27	510.01	458.72	51.28	9.945	
7,200.00	7,176.30	7,244.89	7,177.71	26.03	27.83	-0.27	764.69	257.27	510.01	458.03	51.98	9.811	
7,300.00	7,276.30	7,344.89	7,277.71	26.38	28.16	-0.27	764.69	257.27	510.01	457.33	52.68	9.681	
7,400.00	7,376.30	7,444.89	7,377.71	26.73	28.48	-0.27	764.69	257.27	510.01	456.63	53.38	9.555	
7,500.00	7,476.30	7,544.89	7,477.71	27.08	28.81	-0.27	764.69	257.27	510.01	455.93	54.08	9.431	
7,600.00	7,576.30	7,644.89	7,577.71	27.43	29.14	-0.27	764.69	257.27	510.01	455.23	54.78	9.311	
7,700.00	7,676.30	7,744.89	7,677.71	27.78	29.47	-0.27	764.69	257.27	510.01	454.53	55.48	9.193	
7,800.00	7,776.30	7,844.89	7,777.71	28.13	29.80	-0.27	764.69	257.27	510.01	453.83	56.18	9.079	
7,900.00	7,876.30	7,944.89	7,877.71	28.48	30.13	-0.27	764.69	257.27	510.01	453.13	56.88	8.967	
8,000.00	7,976.30	8,044.89	7,977.71	28.83	30.46	-0.27	764.69	257.27	510.01	452.43	57.58	8.858	
8,100.00	8,076.30	8,144.89	8,077.71	29.18	30.79	-0.27	764.69	257.27	510.01	451.73	58.28	8.751	
8,200.00	8,176.30	8,244.89	8,177.71	29.53	31.12	-0.27	764.69	257.27	510.01	451.03	58.98	8.647	
8,300.00	8,276.30	8,344.89	8,277.71	29.88	31.45	-0.27	764.69	257.27	510.01	450.32	59.68	8.545	
8,400.00	8,376.30	8,444.89	8,377.71	30.23	31.79	-0.27	764.69	257.27	510.01	449.62	60.39	8.446	
8,500.00	8,476.30	8,544.89	8,477.71	30.58	32.12	-0.27	764.69	257.27	510.01	448.92	61.09	8.349	
8,600.00	8,576.30	8,644.89	8,577.71	30.94	32.45	-0.27	764.69	257.27	510.01	448.21	61.79	8.254	
8,700.00	8,676.30	8,744.89	8,677.71	31.29	32.79	-0.27	764.69	257.27	510.01	447.51	62.50	8.161	
8,800.00	8,776.30	8,844.89	8,777.71	31.64	33.12	-0.27	764.69	257.27	510.01	446.81	63.20	8.070	
8,900.00	8,876.30	8,944.89	8,877.71	31.99	33.46	-0.27	764.69	257.27	510.01	446.10	63.90	7.981	
9,000.00	8,976.30	9,044.89	8,977.71	32.34	33.80	-0.27	764.69	257.27	510.01	445.40	64.61	7.894	
9,100.00	9,076.30	9,144.89	9,077.71	32.70	34.13	-0.27	764.69	257.27	510.01	444.69	65.31	7.809	
9,200.00	9,176.30	9,244.94	9,177.71	33.05	34.47	-0.26	764.69	257.39	510.01	443.99	66.02	7.725	
9,243.64	9,219.94	9,288.61	9,221.35	33.20	34.62	0.02	764.69	259.93	510.00	443.68	66.32	7.690	
9,300.00	9,276.30	9,344.01	9,276.15	33.40	34.81	0.92	764.69	267.91	510.06	443.36	66.70	7.647	
9,400.00	9,376.30	9,436.87	9,365.44	33.75	35.14	3.74	764.67	293.01	511.22	443.83	67.39	7.586	
9,500.00	9,476.30	9,519.83	9,440.87	34.11	35.45	7.56	764.66	327.38	515.76	447.76	68.00	7.585	
9,600.00	9,576.30	9,591.52	9,501.48	34.46	35.73	11.73	764.64	365.58	526.38	458.06	68.32	7.705	
9,700.00	9,676.30	9,650.00	9,547.08	34.81	35.96	15.61	764.63	402.16	545.34	477.28	68.06	8.013	
9,800.00	9,776.30	9,700.00	9,582.94	35.16	36.17	19.17	764.61	436.98	573.92	506.82	67.10	8.553	
9,900.00	9,876.30	9,750.00	9,615.63	35.52	36.40	22.87	764.60	474.79	612.34	546.63	65.71	9.319	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #202H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
9,994.94	9,971.24	9,780.73	9,634.04	35.85	36.55	25.18	764.59	499.40	657.35	593.69	63.66	10.326	
10,000.00	9,976.30	9,782.43	9,635.01	35.87	36.55	-75.05	764.58	500.79	659.96	596.41	63.55	10.386	
10,050.00	10,026.22	9,800.00	9,644.89	36.04	36.64	-70.86	764.58	515.31	686.28	623.84	62.44	10.991	
10,100.00	10,075.71	9,817.20	9,654.13	36.22	36.73	-66.81	764.57	529.82	713.21	651.89	61.32	11.631	
10,150.00	10,124.41	9,835.31	9,663.38	36.41	36.83	-62.91	764.57	545.39	740.34	680.10	60.24	12.290	
10,200.00	10,171.95	9,850.00	9,670.52	36.59	36.91	-59.42	764.56	558.23	767.33	708.25	59.08	12.988	
10,250.00	10,217.96	9,872.64	9,680.87	36.79	37.04	-55.90	764.55	578.36	793.82	735.60	58.22	13.636	
10,300.00	10,262.09	9,900.00	9,692.31	36.98	37.20	-52.62	764.54	603.21	819.69	762.15	57.55	14.244	
10,350.00	10,304.01	9,911.12	9,696.61	37.19	37.27	-50.13	764.54	613.46	844.44	787.98	56.46	14.955	
10,400.00	10,343.39	9,930.68	9,703.70	37.40	37.40	-47.71	764.53	631.70	868.13	812.41	55.72	15.580	
10,450.00	10,379.94	9,950.00	9,710.09	37.62	37.53	-45.59	764.52	649.93	890.51	835.44	55.07	16.171	
10,500.00	10,413.39	9,970.33	9,716.14	37.86	37.67	-43.74	764.51	669.33	911.43	856.88	54.56	16.706	
10,550.00	10,443.46	10,000.00	9,723.73	38.12	37.88	-42.10	764.50	698.01	930.89	876.52	54.37	17.122	
10,600.00	10,469.95	10,010.48	9,726.06	38.40	37.96	-40.81	764.50	708.23	948.44	894.54	53.90	17.598	
10,650.00	10,492.63	10,033.42	9,730.49	38.71	38.14	-39.69	764.49	730.73	964.33	910.51	53.83	17.915	
10,700.00	10,511.35	10,050.00	9,733.23	39.03	38.27	-38.77	764.48	747.09	978.29	924.49	53.80	18.184	
10,750.00	10,525.96	10,082.81	9,737.81	39.39	38.54	-38.11	764.46	779.58	989.99	935.80	54.19	18.269	
10,794.94	10,535.49	10,100.00	9,739.76	39.73	38.69	-37.65	764.46	796.66	998.65	944.17	54.48	18.330	
10,800.00	10,536.36	10,109.45	9,740.70	39.77	38.77	-37.67	764.45	806.06	999.47	944.85	54.62	18.299	
10,850.00	10,543.49	10,136.10	9,742.86	40.17	39.01	-37.54	764.44	832.63	1,007.49	952.31	55.17	18.261	
10,900.00	10,548.01	10,162.75	9,744.27	40.60	39.26	-37.47	764.43	859.24	1,014.58	958.75	55.83	18.174	
10,950.00	10,549.93	10,189.40	9,744.94	41.06	39.51	-37.45	764.42	885.87	1,020.74	964.16	56.58	18.042	
10,961.61	10,550.00	10,208.39	9,745.00	41.16	39.70	-37.43	764.42	888.25	1,022.02	965.17	56.85	17.977	
11,000.00	10,550.00	10,229.58	9,745.00	41.53	39.92	-37.82	764.40	926.06	1,026.15	968.65	57.50	17.846	
11,100.00	10,550.00	10,328.60	9,745.00	42.59	40.98	-38.62	764.36	1,025.08	1,034.78	975.32	59.46	17.402	
11,200.00	10,550.00	10,428.22	9,745.00	43.75	42.16	-39.12	764.32	1,124.69	1,040.24	978.84	61.40	16.943	
11,300.00	10,550.00	10,528.15	9,745.00	45.03	43.46	-39.32	764.27	1,224.62	1,042.42	979.14	63.27	16.475	
11,316.07	10,550.00	10,544.22	9,745.00	45.24	43.67	-39.32	764.27	1,240.69	1,042.46	978.89	63.57	16.399	
11,400.00	10,550.00	10,628.15	9,745.00	46.39	44.84	-39.32	764.23	1,324.62	1,042.45	977.31	65.14	16.003	
11,500.00	10,550.00	10,728.15	9,745.00	47.83	46.32	-39.32	764.19	1,424.62	1,042.44	975.32	67.12	15.531	
11,600.00	10,550.00	10,828.15	9,745.00	49.35	47.87	-39.32	764.14	1,524.62	1,042.43	973.23	69.20	15.055	
11,700.00	10,550.00	10,928.15	9,745.00	50.94	49.50	-39.32	764.10	1,624.62	1,042.42	971.05	71.37	14.606	
11,800.00	10,550.00	11,028.15	9,745.00	52.60	51.19	-39.32	764.06	1,724.62	1,042.41	968.79	73.62	14.159	
11,900.00	10,550.00	11,128.15	9,745.00	54.31	52.93	-39.32	764.01	1,824.62	1,042.40	966.44	75.96	13.723	
12,000.00	10,550.00	11,228.15	9,745.00	56.08	54.73	-39.32	763.97	1,924.62	1,042.39	964.03	78.36	13.302	
12,100.00	10,550.00	11,328.15	9,745.00	57.89	56.58	-39.32	763.93	2,024.62	1,042.38	961.55	80.83	12.896	
12,200.00	10,550.00	11,428.15	9,745.00	59.75	58.47	-39.32	763.88	2,124.62	1,042.37	959.02	83.35	12.505	
12,300.00	10,550.00	11,528.15	9,745.00	61.65	60.39	-39.32	763.84	2,224.62	1,042.36	956.43	85.93	12.130	
12,400.00	10,550.00	11,628.15	9,745.00	63.58	62.35	-39.32	763.80	2,324.62	1,042.35	953.79	88.56	11.770	
12,500.00	10,550.00	11,728.15	9,745.00	65.54	64.35	-39.32	763.76	2,424.62	1,042.34	951.11	91.23	11.425	
12,600.00	10,550.00	11,828.15	9,745.00	67.54	66.37	-39.32	763.71	2,524.62	1,042.33	948.39	93.95	11.095	
12,700.00	10,550.00	11,928.15	9,745.00	69.56	68.42	-39.32	763.67	2,624.62	1,042.32	945.63	96.69	10.780	
12,800.00	10,550.00	12,028.15	9,745.00	71.61	70.49	-39.32	763.63	2,724.62	1,042.32	942.84	99.48	10.478	
12,900.00	10,550.00	12,128.15	9,745.00	73.67	72.59	-39.31	763.58	2,824.62	1,042.31	940.01	102.29	10.189	
13,000.00	10,550.00	12,228.15	9,745.00	75.77	74.70	-39.31	763.54	2,924.62	1,042.30	937.16	105.14	9.914	
13,100.00	10,550.00	12,328.15	9,745.00	77.88	76.83	-39.31	763.50	3,024.62	1,042.29	934.28	108.01	9.650	
13,200.00	10,550.00	12,428.15	9,745.00	80.00	78.98	-39.31	763.45	3,124.62	1,042.28	931.38	110.90	9.398	
13,300.00	10,550.00	12,528.15	9,745.00	82.15	81.15	-39.31	763.41	3,224.62	1,042.27	928.45	113.82	9.157	
13,400.00	10,550.00	12,628.15	9,745.00	84.31	83.33	-39.31	763.37	3,324.62	1,042.26	925.50	116.76	8.927	
13,500.00	10,550.00	12,728.15	9,745.00	86.48	85.52	-39.31	763.32	3,424.62	1,042.25	922.54	119.71	8.706	
13,600.00	10,550.00	12,828.15	9,745.00	88.67	87.73	-39.31	763.28	3,524.62	1,042.24	919.55	122.69	8.495	
13,700.00	10,550.00	12,928.15	9,745.00	90.87	89.94	-39.31	763.24	3,624.62	1,042.23	916.55	125.68	8.293	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #202H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
13,800.00	10,550.00	13,028.15	9,745.00	93.07	92.17	-39.31	763.19	3,724.62	1,042.22	913.53	128.69	8.099	
13,900.00	10,550.00	13,128.15	9,745.00	95.29	94.41	-39.31	763.15	3,824.62	1,042.21	910.50	131.71	7.913	
14,000.00	10,550.00	13,228.15	9,745.00	97.52	96.65	-39.31	763.11	3,924.62	1,042.20	907.46	134.74	7.735	
14,100.00	10,550.00	13,328.15	9,745.00	99.76	98.90	-39.31	763.07	4,024.62	1,042.19	904.40	137.79	7.564	
14,200.00	10,550.00	13,428.15	9,745.00	102.01	101.17	-39.31	763.02	4,124.62	1,042.18	901.33	140.85	7.399	
14,300.00	10,550.00	13,528.15	9,745.00	104.27	103.44	-39.31	762.98	4,224.62	1,042.17	898.25	143.92	7.241	
14,400.00	10,550.00	13,628.15	9,745.00	106.53	105.71	-39.30	762.94	4,324.62	1,042.16	895.16	147.00	7.090	
14,500.00	10,550.00	13,728.15	9,745.00	108.80	107.99	-39.30	762.89	4,424.62	1,042.15	892.07	150.09	6.944	
14,600.00	10,550.00	13,828.15	9,745.00	111.07	110.28	-39.30	762.85	4,524.62	1,042.14	888.96	153.19	6.803	
14,700.00	10,550.00	13,928.15	9,745.00	113.36	112.58	-39.30	762.81	4,624.62	1,042.13	885.84	156.29	6.668	
14,800.00	10,550.00	14,028.15	9,745.00	115.64	114.88	-39.30	762.76	4,724.62	1,042.12	882.72	159.41	6.537	
14,900.00	10,550.00	14,128.15	9,745.00	117.94	117.18	-39.30	762.72	4,824.62	1,042.11	879.58	162.53	6.412	
15,000.00	10,550.00	14,228.15	9,745.00	120.24	119.49	-39.30	762.68	4,924.62	1,042.10	876.44	165.66	6.291	
15,100.00	10,550.00	14,328.15	9,745.00	122.54	121.81	-39.30	762.63	5,024.62	1,042.09	873.30	168.80	6.174	
15,200.00	10,550.00	14,428.15	9,745.00	124.85	124.12	-39.30	762.59	5,124.62	1,042.09	870.15	171.94	6.061	
15,300.00	10,550.00	14,528.15	9,745.00	127.16	126.45	-39.30	762.55	5,224.62	1,042.08	866.99	175.09	5.952	
15,400.00	10,550.00	14,628.15	9,745.00	129.48	128.77	-39.30	762.50	5,324.62	1,042.07	863.82	178.24	5.846	
15,437.85	10,550.00	14,665.99	9,745.00	130.35	129.65	-39.30	762.49	5,362.46	1,042.06	862.62	179.44	5.807	
15,438.79	10,550.00	14,666.94	9,745.00	130.37	129.67	-39.30	762.49	5,363.41	1,042.06	862.60	179.46	5.807 SF	



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #205H - Wellbore #1 - Design #1												Offset Site Error:
Survey Program: 0-MWD												Offset Well Error:
Reference	Offset	Semi Major Axis		Distance		Warning						
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor
0.00	0.00	1.49	-1.49	0.00	0.00	20.43	1,673.48	623.47	1,785.85			
100.00	100.00	101.49	98.51	0.13	0.13	20.43	1,673.48	623.47	1,785.85	1,785.59	0.26	6,872.440
200.00	200.00	201.49	198.51	0.49	0.49	20.43	1,673.48	623.47	1,785.85	1,784.87	0.98	1,828.264
300.00	300.00	301.49	298.51	0.84	0.85	20.43	1,673.48	623.47	1,785.85	1,784.15	1.69	1,054.379
400.00	400.00	401.49	398.51	1.20	1.21	20.43	1,673.48	623.47	1,785.85	1,783.44	2.41	740.805
500.00	500.00	501.49	498.51	1.56	1.57	20.43	1,673.48	623.47	1,785.85	1,782.72	3.13	570.991
600.00	600.00	601.49	598.51	1.92	1.92	20.43	1,673.48	623.47	1,785.85	1,782.00	3.84	464.511
700.00	700.00	701.49	698.51	2.28	2.28	20.43	1,673.48	623.47	1,785.85	1,781.29	4.56	391.503
800.00	800.00	801.49	798.51	2.64	2.64	20.43	1,673.48	623.47	1,785.85	1,780.57	5.28	338.327
900.00	900.00	901.49	898.51	3.00	3.00	20.43	1,673.48	623.47	1,785.85	1,779.85	6.00	297.870
1,000.00	1,000.00	998.51	998.51	3.35	3.35	20.43	1,673.48	623.47	1,785.85	1,779.15	6.70	266.478
1,100.00	1,100.00	1,158.83	1,158.78	3.71	3.90	20.37	1,671.64	620.73	1,784.18	1,776.58	7.61	234.577
1,200.00	1,200.00	1,300.47	1,299.23	4.07	4.38	20.22	1,667.00	613.85	1,779.28	1,770.85	8.44	210.844
1,300.00	1,300.00	1,400.71	1,398.75	4.43	4.73	20.08	1,663.11	608.08	1,773.63	1,764.49	9.14	194.030
1,400.00	1,400.00	1,500.96	1,498.26	4.79	5.08	19.95	1,659.23	602.31	1,767.98	1,758.13	9.85	179.557
1,500.00	1,500.00	1,601.20	1,597.77	5.15	5.43	19.82	1,655.34	596.54	1,762.34	1,751.79	10.55	166.977
1,600.00	1,600.00	1,701.44	1,697.29	5.50	5.79	19.68	1,651.45	590.77	1,756.72	1,745.45	11.26	155.950
1,700.00	1,700.00	1,801.69	1,796.80	5.86	6.15	19.55	1,647.56	584.99	1,751.10	1,739.12	11.98	146.210
1,800.00	1,800.00	1,901.93	1,896.31	6.22	6.51	19.41	1,643.68	579.22	1,745.49	1,732.80	12.69	137.547
1,900.00	1,900.00	2,002.18	1,995.83	6.58	6.88	19.28	1,639.79	573.45	1,739.89	1,726.49	13.41	129.794
2,000.00	2,000.00	2,102.42	2,095.34	6.94	7.24	19.14	1,635.90	567.68	1,734.30	1,720.18	14.12	122.817
2,100.00	2,099.99	2,197.24	2,194.75	7.29	7.59	-26.62	1,632.02	561.91	1,727.56	1,712.74	14.82	116.599
2,200.00	2,199.91	2,303.36	2,293.92	7.65	7.98	-26.88	1,628.14	556.16	1,718.49	1,702.94	15.55	110.508
2,300.00	2,299.69	2,404.26	2,392.77	8.00	8.35	-27.20	1,624.28	550.43	1,707.13	1,690.87	16.27	104.939
2,400.00	2,399.27	2,505.56	2,491.24	8.36	8.72	-27.58	1,620.44	544.72	1,693.50	1,676.51	16.99	99.691
2,500.00	2,498.57	2,607.30	2,589.25	8.72	9.10	-28.03	1,616.61	539.03	1,677.62	1,659.91	17.71	94.728
2,533.34	2,531.60	2,625.34	2,621.81	8.84	9.17	-28.19	1,615.33	537.15	1,671.83	1,653.94	17.89	93.428
2,600.00	2,597.62	2,709.44	2,686.87	9.09	9.48	-28.44	1,612.79	533.37	1,660.03	1,641.59	18.44	90.047
2,700.00	2,696.65	2,788.39	2,784.47	9.46	9.77	-28.82	1,608.98	527.71	1,642.38	1,623.30	19.08	86.091
2,800.00	2,795.67	2,900.63	2,896.42	9.83	10.19	-29.27	1,604.47	521.01	1,624.67	1,604.84	19.83	81.912
2,900.00	2,894.70	3,044.94	3,040.00	10.21	10.74	-29.96	1,596.41	509.05	1,604.89	1,584.21	20.69	77.584
3,000.00	2,993.73	3,166.56	3,160.54	10.59	11.21	-30.66	1,587.40	495.67	1,582.72	1,561.25	21.47	73.710
3,100.00	3,092.75	3,282.72	3,255.76	10.97	11.60	-31.24	1,579.92	484.57	1,560.28	1,538.08	22.20	70.289
3,200.00	3,191.78	3,358.88	3,350.98	11.36	11.98	-31.84	1,572.45	473.47	1,538.00	1,515.08	22.93	67.080
3,300.00	3,290.81	3,455.03	3,446.20	11.74	12.36	-32.46	1,564.97	462.37	1,515.90	1,492.24	23.66	64.067
3,400.00	3,389.83	3,551.19	3,541.43	12.13	12.75	-33.09	1,557.49	451.28	1,493.97	1,469.57	24.40	61.232
3,500.00	3,488.86	3,647.35	3,636.65	12.52	13.14	-33.75	1,550.02	440.18	1,472.23	1,447.09	25.14	58.562
3,600.00	3,587.89	3,743.51	3,731.87	12.92	13.53	-34.42	1,542.54	429.08	1,450.68	1,424.79	25.88	56.044
3,700.00	3,686.91	3,839.67	3,827.09	13.31	13.92	-35.11	1,535.07	417.98	1,429.33	1,402.70	26.63	53.667
3,800.00	3,785.94	3,935.83	3,922.32	13.71	14.31	-35.82	1,527.59	406.88	1,408.19	1,380.81	27.39	51.420
3,900.00	3,884.97	4,031.99	4,017.54	14.11	14.70	-36.56	1,520.11	395.78	1,387.28	1,359.14	28.14	49.295
4,000.00	3,984.00	4,128.14	4,112.76	14.50	15.10	-37.31	1,512.64	384.68	1,366.59	1,337.69	28.90	47.282
4,100.00	4,083.02	4,224.30	4,207.99	14.90	15.49	-38.09	1,505.16	373.58	1,346.15	1,316.49	29.67	45.374
4,200.00	4,182.05	4,320.46	4,303.21	15.30	15.88	-38.89	1,497.68	362.48	1,325.96	1,295.53	30.44	43.565
4,300.00	4,281.08	4,416.62	4,398.43	15.71	16.28	-39.71	1,490.21	351.38	1,306.04	1,274.83	31.21	41.848
4,400.00	4,380.10	4,512.78	4,493.65	16.11	16.68	-40.56	1,482.73	340.28	1,286.40	1,254.41	31.99	40.217
4,500.00	4,479.13	4,608.94	4,588.88	16.51	17.07	-41.43	1,475.26	329.18	1,267.04	1,234.27	32.77	38.667
4,600.00	4,578.16	4,705.09	4,684.10	16.91	17.47	-42.33	1,467.78	318.08	1,247.99	1,214.43	33.55	37.193
4,612.79	4,590.82	4,717.39	4,696.27	16.97	17.52	-42.45	1,466.82	316.66	1,245.57	1,211.92	33.65	37.010
4,700.00	4,677.31	4,801.52	4,779.58	17.31	17.87	-43.06	1,460.28	306.95	1,229.97	1,195.62	34.34	35.815
4,800.00	4,776.77	4,901.41	4,875.71	17.70	18.28	-43.74	1,452.73	295.75	1,214.10	1,178.96	35.14	34.552
4,900.00	4,876.47	4,996.26	4,972.43	18.08	18.67	-44.37	1,445.14	284.47	1,200.35	1,164.44	35.91	33.428

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #205H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
5,000.00	4,976.34	5,078.96	5,054.45	18.44	19.01	-44.81	1,439.26	275.74	1,189.33	1,152.68	36.65	32.452		
5,100.00	5,076.30	5,163.20	5,138.22	18.79	19.34	-45.16	1,434.28	268.35	1,181.52	1,144.16	37.37	31.619		
5,146.12	5,122.42	5,202.28	5,177.14	18.95	19.49	0.28	1,432.33	265.45	1,178.99	1,141.30	37.69	31.279		
5,200.00	5,176.30	5,248.05	5,222.77	19.13	19.67	0.13	1,430.32	262.47	1,176.61	1,138.54	38.07	30.910		
5,300.00	5,276.30	5,333.20	5,307.76	19.47	19.98	-0.08	1,427.39	258.12	1,173.17	1,134.42	38.75	30.278		
5,400.00	5,376.30	5,418.54	5,393.03	19.81	20.29	-0.21	1,425.53	255.35	1,170.99	1,131.57	39.41	29.711		
5,500.00	5,476.30	5,503.99	5,478.47	20.16	20.58	-0.27	1,424.72	254.16	1,170.05	1,129.99	40.06	29.205		
5,544.56	5,520.86	5,544.89	5,519.37	20.31	20.71	-0.27	1,424.69	254.11	1,170.01	1,129.66	40.35	28.994		
5,600.00	5,576.30	5,600.33	5,574.81	20.50	20.89	-0.27	1,424.69	254.11	1,170.01	1,129.29	40.73	28.729		
5,700.00	5,676.30	5,700.33	5,674.81	20.84	21.21	-0.27	1,424.69	254.11	1,170.01	1,128.62	41.40	28.263		
5,800.00	5,776.30	5,800.33	5,774.81	21.18	21.53	-0.27	1,424.69	254.11	1,170.01	1,127.94	42.07	27.810		
5,900.00	5,876.30	5,900.33	5,874.81	21.53	21.85	-0.27	1,424.69	254.11	1,170.01	1,127.27	42.75	27.371		
6,000.00	5,976.30	6,000.33	5,974.81	21.87	22.17	-0.27	1,424.69	254.11	1,170.01	1,126.59	43.42	26.945		
6,100.00	6,076.30	6,100.33	6,074.81	22.22	22.49	-0.27	1,424.69	254.11	1,170.01	1,125.91	44.10	26.531		
6,200.00	6,176.30	6,200.33	6,174.81	22.56	22.82	-0.27	1,424.69	254.11	1,170.01	1,125.24	44.78	26.129		
6,300.00	6,276.30	6,300.33	6,274.81	22.91	23.14	-0.27	1,424.69	254.11	1,170.01	1,124.56	45.46	25.738		
6,400.00	6,376.30	6,400.33	6,374.81	23.25	23.47	-0.27	1,424.69	254.11	1,170.01	1,123.87	46.14	25.358		
6,500.00	6,476.30	6,500.33	6,474.81	23.60	23.79	-0.27	1,424.69	254.11	1,170.01	1,123.19	46.82	24.988		
6,600.00	6,576.30	6,600.33	6,574.81	23.95	24.12	-0.27	1,424.69	254.11	1,170.01	1,122.51	47.51	24.629		
6,700.00	6,676.30	6,700.33	6,674.81	24.29	24.45	-0.27	1,424.69	254.11	1,170.01	1,121.82	48.19	24.279		
6,800.00	6,776.30	6,800.33	6,774.81	24.64	24.78	-0.27	1,424.69	254.11	1,170.01	1,121.14	48.87	23.939		
6,900.00	6,876.30	6,900.33	6,874.81	24.99	25.11	-0.27	1,424.69	254.11	1,170.01	1,120.45	49.56	23.608		
7,000.00	6,976.30	7,000.33	6,974.81	25.34	25.44	-0.27	1,424.69	254.11	1,170.01	1,119.77	50.25	23.285		
7,100.00	7,076.30	7,100.33	7,074.81	25.68	25.77	-0.27	1,424.69	254.11	1,170.01	1,119.08	50.94	22.971		
7,200.00	7,176.30	7,200.33	7,174.81	26.03	26.11	-0.27	1,424.69	254.11	1,170.01	1,118.39	51.62	22.664		
7,300.00	7,276.30	7,300.33	7,274.81	26.38	26.44	-0.27	1,424.69	254.11	1,170.01	1,117.70	52.31	22.366		
7,400.00	7,376.30	7,400.33	7,374.81	26.73	26.77	-0.27	1,424.69	254.11	1,170.01	1,117.01	53.00	22.075		
7,500.00	7,476.30	7,500.33	7,474.81	27.08	27.11	-0.27	1,424.69	254.11	1,170.01	1,116.32	53.69	21.791		
7,600.00	7,576.30	7,600.33	7,574.81	27.43	27.44	-0.27	1,424.69	254.11	1,170.01	1,115.63	54.38	21.514		
7,700.00	7,676.30	7,700.33	7,674.81	27.78	27.78	-0.27	1,424.69	254.11	1,170.01	1,114.94	55.08	21.243		
7,800.00	7,776.30	7,800.33	7,774.81	28.13	28.11	-0.27	1,424.69	254.11	1,170.01	1,114.25	55.77	20.980		
7,900.00	7,876.30	7,900.33	7,874.81	28.48	28.45	-0.27	1,424.69	254.11	1,170.01	1,113.55	56.46	20.722		
8,000.00	7,976.30	8,000.33	7,974.81	28.83	28.79	-0.27	1,424.69	254.11	1,170.01	1,112.86	57.16	20.470		
8,100.00	8,076.30	8,100.33	8,074.81	29.18	29.13	-0.27	1,424.69	254.11	1,170.01	1,112.16	57.85	20.225		
8,200.00	8,176.30	8,200.33	8,174.81	29.53	29.46	-0.27	1,424.69	254.11	1,170.01	1,111.47	58.55	19.985		
8,300.00	8,276.30	8,300.33	8,274.81	29.88	29.80	-0.27	1,424.69	254.11	1,170.01	1,110.77	59.24	19.750		
8,400.00	8,376.30	8,400.33	8,374.81	30.23	30.14	-0.27	1,424.69	254.11	1,170.01	1,110.08	59.94	19.521		
8,500.00	8,476.30	8,500.33	8,474.81	30.58	30.48	-0.27	1,424.69	254.11	1,170.01	1,109.38	60.63	19.297		
8,600.00	8,576.30	8,600.33	8,574.81	30.94	30.82	-0.27	1,424.69	254.11	1,170.01	1,108.68	61.33	19.077		
8,700.00	8,676.30	8,700.33	8,674.81	31.29	31.16	-0.27	1,424.69	254.11	1,170.01	1,107.99	62.03	18.863		
8,800.00	8,776.30	8,800.33	8,774.81	31.64	31.50	-0.27	1,424.69	254.11	1,170.01	1,107.29	62.73	18.653		
8,900.00	8,876.30	8,900.33	8,874.81	31.99	31.84	-0.27	1,424.69	254.11	1,170.01	1,106.59	63.42	18.448		
9,000.00	8,976.30	9,000.33	8,974.81	32.34	32.19	-0.27	1,424.69	254.11	1,170.01	1,105.89	64.12	18.247		
9,100.00	9,076.30	9,100.33	9,074.81	32.70	32.53	-0.27	1,424.69	254.11	1,170.01	1,105.19	64.82	18.050		
9,200.00	9,176.30	9,200.42	9,174.90	33.05	32.87	-0.27	1,424.69	254.18	1,170.01	1,104.49	65.52	17.857		
9,274.82	9,251.12	9,275.45	9,249.63	33.31	33.10	0.02	1,424.69	260.21	1,170.00	1,103.98	66.01	17.724 CC		
9,300.00	9,276.30	9,300.19	9,274.02	33.40	33.18	0.23	1,424.69	264.34	1,170.01	1,103.83	66.17	17.681		
9,400.00	9,376.30	9,393.77	9,364.09	33.75	33.43	1.45	1,424.67	289.35	1,170.41	1,103.65	66.76	17.532 ES		
9,500.00	9,476.30	9,477.38	9,440.18	34.11	33.62	3.14	1,424.66	323.84	1,172.24	1,104.98	67.26	17.428		
9,600.00	9,576.30	9,549.59	9,501.26	34.46	33.77	5.01	1,424.64	362.26	1,176.74	1,109.08	67.66	17.391		
9,700.00	9,676.30	9,610.74	9,548.86	34.81	33.89	6.87	1,424.63	400.59	1,185.10	1,117.19	67.91	17.451		
9,800.00	9,776.30	9,662.09	9,585.50	35.16	33.99	8.60	1,424.61	436.55	1,198.26	1,130.31	67.95	17.634		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #205H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
9,900.00	9,876.30	9,700.00	9,610.40	35.52	34.07	9.96	1,424.60	465.13	1,216.88	1,149.17	67.71	17.973	
9,994.94	9,971.24	9,739.74	9,634.42	35.85	34.15	11.46	1,424.59	496.78	1,239.88	1,172.55	67.33	18.415	
10,000.00	9,976.30	9,741.44	9,635.40	35.87	34.16	-88.99	1,424.58	498.17	1,241.26	1,173.96	67.30	18.444	
10,050.00	10,026.22	9,758.60	9,645.04	36.04	34.20	-86.85	1,424.58	512.37	1,255.58	1,188.59	66.99	18.742	
10,100.00	10,075.71	9,776.30	9,654.53	36.22	34.24	-84.61	1,424.57	527.31	1,271.05	1,204.39	66.66	19.067	
10,150.00	10,124.41	9,800.00	9,666.50	36.41	34.31	-82.13	1,424.56	547.75	1,287.46	1,221.08	66.38	19.396	
10,200.00	10,171.95	9,813.00	9,672.71	36.59	34.34	-79.95	1,424.56	559.17	1,304.48	1,238.51	65.97	19.774	
10,250.00	10,217.96	9,831.88	9,681.26	36.79	34.40	-77.61	1,424.55	576.00	1,321.97	1,256.34	65.63	20.143	
10,300.00	10,262.09	9,850.00	9,688.94	36.98	34.46	-75.32	1,424.54	592.42	1,339.69	1,274.40	65.29	20.519	
10,350.00	10,304.01	9,870.44	9,696.98	37.19	34.54	-73.05	1,424.54	611.21	1,357.42	1,292.41	65.01	20.880	
10,400.00	10,343.39	9,900.00	9,707.41	37.40	34.65	-70.72	1,424.52	638.87	1,375.05	1,310.19	64.86	21.200	
10,450.00	10,379.94	9,900.00	9,707.41	37.62	34.65	-69.00	1,424.52	638.87	1,392.24	1,327.80	64.44	21.605	
10,500.00	10,413.39	9,929.77	9,716.45	37.86	34.78	-66.95	1,424.51	667.23	1,408.84	1,344.43	64.41	21.875	
10,550.00	10,443.46	9,950.00	9,721.75	38.12	34.87	-65.18	1,424.50	686.75	1,424.84	1,360.51	64.33	22.149	
10,600.00	10,469.95	9,970.00	9,726.31	38.40	34.96	-63.57	1,424.49	706.23	1,440.03	1,375.70	64.34	22.382	
10,650.00	10,492.63	9,991.76	9,730.49	38.71	35.07	-62.11	1,424.49	727.57	1,454.30	1,389.86	64.44	22.568	
10,700.00	10,511.35	10,016.25	9,734.44	39.03	35.21	-60.82	1,424.48	751.74	1,467.44	1,402.78	64.66	22.694	
10,750.00	10,525.96	10,050.00	9,738.85	39.39	35.40	-59.71	1,424.46	785.20	1,479.28	1,414.23	65.05	22.741	
10,794.94	10,535.49	10,066.81	9,740.61	39.73	35.50	-58.89	1,424.45	801.92	1,488.66	1,423.28	65.38	22.770	
10,800.00	10,536.36	10,069.51	9,740.86	39.77	35.52	-58.85	1,424.45	804.61	1,489.65	1,424.22	65.43	22.768	
10,850.00	10,543.49	10,100.00	9,743.21	40.17	35.71	-58.41	1,424.44	835.00	1,499.11	1,433.15	65.96	22.728	
10,900.00	10,548.01	10,122.91	9,744.34	40.60	35.87	-58.01	1,424.43	857.88	1,507.95	1,441.44	66.51	22.673	
10,950.00	10,549.93	10,150.00	9,744.96	41.06	36.06	-57.67	1,424.42	884.97	1,516.16	1,449.02	67.14	22.581	
10,961.81	10,550.00	10,155.79	9,745.00	41.16	36.10	-57.60	1,424.42	890.76	1,517.98	1,450.68	67.30	22.556	
11,000.00	10,550.00	10,208.63	9,745.00	41.53	36.51	-57.82	1,424.40	926.34	1,523.66	1,455.61	68.05	22.391	
11,100.00	10,550.00	10,290.39	9,745.00	42.59	37.21	-58.28	1,424.36	1,025.36	1,535.46	1,465.73	69.73	22.019	
11,200.00	10,550.00	10,409.99	9,745.00	43.75	38.41	-58.57	1,424.31	1,124.97	1,542.86	1,470.98	71.88	21.465	
11,300.00	10,550.00	10,489.94	9,745.00	45.03	39.31	-58.68	1,424.27	1,224.90	1,545.80	1,472.00	73.79	20.947	
11,316.07	10,550.00	10,506.01	9,745.00	45.24	39.49	-58.68	1,424.26	1,240.97	1,545.85	1,471.71	74.14	20.850	
11,400.00	10,550.00	10,589.94	9,745.00	46.39	40.53	-58.68	1,424.23	1,324.90	1,545.84	1,469.81	76.03	20.331	
11,500.00	10,550.00	10,689.94	9,745.00	47.83	41.86	-58.68	1,424.18	1,424.90	1,545.83	1,467.39	78.44	19.708	
11,600.00	10,550.00	10,789.94	9,745.00	49.35	43.28	-58.68	1,424.14	1,524.90	1,545.82	1,464.82	80.99	19.086	
11,700.00	10,550.00	10,889.94	9,745.00	50.94	44.79	-58.68	1,424.10	1,624.90	1,545.80	1,462.12	83.68	18.472	
11,800.00	10,550.00	10,989.94	9,745.00	52.60	46.38	-58.68	1,424.06	1,724.90	1,545.79	1,459.29	86.50	17.870	
11,900.00	10,550.00	11,089.94	9,745.00	54.31	48.04	-58.68	1,424.01	1,824.90	1,545.78	1,456.35	89.43	17.285	
12,000.00	10,550.00	11,189.94	9,745.00	56.08	49.76	-58.68	1,423.97	1,924.90	1,545.77	1,453.31	92.45	16.719	
12,100.00	10,550.00	11,289.94	9,745.00	57.89	51.53	-58.68	1,423.93	2,024.90	1,545.75	1,450.18	95.57	16.173	
12,200.00	10,550.00	11,389.94	9,745.00	59.75	53.36	-58.68	1,423.88	2,124.90	1,545.74	1,446.96	98.78	15.649	
12,300.00	10,550.00	11,489.94	9,745.00	61.65	55.24	-58.68	1,423.84	2,224.90	1,545.73	1,443.67	102.05	15.146	
12,400.00	10,550.00	11,589.94	9,745.00	63.58	57.15	-58.68	1,423.80	2,324.90	1,545.71	1,440.31	105.40	14.665	
12,500.00	10,550.00	11,689.94	9,745.00	65.54	59.10	-58.68	1,423.75	2,424.90	1,545.70	1,436.89	108.81	14.206	
12,600.00	10,550.00	11,789.94	9,745.00	67.54	61.09	-58.68	1,423.71	2,524.90	1,545.69	1,433.42	112.27	13.768	
12,700.00	10,550.00	11,889.94	9,745.00	69.56	63.10	-58.68	1,423.67	2,624.90	1,545.68	1,429.89	115.78	13.350	
12,800.00	10,550.00	11,989.94	9,745.00	71.61	65.15	-58.68	1,423.62	2,724.90	1,545.66	1,426.32	119.34	12.952	
12,900.00	10,550.00	12,089.94	9,745.00	73.67	67.22	-58.68	1,423.58	2,824.90	1,545.65	1,422.71	122.94	12.572	
13,000.00	10,550.00	12,189.94	9,745.00	75.77	69.31	-58.68	1,423.54	2,924.90	1,545.64	1,419.05	126.58	12.210	
13,100.00	10,550.00	12,289.94	9,745.00	77.88	71.42	-58.68	1,423.49	3,024.90	1,545.62	1,415.36	130.26	11.866	
13,200.00	10,550.00	12,389.94	9,745.00	80.00	73.56	-58.68	1,423.45	3,124.90	1,545.61	1,411.64	133.97	11.537	
13,300.00	10,550.00	12,489.94	9,745.00	82.15	75.71	-58.68	1,423.41	3,224.90	1,545.60	1,407.89	137.71	11.224	
13,400.00	10,550.00	12,589.94	9,745.00	84.31	77.87	-58.68	1,423.37	3,324.90	1,545.58	1,404.11	141.47	10.925	
13,500.00	10,550.00	12,689.94	9,745.00	86.48	80.05	-58.68	1,423.32	3,424.90	1,545.57	1,400.31	145.26	10.640	
13,600.00	10,550.00	12,789.94	9,745.00	88.67	82.25	-58.68	1,423.28	3,524.90	1,545.56	1,396.48	149.08	10.367	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #205H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,700.00	10,550.00	12,889.94	9,745.00	90.87	84.46	-58.68	1,423.24	3,624.90	1,545.55	1,392.63	152.91	10.107		
13,800.00	10,550.00	12,989.94	9,745.00	93.07	86.67	-58.68	1,423.19	3,724.90	1,545.53	1,388.76	156.77	9.859		
13,900.00	10,550.00	13,089.94	9,745.00	95.29	88.90	-58.67	1,423.15	3,824.90	1,545.52	1,384.88	160.64	9.621		
14,000.00	10,550.00	13,189.94	9,745.00	97.52	91.14	-58.67	1,423.11	3,924.90	1,545.51	1,380.97	164.54	9.393		
14,100.00	10,550.00	13,289.94	9,745.00	99.76	93.39	-58.67	1,423.06	4,024.90	1,545.49	1,377.05	168.44	9.175		
14,200.00	10,550.00	13,389.94	9,745.00	102.01	95.65	-58.67	1,423.02	4,124.90	1,545.48	1,373.12	172.37	8.966		
14,300.00	10,550.00	13,489.94	9,745.00	104.27	97.91	-58.67	1,422.98	4,224.90	1,545.47	1,369.17	176.30	8.766		
14,400.00	10,550.00	13,589.94	9,745.00	106.53	100.19	-58.67	1,422.93	4,324.90	1,545.46	1,365.20	180.25	8.574		
14,500.00	10,550.00	13,689.94	9,745.00	108.80	102.47	-58.67	1,422.89	4,424.90	1,545.44	1,361.23	184.21	8.389		
14,600.00	10,550.00	13,789.94	9,745.00	111.07	104.75	-58.67	1,422.85	4,524.90	1,545.43	1,357.24	188.19	8.212		
14,700.00	10,550.00	13,889.94	9,745.00	113.36	107.04	-58.67	1,422.80	4,624.90	1,545.42	1,353.24	192.17	8.042		
14,800.00	10,550.00	13,989.94	9,745.00	115.64	109.34	-58.67	1,422.76	4,724.90	1,545.40	1,349.24	196.17	7.878		
14,900.00	10,550.00	14,089.94	9,745.00	117.94	111.64	-58.67	1,422.72	4,824.90	1,545.39	1,345.22	200.17	7.720		
15,000.00	10,550.00	14,189.94	9,745.00	120.24	113.95	-58.67	1,422.67	4,924.90	1,545.38	1,341.20	204.18	7.569		
15,100.00	10,550.00	14,289.94	9,745.00	122.54	116.27	-58.67	1,422.63	5,024.90	1,545.36	1,337.16	208.20	7.422		
15,200.00	10,550.00	14,389.94	9,745.00	124.85	118.58	-58.67	1,422.59	5,124.90	1,545.35	1,333.12	212.23	7.281		
15,300.00	10,550.00	14,489.94	9,745.00	127.16	120.90	-58.67	1,422.55	5,224.90	1,545.34	1,329.07	216.27	7.145		
15,400.00	10,550.00	14,589.94	9,745.00	129.48	123.23	-58.67	1,422.50	5,324.90	1,545.33	1,325.01	220.31	7.014		
15,430.10	10,550.00	14,620.04	9,745.00	130.17	123.93	-58.67	1,422.49	5,355.00	1,545.32	1,323.79	221.53	6.976		
15,437.85	10,550.00	14,618.22	9,745.00	130.35	123.89	-58.67	1,422.49	5,353.19	1,545.35	1,323.72	221.63	6.973		
15,438.79	10,550.00	14,618.22	9,745.00	130.37	123.89	-58.67	1,422.49	5,353.19	1,545.36	1,323.72	221.64	6.972 SF		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #206H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	0.02	-0.02	0.00	0.00	-179.87	-30.02	-0.07	30.02					
100.00	100.00	100.02	99.98	0.13	0.13	-179.87	-30.02	-0.07	30.02	29.77	0.25	117.917		
200.00	200.00	200.02	199.98	0.49	0.49	-179.87	-30.02	-0.07	30.02	29.05	0.97	30.900		
300.00	300.00	300.02	299.98	0.84	0.84	-179.87	-30.02	-0.07	30.02	28.33	1.69	17.779		
400.00	400.00	400.02	399.98	1.20	1.20	-179.87	-30.02	-0.07	30.02	27.61	2.41	12.480		
500.00	500.00	500.02	499.98	1.56	1.56	-179.87	-30.02	-0.07	30.02	26.90	3.12	9.615		
600.00	600.00	600.02	599.98	1.92	1.92	-179.87	-30.02	-0.07	30.02	26.18	3.84	7.819		
700.00	700.00	700.02	699.98	2.28	2.28	-179.87	-30.02	-0.07	30.02	25.46	4.56	6.589		
800.00	800.00	800.02	799.98	2.64	2.64	-179.87	-30.02	-0.07	30.02	24.75	5.27	5.693		
900.00	900.00	900.02	899.98	3.00	3.00	-179.87	-30.02	-0.07	30.02	24.03	5.99	5.012		
1,000.00	1,000.00	999.98	999.98	3.35	3.35	-179.87	-30.02	-0.07	30.02	23.31	6.71	4.476		
1,100.00	1,100.00	1,100.32	1,100.31	3.71	3.71	177.86	-29.41	1.10	29.44	22.02	7.42	3.967		
1,200.00	1,200.00	1,200.52	1,200.43	4.07	4.06	170.53	-27.60	4.60	27.99	19.86	8.13	3.442		
1,300.00	1,300.00	1,300.43	1,300.13	4.43	4.42	157.36	-24.66	10.29	26.72	17.88	8.84	3.022		
1,331.50	1,331.50	1,331.85	1,331.48	4.54	4.53	152.65	-23.66	12.23	26.63	17.56	9.07	2.937 CC		
1,400.00	1,400.00	1,400.19	1,399.65	4.79	4.77	142.51	-21.47	16.47	27.06	17.50	9.56	2.831 ES		
1,500.00	1,500.00	1,499.94	1,499.16	5.15	5.13	128.89	-18.27	22.65	29.11	18.84	10.27	2.835		
1,600.00	1,600.00	1,600.30	1,598.67	5.50	5.49	117.60	-15.07	28.83	32.56	21.58	10.98	2.965		
1,700.00	1,700.00	1,700.54	1,698.19	5.86	5.86	108.74	-11.88	35.01	37.01	25.32	11.69	3.166		
1,800.00	1,800.00	1,800.79	1,797.70	6.22	6.22	101.90	-8.68	41.19	42.16	29.75	12.40	3.399		
1,900.00	1,900.00	1,901.03	1,897.21	6.58	6.59	96.60	-5.49	47.37	47.77	34.65	13.12	3.642		
2,000.00	2,000.00	2,001.27	1,996.73	6.94	6.96	92.45	-2.29	53.55	53.70	39.87	13.83	3.883		
2,100.00	2,099.99	2,101.44	2,096.32	7.29	7.33	44.39	0.91	59.74	58.92	44.38	14.54	4.051		
2,200.00	2,199.91	2,201.50	2,196.01	7.65	7.69	43.94	4.11	65.93	62.32	47.06	15.25	4.085		
2,300.00	2,299.69	2,301.53	2,295.74	8.00	8.06	45.17	7.32	72.13	63.85	47.88	15.97	3.998		
2,400.00	2,399.27	2,401.58	2,395.45	8.36	8.43	48.06	10.52	78.32	63.63	46.94	16.69	3.813		
2,500.00	2,498.57	2,501.74	2,495.05	8.72	8.80	52.86	13.72	84.51	61.96	44.54	17.42	3.558		
2,533.34	2,531.60	2,531.51	2,528.22	8.84	8.91	54.95	14.78	86.57	61.16	43.52	17.65	3.466		
2,600.00	2,597.62	2,602.01	2,594.53	9.09	9.17	59.51	16.91	90.69	59.68	41.52	18.16	3.287		
2,700.00	2,696.65	2,702.30	2,694.00	9.46	9.54	66.71	20.11	96.86	58.21	39.30	18.91	3.079		
2,800.00	2,795.67	2,802.58	2,793.47	9.83	9.91	74.16	23.30	103.04	57.70	38.03	19.67	2.933		
2,801.51	2,797.16	2,801.08	2,794.97	9.84	9.91	74.27	23.35	103.14	57.70	38.03	19.67	2.933		
2,900.00	2,894.70	2,896.82	2,892.61	10.21	10.26	81.33	26.62	109.46	58.30	37.89	20.42	2.856		
3,000.00	2,993.73	2,996.06	2,991.40	10.59	10.64	86.25	30.95	117.82	60.56	39.38	21.18	2.859		
3,100.00	3,092.75	3,095.43	3,090.04	10.97	11.02	88.58	36.46	128.48	64.00	42.05	21.95	2.916		
3,200.00	3,191.78	3,204.77	3,188.88	11.36	11.45	89.22	42.81	140.77	68.06	45.30	22.76	2.990		
3,300.00	3,290.81	3,295.15	3,287.82	11.74	11.81	89.75	49.20	153.12	72.14	48.64	23.50	3.070		
3,400.00	3,389.83	3,404.94	3,386.77	12.13	12.25	90.22	55.59	165.47	76.23	51.91	24.33	3.134		
3,500.00	3,488.86	3,494.98	3,485.71	12.52	12.61	90.65	61.98	177.82	80.33	55.26	25.07	3.204		
3,600.00	3,587.89	3,594.89	3,584.65	12.92	13.00	91.03	68.36	190.17	84.43	58.57	25.86	3.264		
3,700.00	3,686.91	3,705.19	3,683.59	13.31	13.45	91.37	74.75	202.53	88.53	61.83	26.70	3.316		
3,800.00	3,785.94	3,794.72	3,782.53	13.71	13.81	91.69	81.14	214.88	92.64	65.19	27.45	3.374		
3,900.00	3,884.97	3,894.63	3,881.48	14.11	14.21	91.98	87.53	227.23	96.75	68.50	28.25	3.424		
4,000.00	3,984.00	3,995.19	3,981.22	14.50	14.61	92.96	93.37	238.53	100.54	71.48	29.06	3.460		
4,100.00	4,083.02	4,095.65	4,081.17	14.90	15.00	95.28	98.00	247.48	103.80	73.94	29.86	3.476		
4,200.00	4,182.05	4,195.87	4,181.11	15.30	15.37	98.85	101.41	254.08	106.82	76.17	30.65	3.485		
4,300.00	4,281.08	4,295.70	4,280.83	15.71	15.74	103.55	103.62	258.34	110.03	78.62	31.42	3.502		
4,400.00	4,380.10	4,395.03	4,380.12	16.11	16.09	109.23	104.62	260.28	114.02	81.87	32.15	3.547		
4,500.00	4,479.13	4,505.99	4,479.11	16.51	16.46	115.42	104.69	260.42	119.35	86.46	32.88	3.629		
4,600.00	4,578.16	4,606.96	4,578.14	16.91	16.81	121.11	104.69	260.42	126.00	92.44	33.56	3.754		
4,612.79	4,590.82	4,605.70	4,590.80	16.97	16.80	121.79	104.69	260.42	126.93	93.33	33.60	3.778		
4,700.00	4,677.31	4,707.80	4,677.29	17.31	17.15	125.93	104.69	260.42	133.18	98.96	34.23	3.891		

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #206H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
4,800.00	4,776.77	4,808.34	4,776.75	17.70	17.49	129.43	104.69	260.42	139.54	104.64	34.89	3.999	
4,900.00	4,876.47	4,908.65	4,876.45	18.08	17.84	131.86	104.69	260.42	144.59	109.03	35.56	4.066	
5,000.00	4,976.34	5,008.78	4,976.32	18.44	18.18	133.37	104.69	260.42	148.07	111.82	36.24	4.085	
5,100.00	5,076.30	5,108.81	5,076.28	18.79	18.52	134.09	104.69	260.42	149.81	112.88	36.93	4.057	
5,146.12	5,122.42	5,137.30	5,122.40	18.95	18.62	179.73	104.69	260.42	150.00	112.82	37.18	4.034	
5,200.00	5,176.30	5,208.82	5,176.28	19.13	18.87	179.73	104.69	260.42	150.00	112.38	37.62	3.988	
5,300.00	5,276.30	5,308.82	5,276.28	19.47	19.21	179.73	104.69	260.42	150.00	111.69	38.31	3.916	
5,400.00	5,376.30	5,408.82	5,376.28	19.81	19.55	179.73	104.69	260.42	150.00	111.00	39.00	3.846	
5,500.00	5,476.30	5,508.82	5,476.28	20.16	19.90	179.73	104.69	260.42	150.00	110.31	39.70	3.779	
5,600.00	5,576.30	5,608.82	5,576.28	20.50	20.25	179.73	104.69	260.42	150.00	109.61	40.39	3.714	
5,700.00	5,676.30	5,708.82	5,676.28	20.84	20.59	179.73	104.69	260.42	150.00	108.92	41.08	3.651	
5,800.00	5,776.30	5,808.82	5,776.28	21.18	20.94	179.73	104.69	260.42	150.00	108.22	41.78	3.590	
5,900.00	5,876.30	5,908.82	5,876.28	21.53	21.28	179.73	104.69	260.42	150.00	107.52	42.48	3.531	
6,000.00	5,976.30	6,008.82	5,976.28	21.87	21.63	179.73	104.69	260.42	150.00	106.83	43.17	3.474	
6,100.00	6,076.30	6,108.82	6,076.28	22.22	21.98	179.73	104.69	260.42	150.00	106.13	43.87	3.419	
6,200.00	6,176.30	6,208.82	6,176.28	22.56	22.33	179.73	104.69	260.42	150.00	105.43	44.57	3.365	
6,300.00	6,276.30	6,308.82	6,276.28	22.91	22.68	179.73	104.69	260.42	150.00	104.73	45.27	3.314	
6,400.00	6,376.30	6,408.82	6,376.28	23.25	23.02	179.73	104.69	260.42	150.00	104.03	45.97	3.263	
6,500.00	6,476.30	6,508.82	6,476.28	23.60	23.37	179.73	104.69	260.42	150.00	103.33	46.67	3.214	
6,600.00	6,576.30	6,608.82	6,576.28	23.95	23.72	179.73	104.69	260.42	150.00	102.63	47.37	3.167	
6,700.00	6,676.30	6,708.82	6,676.28	24.29	24.07	179.73	104.69	260.42	150.00	101.93	48.07	3.120	
6,800.00	6,776.30	6,808.82	6,776.28	24.64	24.42	179.73	104.69	260.42	150.00	101.23	48.77	3.076	
6,900.00	6,876.30	6,908.82	6,876.28	24.99	24.77	179.73	104.69	260.42	150.00	100.53	49.47	3.032	
7,000.00	6,976.30	7,008.82	6,976.28	25.34	25.12	179.73	104.69	260.42	150.00	99.82	50.18	2.989	
7,100.00	7,076.30	7,108.82	7,076.28	25.68	25.47	179.73	104.69	260.42	150.00	99.12	50.88	2.948	
7,200.00	7,176.30	7,208.82	7,176.28	26.03	25.82	179.73	104.69	260.42	150.00	98.42	51.58	2.908	
7,300.00	7,276.30	7,308.82	7,276.28	26.38	26.17	179.73	104.69	260.42	150.00	97.71	52.29	2.869	
7,400.00	7,376.30	7,408.82	7,376.28	26.73	26.53	179.73	104.69	260.42	150.00	97.01	52.99	2.831	
7,500.00	7,476.30	7,508.82	7,476.28	27.08	26.88	179.73	104.69	260.42	150.00	96.31	53.69	2.794	
7,600.00	7,576.30	7,608.82	7,576.28	27.43	27.23	179.73	104.69	260.42	150.00	95.60	54.40	2.757	
7,700.00	7,676.30	7,708.82	7,676.28	27.78	27.58	179.73	104.69	260.42	150.00	94.90	55.10	2.722	
7,800.00	7,776.30	7,808.82	7,776.28	28.13	27.93	179.73	104.69	260.42	150.00	94.19	55.81	2.688	
7,900.00	7,876.30	7,908.82	7,876.28	28.48	28.28	179.73	104.69	260.42	150.00	93.49	56.51	2.654	
8,000.00	7,976.30	8,008.82	7,976.28	28.83	28.64	179.73	104.69	260.42	150.00	92.78	57.22	2.621	
8,100.00	8,076.30	8,108.82	8,076.28	29.18	28.99	179.73	104.69	260.42	150.00	92.07	57.93	2.589	
8,200.00	8,176.30	8,208.82	8,176.28	29.53	29.34	179.73	104.69	260.42	150.00	91.37	58.63	2.558	
8,300.00	8,276.30	8,308.82	8,276.28	29.88	29.69	179.73	104.69	260.42	150.00	90.66	59.34	2.528	
8,400.00	8,376.30	8,408.82	8,376.28	30.23	30.05	179.73	104.69	260.42	150.00	89.95	60.05	2.498	
8,500.00	8,476.30	8,508.82	8,476.28	30.58	30.40	179.73	104.69	260.42	150.00	89.25	60.75	2.469	
8,600.00	8,576.30	8,608.82	8,576.28	30.94	30.75	179.73	104.69	260.42	150.00	88.54	61.46	2.441	
8,700.00	8,676.30	8,708.82	8,676.28	31.29	31.11	179.73	104.69	260.42	150.00	87.83	62.17	2.413	
8,800.00	8,776.30	8,808.82	8,776.28	31.64	31.46	179.73	104.69	260.42	150.00	87.12	62.88	2.386	
8,900.00	8,876.30	8,908.82	8,876.28	31.99	31.81	179.73	104.69	260.42	150.00	86.42	63.58	2.359	
9,000.00	8,976.30	9,008.82	8,976.28	32.34	32.17	179.73	104.69	260.42	150.00	85.71	64.29	2.333	
9,100.00	9,076.30	9,091.18	9,076.28	32.70	32.46	179.73	104.69	260.42	150.00	85.06	64.94	2.310	
9,113.15	9,089.46	9,104.34	9,089.44	32.74	32.50	179.73	104.69	260.42	150.00	84.97	65.03	2.307	
9,200.00	9,176.30	9,191.17	9,176.27	33.05	32.81	179.69	104.69	260.51	150.00	84.35	65.65	2.285	
9,200.88	9,177.18	9,192.05	9,177.14	33.05	32.81	179.69	104.69	260.52	150.00	84.35	65.65	2.285	
9,300.00	9,276.30	9,289.72	9,274.16	33.40	33.17	175.82	104.69	270.68	150.42	84.04	66.38	2.266 SF	
9,400.00	9,376.30	9,382.22	9,363.21	33.75	33.54	166.64	104.67	295.34	154.74	87.82	66.93	2.312	
9,500.00	9,476.30	9,465.01	9,438.63	34.11	33.89	155.11	104.66	329.31	169.62	103.24	66.38	2.555	
9,600.00	9,576.30	9,536.67	9,499.39	34.46	34.21	144.37	104.64	367.23	199.97	135.96	64.01	3.124	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #206H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference	Offset		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)				Between Centres (usft)	Between Ellipses (usft)	
9,700.00	9,676.30	9,600.00	9,548.77	34.81	34.52	135.57	104.63	406.82	245.80	185.12		60.69		4.050
9,800.00	9,776.30	9,650.00	9,584.49	35.16	34.78	129.50	104.61	441.79	304.07	247.37		56.70		5.363
9,900.00	9,876.30	9,691.75	9,611.89	35.52	35.01	125.10	104.60	473.28	371.54	318.50		53.04		7.005
9,994.94	9,971.24	9,726.36	9,632.82	35.85	35.22	121.90	104.59	500.83	441.80	391.66		50.15		8.810
10,000.00	9,976.30	9,728.06	9,633.81	35.87	35.23	121.90	104.59	502.22	445.67	395.67		50.00		8.913
10,050.00	10,026.22	9,750.00	9,646.14	36.04	35.36	17.43	104.58	520.36	483.14	434.14		49.00		9.860
10,100.00	10,075.71	9,762.96	9,653.09	36.22	35.45	15.24	104.57	531.30	518.96	471.77		47.19		10.998
10,150.00	10,124.41	9,781.12	9,662.43	36.41	35.56	13.22	104.57	546.88	553.11	507.34		45.77		12.085
10,200.00	10,171.95	9,800.00	9,671.59	36.59	35.69	11.56	104.56	563.38	585.43	541.06		44.37		13.195
10,250.00	10,217.96	9,818.55	9,680.07	36.79	35.82	10.22	104.55	579.88	615.82	572.91		42.91		14.352
10,300.00	10,262.09	9,837.71	9,688.26	36.98	35.95	9.09	104.54	597.20	644.19	602.72		41.48		15.532
10,350.00	10,304.01	9,850.00	9,693.20	37.19	36.04	8.30	104.54	608.45	670.55	630.95		39.60		16.935
10,400.00	10,343.39	9,876.72	9,703.11	37.40	36.24	7.32	104.53	633.26	694.57	655.95		38.63		17.981
10,450.00	10,379.94	9,900.00	9,710.80	37.62	36.42	6.55	104.52	655.24	716.47	679.03		37.44		19.139
10,500.00	10,413.39	9,916.42	9,715.68	37.86	36.55	6.01	104.51	670.92	736.04	700.16		35.88		20.514
10,550.00	10,443.46	9,936.48	9,721.03	38.12	36.71	5.47	104.50	690.24	753.31	718.73		34.58		21.785
10,600.00	10,469.95	9,950.00	9,724.25	38.40	36.82	5.11	104.50	703.38	768.26	735.22		33.05		23.247
10,650.00	10,492.63	9,981.14	9,730.49	38.71	37.09	4.52	104.49	733.88	780.71	748.32		32.39		24.105
10,700.00	10,511.35	10,000.00	9,733.58	39.03	37.25	4.16	104.48	752.49	790.61	759.33		31.29		25.271
10,750.00	10,525.96	10,028.58	9,737.57	39.39	37.52	3.71	104.47	780.79	797.71	767.06		30.65		26.025
10,794.94	10,535.49	10,050.00	9,740.00	39.73	37.71	3.40	104.46	802.07	801.66	771.64		30.02		26.704
10,800.00	10,536.36	10,050.00	9,740.00	39.77	37.71	3.40	104.46	802.07	801.99	772.10		29.89		26.836
10,850.00	10,543.49	10,081.92	9,742.73	40.17	38.02	2.96	104.44	833.87	804.37	774.83		29.54		27.229
10,900.00	10,548.01	10,108.59	9,744.20	40.60	38.28	2.61	104.43	860.49	805.65	776.48		29.17		27.622
10,950.00	10,549.93	10,135.25	9,744.92	41.06	38.55	2.26	104.42	887.15	805.79	776.86		28.93		27.855
10,961.61	10,550.00	10,147.81	9,745.00	41.16	38.68	2.09	104.41	899.71	805.71	776.72		28.99		27.792
11,000.00	10,550.00	10,173.88	9,745.00	41.53	38.95	1.78	104.40	925.77	805.38	776.40		28.98		27.791
11,100.00	10,550.00	10,272.90	9,745.00	42.59	40.07	0.82	104.36	1,024.79	805.06	775.55		29.51		27.282
11,200.00	10,550.00	10,372.51	9,745.00	43.75	41.30	0.21	104.32	1,124.41	804.99	774.84		30.14		26.705
11,266.99	10,550.00	10,436.44	9,745.00	44.61	42.19	0.00	104.29	1,191.33	804.98	774.37		30.61		26.300
11,300.00	10,550.00	10,472.44	9,745.00	45.03	42.64	-0.04	104.27	1,224.33	804.98	774.14		30.84		26.104
11,316.07	10,550.00	10,488.51	9,745.00	45.24	42.86	-0.04	104.27	1,240.41	804.98	774.03		30.95		26.008
11,400.00	10,550.00	10,572.44	9,745.00	46.39	44.07	-0.04	104.23	1,324.33	804.98	773.40		31.58		25.491
11,500.00	10,550.00	10,672.44	9,745.00	47.83	45.58	-0.04	104.19	1,424.33	804.98	772.60		32.38		24.860
11,600.00	10,550.00	10,772.44	9,745.00	49.35	47.17	-0.04	104.14	1,524.33	804.98	771.74		33.24		24.221
11,700.00	10,550.00	10,872.44	9,745.00	50.94	48.83	-0.04	104.10	1,624.33	804.98	770.84		34.14		23.578
11,800.00	10,550.00	10,972.44	9,745.00	52.60	50.55	-0.04	104.06	1,724.33	804.98	769.89		35.09		22.937
11,900.00	10,550.00	11,072.44	9,745.00	54.31	52.32	-0.04	104.02	1,824.33	804.98	768.89		36.09		22.304
12,000.00	10,550.00	11,172.44	9,745.00	56.08	54.15	-0.04	103.97	1,924.33	804.98	767.85		37.13		21.682
12,100.00	10,550.00	11,272.44	9,745.00	57.89	56.02	-0.04	103.93	2,024.33	804.98	766.78		38.20		21.074
12,200.00	10,550.00	11,372.44	9,745.00	59.75	57.93	-0.03	103.89	2,124.33	804.98	765.68		39.30		20.481
12,300.00	10,550.00	11,472.44	9,745.00	61.65	59.88	-0.03	103.84	2,224.33	804.98	764.54		40.44		19.906
12,400.00	10,550.00	11,572.44	9,745.00	63.58	61.86	-0.03	103.80	2,324.33	804.98	763.38		41.60		19.349
12,500.00	10,550.00	11,672.44	9,745.00	65.54	63.88	-0.03	103.76	2,424.33	804.98	762.19		42.79		18.811
12,600.00	10,550.00	11,772.44	9,745.00	67.54	65.92	-0.03	103.71	2,524.33	804.98	760.97		44.01		18.292
12,700.00	10,550.00	11,872.44	9,745.00	69.56	67.98	-0.03	103.67	2,624.33	804.98	759.74		45.24		17.792
12,800.00	10,550.00	11,972.44	9,745.00	71.61	70.07	-0.03	103.63	2,724.33	804.98	758.48		46.50		17.312
12,900.00	10,550.00	12,072.44	9,745.00	73.67	72.18	-0.03	103.58	2,824.33	804.98	757.21		47.77		16.850
13,000.00	10,550.00	12,172.44	9,745.00	75.77	74.31	-0.03	103.54	2,924.33	804.98	755.92		49.06		16.407
13,100.00	10,550.00	12,272.44	9,745.00	77.88	76.46	-0.03	103.50	3,024.33	804.98	754.61		50.37		15.981
13,200.00	10,550.00	12,372.44	9,745.00	80.00	78.62	-0.02	103.46	3,124.33	804.98	753.29		51.69		15.572
13,300.00	10,550.00	12,472.44	9,745.00	82.15	80.80	-0.02	103.41	3,224.33	804.98	751.95		53.03		15.180

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #206H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft	
Survey Program: 0-MWD													Offset Well Error: 0.00 usft	
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)				Between Centres (usft)	Between Ellipses (usft)	
13,400.00	10,550.00	12,572.44	9,745.00	84.31	82.99	-0.02	103.37	3,324.33	804.98	750.60	54.38	14.804		
13,500.00	10,550.00	12,672.44	9,745.00	86.48	85.20	-0.02	103.33	3,424.33	804.98	749.25	55.73	14.443		
13,600.00	10,550.00	12,772.44	9,745.00	88.67	87.41	-0.02	103.28	3,524.33	804.98	747.88	57.10	14.097		
13,700.00	10,550.00	12,872.44	9,745.00	90.87	89.64	-0.02	103.24	3,624.33	804.98	746.50	58.48	13.764		
13,800.00	10,550.00	12,972.44	9,745.00	93.07	91.87	-0.02	103.20	3,724.33	804.98	745.11	59.87	13.445		
13,900.00	10,550.00	13,072.44	9,745.00	95.29	94.12	-0.02	103.15	3,824.33	804.98	743.71	61.27	13.138		
14,000.00	10,550.00	13,172.44	9,745.00	97.52	96.37	-0.02	103.11	3,924.33	804.98	742.30	62.68	12.843		
14,100.00	10,550.00	13,272.44	9,745.00	99.76	98.64	-0.01	103.07	4,024.33	804.98	740.89	64.09	12.560		
14,200.00	10,550.00	13,372.44	9,745.00	102.01	100.91	-0.01	103.02	4,124.33	804.98	739.47	65.51	12.288		
14,300.00	10,550.00	13,472.44	9,745.00	104.27	103.18	-0.01	102.98	4,224.33	804.98	738.04	66.94	12.026		
14,400.00	10,550.00	13,572.44	9,745.00	106.53	105.47	-0.01	102.94	4,324.33	804.98	736.61	68.37	11.773		
14,500.00	10,550.00	13,672.44	9,745.00	108.80	107.76	-0.01	102.89	4,424.33	804.98	735.17	69.81	11.531		
14,600.00	10,550.00	13,772.44	9,745.00	111.07	110.05	-0.01	102.85	4,524.33	804.98	733.72	71.26	11.297		
14,700.00	10,550.00	13,872.44	9,745.00	113.36	112.35	-0.01	102.81	4,624.33	804.98	732.27	72.71	11.072		
14,800.00	10,550.00	13,972.44	9,745.00	115.64	114.66	-0.01	102.77	4,724.33	804.98	730.82	74.16	10.854		
14,900.00	10,550.00	14,072.44	9,745.00	117.94	116.97	-0.01	102.72	4,824.33	804.98	729.36	75.62	10.645		
15,000.00	10,550.00	14,172.44	9,745.00	120.24	119.29	0.00	102.68	4,924.33	804.98	727.90	77.08	10.443		
15,100.00	10,550.00	14,272.44	9,745.00	122.54	121.60	0.00	102.64	5,024.33	804.98	726.43	78.55	10.248		
15,200.00	10,550.00	14,372.44	9,745.00	124.85	123.93	0.00	102.59	5,124.33	804.98	724.96	80.02	10.059		
15,300.00	10,550.00	14,472.44	9,745.00	127.16	126.26	0.00	102.55	5,224.33	804.98	723.48	81.50	9.877		
15,400.00	10,550.00	14,572.44	9,745.00	129.48	128.59	0.00	102.51	5,324.33	804.98	722.00	82.98	9.701		
15,437.85	10,550.00	14,610.28	9,745.00	130.35	129.47	0.00	102.49	5,362.18	804.98	721.44	83.54	9.636		
15,438.79	10,550.00	14,611.23	9,745.00	130.37	129.49	0.00	102.49	5,363.12	804.98	721.43	83.55	9.635		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #221H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Tooface (")	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	1.16	-1.16	0.00	0.00	19.21	1,703.57	593.42	1,803.97					
100.00	100.00	101.16	98.84	0.13	0.13	19.21	1,703.57	593.42	1,803.97	1,803.71	0.26	6,973.919		
200.00	200.00	201.16	198.84	0.49	0.49	19.21	1,703.57	593.42	1,803.97	1,802.99	0.98	1,849.054		
300.00	300.00	301.16	298.84	0.84	0.85	19.21	1,703.57	593.42	1,803.97	1,802.27	1.69	1,065.822		
400.00	400.00	401.16	398.84	1.20	1.21	19.21	1,703.57	593.42	1,803.97	1,801.56	2.41	748.689		
500.00	500.00	501.16	498.84	1.56	1.57	19.21	1,703.57	593.42	1,803.97	1,800.84	3.13	577.003		
600.00	600.00	601.16	598.84	1.92	1.92	19.21	1,703.57	593.42	1,803.97	1,800.12	3.84	469.369		
700.00	700.00	701.16	698.84	2.28	2.28	19.21	1,703.57	593.42	1,803.97	1,799.41	4.56	395.578		
800.00	800.00	801.16	798.84	2.64	2.64	19.21	1,703.57	593.42	1,803.97	1,798.69	5.28	341.837		
900.00	900.00	901.16	898.84	3.00	3.00	19.21	1,703.57	593.42	1,803.97	1,797.97	5.99	300.951		
1,000.00	1,000.00	998.84	998.84	3.35	3.35	19.21	1,703.57	593.42	1,803.97	1,797.26	6.70	269.135		
1,100.00	1,100.00	1,088.14	1,088.13	3.71	3.67	19.17	1,704.14	592.58	1,804.26	1,796.88	7.38	244.539		
1,200.00	1,200.00	1,177.22	1,177.16	4.07	3.98	19.08	1,705.87	590.02	1,805.16	1,797.11	8.05	224.212		
1,300.00	1,300.00	1,267.29	1,265.83	4.43	4.30	18.92	1,708.76	585.75	1,806.67	1,797.94	8.73	206.981		
1,400.00	1,400.00	1,365.80	1,365.34	4.79	4.65	18.71	1,712.66	579.98	1,808.51	1,799.07	9.44	191.581		
1,500.00	1,500.00	1,465.56	1,464.85	5.15	5.01	18.50	1,716.56	574.22	1,810.37	1,800.21	10.16	178.226		
1,600.00	1,600.00	1,565.31	1,564.37	5.50	5.37	18.28	1,720.45	568.46	1,812.26	1,801.38	10.88	166.607		
1,700.00	1,700.00	1,665.07	1,663.88	5.86	5.74	18.07	1,724.35	562.69	1,814.18	1,802.58	11.60	156.414		
1,800.00	1,800.00	1,764.82	1,763.39	6.22	6.10	17.86	1,728.25	556.93	1,816.12	1,803.79	12.32	147.402		
1,900.00	1,900.00	1,864.58	1,862.91	6.58	6.47	17.65	1,732.15	551.16	1,818.08	1,805.04	13.04	139.379		
2,000.00	2,000.00	1,964.34	1,962.42	6.94	6.83	17.44	1,736.05	545.40	1,820.07	1,806.30	13.77	132.193		
2,100.00	2,099.99	2,064.06	2,061.91	7.29	7.20	-28.34	1,739.94	539.64	1,820.93	1,806.44	14.49	125.665		
2,200.00	2,199.91	2,163.69	2,161.28	7.65	7.57	-28.62	1,743.84	533.88	1,819.52	1,804.31	15.21	119.621		
2,300.00	2,299.69	2,263.14	2,260.49	8.00	7.93	-28.95	1,747.72	528.13	1,815.86	1,799.93	15.93	113.977		
2,400.00	2,399.27	2,262.34	2,359.46	8.36	8.30	-29.34	1,751.60	522.40	1,809.98	1,793.32	16.65	108.685		
2,500.00	2,498.57	2,461.24	2,458.12	8.72	8.67	-29.80	1,755.47	516.69	1,801.89	1,784.51	17.38	103.702		
2,533.34	2,531.60	2,505.87	2,490.92	8.84	8.83	-29.96	1,756.75	514.79	1,798.71	1,781.05	17.66	101.851		
2,600.00	2,597.62	2,559.86	2,556.49	9.09	9.03	-30.24	1,759.32	510.99	1,792.13	1,774.03	18.10	99.021		
2,700.00	2,696.65	2,658.45	2,654.84	9.46	9.40	-30.68	1,763.17	505.29	1,782.35	1,763.53	18.82	94.691		
2,800.00	2,795.67	2,757.04	2,753.19	9.83	9.76	-31.12	1,767.03	499.60	1,772.68	1,753.13	19.55	90.677		
2,900.00	2,894.70	2,854.87	2,850.78	10.21	10.12	-31.55	1,770.85	493.94	1,763.11	1,742.84	20.28	86.959		
3,000.00	2,993.73	2,939.82	2,935.45	10.59	10.44	-31.97	1,774.76	488.16	1,754.08	1,733.12	20.96	83.696		
3,100.00	3,092.75	3,024.32	3,019.48	10.97	10.77	-32.45	1,779.69	480.87	1,745.95	1,724.31	21.64	80.668		
3,200.00	3,191.78	3,108.28	3,102.77	11.36	11.09	-32.98	1,785.62	472.10	1,738.79	1,716.45	22.33	77.858		
3,300.00	3,290.81	3,204.55	3,198.11	11.74	11.47	-33.63	1,793.12	461.01	1,732.32	1,709.24	23.08	75.058		
3,400.00	3,389.83	3,302.23	3,294.83	12.13	11.86	-34.30	1,800.74	449.75	1,726.10	1,702.26	23.84	72.418		
3,500.00	3,488.86	3,400.09	3,391.56	12.52	12.25	-34.97	1,808.36	438.49	1,720.12	1,695.53	24.59	69.940		
3,600.00	3,587.89	3,497.58	3,488.29	12.92	12.64	-35.64	1,815.97	427.23	1,714.39	1,689.04	25.35	67.618		
3,700.00	3,686.91	3,604.74	3,585.01	13.31	13.07	-36.32	1,823.59	415.97	1,708.91	1,682.76	26.15	65.340		
3,800.00	3,785.94	3,707.06	3,681.74	13.71	13.48	-37.00	1,831.20	404.71	1,703.68	1,676.75	26.94	63.247		
3,900.00	3,884.97	3,809.39	3,778.47	14.11	13.89	-37.69	1,838.82	393.45	1,698.71	1,670.99	27.72	61.277		
4,000.00	3,984.00	3,888.29	3,875.19	14.50	14.21	-38.38	1,846.43	382.19	1,693.99	1,665.58	28.42	59.616		
4,100.00	4,083.02	3,985.97	3,971.92	14.90	14.60	-39.08	1,854.05	370.92	1,689.53	1,660.35	29.18	57.892		
4,200.00	4,182.05	4,083.65	4,068.65	15.30	15.00	-39.78	1,861.67	359.66	1,685.34	1,655.38	29.95	56.282		
4,300.00	4,281.08	4,181.32	4,165.37	15.71	15.40	-40.48	1,869.28	348.40	1,681.40	1,650.67	30.73	54.721		
4,400.00	4,380.10	4,279.00	4,262.10	16.11	15.79	-41.18	1,876.90	337.14	1,677.73	1,646.23	31.50	53.282		
4,500.00	4,479.13	4,376.68	4,358.83	16.51	16.19	-41.89	1,884.51	325.88	1,674.32	1,642.05	32.27	51.879		
4,600.00	4,578.16	4,474.36	4,455.56	16.91	16.59	-42.60	1,892.13	314.62	1,671.19	1,638.14	33.05	50.568		
4,612.79	4,590.82	4,486.85	4,467.92	16.97	16.64	-42.69	1,893.10	313.18	1,670.81	1,637.66	33.15	50.405		
4,700.00	4,677.31	4,572.19	4,552.44	17.31	16.99	-43.27	1,899.76	303.34	1,669.04	1,635.22	33.82	49.348		
4,750.81	4,727.82	4,622.05	4,601.81	17.51	17.19	-43.60	1,903.65	297.60	1,668.77	1,634.56	34.21	48.777 CC		
4,800.00	4,776.77	4,670.40	4,649.69	17.70	17.39	-43.91	1,907.41	292.02	1,669.02	1,634.43	34.59	48.252		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #221H - Wellbore #1 - Design #1												Offset Site Error:	0 00 usft
Survey Program: 0-MWD												Offset Well Error:	0 00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
4,900.00	4,876.47	4,773.88	4,752.17	18.08	17.82	-44.53	1,915.45	280.14	1,671.06	1,635.69	35.37	47.240	
5,000.00	4,976.34	4,904.67	4,882.06	18.44	18.34	-45.16	1,924.01	267.48	1,673.90	1,637.64	36.26	46.166	
5,100.00	5,076.30	5,036.64	5,013.57	18.79	18.84	-45.58	1,930.12	258.45	1,676.76	1,639.65	37.11	45.189	
5,146.12	5,122.42	5,097.77	5,074.60	18.95	19.06	-0.14	1,932.09	255.54	1,678.05	1,640.57	37.49	44.765	
5,200.00	5,176.30	5,169.32	5,146.09	19.13	19.32	-0.22	1,933.69	253.17	1,679.27	1,641.35	37.92	44.287	
5,300.00	5,276.30	5,301.61	5,275.14	19.47	19.77	-0.27	1,934.70	251.68	1,680.03	1,641.33	38.70	43.413	
5,400.00	5,376.30	5,401.61	5,375.14	19.81	20.11	-0.27	1,934.70	251.68	1,680.03	1,640.65	39.38	42.658	
5,500.00	5,476.30	5,501.61	5,475.14	20.16	20.44	-0.27	1,934.70	251.68	1,680.03	1,639.96	40.07	41.927	
5,600.00	5,576.30	5,601.61	5,575.14	20.50	20.78	-0.27	1,934.70	251.68	1,680.03	1,639.27	40.76	41.220	
5,700.00	5,676.30	5,701.61	5,675.14	20.84	21.11	-0.27	1,934.70	251.68	1,680.03	1,638.58	41.45	40.536	
5,800.00	5,776.30	5,801.61	5,775.14	21.18	21.45	-0.27	1,934.70	251.68	1,680.03	1,637.90	42.13	39.873	
5,900.00	5,876.30	5,901.61	5,875.14	21.53	21.79	-0.27	1,934.70	251.68	1,680.03	1,637.21	42.82	39.230	
6,000.00	5,976.30	6,001.61	5,975.14	21.87	22.13	-0.27	1,934.70	251.68	1,680.03	1,636.51	43.52	38.607	
6,100.00	6,076.30	6,101.61	6,075.14	22.22	22.47	-0.27	1,934.70	251.68	1,680.03	1,635.82	44.21	38.003	
6,200.00	6,176.30	6,201.61	6,175.14	22.56	22.81	-0.27	1,934.70	251.68	1,680.03	1,635.13	44.90	37.417	
6,300.00	6,276.30	6,301.61	6,275.14	22.91	23.15	-0.27	1,934.70	251.68	1,680.03	1,634.44	45.59	36.848	
6,400.00	6,376.30	6,401.61	6,375.14	23.25	23.49	-0.27	1,934.70	251.68	1,680.03	1,633.74	46.29	36.296	
6,500.00	6,476.30	6,501.61	6,475.14	23.60	23.83	-0.27	1,934.70	251.68	1,680.03	1,633.05	46.98	35.759	
6,600.00	6,576.30	6,601.61	6,575.14	23.95	24.17	-0.27	1,934.70	251.68	1,680.03	1,632.35	47.68	35.237	
6,700.00	6,676.30	6,701.61	6,675.14	24.29	24.52	-0.27	1,934.70	251.68	1,680.03	1,631.66	48.37	34.730	
6,800.00	6,776.30	6,801.61	6,775.14	24.64	24.86	-0.27	1,934.70	251.68	1,680.03	1,630.96	49.07	34.237	
6,900.00	6,876.30	6,901.61	6,875.14	24.99	25.20	-0.27	1,934.70	251.68	1,680.03	1,630.26	49.77	33.758	
7,000.00	6,976.30	7,001.61	6,975.14	25.34	25.55	-0.27	1,934.70	251.68	1,680.03	1,629.57	50.47	33.291	
7,100.00	7,076.30	7,101.61	7,075.14	25.68	25.89	-0.27	1,934.70	251.68	1,680.03	1,628.87	51.16	32.837	
7,200.00	7,176.30	7,201.61	7,175.14	26.03	26.23	-0.27	1,934.70	251.68	1,680.03	1,628.17	51.86	32.394	
7,300.00	7,276.30	7,301.61	7,275.14	26.38	26.58	-0.27	1,934.70	251.68	1,680.03	1,627.47	52.56	31.963	
7,400.00	7,376.30	7,401.61	7,375.14	26.73	26.92	-0.27	1,934.70	251.68	1,680.03	1,626.77	53.26	31.543	
7,500.00	7,476.30	7,501.61	7,475.14	27.08	27.27	-0.27	1,934.70	251.68	1,680.03	1,626.07	53.96	31.134	
7,600.00	7,576.30	7,601.61	7,575.14	27.43	27.62	-0.27	1,934.70	251.68	1,680.03	1,625.37	54.66	30.735	
7,700.00	7,676.30	7,701.61	7,675.14	27.78	27.96	-0.27	1,934.70	251.68	1,680.03	1,624.67	55.36	30.346	
7,800.00	7,776.30	7,801.61	7,775.14	28.13	28.31	-0.27	1,934.70	251.68	1,680.03	1,623.97	56.06	29.966	
7,900.00	7,876.30	7,901.61	7,875.14	28.48	28.66	-0.27	1,934.70	251.68	1,680.03	1,623.26	56.77	29.596	
8,000.00	7,976.30	8,001.61	7,975.14	28.83	29.00	-0.27	1,934.70	251.68	1,680.03	1,622.56	57.47	29.234	
8,100.00	8,076.30	8,101.61	8,075.14	29.18	29.35	-0.27	1,934.70	251.68	1,680.03	1,621.86	58.17	28.881	
8,200.00	8,176.30	8,201.61	8,175.14	29.53	29.70	-0.27	1,934.70	251.68	1,680.03	1,621.16	58.87	28.536	
8,300.00	8,276.30	8,301.61	8,275.14	29.88	30.05	-0.27	1,934.70	251.68	1,680.03	1,620.45	59.58	28.199	
8,400.00	8,376.30	8,401.61	8,375.14	30.23	30.40	-0.27	1,934.70	251.68	1,680.03	1,619.75	60.28	27.870	
8,500.00	8,476.30	8,501.61	8,475.14	30.58	30.74	-0.27	1,934.70	251.68	1,680.03	1,619.05	60.98	27.549	
8,600.00	8,576.30	8,601.61	8,575.14	30.94	31.09	-0.27	1,934.70	251.68	1,680.03	1,618.34	61.69	27.234	
8,700.00	8,676.30	8,701.61	8,675.14	31.29	31.44	-0.27	1,934.70	251.68	1,680.03	1,617.64	62.39	26.927	
8,800.00	8,776.30	8,801.61	8,775.14	31.64	31.79	-0.27	1,934.70	251.68	1,680.03	1,616.93	63.10	26.626	
8,900.00	8,876.30	8,901.61	8,875.14	31.99	32.14	-0.27	1,934.70	251.68	1,680.03	1,616.23	63.80	26.332	
9,000.00	8,976.30	9,001.61	8,975.14	32.34	32.49	-0.27	1,934.70	251.68	1,680.03	1,615.52	64.51	26.044	
9,100.00	9,076.30	9,101.61	9,075.14	32.70	32.84	-0.27	1,934.70	251.68	1,680.03	1,614.82	65.21	25.762	
9,200.00	9,176.30	9,201.61	9,175.14	33.05	33.19	-0.27	1,934.70	251.68	1,680.03	1,614.11	65.92	25.486	
9,300.00	9,276.30	9,301.61	9,275.14	33.40	33.54	-0.27	1,934.70	251.68	1,680.03	1,613.40	66.63	25.216	
9,400.00	9,376.30	9,401.61	9,375.14	33.75	33.89	-0.27	1,934.70	251.68	1,680.03	1,612.70	67.33	24.952	
9,500.00	9,476.30	9,501.61	9,475.14	34.11	34.24	-0.27	1,934.70	251.68	1,680.03	1,611.99	68.04	24.693	
9,600.00	9,576.30	9,601.61	9,575.14	34.46	34.59	-0.27	1,934.70	251.68	1,680.03	1,611.29	68.74	24.439	
9,700.00	9,676.30	9,701.61	9,675.14	34.81	34.94	-0.27	1,934.70	251.68	1,680.03	1,610.58	69.45	24.190	
9,800.00	9,776.30	9,801.61	9,775.14	35.16	35.29	-0.27	1,934.70	251.68	1,680.03	1,609.87	70.16	23.946	
9,900.00	9,876.30	9,901.61	9,875.14	35.52	35.64	-0.27	1,934.70	251.68	1,680.03	1,609.16	70.87	23.707	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #221H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning			
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
9,994.94	9,971.24	9,993.33	9,970.08	35.85	35.97	-0.27	1,934.70	251.68	1,680.03	1,608.50	71.53	23.488		
10,000.00	9,976.30	9,998.39	9,975.14	35.87	35.98	-100.92	1,934.70	251.68	1,680.03	1,608.47	71.56	23.477 ES		
10,050.00	10,026.22	10,029.87	10,006.61	36.04	36.08	-100.87	1,934.90	252.75	1,680.83	1,608.98	71.85	23.393		
10,100.00	10,075.71	10,062.70	10,039.29	36.22	36.19	-100.71	1,935.44	255.67	1,682.95	1,610.81	72.14	23.328		
10,150.00	10,124.41	10,100.00	10,076.16	36.41	36.31	-100.47	1,936.47	261.20	1,686.40	1,613.96	72.45	23.278		
10,200.00	10,171.95	10,128.30	10,103.84	36.59	36.39	-100.11	1,937.55	266.97	1,691.13	1,618.41	72.72	23.256		
10,250.00	10,217.96	10,161.08	10,135.50	36.79	36.48	-99.67	1,939.10	275.32	1,697.14	1,624.13	73.01	23.246		
10,300.00	10,262.09	10,193.84	10,166.60	36.98	36.57	-99.13	1,940.99	285.43	1,704.37	1,631.07	73.29	23.254		
10,350.00	10,304.01	10,226.58	10,197.04	37.19	36.66	-98.51	1,943.19	297.27	1,712.78	1,639.19	73.59	23.276		
10,400.00	10,343.39	10,259.32	10,226.74	37.40	36.74	-97.80	1,945.71	310.79	1,722.32	1,648.43	73.89	23.310		
10,450.00	10,379.94	10,292.06	10,255.61	37.62	36.82	-97.00	1,948.53	325.95	1,732.93	1,658.73	74.20	23.355		
10,500.00	10,413.39	10,324.81	10,283.57	37.86	36.89	-96.14	1,951.66	342.73	1,744.54	1,670.01	74.53	23.408		
10,550.00	10,443.46	10,357.60	10,310.53	38.12	36.96	-95.20	1,955.07	361.06	1,757.08	1,682.21	74.88	23.466		
10,600.00	10,469.95	10,390.46	10,336.44	38.40	37.03	-94.19	1,958.77	380.93	1,770.49	1,695.24	75.25	23.528		
10,650.00	10,492.63	10,423.43	10,361.22	38.71	37.10	-93.13	1,962.75	402.29	1,784.66	1,709.02	75.65	23.592		
10,700.00	10,511.35	10,456.54	10,384.81	39.03	37.17	-92.02	1,967.00	425.12	1,799.54	1,723.46	76.07	23.656		
10,750.00	10,525.96	10,489.85	10,407.16	39.39	37.24	-90.88	1,971.53	449.41	1,815.02	1,738.49	76.52	23.718		
10,794.94	10,535.49	10,520.02	10,426.12	39.73	37.31	-89.82	1,975.82	472.47	1,829.38	1,752.43	76.95	23.772		
10,800.00	10,536.36	10,523.44	10,428.19	39.77	37.32	-89.77	1,976.32	475.14	1,831.02	1,754.02	77.00	23.778		
10,850.00	10,543.49	10,557.77	10,448.07	40.17	37.41	-89.25	1,981.44	502.66	1,847.47	1,769.96	77.51	23.836		
10,900.00	10,548.01	10,593.21	10,466.80	40.60	37.51	-88.72	1,986.95	532.23	1,864.30	1,786.26	78.04	23.889		
10,950.00	10,549.93	10,629.87	10,484.17	41.06	37.63	-88.16	1,992.86	563.96	1,881.45	1,802.84	78.61	23.935		
10,961.61	10,550.00	10,638.56	10,487.99	41.16	37.66	-88.03	1,994.29	571.64	1,885.47	1,806.73	78.74	23.947		
11,000.00	10,550.00	10,668.25	10,500.11	41.53	37.77	-88.44	1,999.25	598.28	1,898.52	1,819.33	79.19	23.973		
11,100.00	10,550.00	10,752.71	10,526.75	42.59	38.12	-89.31	2,013.91	676.99	1,929.73	1,849.19	80.54	23.961		
11,200.00	10,550.00	10,845.66	10,543.03	43.75	38.60	-89.82	2,030.66	766.90	1,956.40	1,874.29	82.11	23.826		
11,300.00	10,550.00	10,942.82	10,549.83	45.03	39.20	-90.03	2,048.39	862.14	1,978.12	1,894.20	83.92	23.572		
11,316.07	10,550.00	11,324.13	10,550.00	45.24	42.61	-90.03	2,084.03	1,241.15	1,980.39	1,892.76	87.62	22.601		
11,400.00	10,550.00	11,408.05	10,550.00	46.39	43.57	-90.03	2,084.00	1,325.08	1,980.38	1,890.65	89.73	22.070		
11,500.00	10,550.00	11,508.05	10,550.00	47.83	44.81	-90.03	2,083.96	1,425.08	1,980.37	1,887.95	92.42	21.429		
11,600.00	10,550.00	11,608.05	10,550.00	49.35	46.15	-90.03	2,083.92	1,525.08	1,980.36	1,885.08	95.27	20.786		
11,700.00	10,550.00	11,708.05	10,550.00	50.94	47.57	-90.03	2,083.89	1,625.08	1,980.35	1,882.06	98.29	20.148		
11,800.00	10,550.00	11,808.05	10,550.00	52.60	49.06	-90.03	2,083.85	1,725.08	1,980.34	1,878.90	101.44	19.521		
11,900.00	10,550.00	11,908.05	10,550.00	54.31	50.63	-90.03	2,083.81	1,825.08	1,980.33	1,875.60	104.73	18.909		
12,000.00	10,550.00	12,008.05	10,550.00	56.08	52.27	-90.03	2,083.77	1,925.08	1,980.32	1,872.19	108.13	18.314		
12,100.00	10,550.00	12,108.05	10,550.00	57.89	53.96	-90.03	2,083.74	2,025.08	1,980.31	1,868.67	111.64	17.738		
12,200.00	10,550.00	12,208.05	10,550.00	59.75	55.71	-90.03	2,083.70	2,125.08	1,980.30	1,865.05	115.25	17.182		
12,300.00	10,550.00	12,308.05	10,550.00	61.65	57.50	-90.03	2,083.66	2,225.08	1,980.29	1,861.34	118.95	16.648		
12,400.00	10,550.00	12,408.05	10,550.00	63.58	59.34	-90.03	2,083.62	2,325.08	1,980.28	1,857.56	122.73	16.136		
12,500.00	10,550.00	12,508.05	10,550.00	65.54	61.22	-90.03	2,083.59	2,425.08	1,980.27	1,853.70	126.58	15.645		
12,600.00	10,550.00	12,608.05	10,550.00	67.54	63.14	-90.03	2,083.55	2,525.08	1,980.26	1,849.77	130.49	15.175		
12,700.00	10,550.00	12,708.05	10,550.00	69.56	65.09	-90.03	2,083.51	2,625.08	1,980.25	1,845.79	134.47	14.726		
12,800.00	10,550.00	12,808.05	10,550.00	71.61	67.08	-90.03	2,083.47	2,725.08	1,980.25	1,841.74	138.51	14.297		
12,900.00	10,550.00	12,908.05	10,550.00	73.67	69.09	-90.03	2,083.44	2,825.08	1,980.24	1,837.65	142.59	13.888		
13,000.00	10,550.00	13,008.05	10,550.00	75.77	71.12	-90.03	2,083.40	2,925.08	1,980.23	1,833.50	146.72	13.497		
13,100.00	10,550.00	13,108.05	10,550.00	77.88	73.18	-90.03	2,083.36	3,025.08	1,980.22	1,829.32	150.90	13.123		
13,200.00	10,550.00	13,208.05	10,550.00	80.00	75.26	-90.03	2,083.32	3,125.08	1,980.21	1,825.10	155.11	12.767		
13,300.00	10,550.00	13,308.05	10,550.00	82.15	77.36	-90.03	2,083.29	3,225.08	1,980.20	1,820.84	159.36	12.426		
13,400.00	10,550.00	13,408.05	10,550.00	84.31	79.48	-90.03	2,083.25	3,325.08	1,980.19	1,816.55	163.64	12.101		
13,500.00	10,550.00	13,508.05	10,550.00	86.48	81.62	-90.03	2,083.21	3,425.08	1,980.18	1,812.22	167.95	11.790		
13,600.00	10,550.00	13,608.05	10,550.00	88.67	83.77	-90.03	2,083.17	3,525.08	1,980.17	1,807.87	172.30	11.493		
13,700.00	10,550.00	13,708.05	10,550.00	90.87	85.94	-90.03	2,083.14	3,625.08	1,980.16	1,803.50	176.66	11.209		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #221H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,800.00	10,550.00	13,808.05	10,550.00	93.07	88.12	-90.03	2,083.10	3,725.08	1,980.15	1,799.09	181.06	10.937		
13,900.00	10,550.00	13,908.05	10,550.00	95.29	90.31	-90.03	2,083.06	3,825.08	1,980.14	1,794.67	185.47	10.676		
14,000.00	10,550.00	14,008.05	10,550.00	97.52	92.52	-90.03	2,083.02	3,925.08	1,980.13	1,790.22	189.91	10.427		
14,100.00	10,550.00	14,108.05	10,550.00	99.76	94.73	-90.03	2,082.99	4,025.08	1,980.12	1,785.76	194.37	10.188		
14,200.00	10,550.00	14,208.05	10,550.00	102.01	96.96	-90.03	2,082.95	4,125.08	1,980.11	1,781.27	198.84	9.958		
14,300.00	10,550.00	14,308.05	10,550.00	104.27	99.19	-90.03	2,082.91	4,225.08	1,980.10	1,776.77	203.33	9.738		
14,400.00	10,550.00	14,408.05	10,550.00	106.53	101.43	-90.03	2,082.87	4,325.08	1,980.09	1,772.25	207.84	9.527		
14,500.00	10,550.00	14,508.05	10,550.00	108.80	103.68	-90.03	2,082.84	4,425.08	1,980.08	1,767.72	212.37	9.324		
14,600.00	10,550.00	14,608.05	10,550.00	111.07	105.94	-90.03	2,082.80	4,525.08	1,980.07	1,763.17	216.90	9.129		
14,700.00	10,550.00	14,708.05	10,550.00	113.36	108.21	-90.03	2,082.76	4,625.08	1,980.07	1,758.61	221.45	8.941		
14,800.00	10,550.00	14,808.05	10,550.00	115.64	110.48	-90.03	2,082.72	4,725.08	1,980.06	1,754.04	226.02	8.761		
14,900.00	10,550.00	14,908.05	10,550.00	117.94	112.76	-90.03	2,082.69	4,825.08	1,980.05	1,749.46	230.59	8.587		
15,000.00	10,550.00	15,008.05	10,550.00	120.24	115.04	-90.03	2,082.65	4,925.08	1,980.04	1,744.86	235.18	8.419		
15,100.00	10,550.00	15,108.05	10,550.00	122.54	117.33	-90.03	2,082.61	5,025.08	1,980.03	1,740.26	239.77	8.258		
15,200.00	10,550.00	15,208.05	10,550.00	124.85	119.63	-90.03	2,082.57	5,125.08	1,980.02	1,735.64	244.38	8.102		
15,300.00	10,550.00	15,308.05	10,550.00	127.16	121.93	-90.03	2,082.54	5,225.08	1,980.01	1,731.02	248.99	7.952		
15,400.00	10,550.00	15,408.05	10,550.00	129.48	124.24	-90.03	2,082.50	5,325.08	1,980.00	1,726.38	253.61	7.807		
15,426.71	10,550.00	15,434.76	10,550.00	130.10	124.85	-90.03	2,082.49	5,351.78	1,980.00	1,725.15	254.85	7.769		
15,437.85	10,550.00	15,431.68	10,550.00	130.35	124.78	-90.03	2,082.49	5,348.70	1,980.05	1,724.99	255.06	7.763		
15,438.79	10,550.00	15,431.68	10,550.00	130.37	124.78	-90.03	2,082.49	5,348.70	1,980.05	1,724.98	255.08	7.763 SF		



Anticollision Report



Company: Matador Resources
 Project: Eddy County, New Mexico (NAD 27)
 Reference Site: Zach McCormick Federal 18-24S-29E RB
 Site Error: 0.00 usft
 Reference Well: #226H
 Well Error: 0.00 usft
 Reference Wellbore: Wellbore #1
 Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
 TVD Reference: WELL @ 2983.09usft (Patterson 297)
 MD Reference: WELL @ 2983.09usft (Patterson 297)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature
 Output errors are at: 2.00 sigma
 Database: EDM 5000.1 Conroe DB
 Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #222H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Semi Major Axis Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	1.73	1.73	0.00	0.00	0.01	59.93	0.01	59.93				
100.00	100.00	101.73	101.73	0.13	0.13	0.01	59.93	0.01	59.93	59.67	0.26	229.866	
200.00	200.00	201.73	201.73	0.49	0.49	0.01	59.93	0.01	59.93	58.95	0.98	61.299	
300.00	300.00	301.73	301.73	0.84	0.85	0.01	59.93	0.01	59.93	58.24	1.69	35.365	
400.00	400.00	401.73	401.73	1.20	1.21	0.01	59.93	0.01	59.93	57.52	2.41	24.851	
500.00	500.00	501.73	501.73	1.56	1.57	0.01	59.93	0.01	59.93	56.80	3.13	19.156	
600.00	600.00	601.73	601.73	1.92	1.93	0.01	59.93	0.01	59.93	56.08	3.85	15.585	
700.00	700.00	701.73	701.73	2.28	2.28	0.01	59.93	0.01	59.93	55.37	4.56	13.136	
800.00	800.00	801.73	801.73	2.64	2.64	0.01	59.93	0.01	59.93	54.65	5.28	11.352	
900.00	900.00	901.73	901.73	3.00	3.00	0.01	59.93	0.01	59.93	53.93	6.00	9.995	
1,000.00	1,000.00	1,001.73	1,001.73	3.35	3.36	0.01	59.93	0.01	59.93	53.22	6.71	8.927	CC, ES
1,100.00	1,100.00	1,100.28	1,100.27	3.71	3.71	0.53	61.12	0.57	61.14	53.72	7.42	8.237	
1,200.00	1,200.00	1,198.72	1,198.63	4.07	4.06	1.94	64.62	2.19	64.73	56.60	8.13	7.962	
1,300.00	1,300.00	1,296.90	1,296.60	4.43	4.42	3.96	70.39	4.87	70.74	61.91	8.83	8.010	
1,400.00	1,400.00	1,405.42	1,393.88	4.79	4.81	6.26	78.39	8.59	79.25	69.69	9.56	8.287	
1,500.00	1,500.00	1,505.97	1,492.79	5.15	5.18	8.41	87.82	12.98	89.22	78.94	10.28	8.679	
1,600.00	1,600.00	1,606.52	1,591.69	5.50	5.55	10.12	97.24	17.36	99.29	88.29	11.00	9.029	
1,700.00	1,700.00	1,692.94	1,690.60	5.86	5.87	11.52	106.67	21.74	109.43	97.77	11.66	9.382	
1,800.00	1,800.00	1,792.39	1,789.51	6.22	6.24	12.68	116.09	26.13	119.62	107.25	12.38	9.663	
1,900.00	1,900.00	1,908.16	1,888.42	6.58	6.68	13.66	125.52	30.51	129.86	116.71	13.15	9.872	
2,000.00	2,000.00	2,008.71	1,987.32	6.94	7.06	14.50	134.95	34.90	140.13	126.25	13.87	10.100	
2,100.00	2,099.99	2,109.14	2,086.35	7.29	7.44	-30.52	144.38	39.28	149.30	134.71	14.59	10.232	
2,200.00	2,199.91	2,209.38	2,185.56	7.65	7.82	-30.54	153.84	43.68	156.23	140.92	15.31	10.206	
2,300.00	2,299.69	2,309.51	2,284.89	8.00	8.20	-31.04	163.31	48.08	160.91	144.88	16.03	10.040	
2,400.00	2,399.27	2,409.58	2,384.27	8.36	8.59	-32.02	172.78	52.49	163.38	146.63	16.75	9.756	
2,500.00	2,498.57	2,509.67	2,483.63	8.72	8.97	-33.47	182.25	56.89	163.71	146.24	17.47	9.369	
2,533.34	2,531.60	2,523.62	2,516.74	8.84	9.03	-34.07	185.40	58.36	163.36	145.72	17.65	9.258	
2,600.00	2,597.62	2,609.82	2,582.93	9.09	9.36	-35.33	191.71	61.29	162.48	144.28	18.20	8.926	
2,700.00	2,696.65	2,709.97	2,682.23	9.46	9.74	-37.25	201.17	65.69	161.31	142.37	18.94	8.517	
2,800.00	2,795.67	2,810.13	2,781.53	9.83	10.13	-39.19	210.64	70.09	160.33	140.65	19.68	8.147	
2,900.00	2,894.70	2,889.72	2,880.83	10.21	10.44	-41.16	220.10	74.49	159.53	139.18	20.35	7.839	
2,942.24	2,936.53	2,930.90	2,921.77	10.37	10.60	-41.96	224.08	76.35	159.33	138.67	20.66	7.714	
3,000.00	2,993.73	2,986.43	2,976.92	10.59	10.81	-42.96	230.05	79.12	159.75	138.68	21.06	7.585	
3,100.00	3,092.75	3,082.59	3,072.15	10.97	11.20	-44.39	242.09	84.72	162.40	140.64	21.76	7.462	
3,200.00	3,191.78	3,178.65	3,166.92	11.36	11.59	-45.43	256.29	91.32	167.43	144.97	22.46	7.455	
3,300.00	3,290.81	3,274.59	3,261.15	11.74	12.00	-46.05	272.62	98.92	174.77	151.62	23.15	7.550	
3,400.00	3,389.83	3,374.23	3,358.79	12.13	12.43	-46.49	290.63	107.29	183.19	159.28	23.91	7.660	
3,500.00	3,488.86	3,473.86	3,456.43	12.52	12.86	-46.88	308.65	115.67	191.62	166.94	24.68	7.763	
3,600.00	3,587.89	3,573.50	3,554.06	12.92	13.30	-47.24	326.66	124.05	200.06	174.60	25.46	7.859	
3,700.00	3,686.91	3,673.14	3,651.70	13.31	13.73	-47.58	344.67	132.42	208.50	182.27	26.23	7.949	
3,800.00	3,785.94	3,772.77	3,749.33	13.71	14.17	-47.89	362.68	140.80	216.95	189.95	27.01	8.033	
3,900.00	3,884.97	3,872.41	3,846.97	14.11	14.61	-48.17	380.69	149.17	225.41	197.62	27.79	8.112	
4,000.00	3,984.00	3,972.04	3,944.60	14.50	15.06	-48.43	398.71	157.55	233.87	205.30	28.57	8.186	
4,100.00	4,083.02	4,071.68	4,042.24	14.90	15.50	-48.68	416.72	165.93	242.34	212.99	29.35	8.256	
4,200.00	4,182.05	4,171.31	4,139.87	15.30	15.95	-48.91	434.73	174.30	250.81	220.67	30.14	8.322	
4,300.00	4,281.08	4,270.95	4,237.51	15.71	16.40	-49.12	452.74	182.68	259.29	228.36	30.92	8.385	
4,400.00	4,380.10	4,370.59	4,335.14	16.11	16.84	-49.32	470.75	191.05	267.76	236.05	31.71	8.444	
4,500.00	4,479.13	4,470.22	4,432.78	16.51	17.29	-49.51	488.76	199.43	276.24	243.74	32.50	8.499	
4,600.00	4,578.16	4,569.86	4,530.42	16.91	17.75	-49.68	506.78	207.81	284.73	251.44	33.29	8.552	
4,612.79	4,590.82	4,582.60	4,542.90	16.97	17.80	-49.71	509.08	208.88	285.81	252.42	33.39	8.559	
4,700.00	4,677.31	4,669.44	4,628.00	17.31	18.20	-49.79	524.78	216.18	293.85	259.78	34.08	8.623	
4,800.00	4,776.77	4,768.83	4,725.40	17.70	18.65	-49.56	542.75	224.53	304.65	269.82	34.84	8.745	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #222H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	Offset Wellbore Centre +E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
4,900.00	4,876.47	4,874.72	4,829.37	18.08	19.12	-49.05	560.89	232.97	316.26	280.59	35.67	8.866		
5,000.00	4,976.34	4,982.02	4,935.26	18.44	19.58	-48.44	576.63	240.29	327.17	290.70	36.48	8.969		
5,100.00	5,076.30	5,089.73	5,041.99	18.79	20.03	-47.75	589.70	246.37	337.39	300.14	37.25	9.057		
5,146.12	5,122.42	5,139.53	5,091.47	18.95	20.22	-1.84	594.82	248.75	341.88	304.28	37.59	9.094		
5,200.00	5,176.30	5,197.85	5,149.50	19.13	20.45	-1.41	600.08	251.19	346.67	308.68	37.99	9.126		
5,300.00	5,276.30	5,306.51	5,257.83	19.47	20.86	-0.80	607.72	254.75	353.65	314.94	38.70	9.138		
5,400.00	5,376.30	5,415.56	5,366.74	19.81	21.24	-0.43	612.58	257.01	358.08	318.69	39.39	9.090		
5,500.00	5,476.30	5,524.82	5,475.98	20.16	21.60	-0.28	614.62	257.96	359.94	319.88	40.06	8.985		
5,600.00	5,576.30	5,626.87	5,578.03	20.50	21.93	-0.27	614.69	257.99	360.01	319.26	40.74	8.836		
5,700.00	5,676.30	5,726.87	5,678.03	20.84	22.25	-0.27	614.69	257.99	360.01	318.57	41.43	8.689		
5,800.00	5,776.30	5,826.87	5,778.03	21.18	22.57	-0.27	614.69	257.99	360.01	317.88	42.12	8.547		
5,900.00	5,876.30	5,926.87	5,878.03	21.53	22.89	-0.27	614.69	257.99	360.01	317.19	42.81	8.409		
6,000.00	5,976.30	6,026.87	5,978.03	21.87	23.22	-0.27	614.69	257.99	360.01	316.50	43.51	8.275		
6,100.00	6,076.30	6,126.87	6,078.03	22.22	23.54	-0.27	614.69	257.99	360.01	315.81	44.20	8.145		
6,200.00	6,176.30	6,226.87	6,178.03	22.56	23.87	-0.27	614.69	257.99	360.01	315.11	44.89	8.019		
6,300.00	6,276.30	6,326.87	6,278.03	22.91	24.19	-0.27	614.69	257.99	360.01	314.42	45.59	7.897		
6,400.00	6,376.30	6,426.87	6,378.03	23.25	24.52	-0.27	614.69	257.99	360.01	313.72	46.28	7.779		
6,500.00	6,476.30	6,526.87	6,478.03	23.60	24.85	-0.27	614.69	257.99	360.01	313.03	46.98	7.663		
6,600.00	6,576.30	6,626.87	6,578.03	23.95	25.18	-0.27	614.69	257.99	360.01	312.33	47.67	7.551		
6,700.00	6,676.30	6,726.87	6,678.03	24.29	25.51	-0.27	614.69	257.99	360.01	311.63	48.37	7.442		
6,800.00	6,776.30	6,826.87	6,778.03	24.64	25.84	-0.27	614.69	257.99	360.01	310.94	49.07	7.337		
6,900.00	6,876.30	6,926.87	6,878.03	24.99	26.17	-0.27	614.69	257.99	360.01	310.24	49.77	7.234		
7,000.00	6,976.30	7,026.87	6,978.03	25.34	26.50	-0.27	614.69	257.99	360.01	309.54	50.47	7.134		
7,100.00	7,076.30	7,126.87	7,078.03	25.68	26.83	-0.27	614.69	257.99	360.01	308.84	51.17	7.036		
7,200.00	7,176.30	7,226.87	7,178.03	26.03	27.17	-0.27	614.69	257.99	360.01	308.14	51.87	6.941		
7,300.00	7,276.30	7,326.87	7,278.03	26.38	27.50	-0.27	614.69	257.99	360.01	307.44	52.57	6.849		
7,400.00	7,376.30	7,426.87	7,378.03	26.73	27.83	-0.27	614.69	257.99	360.01	306.74	53.27	6.759		
7,500.00	7,476.30	7,526.87	7,478.03	27.08	28.17	-0.27	614.69	257.99	360.01	306.04	53.97	6.671		
7,600.00	7,576.30	7,626.87	7,578.03	27.43	28.51	-0.27	614.69	257.99	360.01	305.34	54.67	6.585		
7,700.00	7,676.30	7,726.87	7,678.03	27.78	28.84	-0.27	614.69	257.99	360.01	304.63	55.37	6.502		
7,800.00	7,776.30	7,826.87	7,778.03	28.13	29.18	-0.27	614.69	257.99	360.01	303.93	56.07	6.420		
7,900.00	7,876.30	7,926.87	7,878.03	28.48	29.52	-0.27	614.69	257.99	360.01	303.23	56.78	6.341		
8,000.00	7,976.30	8,026.87	7,978.03	28.83	29.85	-0.27	614.69	257.99	360.01	302.53	57.48	6.263		
8,100.00	8,076.30	8,126.87	8,078.03	29.18	30.19	-0.27	614.69	257.99	360.01	301.82	58.18	6.188		
8,200.00	8,176.30	8,226.87	8,178.03	29.53	30.53	-0.27	614.69	257.99	360.01	301.12	58.89	6.114		
8,300.00	8,276.30	8,326.87	8,278.03	29.88	30.87	-0.27	614.69	257.99	360.01	300.42	59.59	6.041		
8,400.00	8,376.30	8,426.87	8,378.03	30.23	31.21	-0.27	614.69	257.99	360.01	299.71	60.29	5.971		
8,500.00	8,476.30	8,526.87	8,478.03	30.58	31.55	-0.27	614.69	257.99	360.01	299.01	61.00	5.902		
8,600.00	8,576.30	8,626.87	8,578.03	30.94	31.89	-0.27	614.69	257.99	360.01	298.30	61.70	5.834		
8,700.00	8,676.30	8,726.87	8,678.03	31.29	32.23	-0.27	614.69	257.99	360.01	297.60	62.41	5.769		
8,800.00	8,776.30	8,826.87	8,778.03	31.64	32.57	-0.27	614.69	257.99	360.01	296.89	63.11	5.704		
8,900.00	8,876.30	8,926.87	8,878.03	31.99	32.91	-0.27	614.69	257.99	360.01	296.19	63.82	5.641		
9,000.00	8,976.30	9,026.87	8,978.03	32.34	33.25	-0.27	614.69	257.99	360.01	295.48	64.53	5.579		
9,100.00	9,076.30	9,126.87	9,078.03	32.70	33.60	-0.27	614.69	257.99	360.01	294.77	65.23	5.519		
9,200.00	9,176.30	9,226.87	9,178.03	33.05	33.94	-0.27	614.69	257.99	360.01	294.07	65.94	5.460		
9,300.00	9,276.30	9,326.87	9,278.03	33.40	34.28	-0.27	614.69	257.99	360.01	293.36	66.64	5.402		
9,400.00	9,376.30	9,426.87	9,378.03	33.75	34.63	-0.27	614.69	257.99	360.01	292.65	67.35	5.345		
9,500.00	9,476.30	9,526.87	9,478.03	34.11	34.97	-0.27	614.69	257.99	360.01	291.95	68.06	5.290		
9,600.00	9,576.30	9,626.87	9,578.03	34.46	35.31	-0.27	614.69	257.99	360.01	291.24	68.77	5.235		
9,700.00	9,676.30	9,726.87	9,678.03	34.81	35.66	-0.27	614.69	257.99	360.01	290.53	69.47	5.182		
9,800.00	9,776.30	9,826.87	9,778.03	35.16	36.00	-0.27	614.69	257.99	360.01	289.82	70.18	5.130		
9,900.00	9,876.30	9,926.87	9,878.03	35.52	36.35	-0.27	614.69	257.99	360.01	289.12	70.89	5.078		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #222H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis			Distance						Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
9,994.94	9,971.24	10,021.81	9,972.97	35.85	36.67	-0.27	614.69	257.99	360.01	288.44	71.56	5.031	
10,000.00	9,976.30	10,026.19	9,977.35	35.87	36.69	-100.92	614.70	258.02	360.02	288.42	71.60	5.028	
10,050.00	10,026.22	10,071.13	10,022.23	36.04	36.85	-100.85	615.11	260.22	360.96	288.99	71.96	5.016	
10,100.00	10,075.71	10,116.03	10,066.74	36.22	37.01	-100.68	616.16	265.87	363.42	291.09	72.33	5.025	
10,150.00	10,124.41	10,160.85	10,110.60	36.41	37.18	-100.43	617.84	274.91	367.37	294.67	72.70	5.053	
10,200.00	10,171.95	10,205.57	10,153.50	36.59	37.35	-100.09	620.14	287.25	372.80	299.72	73.07	5.102	
10,250.00	10,217.96	10,250.15	10,195.17	36.79	37.53	-99.67	623.03	302.79	379.64	306.19	73.46	5.168	
10,300.00	10,262.09	10,294.58	10,235.36	36.98	37.72	-99.17	626.50	321.41	387.86	314.01	73.85	5.252	
10,350.00	10,304.01	10,338.86	10,273.83	37.19	37.90	-98.59	630.51	342.95	397.38	323.12	74.26	5.351	
10,400.00	10,343.39	10,382.98	10,310.36	37.40	38.10	-97.94	635.04	367.25	408.13	333.44	74.70	5.464	
10,450.00	10,379.94	10,426.96	10,344.77	37.62	38.30	-97.22	640.05	394.15	420.05	344.89	75.16	5.589	
10,500.00	10,413.39	10,470.82	10,376.90	37.86	38.51	-96.43	645.51	423.48	433.03	357.38	75.65	5.724	
10,550.00	10,443.46	10,514.57	10,406.59	38.12	38.73	-95.59	651.39	455.07	446.98	370.80	76.18	5.867	
10,600.00	10,469.95	10,558.28	10,433.71	38.40	38.97	-94.70	657.67	488.75	461.82	385.07	76.75	6.017	
10,650.00	10,492.63	10,601.98	10,458.14	38.71	39.22	-93.76	664.30	524.36	477.43	400.07	77.36	6.172	
10,700.00	10,511.35	10,645.75	10,479.77	39.03	39.49	-92.78	671.26	561.76	493.71	415.71	78.01	6.329	
10,750.00	10,525.96	10,689.65	10,498.48	39.39	39.78	-91.78	678.53	600.78	510.56	431.87	78.69	6.488	
10,794.94	10,535.49	10,729.29	10,512.72	39.73	40.06	-90.87	685.30	637.14	526.09	446.75	79.33	6.631	
10,800.00	10,536.36	10,733.77	10,514.17	39.77	40.09	-90.84	686.08	641.31	527.85	448.45	79.41	6.647	
10,850.00	10,543.49	10,778.32	10,526.75	40.17	40.43	-90.47	693.90	683.32	545.48	465.32	80.15	6.805	
10,900.00	10,548.01	10,823.43	10,536.07	40.60	40.78	-89.93	701.98	726.69	563.32	482.39	80.93	6.961	
10,950.00	10,549.93	10,869.24	10,542.78	41.06	41.17	-89.33	710.28	771.24	581.28	499.54	81.74	7.111	
10,961.61	10,550.00	10,879.90	10,544.03	41.16	41.26	-89.19	712.22	781.65	585.46	503.53	81.94	7.145	
11,000.00	10,550.00	10,915.45	10,547.34	41.53	41.57	-89.55	718.70	816.44	598.95	516.36	82.60	7.252	
11,100.00	10,550.00	11,021.44	10,550.00	42.59	42.58	-89.84	737.78	920.63	630.53	545.94	84.59	7.454	
11,200.00	10,550.00	11,168.54	10,550.00	43.75	44.15	-89.85	756.47	1,066.50	651.85	564.65	87.20	7.476	
11,300.00	10,550.00	11,320.35	10,550.00	45.03	45.95	-89.85	763.94	1,218.09	660.25	570.22	90.03	7.334	
11,316.07	10,550.00	11,344.91	10,550.00	45.24	46.26	-89.85	764.01	1,242.65	660.37	569.88	90.50	7.297	
11,344.06	10,550.00	11,370.90	10,550.00	45.62	46.60	-89.85	764.01	1,268.64	660.38	569.14	91.24	7.238	
11,400.00	10,550.00	11,426.84	10,550.00	46.39	47.34	-89.85	763.99	1,324.58	660.37	567.61	92.77	7.119	
11,500.00	10,550.00	11,526.84	10,550.00	47.83	48.72	-89.85	763.95	1,424.58	660.36	564.73	95.63	6.905	
11,600.00	10,550.00	11,626.84	10,550.00	49.35	50.18	-89.85	763.92	1,524.58	660.35	561.71	98.65	6.694	
11,700.00	10,550.00	11,726.84	10,550.00	50.94	51.71	-89.85	763.88	1,624.58	660.34	558.54	101.81	6.486	
11,800.00	10,550.00	11,826.84	10,550.00	52.60	53.32	-89.85	763.84	1,724.58	660.34	555.24	105.10	6.283	
11,900.00	10,550.00	11,926.84	10,550.00	54.31	54.98	-89.85	763.81	1,824.58	660.33	551.82	108.51	6.086	
12,000.00	10,550.00	12,026.84	10,550.00	56.08	56.70	-89.85	763.77	1,924.58	660.32	548.30	112.02	5.895	
12,100.00	10,550.00	12,126.84	10,550.00	57.89	58.46	-89.85	763.73	2,024.58	660.31	544.68	115.63	5.711	
12,200.00	10,550.00	12,226.84	10,550.00	59.75	60.28	-89.85	763.69	2,124.58	660.30	540.97	119.32	5.534	
12,300.00	10,550.00	12,326.84	10,550.00	61.65	62.13	-89.85	763.66	2,224.58	660.29	537.19	123.10	5.364	
12,400.00	10,550.00	12,426.84	10,550.00	63.58	64.03	-89.85	763.62	2,324.58	660.28	533.33	126.95	5.201	
12,500.00	10,550.00	12,526.84	10,550.00	65.54	65.96	-89.85	763.58	2,424.58	660.27	529.40	130.87	5.045	
12,600.00	10,550.00	12,626.84	10,550.00	67.54	67.92	-89.85	763.54	2,524.58	660.26	525.42	134.84	4.896	
12,700.00	10,550.00	12,726.84	10,550.00	69.56	69.91	-89.85	763.51	2,624.58	660.25	521.38	138.88	4.754	
12,800.00	10,550.00	12,826.84	10,550.00	71.61	71.93	-89.85	763.47	2,724.58	660.24	517.28	142.96	4.618	
12,900.00	10,550.00	12,926.84	10,550.00	73.67	73.97	-89.85	763.43	2,824.58	660.23	513.15	147.09	4.489	
13,000.00	10,550.00	13,026.84	10,550.00	75.77	76.03	-89.85	763.40	2,924.58	660.23	508.97	151.26	4.365	
13,100.00	10,550.00	13,126.84	10,550.00	77.88	78.12	-89.85	763.36	3,024.58	660.22	504.74	155.47	4.247	
13,200.00	10,550.00	13,226.84	10,550.00	80.00	80.22	-89.85	763.32	3,124.58	660.21	500.49	159.72	4.134	
13,300.00	10,550.00	13,326.84	10,550.00	82.15	82.34	-89.85	763.28	3,224.58	660.20	496.20	164.00	4.026	
13,400.00	10,550.00	13,426.84	10,550.00	84.31	84.48	-89.85	763.25	3,324.58	660.19	491.88	168.31	3.922	
13,500.00	10,550.00	13,526.84	10,550.00	86.48	86.64	-89.85	763.21	3,424.58	660.18	487.53	172.65	3.824	
13,600.00	10,550.00	13,626.84	10,550.00	88.67	88.80	-89.85	763.17	3,524.58	660.17	483.15	177.02	3.729	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #222H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
13,700.00	10,550.00	13,726.84	10,550.00	90.87	90.98	-89.85	763.14	3,624.58	660.16	478.75	181.41	3.639		
13,800.00	10,550.00	13,826.84	10,550.00	93.07	93.18	-89.85	763.10	3,724.58	660.15	474.33	185.82	3.553		
13,900.00	10,550.00	13,926.84	10,550.00	95.29	95.38	-89.85	763.06	3,824.58	660.14	469.89	190.26	3.470		
14,000.00	10,550.00	14,026.84	10,550.00	97.52	97.59	-89.85	763.02	3,924.58	660.13	465.42	194.71	3.390		
14,100.00	10,550.00	14,126.84	10,550.00	99.76	99.82	-89.85	762.99	4,024.58	660.12	460.94	199.18	3.314		
14,200.00	10,550.00	14,226.84	10,550.00	102.01	102.05	-89.85	762.95	4,124.58	660.11	456.44	203.67	3.241		
14,300.00	10,550.00	14,326.84	10,550.00	104.27	104.29	-89.85	762.91	4,224.58	660.11	451.93	208.18	3.171		
14,400.00	10,550.00	14,426.84	10,550.00	106.53	106.54	-89.85	762.87	4,324.58	660.10	447.40	212.70	3.103		
14,500.00	10,550.00	14,526.84	10,550.00	108.80	108.80	-89.85	762.84	4,424.58	660.09	442.85	217.23	3.039		
14,600.00	10,550.00	14,626.84	10,550.00	111.07	111.06	-89.85	762.80	4,524.58	660.08	438.29	221.78	2.976		
14,700.00	10,550.00	14,726.84	10,550.00	113.36	113.33	-89.85	762.76	4,624.58	660.07	433.72	226.34	2.916		
14,800.00	10,550.00	14,826.84	10,550.00	115.64	115.61	-89.85	762.73	4,724.58	660.06	429.14	230.92	2.858		
14,900.00	10,550.00	14,926.84	10,550.00	117.94	117.89	-89.85	762.69	4,824.58	660.05	424.55	235.50	2.803		
15,000.00	10,550.00	15,026.84	10,550.00	120.24	120.18	-89.85	762.65	4,924.58	660.04	419.95	240.09	2.749		
15,100.00	10,550.00	15,126.84	10,550.00	122.54	122.48	-89.85	762.61	5,024.58	660.03	415.33	244.70	2.697		
15,200.00	10,550.00	15,226.84	10,550.00	124.85	124.78	-89.85	762.58	5,124.58	660.02	410.71	249.31	2.647		
15,300.00	10,550.00	15,326.84	10,550.00	127.16	127.08	-89.85	762.54	5,224.58	660.01	406.08	253.93	2.599		
15,400.00	10,550.00	15,426.84	10,550.00	129.48	129.20	-89.85	762.50	5,324.58	660.00	401.64	258.37	2.555		
15,437.85	10,550.00	15,464.69	10,550.00	130.35	129.81	-89.85	762.49	5,362.43	660.00	400.15	259.85	2.540		
15,438.79	10,550.00	15,465.63	10,550.00	130.37	129.82	-89.85	762.49	5,363.37	660.00	400.12	259.88	2.540 SF		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #225H - Wellbore #1 - Design #1												Offset Site Error:	0.00 usft
Survey Program: 0-MWD												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
0.00	0.00	1.14	-1.14	0.00	0.00	19.52	1,673.49	593.43	1,775.59				
100.00	100.00	101.14	98.86	0.13	0.13	19.52	1,673.49	593.43	1,775.59	1,775.33	0.26	6,866.127	
200.00	200.00	201.14	198.86	0.49	0.49	19.52	1,673.49	593.43	1,775.59	1,774.62	0.98	1,820.103	
300.00	300.00	301.14	298.86	0.84	0.85	19.52	1,673.49	593.43	1,775.59	1,773.90	1.69	1,049.102	
400.00	400.00	401.14	398.86	1.20	1.21	19.52	1,673.49	593.43	1,775.59	1,773.18	2.41	736.934	
500.00	500.00	501.14	498.86	1.56	1.57	19.52	1,673.49	593.43	1,775.59	1,772.47	3.13	567.940	
600.00	600.00	601.14	598.86	1.92	1.92	19.52	1,673.49	593.43	1,775.59	1,771.75	3.84	461.995	
700.00	700.00	701.14	698.86	2.28	2.28	19.52	1,673.49	593.43	1,775.59	1,771.03	4.56	389.362	
800.00	800.00	801.14	798.86	2.64	2.64	19.52	1,673.49	593.43	1,775.59	1,770.32	5.28	336.465	
900.00	900.00	901.14	898.86	3.00	3.00	19.52	1,673.49	593.43	1,775.59	1,769.60	5.99	296.221	
1,000.00	1,000.00	998.86	998.86	3.35	3.35	19.52	1,673.49	593.43	1,775.59	1,768.89	6.70	264.898	
1,100.00	1,100.00	1,135.63	1,135.61	3.71	3.82	19.46	1,672.82	591.12	1,774.57	1,767.03	7.53	235.556	
1,200.00	1,200.00	1,272.48	1,272.25	4.07	4.29	19.27	1,670.78	584.10	1,771.46	1,763.10	8.36	211.969	
1,300.00	1,300.00	1,370.67	1,370.20	4.43	4.63	19.09	1,668.87	577.53	1,767.41	1,758.36	9.06	195.137	
1,400.00	1,400.00	1,470.43	1,469.72	4.79	4.99	18.90	1,666.93	570.85	1,763.39	1,753.62	9.77	180.580	
1,500.00	1,500.00	1,570.19	1,569.23	5.15	5.34	18.72	1,664.99	564.16	1,759.38	1,748.90	10.48	167.943	
1,600.00	1,600.00	1,669.94	1,668.74	5.50	5.70	18.53	1,663.04	557.48	1,755.39	1,744.20	11.19	156.883	
1,700.00	1,700.00	1,769.70	1,768.26	5.86	6.06	18.34	1,661.10	550.80	1,751.42	1,739.51	11.90	147.128	
1,800.00	1,800.00	1,869.45	1,867.77	6.22	6.42	18.16	1,659.16	544.12	1,747.46	1,734.84	12.62	138.462	
1,900.00	1,900.00	1,969.21	1,967.28	6.58	6.79	17.97	1,657.22	537.43	1,743.53	1,730.19	13.34	130.716	
2,000.00	2,000.00	2,068.97	2,066.80	6.94	7.15	17.78	1,655.28	530.75	1,739.61	1,725.56	14.06	123.752	
2,100.00	2,099.99	2,168.63	2,166.22	7.29	7.52	-28.03	1,653.34	524.08	1,734.56	1,719.79	14.77	117.403	
2,200.00	2,199.91	2,268.07	2,265.41	7.65	7.88	-28.33	1,651.40	517.42	1,727.24	1,711.75	15.49	111.507	
2,300.00	2,299.69	2,367.21	2,364.31	8.00	8.25	-28.70	1,649.47	510.77	1,717.65	1,701.45	16.21	105.992	
2,400.00	2,399.27	2,465.98	2,462.84	8.36	8.61	-29.13	1,647.55	504.16	1,705.84	1,688.92	16.92	100.812	
2,500.00	2,498.57	2,564.32	2,560.94	8.72	8.97	-29.62	1,645.64	497.57	1,691.83	1,674.19	17.64	95.928	
2,533.34	2,531.60	2,603.01	2,593.54	8.84	9.12	-29.80	1,645.00	495.38	1,686.67	1,668.77	17.90	94.240	
2,600.00	2,597.62	2,662.28	2,658.66	9.09	9.34	-30.09	1,643.73	491.01	1,676.15	1,657.80	18.35	91.332	
2,700.00	2,696.65	2,760.21	2,756.35	9.46	9.70	-30.53	1,641.82	484.45	1,660.44	1,641.37	19.07	87.074	
2,800.00	2,795.67	2,860.48	2,856.38	9.83	10.07	-30.99	1,639.87	477.72	1,644.83	1,625.03	19.80	83.086	
2,900.00	2,894.70	2,965.64	2,961.04	10.21	10.54	-31.65	1,636.77	467.04	1,628.37	1,607.76	20.61	79.006	
3,000.00	2,993.73	3,108.92	3,103.40	10.59	11.02	-32.43	1,632.60	452.70	1,610.45	1,589.02	21.42	75.167	
3,100.00	3,092.75	3,206.91	3,200.45	10.97	11.41	-33.13	1,628.80	439.61	1,591.86	1,569.69	22.17	71.800	
3,200.00	3,191.78	3,303.27	3,295.87	11.36	11.79	-33.83	1,625.05	426.73	1,573.51	1,550.60	22.92	68.663	
3,300.00	3,180.81	3,400.37	3,391.29	11.74	12.18	-34.55	1,621.31	413.86	1,555.40	1,531.74	23.67	65.714	
3,400.00	3,169.83	3,497.42	3,486.71	12.13	12.60	-35.29	1,617.57	400.98	1,537.55	1,513.10	24.45	62.880	
3,500.00	3,158.86	3,594.47	3,582.12	12.52	13.02	-36.04	1,613.83	388.10	1,519.95	1,494.71	25.24	60.222	
3,600.00	3,147.89	3,691.52	3,677.54	12.92	13.34	-36.81	1,610.09	375.22	1,502.63	1,476.69	25.94	57.925	
3,700.00	3,136.91	3,788.57	3,772.96	13.31	13.73	-37.59	1,606.35	362.34	1,485.58	1,458.88	26.71	55.625	
3,800.00	3,125.94	3,885.62	3,868.38	13.71	14.13	-38.39	1,602.60	349.47	1,468.83	1,441.35	27.48	53.457	
3,900.00	3,114.97	3,982.67	3,963.80	14.11	14.52	-39.21	1,598.86	336.59	1,452.37	1,424.12	28.25	51.410	
4,000.00	3,104.00	4,079.72	4,059.22	14.50	14.91	-40.05	1,595.12	323.71	1,436.22	1,407.19	29.03	49.476	
4,100.00	3,093.02	4,176.77	4,154.54	14.90	15.31	-40.90	1,591.38	310.83	1,420.39	1,390.58	29.81	47.649	
4,200.00	3,082.05	4,273.82	4,250.06	15.30	15.70	-41.78	1,587.64	297.96	1,404.90	1,374.30	30.59	45.919	
4,300.00	3,071.08	4,370.87	4,342.22	15.71	16.08	-42.63	1,584.05	285.61	1,389.78	1,358.41	31.37	44.299	
4,400.00	3,060.10	4,467.92	4,428.02	16.11	16.43	-43.39	1,581.13	275.57	1,375.55	1,343.42	32.13	42.818	
4,500.00	3,049.13	4,564.97	4,514.96	16.51	16.77	-44.08	1,578.73	267.31	1,362.32	1,329.45	32.87	41.443	
4,600.00	3,038.16	4,662.02	4,602.94	16.91	17.10	-44.72	1,576.87	260.91	1,350.02	1,316.41	33.61	40.166	
4,612.79	4,590.82	4,633.27	4,614.26	16.97	17.14	-44.79	1,576.68	260.23	1,348.51	1,314.81	33.70	40.010	
4,700.00	4,677.31	4,711.09	4,691.98	17.31	17.43	-45.16	1,575.57	256.43	1,339.28	1,304.95	34.34	39.003	
4,800.00	4,776.77	4,801.22	4,782.07	17.70	17.75	-45.46	1,574.85	253.94	1,331.16	1,296.11	35.05	37.983	
4,900.00	4,876.47	4,905.51	4,875.33	18.08	18.09	-45.65	1,574.69	253.40	1,325.55	1,289.78	35.77	37.056	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #225H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)					
5,000.00	4,976.34	5,005.65	4,975.20	18.44	18.42	-45.77	1,574.69	253.40	1,321.96	1,285.50	36.47	36.252	
5,100.00	5,076.30	5,105.68	5,075.16	18.79	18.75	-45.83	1,574.69	253.40	1,320.21	1,283.06	37.15	35.537	
5,146.12	5,122.42	5,140.44	5,121.28	18.95	18.86	-0.27	1,574.69	253.40	1,320.02	1,282.59	37.43	35.270	
5,200.00	5,176.30	5,205.68	5,175.16	19.13	19.08	-0.27	1,574.69	253.40	1,320.02	1,282.19	37.83	34.895	
5,300.00	5,276.30	5,305.68	5,275.16	19.47	19.41	-0.27	1,574.69	253.40	1,320.02	1,281.51	38.51	34.281	
5,400.00	5,376.30	5,405.68	5,375.16	19.81	19.74	-0.27	1,574.69	253.40	1,320.02	1,280.83	39.19	33.687	
5,500.00	5,476.30	5,505.68	5,475.16	20.16	20.07	-0.27	1,574.69	253.40	1,320.02	1,280.15	39.87	33.112	
5,600.00	5,576.30	5,605.68	5,575.16	20.50	20.41	-0.27	1,574.69	253.40	1,320.02	1,279.47	40.55	32.555	
5,700.00	5,676.30	5,705.68	5,675.16	20.84	20.74	-0.27	1,574.69	253.40	1,320.02	1,278.79	41.23	32.016	
5,800.00	5,776.30	5,805.68	5,775.16	21.18	21.07	-0.27	1,574.69	253.40	1,320.02	1,278.10	41.91	31.493	
5,900.00	5,876.30	5,905.68	5,875.16	21.53	21.41	-0.27	1,574.69	253.40	1,320.02	1,277.42	42.60	30.986	
6,000.00	5,976.30	6,005.68	5,975.16	21.87	21.75	-0.27	1,574.69	253.40	1,320.02	1,276.73	43.29	30.495	
6,100.00	6,076.30	6,105.68	6,075.16	22.22	22.08	-0.27	1,574.69	253.40	1,320.02	1,276.04	43.97	30.019	
6,200.00	6,176.30	6,205.68	6,175.16	22.56	22.42	-0.27	1,574.69	253.40	1,320.02	1,275.35	44.66	29.556	
6,300.00	6,276.30	6,305.68	6,275.16	22.91	22.76	-0.27	1,574.69	253.40	1,320.02	1,274.67	45.35	29.107	
6,400.00	6,376.30	6,405.68	6,375.16	23.25	23.10	-0.27	1,574.69	253.40	1,320.02	1,273.98	46.04	28.671	
6,500.00	6,476.30	6,505.68	6,475.16	23.60	23.44	-0.27	1,574.69	253.40	1,320.02	1,273.29	46.73	28.247	
6,600.00	6,576.30	6,605.68	6,575.16	23.95	23.78	-0.27	1,574.69	253.40	1,320.02	1,272.59	47.42	27.835	
6,700.00	6,676.30	6,705.68	6,675.16	24.29	24.12	-0.27	1,574.69	253.40	1,320.02	1,271.90	48.11	27.435	
6,800.00	6,776.30	6,805.68	6,775.16	24.64	24.46	-0.27	1,574.69	253.40	1,320.02	1,271.21	48.81	27.045	
6,900.00	6,876.30	6,905.68	6,875.16	24.99	24.80	-0.27	1,574.69	253.40	1,320.02	1,270.51	49.50	26.666	
7,000.00	6,976.30	7,005.68	6,975.16	25.34	25.14	-0.27	1,574.69	253.40	1,320.02	1,269.82	50.20	26.298	
7,100.00	7,076.30	7,105.68	7,075.16	25.68	25.48	-0.27	1,574.69	253.40	1,320.02	1,269.13	50.89	25.938	
7,200.00	7,176.30	7,205.68	7,175.16	26.03	25.83	-0.27	1,574.69	253.40	1,320.02	1,268.43	51.59	25.589	
7,300.00	7,276.30	7,305.68	7,275.16	26.38	26.17	-0.27	1,574.69	253.40	1,320.02	1,267.73	52.28	25.248	
7,400.00	7,376.30	7,405.68	7,375.16	26.73	26.51	-0.27	1,574.69	253.40	1,320.02	1,267.04	52.98	24.916	
7,500.00	7,476.30	7,505.68	7,475.16	27.08	26.86	-0.27	1,574.69	253.40	1,320.02	1,266.34	53.68	24.592	
7,600.00	7,576.30	7,605.68	7,575.16	27.43	27.20	-0.27	1,574.69	253.40	1,320.02	1,265.64	54.37	24.277	
7,700.00	7,676.30	7,705.68	7,675.16	27.78	27.55	-0.27	1,574.69	253.40	1,320.02	1,264.94	55.07	23.969	
7,800.00	7,776.30	7,805.68	7,775.16	28.13	27.89	-0.27	1,574.69	253.40	1,320.02	1,264.25	55.77	23.669	
7,900.00	7,876.30	7,905.68	7,875.16	28.48	28.24	-0.27	1,574.69	253.40	1,320.02	1,263.55	56.47	23.376	
8,000.00	7,976.30	8,005.68	7,975.16	28.83	28.58	-0.27	1,574.69	253.40	1,320.02	1,262.85	57.17	23.090	
8,100.00	8,076.30	8,105.68	8,075.16	29.18	28.93	-0.27	1,574.69	253.40	1,320.02	1,262.15	57.87	22.811	
8,200.00	8,176.30	8,205.68	8,175.16	29.53	29.28	-0.27	1,574.69	253.40	1,320.02	1,261.45	58.57	22.538	
8,300.00	8,276.30	8,305.68	8,275.16	29.88	29.62	-0.27	1,574.69	253.40	1,320.02	1,260.75	59.27	22.271	
8,400.00	8,376.30	8,405.68	8,375.16	30.23	29.97	-0.27	1,574.69	253.40	1,320.02	1,260.04	59.97	22.011	
8,500.00	8,476.30	8,505.68	8,475.16	30.58	30.32	-0.27	1,574.69	253.40	1,320.02	1,259.34	60.67	21.756	
8,600.00	8,576.30	8,605.68	8,575.16	30.94	30.67	-0.27	1,574.69	253.40	1,320.02	1,258.64	61.37	21.508	
8,700.00	8,676.30	8,705.68	8,675.16	31.29	31.01	-0.27	1,574.69	253.40	1,320.02	1,257.94	62.08	21.264	
8,800.00	8,776.30	8,805.68	8,775.16	31.64	31.36	-0.27	1,574.69	253.40	1,320.02	1,257.24	62.78	21.026	
8,900.00	8,876.30	8,905.68	8,875.16	31.99	31.71	-0.27	1,574.69	253.40	1,320.02	1,256.53	63.48	20.794	
9,000.00	8,976.30	9,005.68	8,975.16	32.34	32.06	-0.27	1,574.69	253.40	1,320.02	1,255.83	64.19	20.566	
9,100.00	9,076.30	9,105.68	9,075.16	32.70	32.41	-0.27	1,574.69	253.40	1,320.02	1,255.13	64.89	20.343	
9,200.00	9,176.30	9,205.68	9,175.16	33.05	32.76	-0.27	1,574.69	253.40	1,320.02	1,254.42	65.59	20.124	
9,300.00	9,276.30	9,305.68	9,275.16	33.40	33.10	-0.27	1,574.69	253.40	1,320.02	1,253.72	66.30	19.911	
9,400.00	9,376.30	9,405.68	9,375.16	33.75	33.45	-0.27	1,574.69	253.40	1,320.02	1,253.02	67.00	19.701	
9,500.00	9,476.30	9,505.68	9,475.16	34.11	33.80	-0.27	1,574.69	253.40	1,320.02	1,252.31	67.71	19.496	
9,600.00	9,576.30	9,605.68	9,575.16	34.46	34.15	-0.27	1,574.69	253.40	1,320.02	1,251.61	68.41	19.296	
9,700.00	9,676.30	9,705.68	9,675.16	34.81	34.50	-0.27	1,574.69	253.40	1,320.02	1,250.90	69.12	19.099	
9,800.00	9,776.30	9,805.68	9,775.16	35.16	34.85	-0.27	1,574.69	253.40	1,320.02	1,250.20	69.82	18.906	
9,900.00	9,876.30	9,905.68	9,875.16	35.52	35.20	-0.27	1,574.69	253.40	1,320.02	1,249.49	70.53	18.717	
9,994.94	9,971.24	9,989.26	9,970.10	35.85	35.50	-0.27	1,574.69	253.40	1,320.02	1,248.86	71.16	18.551	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #225H - Wellbore #1 - Design #1													Offset Site Error: 0.00 usft
Survey Program: 0-MWD													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Highside Tooface (")	Distance		Minimum Separation (usft)	Separation Factor	Warning		
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Between Centres (usft)	Between Ellipses (usft)					
10,000.00	9,976.30	9,997.36	9,978.20	35.87	35.52	-100.92	1,574.68	253.44	1,320.02	1,248.82	71.20	18.539	
10,050.00	10,026.22	10,085.85	10,066.25	36.04	35.80	-100.82	1,573.22	261.20	1,319.67	1,248.06	71.60	18.430	
10,100.00	10,075.71	10,172.99	10,150.76	36.22	36.05	-100.53	1,569.36	281.75	1,318.71	1,246.76	71.94	18.330	
10,150.00	10,124.41	10,257.65	10,228.91	36.41	36.28	-100.08	1,563.38	313.56	1,317.21	1,244.97	72.24	18.234	
10,200.00	10,171.95	10,339.00	10,298.73	36.59	36.47	-99.50	1,555.69	354.45	1,315.28	1,242.76	72.52	18.137	
10,250.00	10,217.96	10,416.50	10,359.14	36.79	36.66	-98.81	1,546.73	402.07	1,313.03	1,240.21	72.82	18.031	
10,300.00	10,262.09	10,489.93	10,409.85	36.98	36.84	-98.05	1,536.93	454.19	1,310.61	1,237.45	73.16	17.913	
10,350.00	10,304.01	10,559.29	10,451.16	37.19	37.03	-97.25	1,526.64	508.90	1,308.13	1,234.56	73.57	17.781	
10,400.00	10,343.39	10,624.76	10,483.71	37.40	37.24	-96.41	1,516.15	564.68	1,305.71	1,231.68	74.03	17.637	
10,450.00	10,379.94	10,686.61	10,508.33	37.62	37.48	-95.56	1,505.68	620.41	1,303.44	1,228.88	74.56	17.481	
10,500.00	10,413.39	10,745.15	10,525.88	37.86	37.74	-94.69	1,495.36	675.27	1,301.40	1,226.26	75.14	17.319	
10,550.00	10,443.46	10,799.96	10,537.10	38.12	38.01	-93.84	1,485.45	727.97	1,299.65	1,223.90	75.76	17.156	
10,600.00	10,469.95	10,850.11	10,544.01	38.40	38.30	-93.07	1,476.27	776.79	1,298.31	1,221.91	76.39	16.995	
10,650.00	10,492.63	10,899.89	10,548.29	38.71	38.60	-92.35	1,467.10	825.53	1,297.35	1,220.29	77.06	16.835	
10,700.00	10,511.35	10,949.36	10,549.96	39.03	38.94	-91.66	1,457.97	874.10	1,296.71	1,218.94	77.76	16.675	
10,730.92	10,520.88	10,970.18	10,550.00	39.25	39.09	-91.39	1,454.16	894.58	1,296.53	1,218.37	78.16	16.588 CC	
10,750.00	10,525.96	10,981.14	10,550.00	39.39	39.17	-91.26	1,452.24	905.36	1,296.60	1,218.21	78.39	16.540	
10,794.94	10,535.49	11,000.00	10,550.00	39.73	39.30	-91.00	1,449.08	923.96	1,297.34	1,218.43	78.90	16.442	
10,800.00	10,536.36	11,000.00	10,550.00	39.77	39.30	-90.99	1,449.08	923.96	1,297.49	1,218.55	78.95	16.435	
10,850.00	10,543.49	11,039.69	10,550.00	40.17	39.63	-90.62	1,443.03	963.19	1,299.12	1,219.42	79.70	16.300	
10,900.00	10,548.01	11,069.27	10,550.00	40.60	39.88	-90.35	1,439.06	992.50	1,301.64	1,221.25	80.39	16.191	
10,950.00	10,549.93	11,100.00	10,550.00	41.06	40.14	-90.10	1,435.41	1,023.01	1,304.96	1,223.85	81.11	16.088	
10,961.61	10,550.00	11,100.00	10,550.00	41.16	40.14	-90.05	1,435.41	1,023.01	1,305.86	1,224.64	81.23	16.077	
11,000.00	10,550.00	11,128.51	10,550.00	41.53	40.41	-90.05	1,432.46	1,051.36	1,308.67	1,226.80	81.87	15.984	
11,100.00	10,550.00	11,200.00	10,550.00	42.59	41.09	-90.05	1,426.93	1,122.64	1,314.66	1,231.05	83.61	15.724	
11,200.00	10,550.00	11,246.83	10,550.00	43.75	41.59	-90.05	1,424.76	1,169.42	1,318.33	1,233.08	85.25	15.465	
11,300.00	10,550.00	11,305.97	10,550.00	45.03	42.23	-90.05	1,423.66	1,228.54	1,319.95	1,232.85	87.10	15.155	
11,316.07	10,550.00	11,318.20	10,550.00	45.24	42.37	-90.05	1,423.64	1,240.78	1,320.00	1,232.56	87.44	15.096	
11,400.00	10,550.00	11,402.13	10,550.00	46.39	43.35	-90.05	1,423.62	1,324.70	1,320.00	1,230.42	89.58	14.736	
11,500.00	10,550.00	11,502.13	10,550.00	47.83	44.62	-90.05	1,423.59	1,424.70	1,320.00	1,227.71	92.29	14.303	
11,600.00	10,550.00	11,602.13	10,550.00	49.35	45.98	-90.05	1,423.56	1,524.70	1,320.00	1,224.83	95.17	13.870	
11,700.00	10,550.00	11,702.13	10,550.00	50.94	47.43	-90.05	1,423.54	1,624.70	1,320.00	1,221.79	98.21	13.440	
11,800.00	10,550.00	11,802.13	10,550.00	52.60	48.95	-90.05	1,423.51	1,724.70	1,320.00	1,218.61	101.39	13.019	
11,900.00	10,550.00	11,902.13	10,550.00	54.31	50.54	-90.05	1,423.48	1,824.70	1,320.00	1,215.30	104.70	12.607	
12,000.00	10,550.00	12,002.13	10,550.00	56.08	52.20	-90.05	1,423.45	1,924.70	1,320.00	1,211.87	108.12	12.208	
12,100.00	10,550.00	12,102.13	10,550.00	57.89	53.91	-90.05	1,423.42	2,024.70	1,320.00	1,208.34	111.66	11.822	
12,200.00	10,550.00	12,202.13	10,550.00	59.75	55.68	-90.05	1,423.40	2,124.70	1,320.00	1,204.72	115.28	11.450	
12,300.00	10,550.00	12,302.13	10,550.00	61.65	57.49	-90.05	1,423.37	2,224.70	1,320.00	1,201.00	119.00	11.093	
12,400.00	10,550.00	12,402.13	10,550.00	63.58	59.35	-90.05	1,423.34	2,324.70	1,320.00	1,197.21	122.79	10.750	
12,500.00	10,550.00	12,502.13	10,550.00	65.54	61.25	-90.05	1,423.31	2,424.70	1,320.00	1,193.34	126.65	10.422	
12,600.00	10,550.00	12,602.13	10,550.00	67.54	63.18	-90.05	1,423.28	2,524.70	1,320.00	1,189.41	130.59	10.108	
12,700.00	10,550.00	12,702.13	10,550.00	69.56	65.14	-90.05	1,423.26	2,624.70	1,320.00	1,185.42	134.58	9.809	
12,800.00	10,550.00	12,802.13	10,550.00	71.61	67.14	-90.05	1,423.23	2,724.70	1,320.00	1,181.38	138.62	9.522	
12,900.00	10,550.00	12,902.13	10,550.00	73.67	69.16	-90.05	1,423.20	2,824.70	1,320.00	1,177.28	142.72	9.249	
13,000.00	10,550.00	13,002.13	10,550.00	75.77	71.21	-90.05	1,423.17	2,924.70	1,320.00	1,173.14	146.86	8.988	
13,100.00	10,550.00	13,102.13	10,550.00	77.88	73.28	-90.05	1,423.14	3,024.70	1,320.00	1,168.95	151.04	8.739	
13,200.00	10,550.00	13,202.13	10,550.00	80.00	75.37	-90.05	1,423.12	3,124.70	1,320.00	1,164.73	155.27	8.501	
13,300.00	10,550.00	13,302.13	10,550.00	82.15	77.49	-90.05	1,423.09	3,224.70	1,320.00	1,160.47	159.53	8.274	
13,400.00	10,550.00	13,402.13	10,550.00	84.31	79.62	-90.05	1,423.06	3,324.70	1,320.00	1,156.18	163.82	8.058	
13,500.00	10,550.00	13,502.13	10,550.00	86.48	81.76	-90.05	1,423.03	3,424.70	1,320.00	1,151.86	168.14	7.851	
13,600.00	10,550.00	13,602.13	10,550.00	88.67	83.92	-90.05	1,423.00	3,524.70	1,320.00	1,147.51	172.49	7.653	
13,700.00	10,550.00	13,702.13	10,550.00	90.87	86.10	-90.05	1,422.98	3,624.70	1,320.00	1,143.13	176.86	7.463	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Offset Design Zach McCormick Federal 18-24S-29E RB - #225H - Wellbore #1 - Design #1													Offset Site Error:	0.00 usft
Survey Program: 0-MWD													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis			Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
13,800.00	10,550.00	13,802.13	10,550.00	93.07	88.28	-90.05	1,422.95	3,724.70	1,320.00	1,138.73	181.26	7.282		
13,900.00	10,550.00	13,902.13	10,550.00	95.29	90.48	-90.05	1,422.92	3,824.70	1,320.00	1,134.31	185.69	7.109		
14,000.00	10,550.00	14,002.13	10,550.00	97.52	92.70	-90.05	1,422.89	3,924.70	1,320.00	1,129.87	190.13	6.943		
14,100.00	10,550.00	14,102.13	10,550.00	99.76	94.92	-90.05	1,422.86	4,024.70	1,320.00	1,125.41	194.59	6.783		
14,200.00	10,550.00	14,202.13	10,550.00	102.01	97.15	-90.05	1,422.83	4,124.70	1,320.00	1,120.93	199.07	6.631		
14,300.00	10,550.00	14,302.13	10,550.00	104.27	99.39	-90.05	1,422.81	4,224.70	1,320.00	1,116.43	203.57	6.484		
14,400.00	10,550.00	14,402.13	10,550.00	106.53	101.64	-90.05	1,422.78	4,324.70	1,320.00	1,111.92	208.08	6.344		
14,500.00	10,550.00	14,502.13	10,550.00	108.80	103.89	-90.05	1,422.75	4,424.70	1,320.00	1,107.39	212.61	6.209		
14,600.00	10,550.00	14,602.13	10,550.00	111.07	106.16	-90.05	1,422.72	4,524.70	1,320.00	1,102.85	217.15	6.079		
14,700.00	10,550.00	14,702.13	10,550.00	113.36	108.43	-90.05	1,422.69	4,624.70	1,320.00	1,098.29	221.71	5.954		
14,800.00	10,550.00	14,802.13	10,550.00	115.64	110.71	-90.05	1,422.67	4,724.70	1,320.00	1,093.72	226.27	5.834		
14,900.00	10,550.00	14,902.13	10,550.00	117.94	112.99	-90.05	1,422.64	4,824.70	1,320.00	1,089.15	230.85	5.718		
15,000.00	10,550.00	15,002.13	10,550.00	120.24	115.28	-90.05	1,422.61	4,924.70	1,320.00	1,084.56	235.44	5.606		
15,100.00	10,550.00	15,102.13	10,550.00	122.54	117.57	-90.05	1,422.58	5,024.70	1,320.00	1,079.96	240.04	5.499		
15,200.00	10,550.00	15,202.13	10,550.00	124.85	119.87	-90.05	1,422.55	5,124.70	1,320.00	1,075.35	244.65	5.395		
15,300.00	10,550.00	15,302.13	10,550.00	127.16	122.18	-90.05	1,422.53	5,224.70	1,320.00	1,070.73	249.27	5.296		
15,400.00	10,550.00	15,402.13	10,550.00	129.48	124.47	-90.05	1,422.50	5,324.70	1,320.00	1,066.12	253.88	5.199		
15,430.57	10,550.00	15,432.70	10,550.00	130.19	124.95	-90.05	1,422.49	5,355.27	1,320.00	1,064.94	255.06	5.175		
15,437.85	10,550.00	15,430.62	10,550.00	130.35	124.92	-90.05	1,422.49	5,353.19	1,320.03	1,064.87	255.16	5.173		
15,438.79	10,550.00	15,430.62	10,550.00	130.37	124.92	-90.05	1,422.49	5,353.19	1,320.04	1,064.87	255.17	5.173 ES, SF		



Anticollision Report

Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Reference Depths are relative to WELL @ 2983.09usft (Patterson 297) Coordinates are relative to: #226H


Offset Depths are relative to Offset Datum

Central Meridian is 104° 20' 0.000 W

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.16°

Ladder Plot

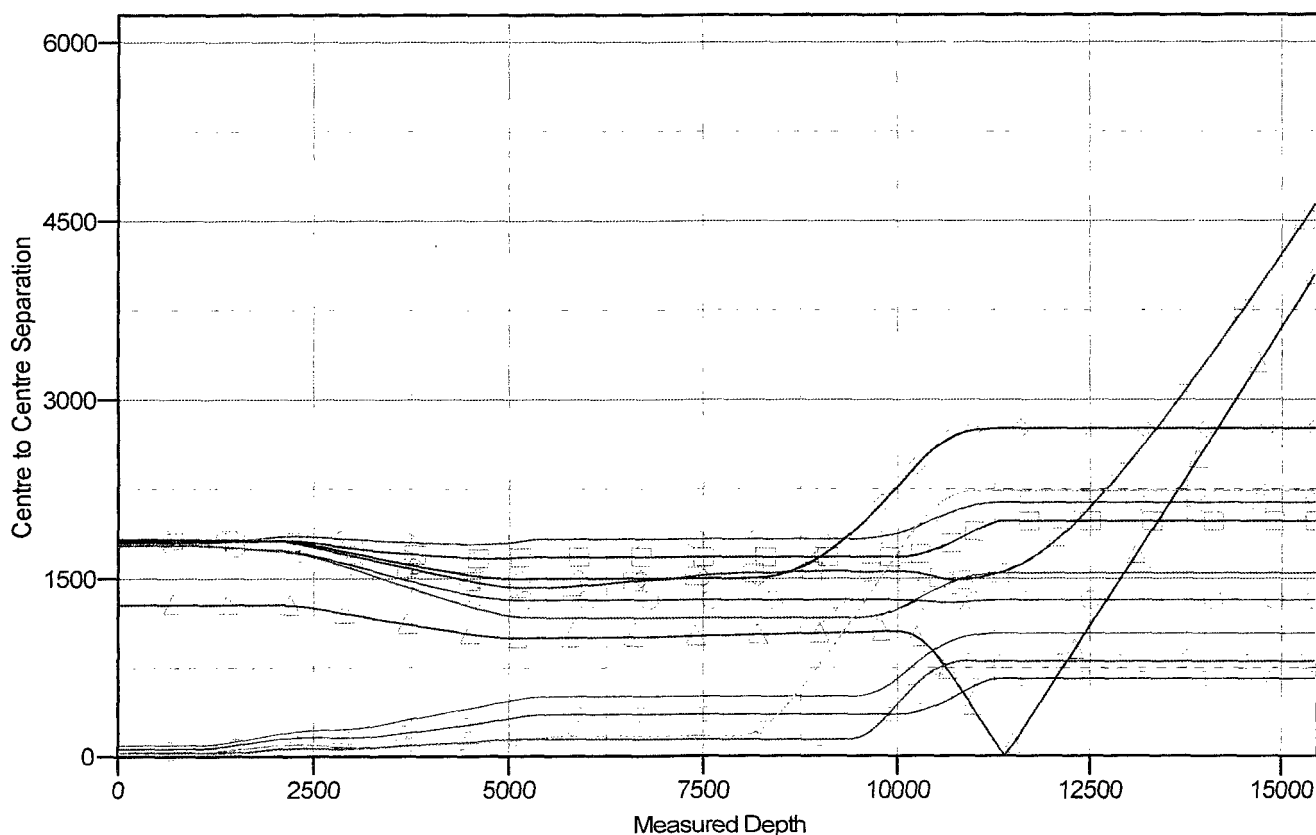

LEGEND

- | | | |
|------------------------------------|------------------------------------|------------------------------------|
| ▲ #1, 226H, Surveys V0 | ● #225H, Wellbore #1, Design #1 V0 | ✕ #205H, Wellbore #1, Design #1 V0 |
| ◆ #222H, Wellbore #1, Design #1 V0 | ◆ #121H, Wellbore #1, Design #1 V0 | ▲ #122H, Wellbore #1, Design #1 V0 |
| ■ #1, Wellbore #1, Surveys V0 | ● #201H, Wellbore #1, Design #1 V0 | ◆ #206H, Wellbore #1, Design #1 V0 |
| ■ #221H, Wellbore #1, Design #1 V0 | ◆ #202H, Wellbore #1, Design #1 V0 | |



Anticollision Report



Company: Matador Resources
Project: Eddy County, New Mexico (NAD 27)
Reference Site: Zach McCormick Federal 18-24S-29E RB
Site Error: 0.00 usft
Reference Well: #226H
Well Error: 0.00 usft
Reference Wellbore: Wellbore #1
Reference Design: Design #1

Local Co-ordinate Reference: Well #226H
TVD Reference: WELL @ 2983.09usft (Patterson 297)
MD Reference: WELL @ 2983.09usft (Patterson 297)
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: EDM 5000.1 Conroe DB
Offset TVD Reference: Offset Datum

Reference Depths are relative to WELL @ 2983.09usft (Patterson 297) Coordinates are relative to: #226H


Offset Depths are relative to Offset Datum

Central Meridian is 104° 20' 0.000 W

Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30

Grid Convergence at Surface is: 0.16°

Separation Factor Plot

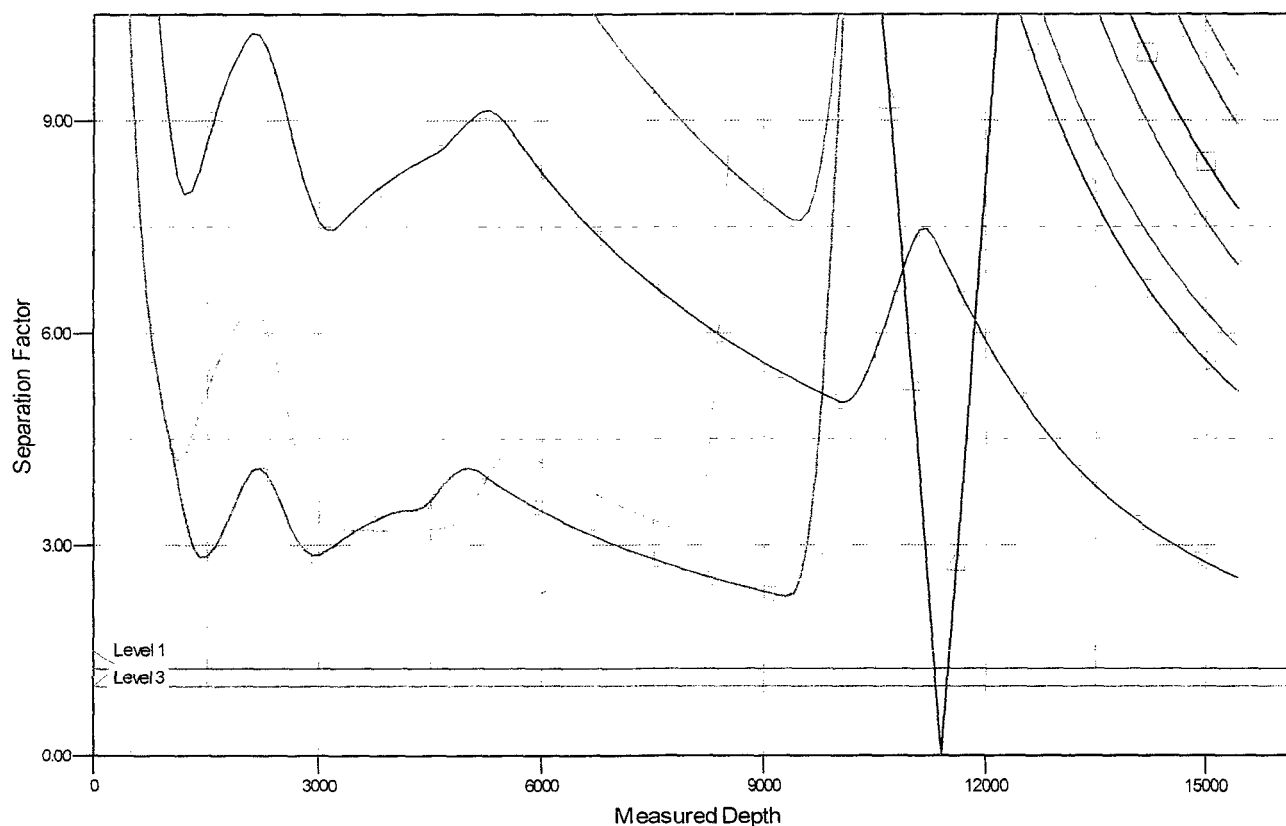



LEGEND

- | | | |
|------------------------------------|------------------------------------|------------------------------------|
| ▲ #1, 226H, Surveys V0 | ● #225H, Wellbore #1, Design #1 V0 | ✕ #205H, Wellbore #1, Design #1 V0 |
| ✕ #222H, Wellbore #1, Design #1 V0 | ● #121H, Wellbore #1, Design #1 V0 | ✕ #122H, Wellbore #1, Design #1 V0 |
| ■ #1, Wellbore #1, Surveys V0 | ● #201H, Wellbore #1, Design #1 V0 | ✕ #206H, Wellbore #1, Design #1 V0 |
| ■ #221H, Wellbore #1, Design #1 V0 | ● #202H, Wellbore #1, Design #1 V0 | |



PATTERSON-UTI

Well Control

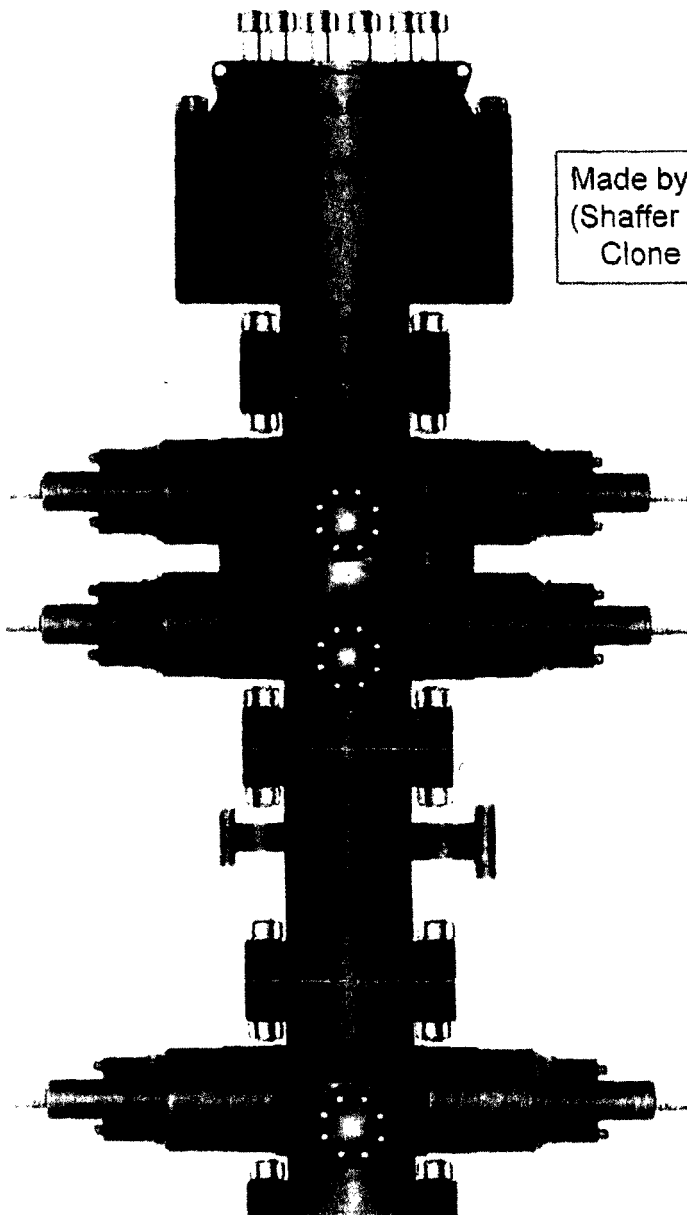

Made by Cameron
(Shaffer Spherical)
Clone Annular

PATTERSON-UTI # PS2-628

STYLE: New Shaffer Spherical

BORE 13 5/8" PRESSURE 5,000

HEIGHT: 48 1/2" WEIGHT: 13,800 lbs

PATTERSON-UTI # PC2-128

STYLE: New Cameron Type U

BORE 13 5/8" PRESSURE 10,000

RAMS: TOP 5" Pipe BTM Blinds

HEIGHT: 66 5/8" WEIGHT: 24,000 lbs

Length 40" Outlets 4" 10M

DSA 4" 10M x 2" 10M

PATTERSON-UTI # PC2-228

STYLE: New Cameron Type U

BORE 13 5/8" PRESSURE 10,000


RAMS: 5" Pipe

HEIGHT: 41 5/8" WEIGHT: 13,000 lbs


WING VALVES




2" Check Valve




2" Manual Valve



2" Manual Valve



4" Manual Valve

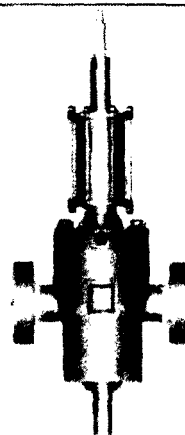

4" Hydraulic Valve

3. PRESSURE CONTROL

A BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram and 1 annular preventer will be installed. The BOP will be used below surface casing to TD. See attachments for BOP and choke manifold diagrams.

An accumulator that meets the requirements of Onshore Order 2 for the pressure rating of the BOP stack will be present. A rotating head will be installed as needed.


Pressure tests will be conducted before drilling out from under all casing strings. BOP will be inspected and operated as recommended in Onshore Order 2. A Kelly cock and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position.

A third party company will test the BOPs. Test pressures will be as follows: After surface casing is set and the BOP is nipped up, BOP pressure tests will be made to 250 psi low and 2000 psi high. On the intermediate #1, pressure tests will be made to 250 psi low and 3000 psi high. On the intermediate #2, pressure tests will be made to 250 psi low and 5000 psi high. The annular preventer will be tested to 250 psi low and 1000 psi high on the surface casing, and 250 psi low and 2500 psi high on the intermediate #1 and #2 casing. In the case of running a speed head with landing mandrel for 9-5/8" and 7" casing the initial, after surface casing is set, BOP test pressures will be 250 psi low and 3000 psi high with wellhead seals tested to 5000 psi once the 9-5/8" casing has been landed and cemented.

The BOP will then be lifted to install the 'C-section' of the wellhead. Matador will nipple the BOP back up and the pressure tests will be made to 250 psi low and 5000 psi high and the annular will be tested to 250 psi low and 2500 psi high.

Matador requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used.

MATADOR
15K 4-STRING
MQ-94

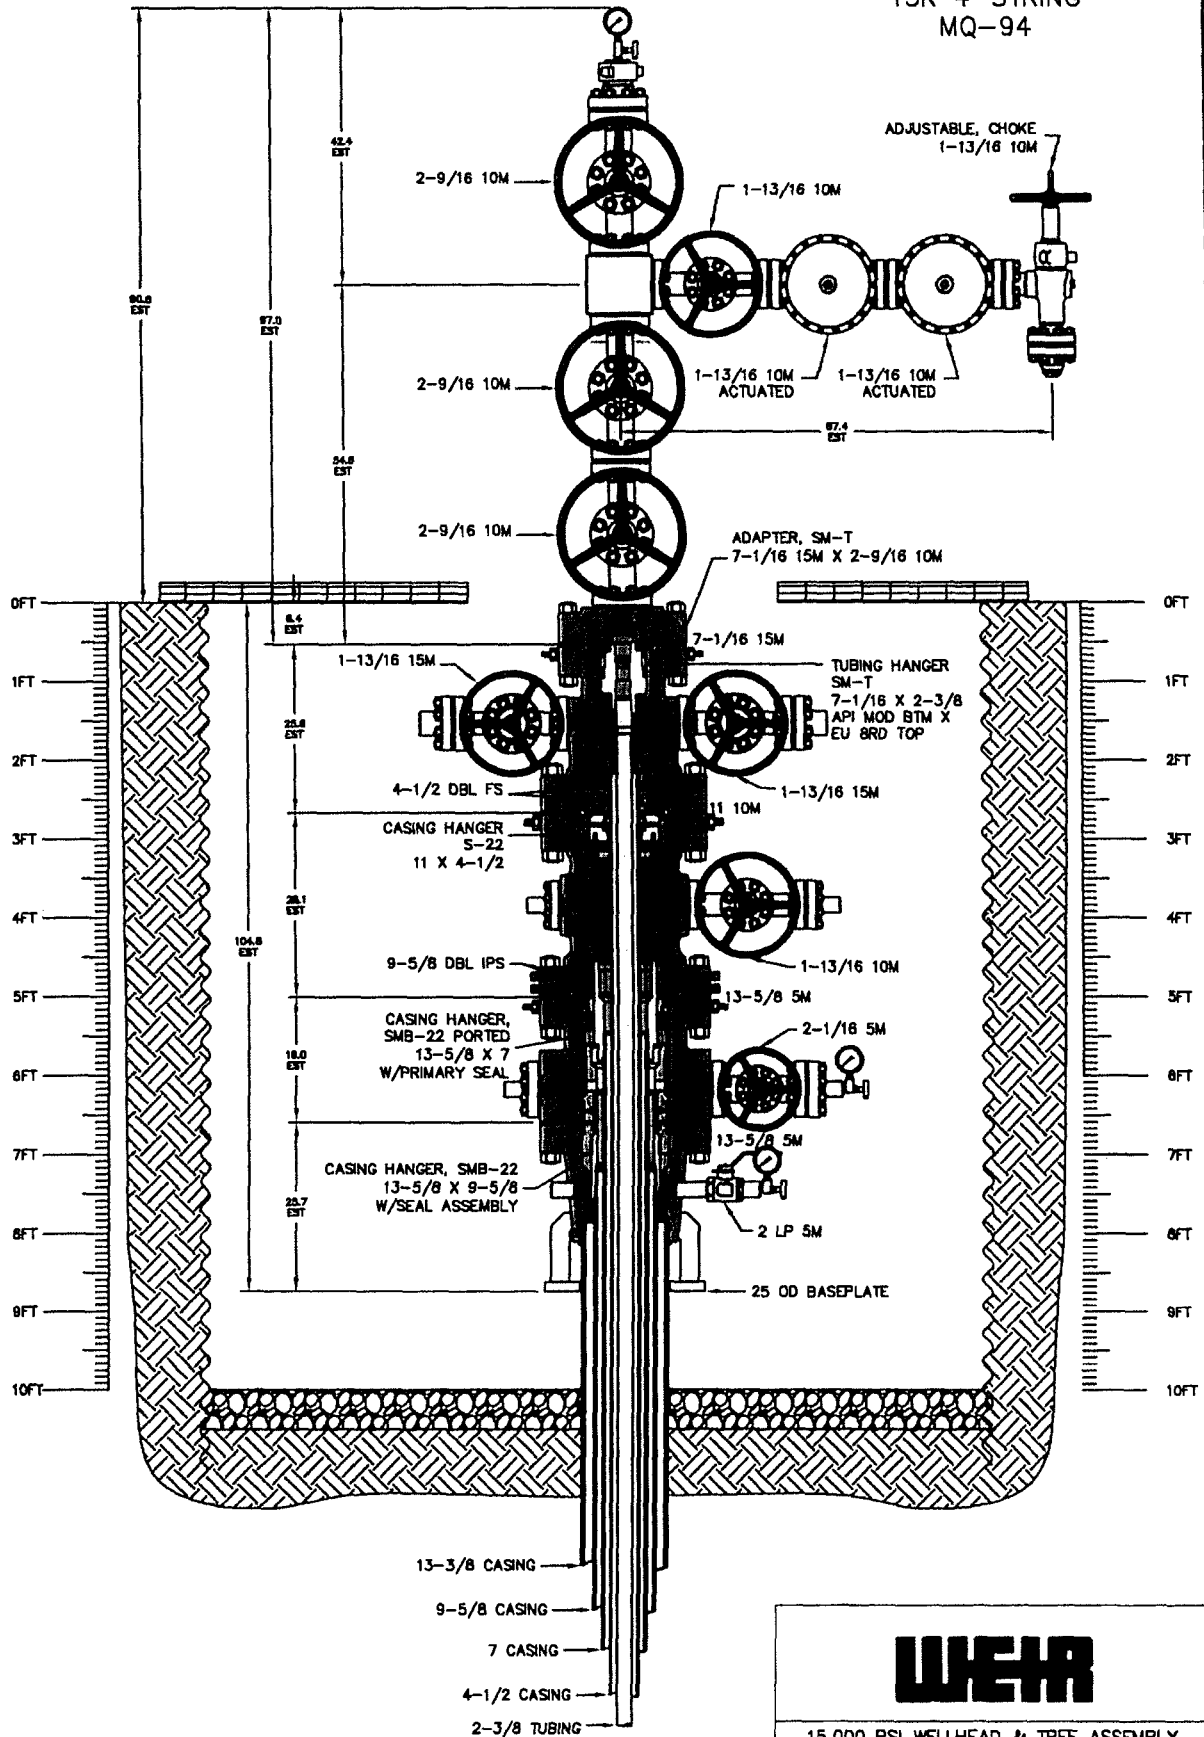

NOTE:
DIMENSIONS SHOWN ON THIS DRAWING ARE
ESTIMATES ONLY AND CAN VARY SIGNIFICANTLY
DEPENDING ON RAW MATERIAL LENGTHS.
NO GUARANTEE OF STACKUP HEIGHT IS IMPLIED.
DIMENSIONS SHOWN SHOULD BE CONSIDERED
FOR REFERENCE PURPOSES ONLY.

RESTRICTED CONFIDENTIAL DOCUMENT


THIS DRAWING AND ALL INFORMATION HEREON ARE THE
EXCLUSIVE PROPERTY OF SLEASER INTERNATIONAL, INC. AND ARE
SUBMITTED ON A CONFIDENTIAL BASIS ONLY. THE RECIPIENT AGREES
NOT TO REPRODUCE THE DRAWING, TO INCLUDE IT UPON REQUEST, AND
THAT NO DISCLOSURE OF THE DRAWING OR THE INFORMATION HEREON
HEREON WILL BE MADE TO A THIRD PARTY WITHOUT PRIOR WRITTEN
CONSENT OF SLEASER INTERNATIONAL, INC.

WEIR

15,000 PSI WELLHEAD & TREE ASSEMBLY
13-3/8 X 9-5/8 X 7 X 4-1/2 X 2-3/8

DATE	RPL	SCALE	1:10	DATE	18JAN16	REV	
DESIGNED BY		DRAWING NO.					
APPROVED BY							

P-20986

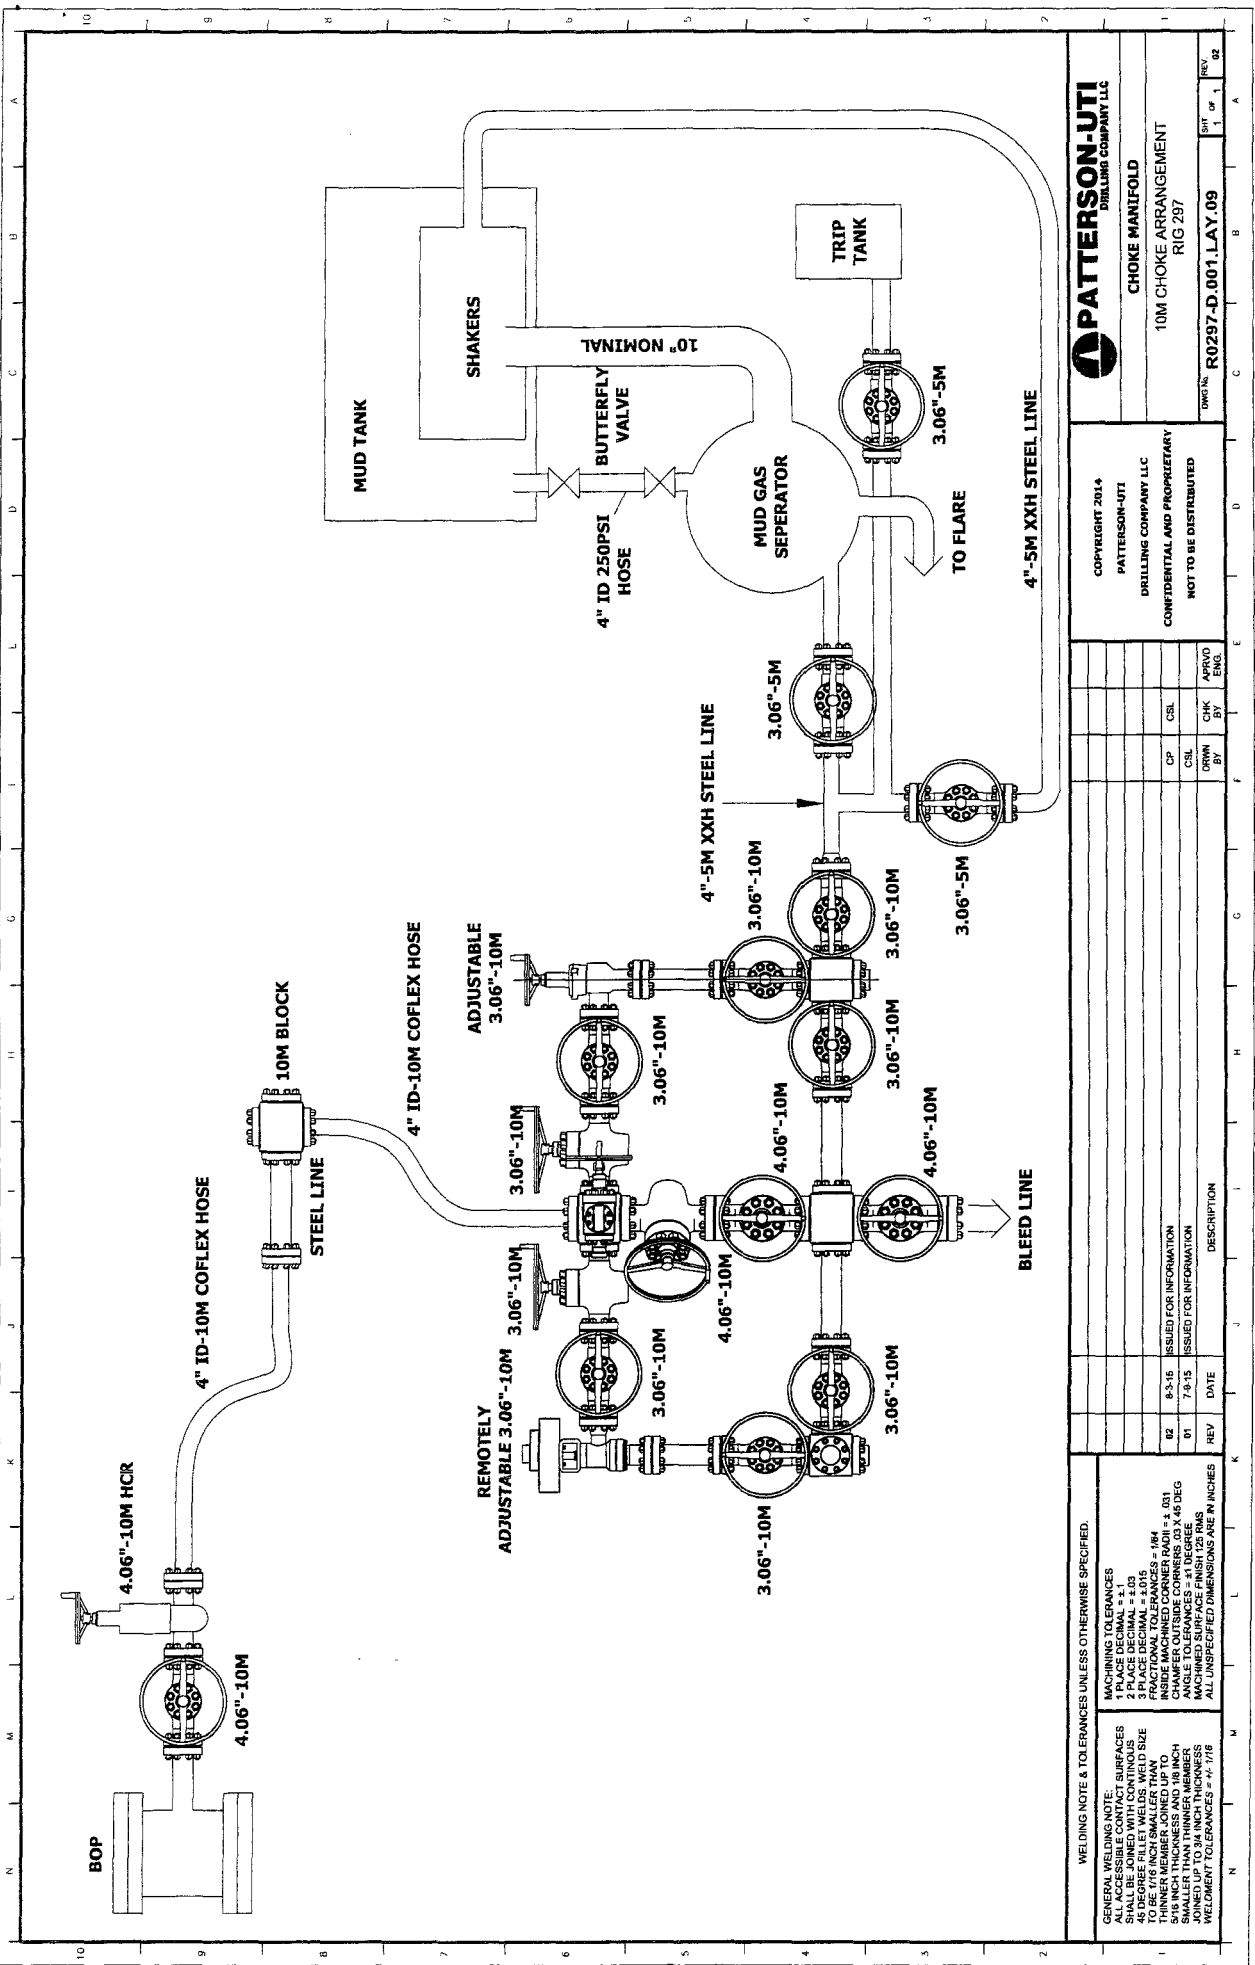

WELDING NOTE & TOLERANCES UNLESS OTHERWISE SPECIFIED.

GENERAL WELDING NOTE:
 ALL ACCESSIBLE CONTACT SURFACES SHALL BE JOINED WITH CONTINUOUS TO BE FILLER WELDS. WELD SIZE TO BE 1/8 INCH MINIMUM. THINNER MEMBER JOINED UP TO 5/16 INCH THICKNESS AND 18 INCH JOINED UP TO 3/4 INCH THICKNESS. WELDMENT TOLERANCES = ± 1/16

MACHINING TOLERANCES
 1 PLACE DECIMAL ± .01
 2 PLACE DECIMAL ± .005
 3 PLACE DECIMAL ± .001
 CHAMFER OUTSIDE CORNERS R4.0
 INSIDE MACHINED CORNERS R4.0
 CHAMFER SURFACE FINISH 125 RMS
 MACHINED SURFACE FINISH 125 RMS
 ALL UNSPECIFIED DIMENSIONS ARE IN INCHES

REV	DATE	DESCRIPTION
02	8-3-15	ISSUED FOR INFORMATION
01	7-9-15	ISSUED FOR INFORMATION

PATTERSON-UTI
 DRILLING COMPANY LLC

CHOKE MANIFOLD
 10M CHOKE ARRANGEMENT
 RIG 297

DRWG No. **R0297-D.001.LAY.09**

COPYRIGHT 2014
 PATTERSON-UTI
 DRILLING COMPANY LLC
 CONFIDENTIAL AND PROPRIETARY
 NOT TO BE DISTRIBUTED

APPROVED	CHK	DRN	ENCL



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

December 8, 2014

Customer: Patterson


Pick Ticket #: 284918

Hose Specifications

Hose Type: Ck
Length: 10'
I.D.: 3"
O.D.: 4.79"
Working Pressure: 10000 PSI
Burst Pressure: Standard Safety Multiplier Applies

Verification

Type of Fitting: 4-1/16 10K
Coupling Method: Swage
Die Size: 5.37"
Final O.D.: 5.37"
Hose Serial #: 10490
Hose Assembly Serial #: 284918-2

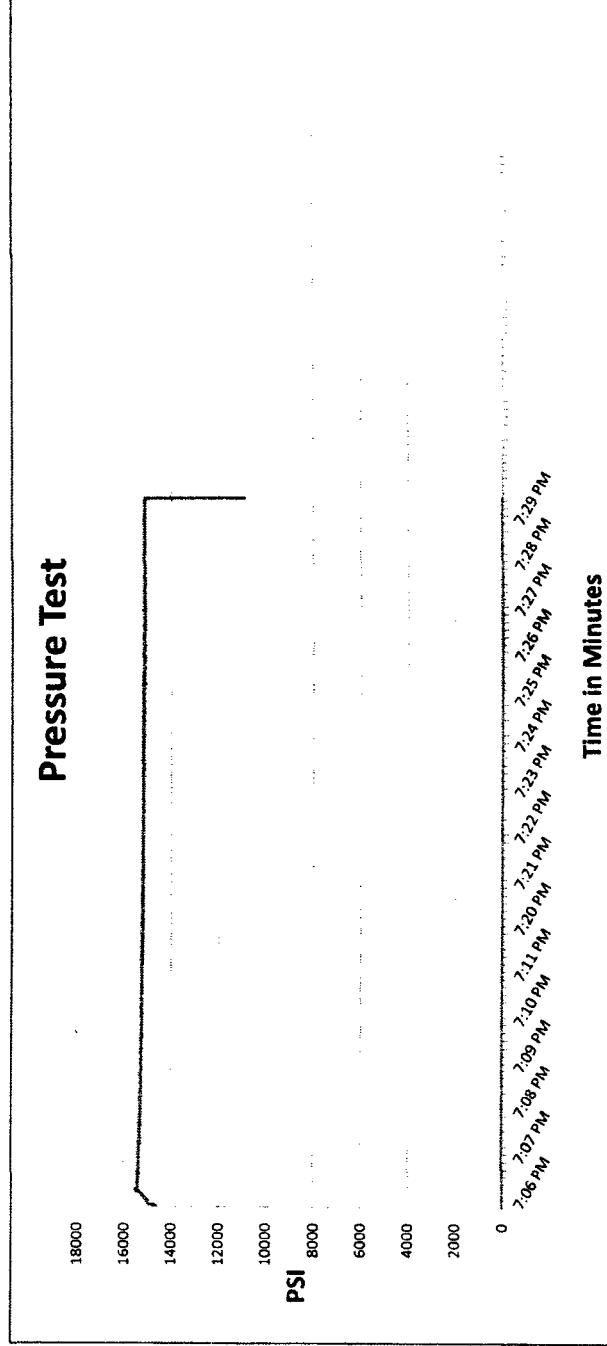

Test Pressure: 15000 PSI
Time Held at Test Pressure: 15 2/4 Minutes
Actual Burst Pressure: 15732 PSI
Peak Pressure: 15732 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Tyler Hill

Approved By: Ryan Adams

[Signature: Tyler Hill]

[Signature: Ryan Adams]



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K
Date Assembled	12/8/2014	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	236404	Hose Lot # and Date Code	10490-01/13
Customer Purchase Order #	260471	Hose I.D. (Inches)	3"
Assembly Serial # (Pick Ticket #)	287918-2	Hose O.D. (Inches)	5.30"
Hose Assembly Length	10'	Armor (yes/no)	YES
Fittings			
End A		End B	
Stem (Part and Revision #)	R3.0X64WB	Stem (Part and Revision #)	R3.0X64WB
Stem (Heat #)	91996	Stem (Heat #)	91996
Ferrule (Part and Revision #)	RF3.0	Ferrule (Part and Revision #)	RF3.0
Ferrule (Heat #)	37DA5631	Ferrule (Heat #)	37DA5631
Connection (Part #)	4 1/16 10K	Connection (Part #)	4 1/16 10K
Connection (Heat #)		Connection (Heat #)	
Dies Used	5.37	Dies Used	5.37
Hydrostatic Test Requirements			
Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	15 1/2		
Date Tested	Tested By		Approved By
12/8/2014			



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **PATTERSON B&E**

Customer P.O.# **260471**

Sales Order # **236404**

Date Assembled: **12/8/2014**

Specifications

Hose Assembly Type: **Choke & Kill**

Assembly Serial # **287918-2**

Hose Lot # and Date Code **10490-01/13**

Hose Working Pressure (psi) **10000**

Test Pressure (psi) **15000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Date

12/9/2014



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

December 9, 2014

Customer: Patterson

Pick Ticket #: 284918

Hose Specifications

Hose Type

CK

Length

20'

Verification

Type of Fitting

4-1/16 10K

Coupling Method

Swage

Die Size

5.37"

Final O.D.

5.40"

Working Pressure

10000 PSI

Burst Pressure

4,77"

Hose Serial #


10490

Hose Assembly Serial #

284918-1

Standard Safety Multiplier Applies

Pressure Test

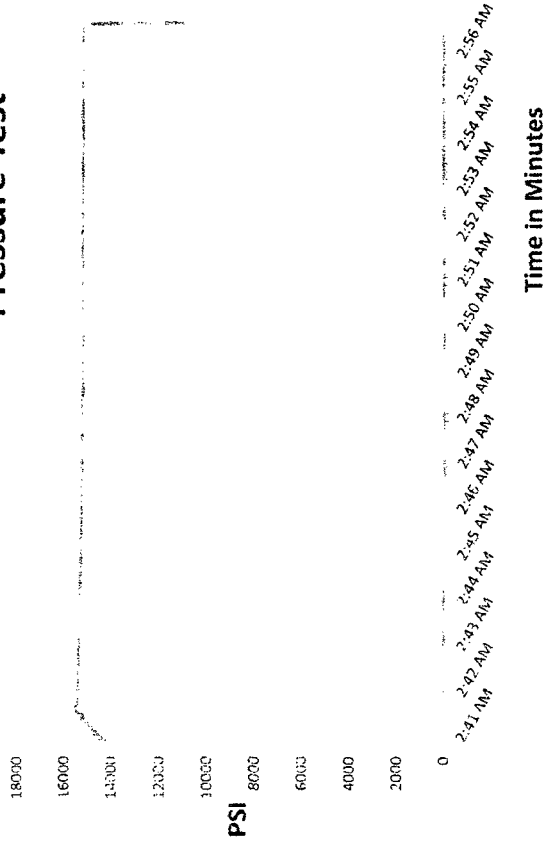

Test Pressure
15000 PSI

Time Held at Test Pressure
15 2/4 Minutes

Actual Burst Pressure

Peak Pressure
15893 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Tyler Hill

Approved By: Ryan Adams



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K
Date Assembled	12/8/2014	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	236404	Hose Lot # and Date Code	10490-01/13
Customer Purchase Order #	260471	Hose I.D. (Inches)	3"
Assembly Serial # (Pick Ticket #)	287918-1	Hose O.D. (Inches)	5.30"
Hose Assembly Length	20'	Armor (yes/no)	YES
Fittings			
End A		End B	
Stem (Part and Revision #)	R3.0X64WB	Stem (Part and Revision #)	R3.0X64WB
Stem (Heat #)	A141420	Stem (Heat #)	A141420
Ferrule (Part and Revision #)	RF3.0	Ferrule (Part and Revision #)	RF3.0
Ferrule (Heat #)	37DA5631	Ferrule (Heat #)	37DA5631
Connection (Part #)	4 1/16 10K	Connection (Part #)	4 1/16 10K
Connection (Heat #)	V3579	Connection (Heat #)	V3579
Dies Used	5.37	Dies Used	5.37
Hydrostatic Test Requirements			
Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	15 1/2		
Date Tested	Tested By		Approved By
12/9/2014			



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **PATTERSON B&E**

Customer P.O.# **260471**

Sales Order # **236404**

Date Assembled: **12/8/2014**

Specifications

Hose Assembly Type: **Choke & Kill**

Assembly Serial # **287918-1**

Hose Lot # and Date Code **10490-01/13**

Hose Working Pressure (psi) **10000**

Test Pressure (psi) **15000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Date

12/9/2014



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph


Customer: Patterson

Pick Ticket #: 284918

December 9, 2014

Hose Specifications		Verification	
Hose Type	Length	Type of Fitting	Coupling Method
Mud	70'	4 1/16 10K	Swage
I.D.	O.D.	Die Size	Final O.D.
3"	4.79"	5.37"	5.37"
Working Pressure	Burst Pressure	Hose Serial #	Hose Assembly Serial #
10000 PSI	Standard Safety Multiplier Applies	10490	284918-3

Pressure Test

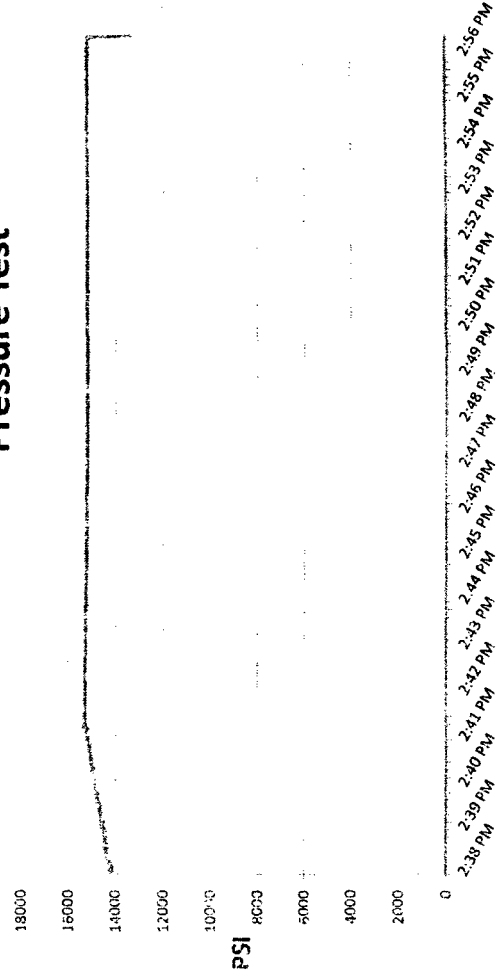

Test Pressure 15000 PSI
Time Held at Test Pressure 16 3/4 Minutes
Actual Burst Pressure
Peak Pressure 15410 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Tyler Hill

Approved By: Ryan Adams



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K
Date Assembled	12/8/2014	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	236404	Hose Lot # and Date Code	10490-01/13
Customer Purchase Order #	260471	Hose I.D. (Inches)	3"
Assembly Serial # (Pick Ticket #)	287918-3	Hose O.D. (Inches)	5.23"
Hose Assembly Length	70'	Aarmor (yes/no)	YES
Fittings			
End A		End B	
Stem (Part and Revision #)	R3.0X64WB	Stem (Part and Revision #)	R3.0X64WB
Stem (Heat #)	A141420	Stem (Heat #)	A141420
Ferrule (Part and Revision #)	RF3.0	Ferrule (Part and Revision #)	RF3.0
Ferrule (Heat #)	37DA5631	Ferrule (Heat #)	37DA5631
Connection (Part #)	4 1/16 10K	Connection (Part #)	4 1/16 10K
Connection (Heat #)		Connection (Heat #)	
Dies Used	5.37	Dies Used	5.37
Hydrostatic Test Requirements			
Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	16 3/4		
Date Tested	Tested By		Approved By
12/9/2014			



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **PATTERSON B&E**

Customer P.O.# **260471**

Sales Order # **236404**

Date Assembled: **12/8/2014**

Specifications

Hose Assembly Type: **Choke & Kill**

Assembly Serial # **287918-3**

Hose Lot # and Date Code **10490-01/13**

Hose Working Pressure (psi) **10000**

Test Pressure (psi) **15000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.
3312 S I-35 Service Rd
Oklahoma City, OK 73129

Comments:


Approved By

Date

12/9/2014

Closed-Loop System

Zach McCormick Fed Com
Matador Resources Company
Eddy County, NM

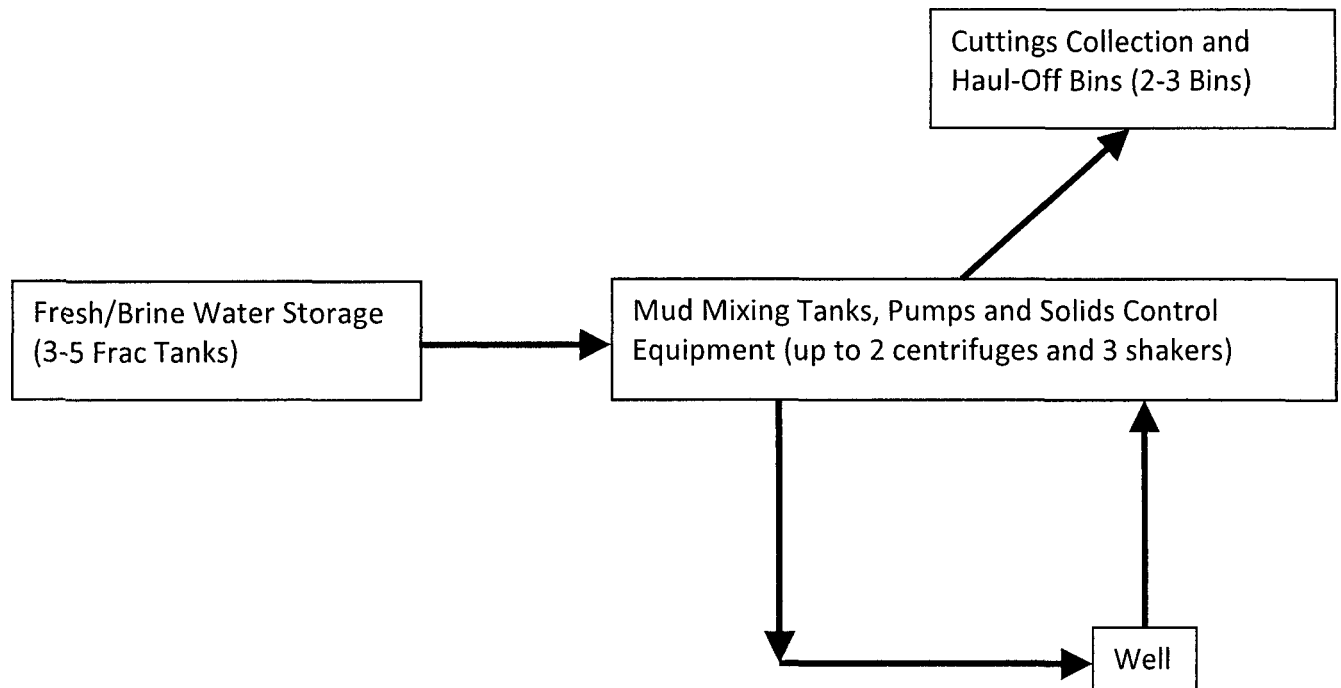


Operating and Maintenance Plan:

During drilling operations, third party service companies will utilize solids control equipment to remove cuttings from the drilling fluids and collect it in haul-off bins. Equipment will be closely monitored at all times while drilling by the derrick man and the service company employees.

Closure Plan:


During drilling operations, third party service companies will haul off drill solids and fluids to an approved disposal facility. At the end of the well, all closed loop equipment will be removed from the location.

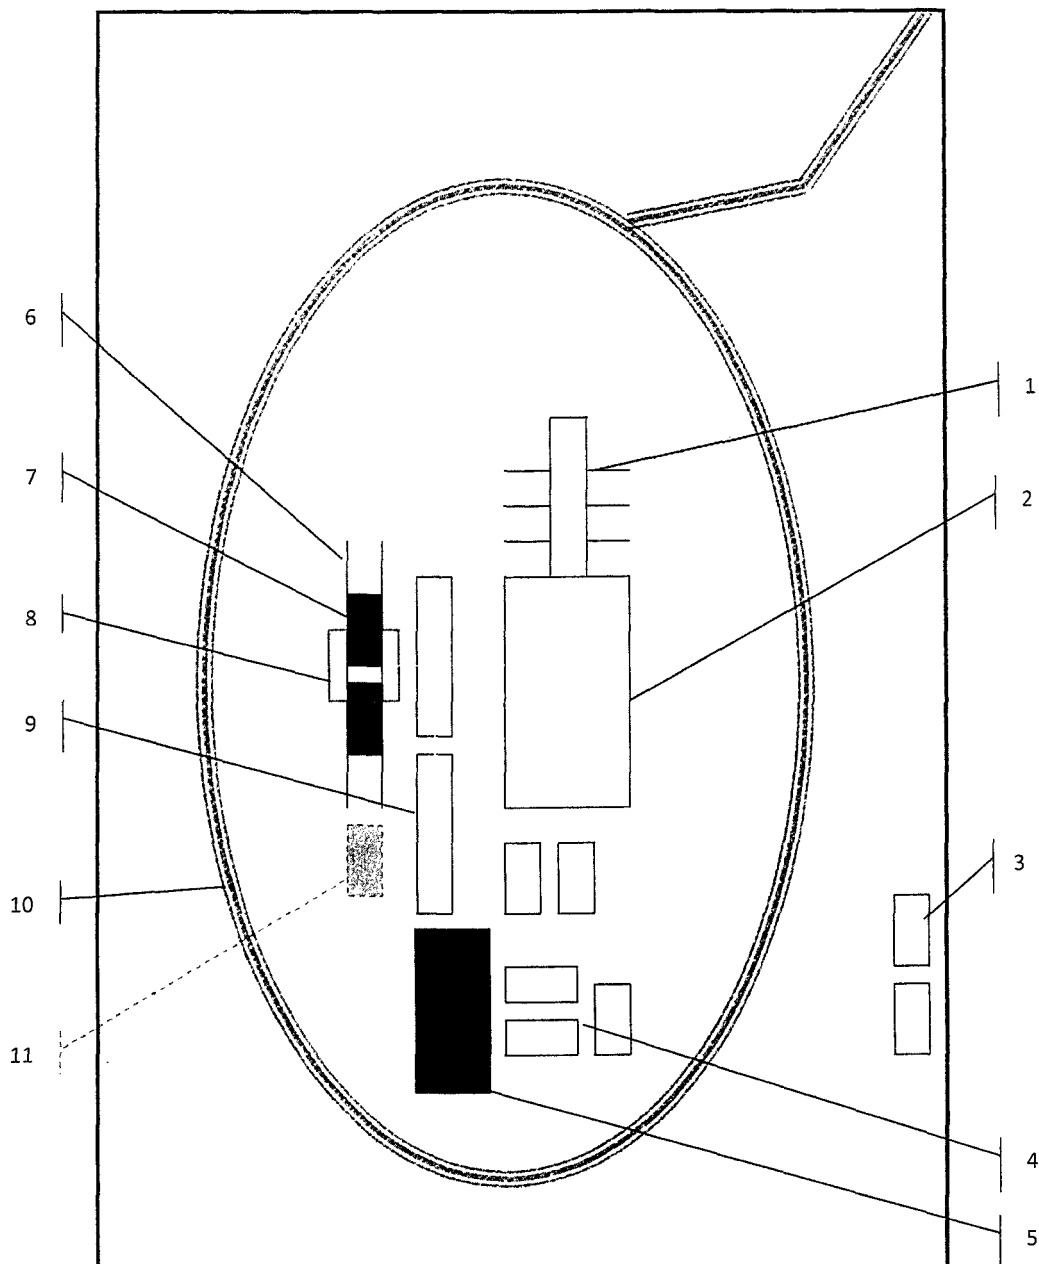

Schematic Closed Loop Drilling Rig*

1. Pipe Rack
2. Drill Rig
3. House Trailers/ Offices
4. Generator/Fuel/Storage
5. Overflow-Frac Tank
6. Skids
7. Roll Offs
8. Hopper or Centrifuge
9. Mud Tanks
10. Loop Drive
11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available

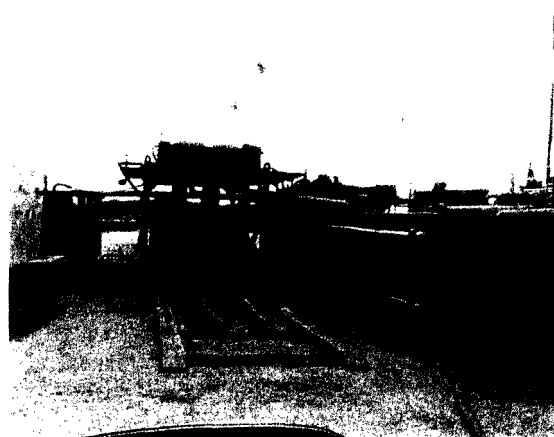


Above: Centrifugal Closed Loop System

PERMITS WEST, INC.


PROVIDING PERMITS for LAND USERS

17Verano Loop, Santa Fe, New Mexico 87508 (505) 466-8120

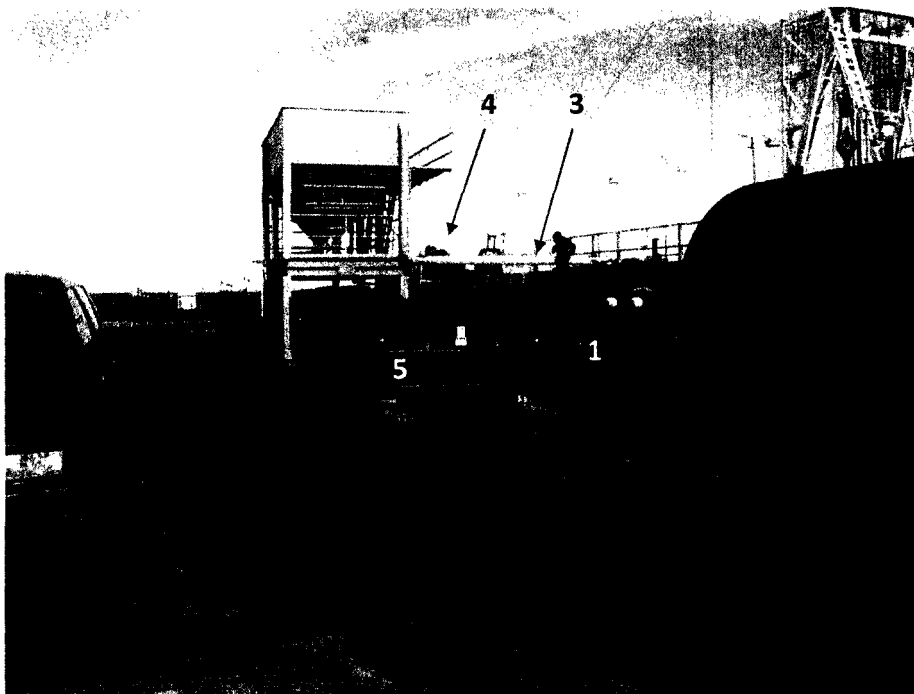


Closed Loop Drilling System: Mud tanks to right (1)
Hopper in air to settle out solids (2)
Water return pipe (3)
Shaker between hopper and mud tanks (4)
Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

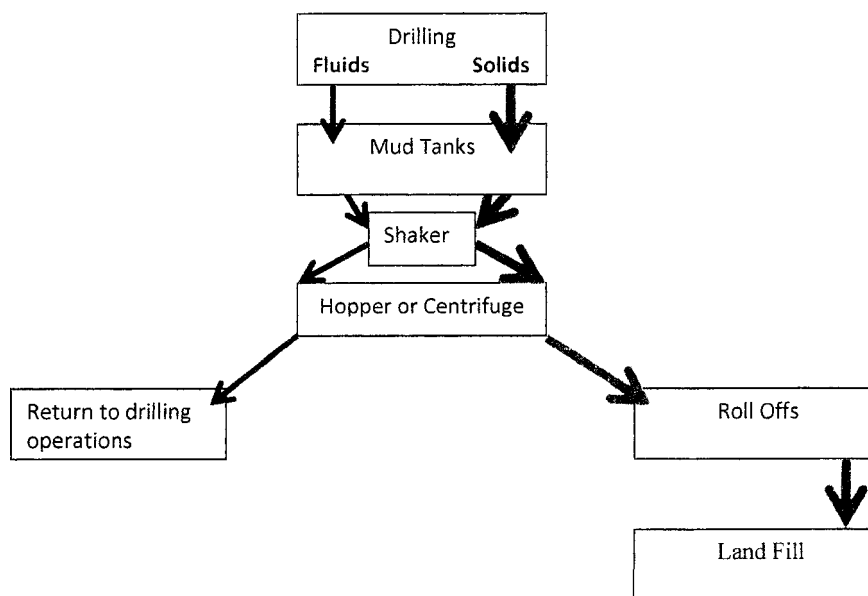

Rig Layout

Zach McCormick Fed Com 226H
Eddy County, NM

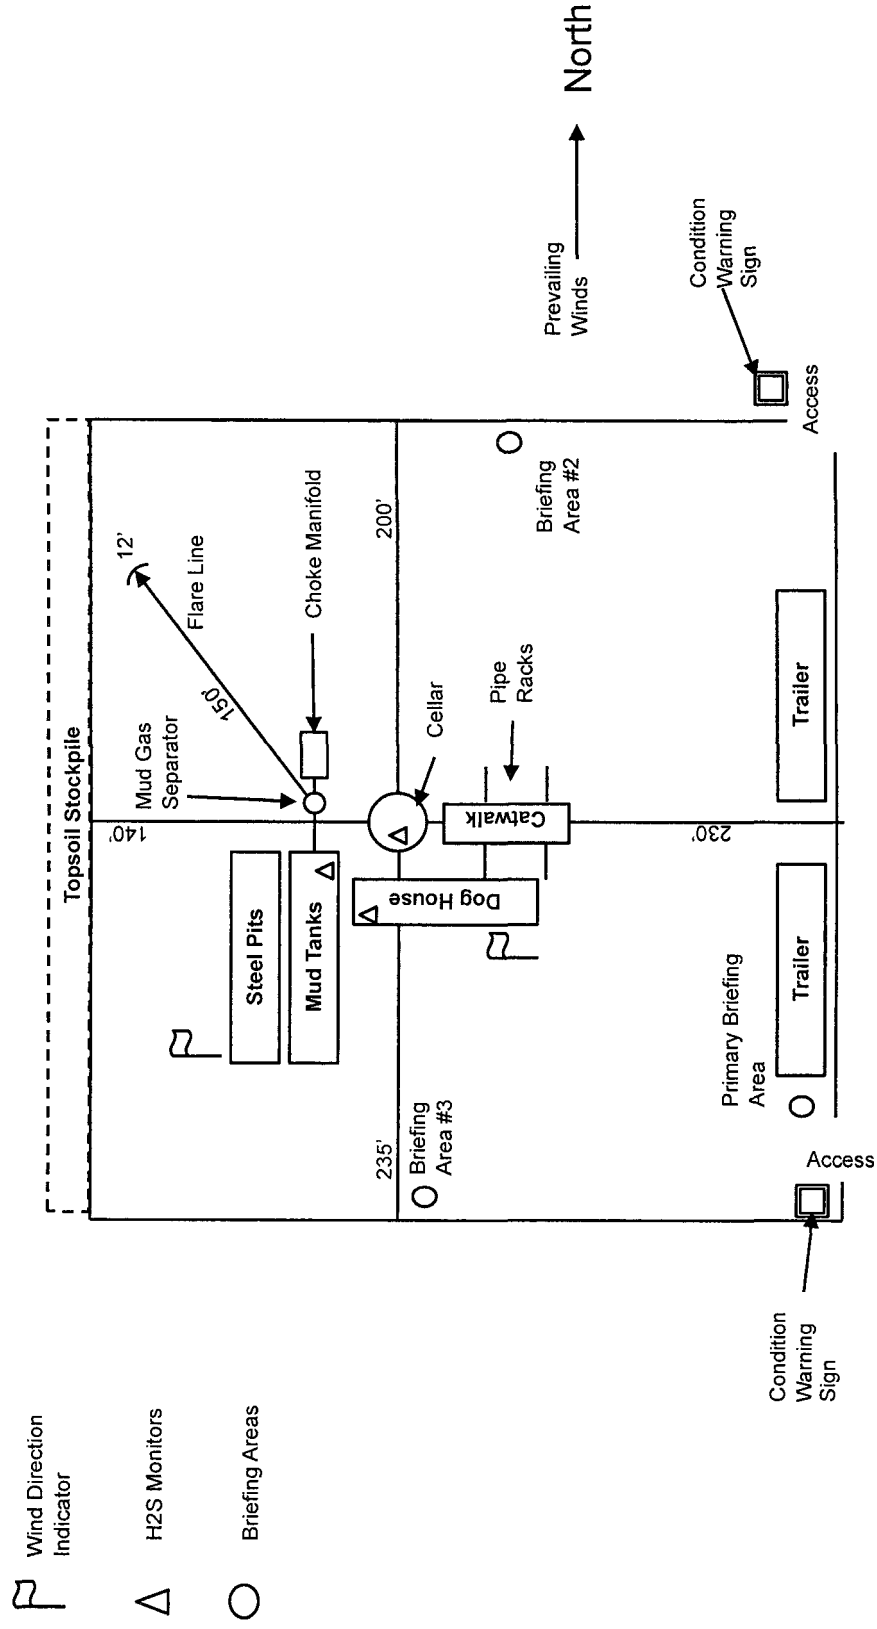



Hydrogen Sulfide Drilling Operations Plan

Matador Production Company

1 H2S safety instructions covering:

- Characteristics of H2S
- Physical effects & hazards
- Principal and operation of H2S detectors, warning system, and briefing areas
- Evacuation procedures, routes, and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30 minute pressure demand air packs

2 H2S Detection and Alarm Systems:

- H2S sensor/detectors to be located on the drilling rig floor, in the base of the sub structure / cellar area, and on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary.
- An audio alarm system will be installed on the derrick floor and in the doghouse.

3 Windsocks and / Wind Streamers:

- Windsocks at mud pit area should be high enough to be visible.
- Windsocks on the rig floor and top of doghouse should be high enough to be visible.

4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
 - Green Flag – Normal Safe Operation Condition
 - Yellow Flag – Potential Pressure and Danger
 - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

5 Well Control Equipment:

- See APD

6 Communications:

- While working under masks, chalkboards will be used for communications.
- Hand signals will be used where chalk board is inappropriate.
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at drilling foreman's trailer or living quarters.



7 Drill Stem Testing:

- No DST or cores are planned at this time.

8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars good and other mechanical equipment.

9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

11 Emergency Contacts


- See next page

H2S Contingency Plan Emergency Contacts
Matador Production Company
Zach McCormick Fed Com wells, Eddy County, NM

Company Office			
Matador Production Company		(972)-371-5200	
Key Personnel			
Name	Title	Office	Mobile
Billy Goodwin	Vice President Drilling	972-371-5210	817-522-2928
Gary Martin	Drilling Superintendent		601-669-1774
Dee Smith	Drilling Superintendent	972-371-5447	972-822-1010
Aaron Byrd	Drilling Engineer	972-371-5267	214-507-2333
	Construction Superintendent		
	Construction Superintendent		
Artesia			
Ambulance		911	
State Police		575-746-2703	
City Police		575-746-2703	
Sheriff's Office		575-746-9888	
Fire Department		575-746-2701	
Local Emergency Planning Committee		575-746-2122	
New Mexico Oil Conservation Division		575-748-1283	
Carlsbad			
Ambulance		911	
State Police		575-885-3137	
Loving City Police		575-745-3511	
Sheriff's Office		575-887-7551	
Malaga Fire Department		575-745-2317	
Local Emergency Planning Committee		575-885-3581	
Santa Fe			
New Mexico Emergency Response Commission (Santa Fe)		505-476-9600	
New Mexico Emergency Response Commission (Santa Fe) 24 hrs		505-827-9126	
New Mexico State Emergency Operations Center		505-476-9635	
National			
Carlsbad BLM		575-234-5972	
National Emergency Response Center (Washington, D.C.)		800-424-8802	
Medical			
Flight for Life- 4000 24th St.; Lubbock, TX		806-743-9911	
Aerocare- R3, Box 49F; Lubbock, TX		806-747-8923	
Med Flight Air Amb- 2301 Yale Blvd S.E., D3; Albuquerque, NM		505-842-4433	
SB Air Med Service- 2505 Clark Carr Loop S.E.; Albuquerque, NM		505-842-4949	
Other			
Boots & Coots IWC		800-256-9688	or 281-931-8884
Cudd Pressure Control		432-699-0139	or 432-563-3356
Halliburton		575-746-2757	
B.J. Services		575-746-3569	

H2S Rig Layout


Zach McCormick Fed Com 226H
Eddy County, NM

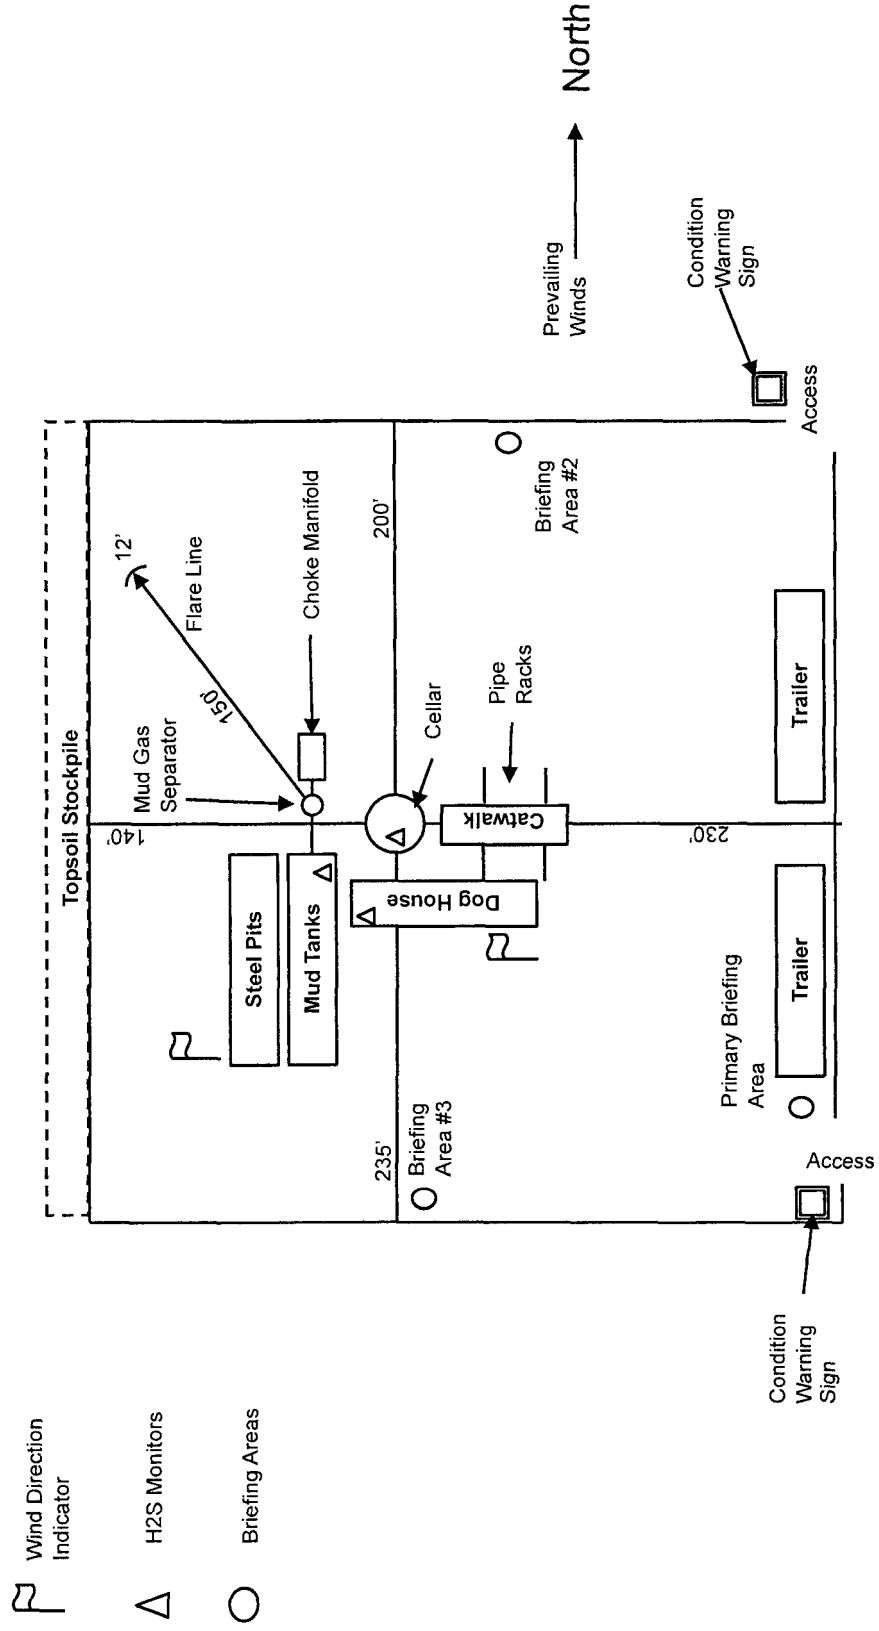


Matador Production Company

Zach McCormick Federal Com
18-24S-29E RB #226H
H2S Contingency Plan:
1 Mile Radius Map

Section 13, Township 24S, Range 28E
Eddy County, New Mexico





Surface Hole Location



NAD 1927 New Mexico State Plane East
FIPS 3001 Feet

PERMITS UNIT
F.A.C.


Prepared by Permits West, Inc. June 23, 2016
for Matador Production Company

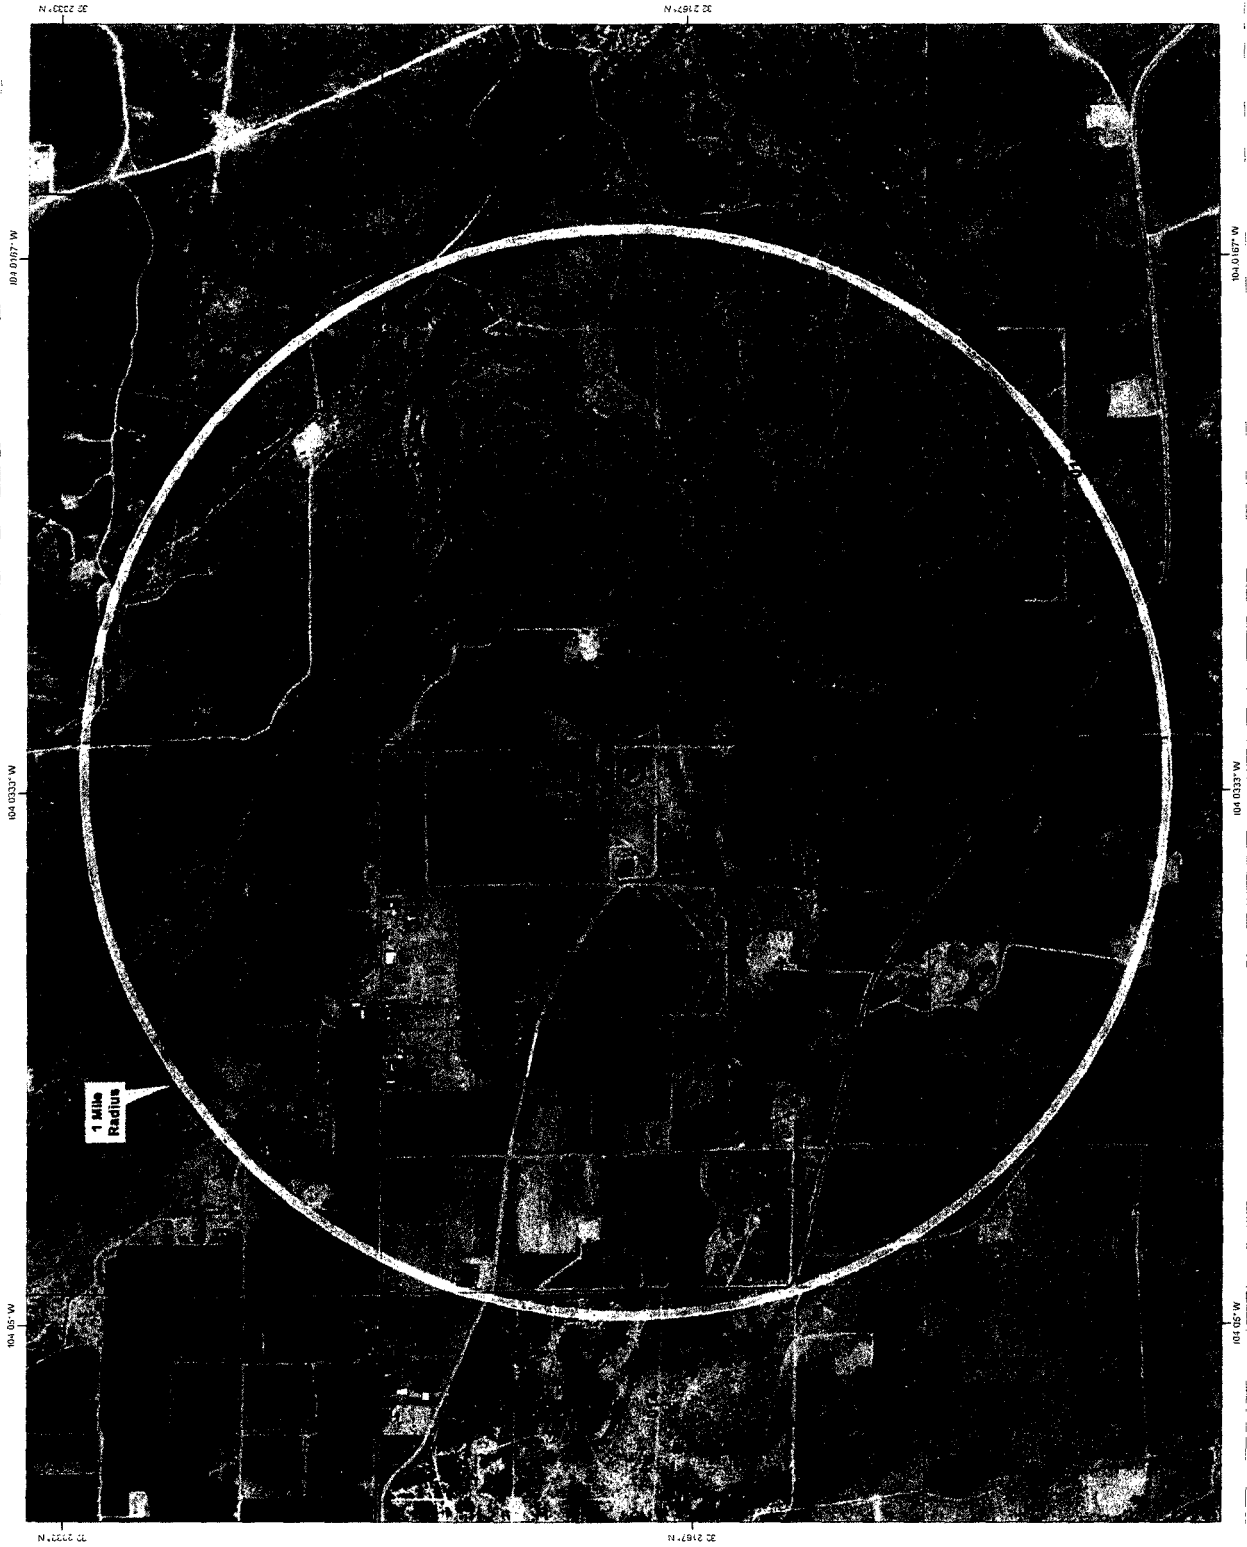


Matador Production Company

Zach McCormick Federal Com
18-24S-29E RB #226H
H&S Contingency Plan:
2 Mile Radius Map

Section 13, Township 24S, Range 28E
Eddy County, New Mexico





Surface Hole Location



NAD 1927 New Mexico State Plane East
FIPS 3001 Feet

PERMITS UNIT


Prepared by Permits West, Inc., June 23, 2016
for Matador Production Company

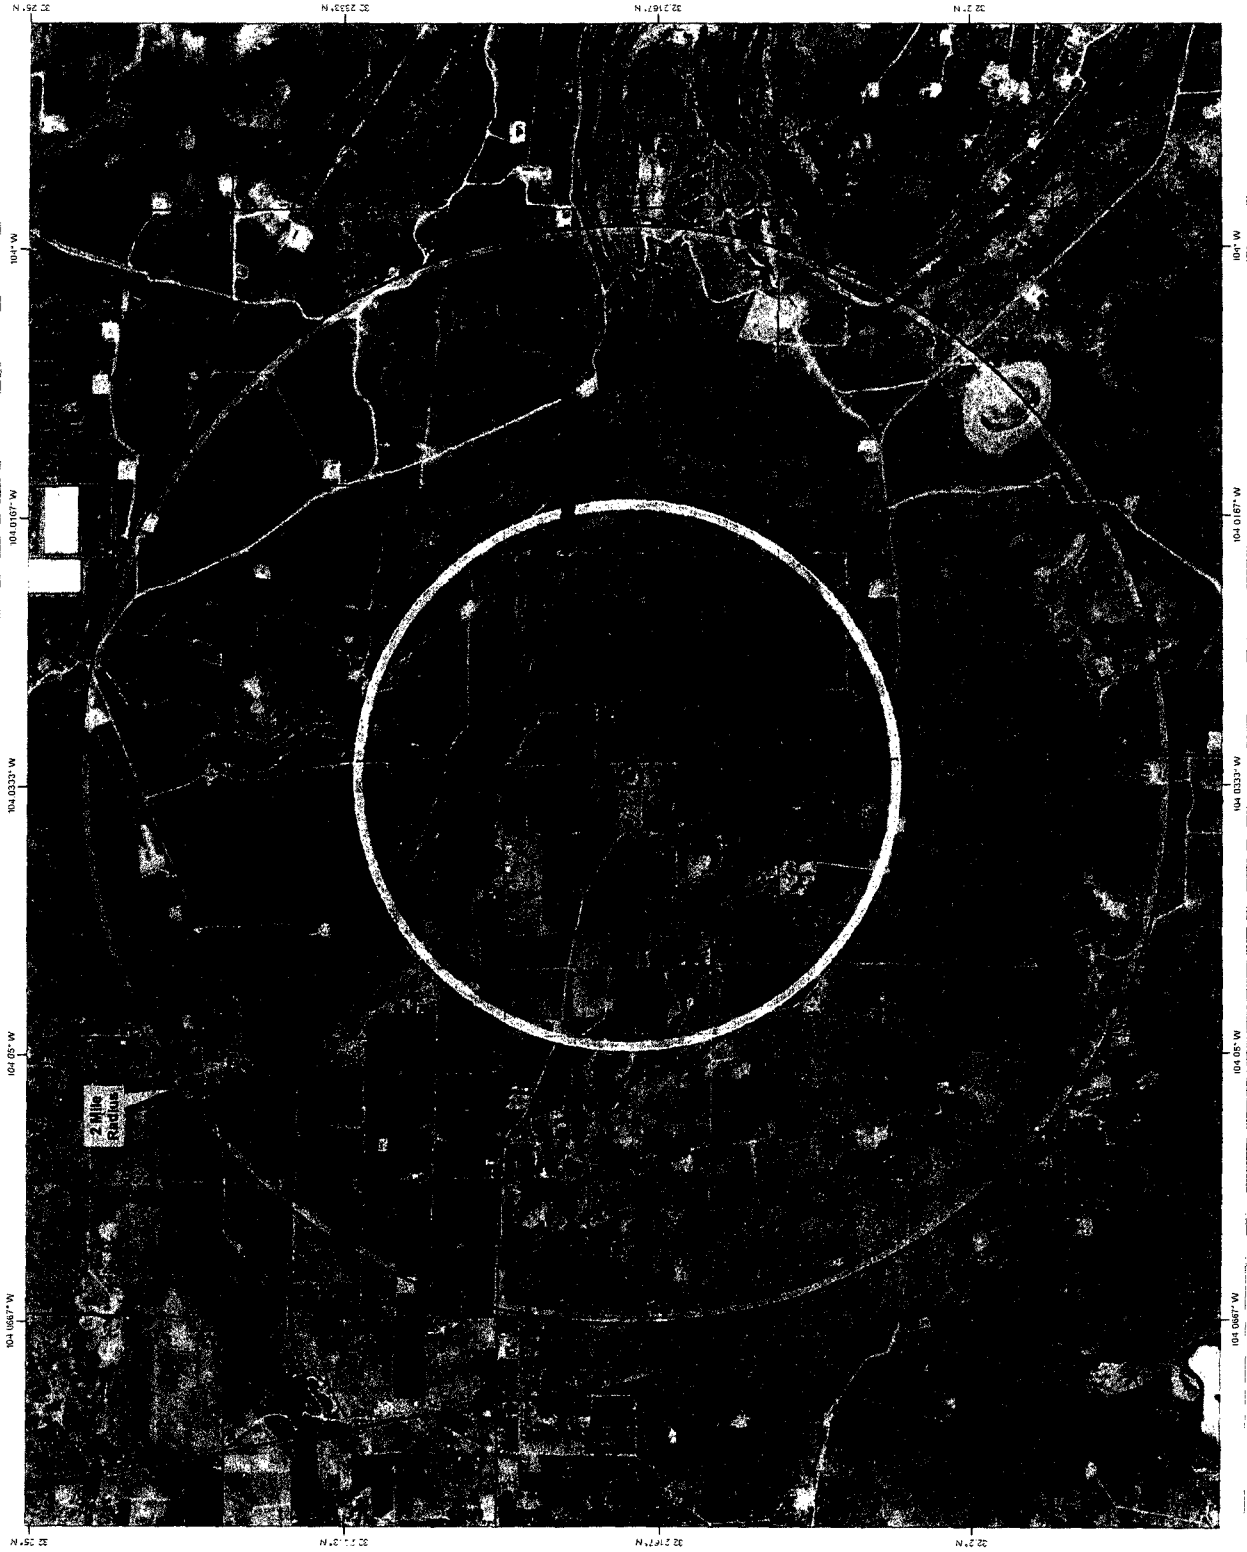



SECTION 13, TOWNSHIP 24-S, RANGE 28-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

DETAIL VIEW
SCALE: 1" = 100'

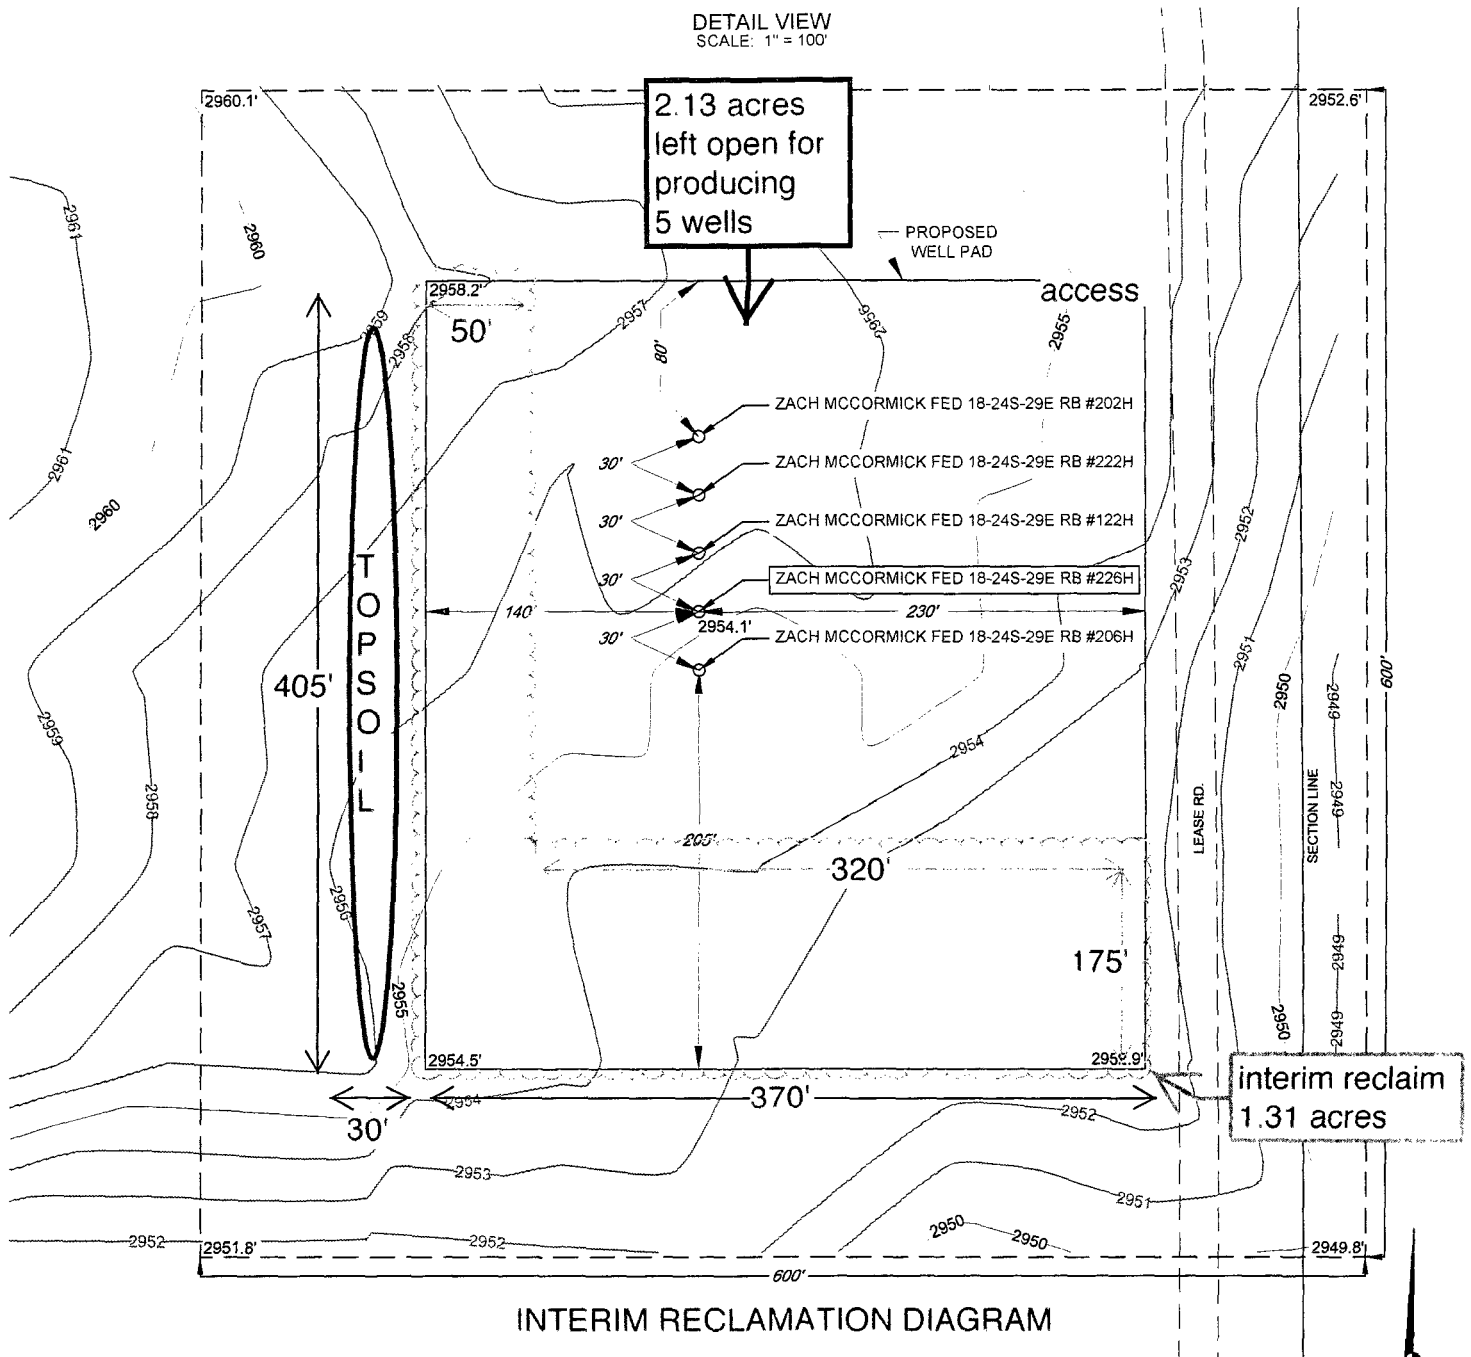

INTERIM RECLAMATION DIAGRAM

LEGEND

- EXISTING ROAD
- SECTION LINE
- ARCH SITE

LEASE NAME & WELL NO.: ZACH MCCORMICK FEDERAL 18-24S-29E RB #226H

#226H LATITUDE N 32.2182597 #226H LONGITUDE W 104.0327656

SCALE: 1" = 100'

0' 50' 100'

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER
MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY,
AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND IS
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



WWW.TOPOGRAPHIC.COM

Matador Production Company

SURFACE PLAN PAGE 1

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

Surface Use Plan

1. ROAD DIRECTIONS & DESCRIPTIONS (See MAPS 1 - 4)

From Malaga, NM...

Go East 2.3 miles on paved County Roads 744 and 720

Then turn right onto a caliche, then dirt, road and go South 0.4 mile

Then turn right and go Southwest 20' cross-country to the proposed pad

Non-county roads will be maintained as needed to Gold Book standards. This includes pulling ditches, preserving the crown, and cleaning culverts. This will be done at least once a year, and more often as needed. Caliche will be hauled from existing caliche pits on private land in NWSE 1-24s-28e and NWSW 6-24s-29e.

2. ROAD TO BE BUILT OR UPGRADED (See MAPS 3 & 4)

Road from County Road 720 to the pad will be upgraded with additional caliche. The new road (20') will be crowned, have a 14' wide driving surface, and surfaced with caliche. Maximum disturbed width = 20'. Maximum grade = 1%. Maximum cut or fill = 1'. No culvert, cattle guard, or vehicle turn out is needed.

3. EXISTING WELLS (See MAP 2)

Existing oil, gas, injection, water, and P & A wells are within a mile. No disposal well is within a mile radius.

4. PROPOSED PRODUCTION FACILITIES (See MAPS 3 & 7-9)

A 190' x 350' (1.53 acre) central production facility will be built 50' north of the well pad. Three to four inch O. D. HDPE low-pressure (<125 psi) flow lines

Matador Production Company

SURFACE PLAN PAGE 2

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

will be buried from the well pad 50' north to the facility. Oil tanks, water tanks, meter runs, separators, and a flare will be installed on the west side of the facility. Top ≈ 6 " of topsoil will be stockpiled west of the facility. A berm will surround the fill sides of the facility.

Longwood Midstream's Black River Gathering System will serve the facility with ≈ 6 " O. D. steel gas line and ≈ 6 " O. D. HDPE buried saltwater disposal line laid in the same trench which is under construction to the existing Zach McCormick Federal Com 18-24s-29e #1. Xcel will build a 3-phase raptor safe overhead power line 0.4 mile south to the production facility and well pad.

5. WATER SUPPLY (See MAP 2)

Water will be trucked 0.9 mile via existing roads from an existing water well (C 00464) on private land in NENW 13-24s-28e.

6. CONSTRUCTION MATERIALS & METHODS (see MAPS 4-6)

NM One Call (811) will be notified before construction starts. Top ≈ 6 " of soil and brush will be stockpiled west of the pad. Pipe racks will be to the east. A closed loop drilling system will be used. Caliche will be hauled from existing caliche pits on private land in NWSE 1-24s-28e and NWSW 6-24s-29e. A berm will surround the fill sides of the pad.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to the Eddy County landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to CRI's state approved (NM-01-0006) disposal site. Human waste will be disposed of in chemical toilets and hauled to the Carlsbad wastewater treatment plant.

Matador Production Company

SURFACE PLAN PAGE 3

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

8. ANCILLARY FACILITIES

There will be no airstrip or camp. Camper trailers will be on location for the company man, tool pusher, or mud logger.

9. WELL SITE LAYOUT

See Rig Layout diagram for depictions of the well pad, trash cage, access onto the location, parking, living facilities, and rig orientation.

10. RECLAMATION

Interim reclamation will be completed within 6 months of completing the last well on the pad. (A variance is requested for the intervening wells.) Interim reclamation will consist of shrinking the pad $\approx 38\%$ by removing caliche and reclaiming the south (175') and west (50') sides. This will leave 2.13 acres for five pump jacks, and tractor-trailer turn around. Disturbed areas will be contoured to match pre-construction grades. Soil and brush will be evenly spread over disturbed areas. Disturbed areas will be seeded in accordance with the surface owner's requirements. Enough stockpiled topsoil will be retained to cover the remainder of the pad when the wells are plugged. Once the last well is plugged, then the remainder of the pad will be similarly reclaimed within 6 months of plugging. Noxious weeds will be controlled.

11. SURFACE OWNER

All construction will be on private surface.

Matador Resources Company has a private surface owner agreement with Evelyn Kay Walker Faulk (P. O. Box 115, Malaga NM 88263) for the Zach McCormick

Matador Production Company

SURFACE PLAN PAGE 4

Zach McCormick Fed Com 226H

SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

Fed Com 18-24s-29e 226H well site, flow lines, production facility, and road in E2NE4 Section 13, T. 24 S., R. 28 E.; Eddy County, NM.

12. OTHER INFORMATION

On site inspection was held with Vance Wolf and Bob Ballard (both of BLM) on June 2, 2016.

Lone Mountain filed archaeology report NMCRIS-136312 on July 22, 2016.

Matador Production Company

SURFACE PLAN PAGE 5

Zach McCormick Fed Com 226H


SHL 2414' FNL & 311' FEL Sec. 13, T. 24 S., R. 28 E.

BHL 2311' FNL & 240' FEL Sec. 18, T. 24 S., R. 29 E.

Eddy County, NM

CERTIFICATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 15th day of August, 2016.



Brian Wood, Consultant

Permits West, Inc.

37 Verano Loop, Santa Fe, NM 87508

(505) 466-8120

FAX: (505) 466-9682

Cellular: (505) 699-2276

Field representative will be:

Sam Pryor, Senior Staff Landman

Matador Production Company

5400 LBJ Freeway, Suite 1500

Dallas TX 75240

Phone: (972) 371-5241

FAX: (214) 866-4841

**PECOS DISTRICT
DRILLING OPERATIONS
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMNM117120
WELL NAME & NO.:	226H-Zach McCormick Fed Com
SURFACE HOLE FOOTAGE:	2414'/N & 311'/E
BOTTOM HOLE FOOTAGE:	2311'/N & 240'/E
LOCATION:	Section 13, T.24 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Although Hydrogen Sulfide has not been reported in the area, it is always a potential hazard. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, report measured amounts and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM**

office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Medium Cave/Karst

Possible water flows in the Artesia Group and Salado.

Possibility of lost circulation in the Artesia Group, Rustler, Capitan Reef, and Delaware.

Abnormal pressure might be encountered upon entering third Bone Spring and subsequent formations.

1. The **13-3/8** inch surface casing shall be set at approximately **650** feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the **9-5/8** inch 1st intermediate casing is:
- ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**
3. The minimum required fill of cement behind the **7** inch 2nd intermediate casing is:
- ☒ Cement as proposed. Operator shall provide method of verification.
4. The minimum required fill of cement behind the **4-1/2** inch production casing is:
- ☒ Cement as proposed. Operator shall provide method of verification. **Excess calculates to 22%. Additional cement may be required.**
5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the

field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).

3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13-3/8** inch surface casing shoe shall be **2000 (2M) annular**.

Option 1:

- i. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** inch second intermediate casing shoe shall be **3000 (3M)** psi.
- ii. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **7** inch third intermediate casing shoe shall be **5000 (5M)** psi.

5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

Option 2:

- i. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the second intermediate casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** inch second intermediate casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
 - e. **After the 9 5/8" casing has been landed and cemented, the operator will then lift up the BOP to install the 'D-section' of the wellhead. Therefore, per Onshore Oil and Gas Order No. 2, the**

entire BOP/BOPE shall be tested prior to drilling out the second intermediate casing hole.

- f. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

5M system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.

- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**

- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the **Wolfcamp** formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

D. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the **Wolfcamp** formation, and shall be used until production casing is run and cemented.

Proposed mud weight may not be adequate for drilling through Wolfcamp.

E. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

F. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

TMAK 05262017

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMNM117120
WELL NAME & NO.:	226H-Zach McCormick Fed Com
SURFACE HOLE FOOTAGE:	2414'N & 311'E
BOTTOM HOLE FOOTAGE:	2311'N & 240'E
LOCATION:	Section 13, T.24 S., R.28 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Avian Protection
 - Cave/Karst
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
 - Electric Lines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Avian Protection

Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006. The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all power line structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. The holder without liability or expense shall make such modifications and/or additions to the United States.

Cave and Karst

** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.

- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situating valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

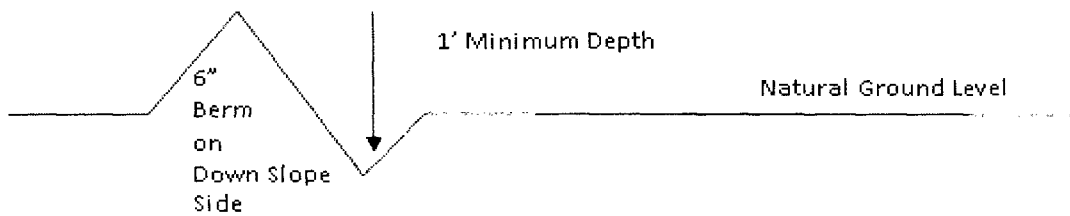

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

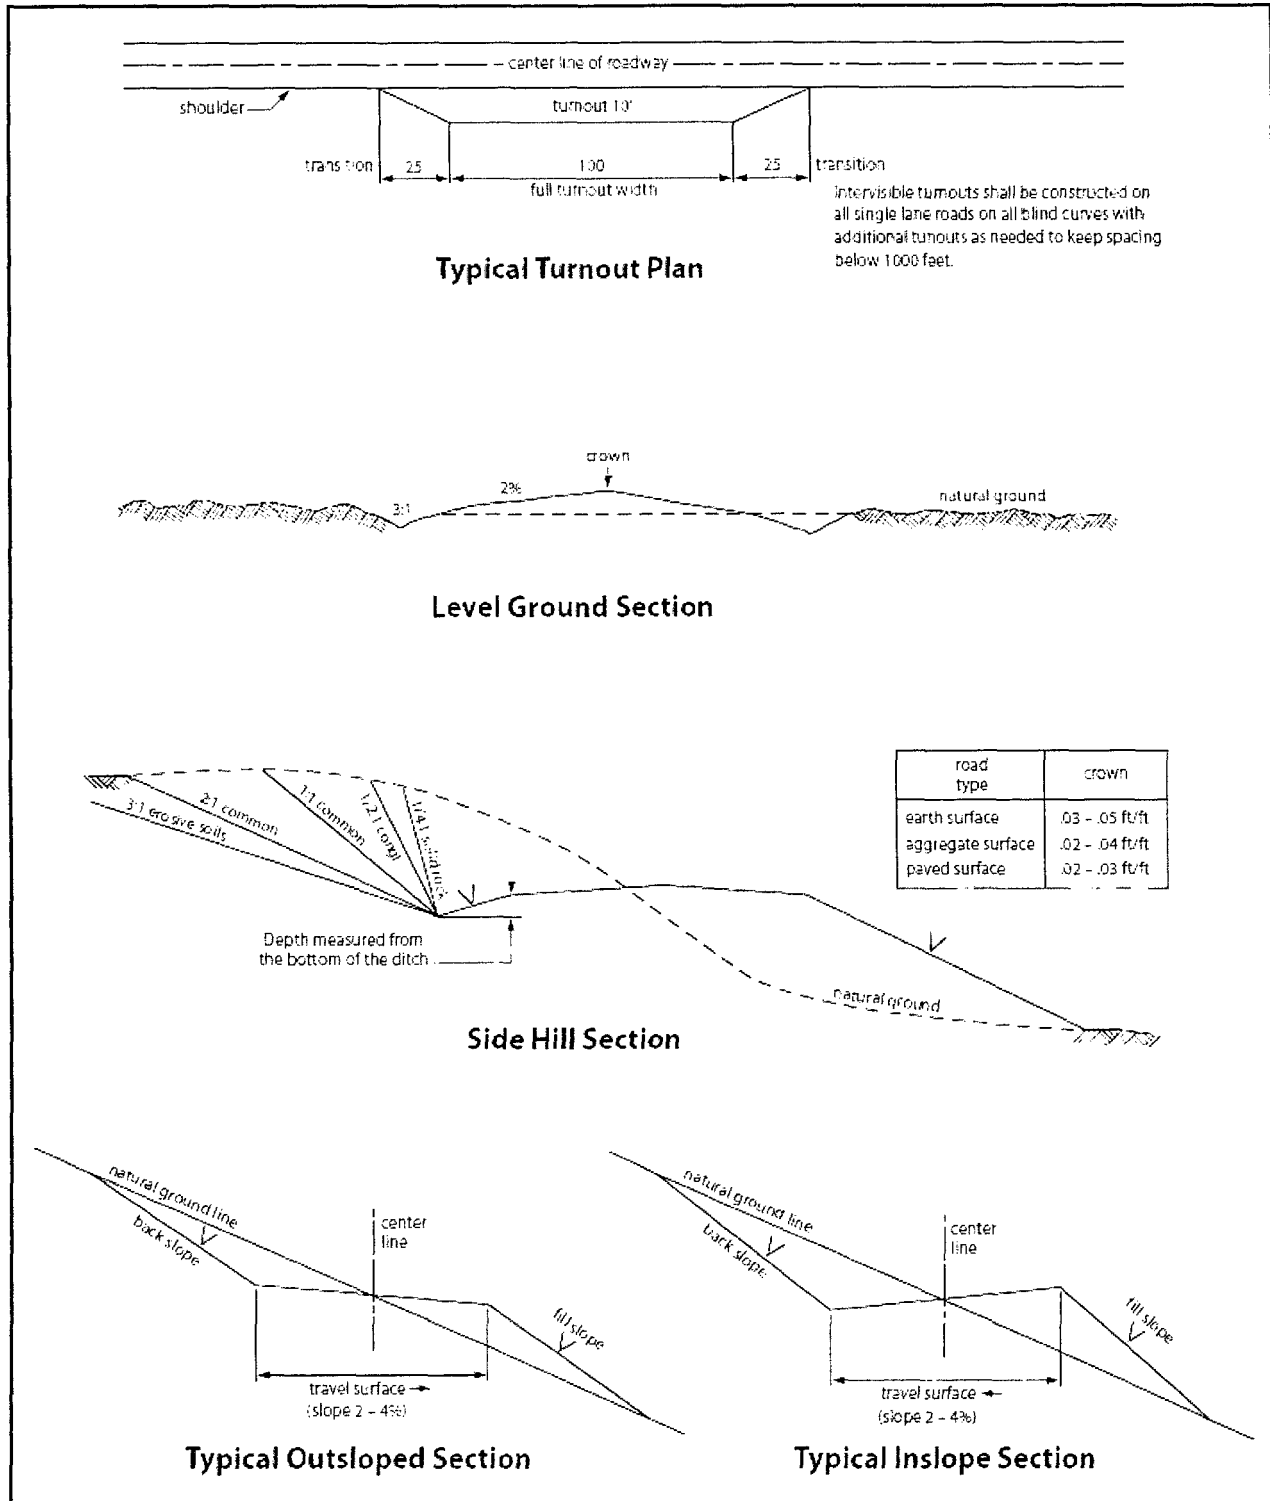


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of

the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.

6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.

7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:

- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
- Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
- The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)

8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.

9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

☐ seed mixture 1	☒ seed mixture 3
☐ seed mixture 2	☐ seed mixture 4
☐ seed mixture 2/LPC	☐ Aplomado Falcon Mixture

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

C. ELECTRIC LINES

STANDARD STIPULATIONS FOR OVERHEAD ELECTRIC DISTRIBUTION LINES

A copy of the grant and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
4. There will be no clearing or blading of the right-of-way unless otherwise agreed to in writing by the Authorized Officer.
5. Power lines shall be constructed and designed in accordance to standards outlined in "Suggested Practices for Avian Protection on Power lines: The State of the Art in 2006" Edison Electric Institute, APLIC, and the California Energy Commission 2006 . The holder shall assume the burden and expense of proving that pole designs not shown in the above publication deter raptor perching, roosting, and nesting. Such proof shall be provided by a raptor expert approved by the Authorized Officer. The BLM reserves the right to require modification or additions to all powerline structures placed on this right-of-way, should they be necessary to ensure the safety of large perching birds. Such modifications and/or additions shall be made by the holder without liability or expense to the United States.

Raptor deterrence will consist of but not limited to the following: triangle perch discouragers shall be placed on each side of the cross arms and a nonconductive perching

deterrence shall be placed on all vertical poles that extend past the cross arms.

6. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

7. The BLM serial number assigned to this authorization shall be posted in a permanent, conspicuous manner where the power line crosses roads and at all serviced facilities. Numbers will be at least two inches high and will be affixed to the pole nearest the road crossing and at the facilities served.

8. Upon cancellation, relinquishment, or expiration of this grant, the holder shall comply with those abandonment procedures as prescribed by the Authorized Officer.

9. All surface structures (poles, lines, transformers, etc.) shall be removed within 180 days of abandonment, relinquishment, or termination of use of the serviced facility or facilities or within 180 days of abandonment, relinquishment, cancellation, or expiration of this grant, whichever comes first. This will not apply where the power line extends service to an active, adjoining facility or facilities.

10. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

11. Special Stipulations:

- For reclamation remove poles, lines, transformer, etc. and dispose of properly.
- Fill in any holes from the poles removed.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce

the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Seed Mixture 3, for Shallow Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains Bristlegrass (<i>Setaria macrostachya</i>)	1.0
Green Sprangletop (<i>Leptochloa dubia</i>)	2.0
Sideoats Grama (<i>Bouteloua curtipendula</i>)	5.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed