

**NM OIL CONSERVATION  
ARTESIA DISTRICT**

**OCT 16 2017**

Form 3160-3  
(March 2012)

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**RECEIVED**

**APPLICATION FOR PERMIT TO DRILL OR REENTER**

FORM APPROVED  
OMB No. 1004-0137  
Expires October 31, 2014

5. Lease Serial No.  
NMNM 027994D

6. If Indian, Allottee or Tribe Name

1a. Type of work: ☒ DRILL ☐ REENTER

7. If Unit or CA Agreement, Name and No.

1b. Type of Well: ☐ Oil Well ☒ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

8. Lease Name and Well No. **319755**  
GHOSTRIDER 25/36 W2AP FED 1H

2. Name of Operator  
MEWBORNE OIL COMPANY

9. API Well No.

**30-015-44481**

3a. Address  
PO Box 5270 Hobbs NM 88240

3b. Phone No. (include area code)  
(575)393-5905

10. Field and Pool, or Exploratory  
PURPLE-SAGE WOLFCAMP GAS / WO

4. Location of Well (Report location clearly and in accordance with any State requirements.)\*

At surface NENE / 185 FNL / 450 FEL / LAT 32.2823231 / LONG -104.2393149

At proposed prod. zone SESE / 330 FSL / 400 FEL / LAT 32.2545961 / LONG -104.239211

11. Sec., T. R. M. or Blk. and Survey or Area  
SEC 25 / T23S / R26E / NMP

14. Distance in miles and direction from nearest town or post office\*  
4 miles

12. County or Parish  
EDDY

13. State  
NM

15. Distance from proposed\*  
location to nearest 185 feet  
property or lease line, ft.  
(Also to nearest drig. unit line, if any)

16. No. of acres in lease  
1200

17. Spacing Unit dedicated to this well  
320

18. Distance from proposed location\*  
to nearest well, drilling, completed, 50 feet  
applied for, on this lease, ft.

19. Proposed Depth  
9382 feet / 19273 feet

20. BLM/BIA Bond No. on file  
FED: NM1693

21. Elevations (Show whether DF, KDB, RT, GL, etc.)  
3221 feet

22. Approximate date work will start\*  
04/16/2017

23. Estimated duration  
60 days

**24. Attachments**

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- |  |   |
|--|---|
| 1. Well plat certified by a registered surveyor.   | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan.  | 5. Operator certification   |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM.             |

25. Signature  
(Electronic Submission)

Name (Printed/Typed)  
Bradley Bishop / Ph: (575)393-5905

Date  
02/24/2017

Title

Regulatory

Approved by (Signature)  
(Electronic Submission)

Name (Printed/Typed)  
Cody Layton / Ph: (575)234-5959

Date  
09/28/2017

Title

Supervisor Multiple Resources

Office  
CARLSBAD

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

\*(Instructions on page 2)

**APPROVED WITH CONDITIONS**

*NSP Required*  
*RWP 10-17-17*

## PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Mewbourne Oil Co
LEASE NO.:	NM027994D
WELL NAME & NO.:	Ghostrider 25 36 W2AP Fed Com – 1H
SURFACE HOLE FOOTAGE:	185'/N & 450'/E
BOTTOM HOLE FOOTAGE:	330'/S & 400'/E, sec. 36
LOCATION:	Sec. 25, T. 23 S, R. 26 E
COUNTY:	Eddy County

Potash	<input checked="" type="radio"/> None	<input type="radio"/> Secretary	<input type="radio"/> R-111-P
Cave Karst Potential	<input type="radio"/> Low	<input checked="" type="radio"/> Medium	<input type="radio"/> High
Variance	<input type="radio"/> None	<input checked="" type="radio"/> Flex Hose	<input type="radio"/> Other
Wellhead	<input type="radio"/> Conventional	<input checked="" type="radio"/> Multibowl	
Other	<input type="checkbox"/> 4 String Area	<input type="checkbox"/> Capitan Reef	<input type="checkbox"/> WIPP

### A. Hydrogen Sulfide

1. Hydrogen Sulfide (H<sub>2</sub>S) monitors shall be installed prior to drilling out the surface shoe. If H<sub>2</sub>S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

### B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately 475 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
  - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
  - Cement to surface. If cement does not circulate see B.1.a, c-d above. **Excess calculates to 22% - Additional cement may be required.**
3. The minimum required fill of cement behind the 7 inch production casing is:

Operator has proposed a DV tool, the depth may be adjusted as long as the cement is changed proportionally. The DV tool may be cancelled if cement circulates to surface on the first stage.

- a. First stage to DV tool: Cement to circulate. If cement does not circulate off the DV tool, contact the appropriate BLM office before proceeding with second stage cement job.
- b. Second stage above DV tool: Cement should tie-back at least 200 feet into previous casing string. Operator shall provide method of verification.

**Formation below the 7" shoe to be tested according to Onshore Order 2.III.B.1.i. Test to be done as a mud equivalency test using the mud weight necessary for the pore pressure of the formation below the shoe (not the mud weight required to prevent dissolving the salt formation) and the mud weight for the bottom of the hole. Report results to BLM office.**

4. The minimum required fill of cement behind the 4-1/2 inch liner is:
    - Cement should tie-back at least 100 feet into previous casing string. Operator shall provide method of verification.
- ❖ In Medium/High Cave/Karst Areas if cement does not circulate to surface on the first two casing strings, the cement on the 3rd casing string must come to surface.

### **C. PRESSURE CONTROL**

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).

**Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 5000 (5M) psi.**

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.

- c. **Manufacturer representative shall install the test plug for the initial BOP test.**

**If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.**

## **GENERAL REQUIREMENTS**

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,  
(575) 361-2822

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
  - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

### **A. CASING**

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.
3. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
4. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
5. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
6. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
7. Whenever a casing string is cemented in the R-111-P potash area, the NMOC requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be

as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.

3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
  - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
  - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
  - c. Manufacturer representative shall install the test plug for the initial BOP test.
  - d. Operator shall perform the intermediate casing integrity test to 70% of the casing burst. This will test the multi-bowl seals.
  - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
  - f. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - a. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be

initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time.

- b. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- g. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

#### C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

#### D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and

disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

**ZS 092517**



**PECOS DISTRICT  
SURFACE USE  
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Mewbourne Oil Co
LEASE NO.:	NM027994D
WELL NAME & NO.:	Ghostrider 25 36 W2AP Fed Com – 1H
SURFACE HOLE FOOTAGE:	185'/N & 450'/E
BOTTOM HOLE FOOTAGE:	330'/S & 400'/E, sec. 36
LOCATION:	Section 25, T. 23 S., R. 26 E., NMPM
COUNTY:	Eddy County, New Mexico

**TABLE OF CONTENTS**

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
  - Cave/Karst
  - Watershed
- ☐ **Construction**
  - Notification
  - Topsoil
  - Closed Loop System
  - Federal Mineral Material Pits
  - Well Pads
  - Roads
- ☐ **Road Section Diagram**
- ☐ **Production (Post Drilling)**
  - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

## **I. GENERAL PROVISIONS**

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

## **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

## **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

## **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

## **V. SPECIAL REQUIREMENT(S)**

### **Cave and Karst**

\*\* Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

#### **Cave/Karst Surface Mitigation**

The following stipulations will be applied to minimize impacts during construction, drilling and production.

##### **Construction:**

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

##### **No Blasting:**

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

##### **Pad Berming:**

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

##### **Tank Battery Liners and Berms:**

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

##### **Leak Detection System:**

A method of detecting leaks is required. The method could incorporate gauges to measure loss, situate valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

**Automatic Shut-off Systems:**

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

**Cave/Karst Subsurface Mitigation**

The following stipulations will be applied to protect cave/karst and ground water concerns:

**Rotary Drilling with Fresh Water:**

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

**Directional Drilling:**

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

**Lost Circulation:**

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

**Abandonment Cementing:**

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

**Pressure Testing:**

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

**Watershed**

- The entire well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the

well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.

- Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion.
- Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

## **VI. CONSTRUCTION**

### **A. NOTIFICATION**

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

### **B. TOPSOIL**

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

### **C. CLOSED LOOP SYSTEM**

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

### **D. FEDERAL MINERAL MATERIALS PIT**

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

### **E. WELL PAD SURFACING**

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

### **F. EXCLOSURE FENCING (CELLARS & PITS)**

**Exclosure Fencing**

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

**G. ON LEASE ACCESS ROADS****Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

**Surfacing**

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

**Crowning**

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

**Ditching**

Ditching shall be required on both sides of the road.

**Turnouts**


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

**Drainage**

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

#### **Cross Section of a Typical Lead-off Ditch**



All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

#### **Formula for Spacing Interval of Lead-off Ditches**

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

#### **Cattle guards**

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

#### **Fence Requirement**

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

#### **Public Access**

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.



### Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

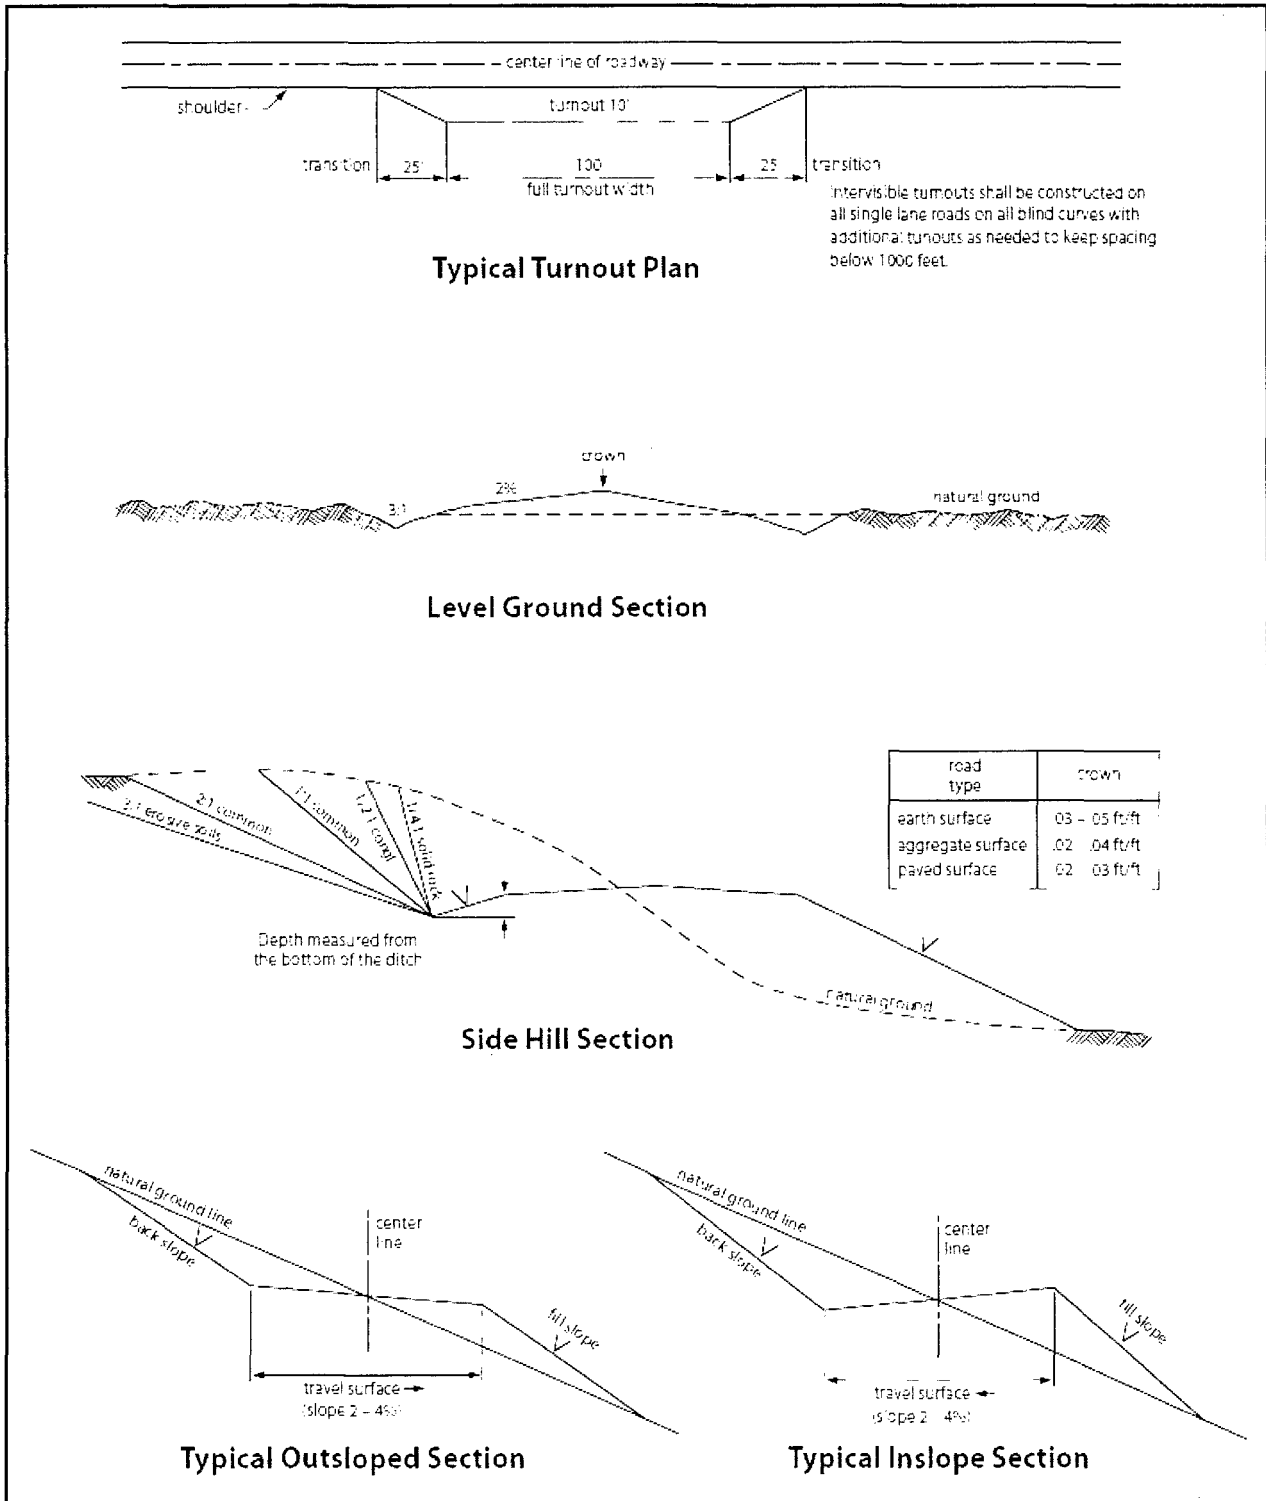


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

## **VII. PRODUCTION (POST DRILLING)**

### **A. WELL STRUCTURES & FACILITIES**

#### **Placement of Production Facilities**

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Exclosure Netting (Open-top Tanks)**

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

#### **Chemical and Fuel Secondary Containment and Exclosure Screening**

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

#### **Open-Vent Exhaust Stack Exclosures**

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

#### **Containment Structures**

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

### **VIII. INTERIM RECLAMATION**

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

### **IX. FINAL ABANDONMENT & RECLAMATION**

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

### **Seed Mixture 1 for Loamy Sites**

Holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed shall be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed shall be either certified or registered seed. The seed container shall be tagged in accordance with State law(s) and available for inspection by the Authorized Officer.

Seed shall be planted using a drill equipped with a depth regulator to ensure proper depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture shall be evenly and uniformly planted over the disturbed area (small/heavier seeds have a tendency to drop the bottom of the drill and are planted first). Holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed shall be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre shall be doubled. The seeding shall be repeated until a satisfactory stand is established as determined by the Authorized Officer. Evaluation of growth may not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

<u>Species</u>	<u>lb/acre</u>
Plains lovegrass ( <i>Eragrostis intermedia</i> )	0.5
Sand dropseed ( <i>Sporobolus cryptandrus</i> )	1.0
Sideoats grama ( <i>Bouteloua curtipendula</i> )	5.0
Plains bristlegrass ( <i>Setaria macrostachya</i> )	2.0

\*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

**Operator Certification**

*I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.*

**NAME:** Bradley Bishop**Signed on:** 02/24/2017**Title:** Regulatory**Street Address:** PO Box 5270**City:** Hobbs**State:** NM**Zip:** 88240**Phone:** (575)393-5905**Email address:** bbishop@mewbourne.com**Field Representative****Representative Name:****Street Address:****City:****State:****Zip:****Phone:****Email address:**

**APD ID:** 10400011277

**Submission Date:** 02/24/2017

 Highlighted data  
 reflects the most  
 recent changes

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

[Show Final Text](#)
**Well Type:** CONVENTIONAL GAS WELL

**Well Work Type:** Drill

## Section 1 - General

**APD ID:** 10400011277

**Tie to previous NOS?**
**Submission Date:** 02/24/2017

**BLM Office:** CARLSBAD

**User:** Bradley Bishop

**Title:** Regulatory

**Federal/Indian APD:** FED

**Is the first lease penetrated for production Federal or Indian?** FED

**Lease number:** NMNM 027994D

**Lease Acres:** 1200

**Surface access agreement in place?**
**Allotted?**
**Reservation:**
**Agreement in place?** NO

**Federal or Indian agreement:**
**Agreement number:**
**Agreement name:**
**Keep application confidential?** YES

**Permitting Agent?** NO

**APD Operator:** MEWBOURNE OIL COMPANY

**Operator letter of designation:** Ghost rider 2536 W2AP Fed Com 1H\_operatorletterofcert\_02-24-2017.pdf

## Operator Info

**Operator Organization Name:** MEWBOURNE OIL COMPANY

**Operator Address:** PO Box 5270

**Zip:** 88240

**Operator PO Box:**
**Operator City:** Hobbs

**State:** NM

**Operator Phone:** (575)393-5905

**Operator Internet Address:**

## Section 2 - Well Information

**Well in Master Development Plan?** NO

**Mater Development Plan name:**
**Well in Master SUPO?** NO

**Master SUPO name:**
**Well in Master Drilling Plan?** NO

**Master Drilling Plan name:**
**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Well API Number:**
**Field/Pool or Exploratory?** Field and Pool

**Field Name:** PURPLE-SAGE  
 WOLFCAMP GAS

**Pool Name:** WOLFCAMP

**Is the proposed well in an area containing other mineral resources?** USEABLE WATER,NATURAL GAS,OIL

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Describe other minerals:**

**Is the proposed well in a Helium production area?** N **Use Existing Well Pad?** NO **New surface disturbance?**

**Type of Well Pad:** MULTIPLE WELL

**Multiple Well Pad Name:**

**Number:** 2

**Well Class:** HORIZONTAL

GHOSTRIDER

**Number of Legs:** 1

**Well Work Type:** Drill

**Well Type:** CONVENTIONAL GAS WELL

**Describe Well Type:**

**Well sub-Type:** APPRAISAL

**Describe sub-type:**

**Distance to town:** 4 Miles

**Distance to nearest well:** 50 FT

**Distance to lease line:** 185 FT

**Reservoir well spacing assigned acres Measurement:** 320 Acres

**Well plat:** Ghost rider 2536 W2AP Fed Com 1H\_well plat\_02-24-2017.pdf

**Well work start Date:** 04/16/2017

**Duration:** 60 DAYS

### Section 3 - Well Location Table

**Survey Type:** RECTANGULAR

**Describe Survey Type:**

**Datum:** NAD83

**Vertical Datum:** NAVD88

**Survey number:**

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
SHL Leg #1	185	FNL	450	FEL	23S	26E	25	Aliquot NENE	32.28232 31	- 104.2393 149	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 027994 D	322 1	0	0
KOP Leg #1	185	FNL	450	FEL	23S	26E	25	Aliquot NENE	32.28232 31	- 104.2393 149	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 027994 D	- 543 9	866 0	866 0
PPP Leg #1	330	FNL	449	FEL	23S	26E	25	Aliquot NENE	32.28180 53	- 104.2388 139	EDD Y	NEW MEXI CO	NEW MEXI CO	F	NMNM 027994 D	- 602 0	927 7	924 1



**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

	NS-Foot	NS Indicator	EW-Foot	EW Indicator	Twsp	Range	Section	Aliquot/Lot/Tract	Latitude	Longitude	County	State	Meridian	Lease Type	Lease Number	Elevation	MD	TVD
EXIT Leg #1	330	FSL	400	FEL	23S	26E	36	Aliquot SESE	32.25459 61	- 104.2392 11	EDD Y	NEW MEXI CO	NEW MEXI CO	S	STATE	- 616 1	192 73	938 2
BHL Leg #1	330	FSL	400	FEL	23S	26E	36	Aliquot SESE	32.25459 61	- 104.2392 11	EDD Y	NEW MEXI CO	NEW MEXI CO	S	STATE	- 616 1	192 73	938 2

**United States Department of the Interior  
Bureau of Land Management  
Roswell Field Office  
2909 West Second Street  
Roswell, New Mexico 88201-1287**

**Statement Accepting Responsibility for Operations**

Operator Name: Mewbourne Oil Company  
Street or Box: P.O. Box 5270  
City, State: Hobbs, New Mexico  
Zip Code: 88241

The undersigned accepts all applicable terms, conditions, stipulations, and restrictions concerning operations conducted of the leased land or portion thereof, as described below.

Lease Number: NMNM 027994D

Legal Description of Land: Section 25, T-23S, R-26E Eddy County, New Mexico.  
Location @ 185' FNL & 450' FEL.

Formation (if applicable): Purple Sage Wolfcamp gas

Bond Coverage: \$150,000

BLM Bond File: NM1693 Nationwide, NMB 000919

Authorized Signature: \_\_\_\_\_



Name: Bradley Bishop

2-24-17

APD ID: 10400011277

Submission Date: 02/24/2017

Highlighted data  
reflects the most  
recent changes

Operator Name: MEWBOURNE OIL COMPANY

Well Name: GHOSTRIDER 25/36 W2AP FED COM

Well Number: 1H

[Show Final Text](#)

Well Type: CONVENTIONAL GAS WELL

Well Work Type: Drill

## Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
17691	UNKNOWN	3221	27	27		NONE	No
17762	CASTILE	2651	570	570	SALT	NONE	No
17723	BOTTOM SALT	1561	1660	1660	SALT	NONE	No
17719	LAMAR	1331	1890	1890	LIMESTONE	NATURAL GAS,OIL	No
15332	BELL CANYON	1216	2005	2005	SANDSTONE	NATURAL GAS,OIL	No
15316	CHERRY CANYON	536	2685	2685	SANDSTONE	NATURAL GAS,OIL	No
17766	MANZANITA	411	2810	2810	LIMESTONE	NATURAL GAS,OIL	No
17713	BRUSHY CANYON	-829	4050	4050	SANDSTONE	NATURAL GAS,OIL	No
17721	BONE SPRING LIME	-2099	5320	5320	LIMESTONE,SHALE	NATURAL GAS,OIL	No
15338	BONE SPRING 1ST	-3124	6345	6345	SANDSTONE	NATURAL GAS,OIL	No
17737	BONE SPRING 2ND	-3574	6795	6795	SANDSTONE	NATURAL GAS,OIL	No
17738	BONE SPRING 3RD	-5164	8385	8385	SANDSTONE	NATURAL GAS,OIL	No
17709	WOLFCAMP	-5504	8725	8725	LIMESTONE,SHALE,SANDSTONE	NATURAL GAS,OIL	Yes

## Section 2 - Blowout Prevention

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Pressure Rating (PSI):** 5M

**Rating Depth:** 19275

**Equipment:** Annular, Pipe Rams, Blind Rams

**Requesting Variance?** YES

**Variance request:** Request variance for the use of a flexible choke line from the BOP to Choke Manifold. A multi-bowl wellhead will be used.

**Testing Procedure:** Test annular to 2500# Test BOPE to 5000#

**Choke Diagram Attachment:**

Ghostrider 25-36 W2PA Fed Com 1H\_5M BOPE Choke Diagram\_02-21-2017.pdf

**BOP Diagram Attachment:**

Ghostrider 25-36 W2PA Fed Com 1H\_5M BOPE Schematic\_02-21-2017.pdf

### Section 3 - Casing

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	475	0	475	-6161	-6636	475	H-40	48	STC	3.12	7	DRY	14.12	DRY	23.73
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	1815	0	1815	-6161	-7976	1815	J-55	36	LTC	2.14	3.73	DRY	6.93	DRY	8.63
3	PRODUCTION	8.75	7.0	NEW	API	N	0	9600	0	9411	-6161	-15572	9600	P-110	26	LTC	1.69	2.16	DRY	2.5	DRY	3.27
4	LINER	6.125	4.5	NEW	API	N	8860	19275	8860	9433	-15021	-15594	10415	P-110	13.5	LTC	1.67	1.95	DRY	2.58	DRY	3.22

**Casing Attachments**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

### Casing Attachments

---

**Casing ID:** 1      **String Type:** SURFACE

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

Ghostrider 25-36 W2AP Fed Com 1H\_Csg Assumptions\_02-21-2017.pdf

---

**Casing ID:** 2      **String Type:** INTERMEDIATE

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

Ghostrider 25-36 W2AP Fed Com 1H\_Csg Assumptions\_02-21-2017.pdf

---

**Casing ID:** 3      **String Type:** PRODUCTION

**Inspection Document:**

**Spec Document:**

**Tapered String Spec:**

**Casing Design Assumptions and Worksheet(s):**

Ghostrider 25-36 W2AP Fed Com 1H\_Csg Assumptions\_02-21-2017.pdf

---

Operator Name: MEWBOURNE OIL COMPANY

Well Name: GHOSTRIDER 25/36 W2AP FED COM

Well Number: 1H

#### Casing Attachments

Casing ID: 4 String Type: LINER

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Ghostrider 25-36 W2AP Fed Com 1H\_Csg Assumptions\_02-21-2017.pdf

#### Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	285	190	2.12	12.5	402	100	Class C	Salt, Gel, Extender, LCM
SURFACE	Tail		285	475	200	1.34	14.8	268	100	Class C	Retarder
INTERMEDIATE	Lead		0	1170	230	2.12	12.5	487	25	Class C	Salt, Gel, Extender, LCM
INTERMEDIATE	Tail		1170	1815	200	1.34	14.8	268	25	Class C	Retarder
PRODUCTION	Lead	2810	1615	2196	60	2.12	12.5	127	25	Class C	Gel, Retarder, Defoamer, Extender
PRODUCTION	Tail		2196	2810	100	1.34	14.8	134	25	Class C	Retarder
PRODUCTION	Lead	2810	2810	7111	385	2.12	12.5	816	25	Class C	Gel, Retarder, Defoamer, Extender
PRODUCTION	Tail		7111	9600	400	1.18	15.6	472	25	Class H	Retarder, Fluid Loss, Defoamer
LINER	Lead		8860	1927 5	425	2.97	11.2	1262	25	Class C	Salt, Gel, Fluid Loss, Retarder, Dispersant, Defoamer, Anti-Settling Agent

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

## Section 5 - Circulating Medium

**Mud System Type:** Closed

**Will an air or gas system be Used?** NO

**Description of the equipment for the circulating system in accordance with Onshore Order #2:**

**Diagram of the equipment for the circulating system in accordance with Onshore Order #2:**

**Describe what will be on location to control well or mitigate other conditions:** Lost circulation material Sweeps Mud scavengers in surface hole

**Describe the mud monitoring system utilized:** Pason/PVT/Visual Monitoring

### Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	475	SPUD MUD	8.6	8.8							
475	1815	SALT SATURATED	10	10							
1815	8860	WATER-BASED MUD	8.6	9.5							
8860	9433	OIL-BASED MUD	10	12							

## Section 6 - Test, Logging, Coring

**List of production tests including testing procedures, equipment and safety measures:**

Will run GR/CNL from KOP (8860') to surface.

Will run MWD GR from KOP (8860') to TD.

**List of open and cased hole logs run in the well:**

CNL,DS,GR,MWD,MUDLOG

**Coring operation description for the well:**

None

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

## **Section 7 - Pressure**

**Anticipated Bottom Hole Pressure:** 5886

**Anticipated Surface Pressure:** 3633.2

**Anticipated Bottom Hole Temperature(F):** 165

**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO

**Describe:**

**Contingency Plans geohazards description:**

**Contingency Plans geohazards attachment:**

**Hydrogen Sulfide drilling operations plan required?** YES

**Hydrogen sulfide drilling operations plan:**

Ghostrider 25-36 W2PA Fed Com 1H\_H2S Plan\_02-21-2017.pdf

## **Section 8 - Other Information**

**Proposed horizontal/directional/multi-lateral plan submission:**

Ghostrider 26-35 W2AP Fed Com 1H\_Dir Plot\_02-21-2017.pdf

Ghostrider 26-35 W2AP Fed Com 1H\_Dir Plan\_02-21-2017.pdf

**Other proposed operations facets description:**

**Other proposed operations facets attachment:**

Ghostrider 25-36 W2AP Fed Com 1H\_Drlg Program\_02-21-2017.doc


**Other Variance attachment:**

Ghostrider 25-36 W2PA Fed Com 1H\_Flex Line Specs\_02-21-2017.pdf

Ghostrider 25-36 W2PA Fed Com 1H\_Multi-Bowl WH\_02-22-2017.pdf





# 5M BOPE & Closed Loop Equipment Schematic

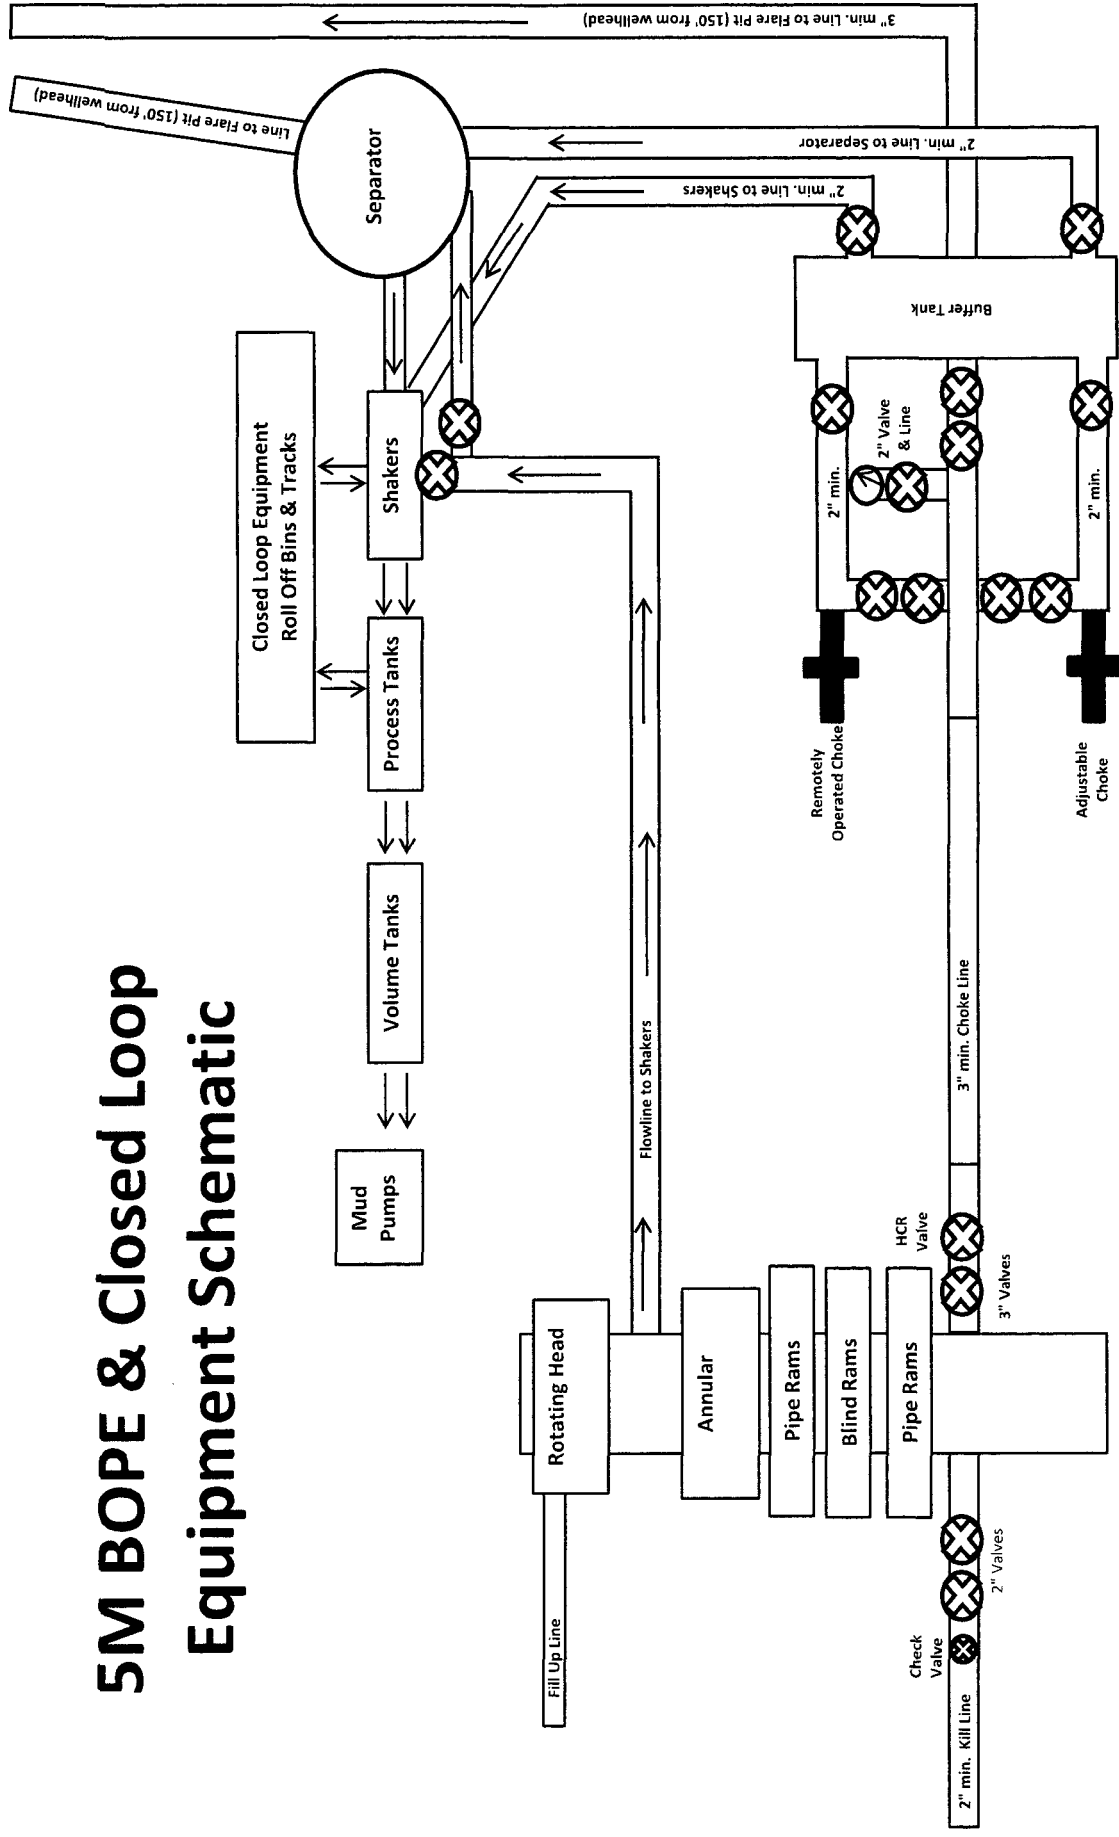


Note: All valves & lines on choke manifold are 3" unless otherwise noted. Exact manifold configuration may vary.

Hydril "GK"  
13 5/8" 5M




Hydril "GK"



Cameron Type U  
13 5/8" 5M



4 1/2" x 5 7/8" VBR



BLIND RAMS

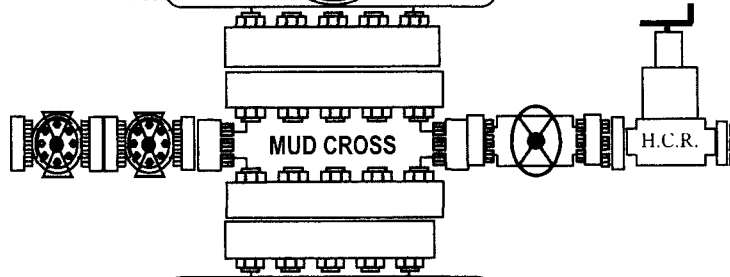


4 1/2" x 5 7/8" VBR

13 5/8" 5M

13 5/8" 5M

13 5/8" 5M

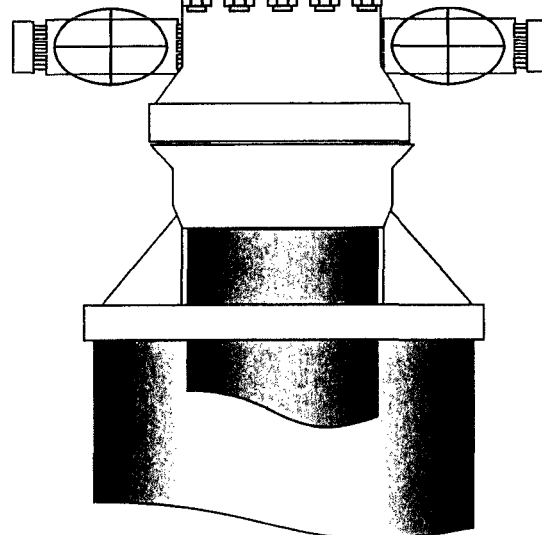

**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

**Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	475'	13.375"	48	H40	STC	3.12	7.00	14.12	23.73
12.25"	0'	1815'	9.625"	36	J55	LTC	2.14	3.73	6.93	8.63
8.75"	0'	9600'	7"	26	HCP110	LTC	1.69	2.16	2.50	3.27
6.125"	8860'	19275'	4.5"	13.5	P110	LTC	1.67	1.95	2.58	3.22
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

Hydrogen Sulfide Drilling Operations Plan  
**Mewbourne Oil Company**

**1. General Requirements**

Rule 118 does not apply to this well because MOC has researched this area and no high concentrations of H<sub>2</sub>S were found. MOC will have on location and working all H<sub>2</sub>S safety equipment before the Delaware formation for purposes of safety and insurance requirements.

**2. Hydrogen Sulfide Training**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will have received training from a qualified instructor in the following areas prior to entering the drilling pad area of the well:

1. The hazards and characteristics of hydrogen sulfide gas.
2. The proper use of personal protective equipment and life support systems.
3. The proper use of hydrogen sulfide detectors, alarms, warning systems, briefing areas, evacuation procedures.
4. The proper techniques for first aid and rescue operations.

Additionally, supervisory personnel will be trained in the following areas:

- 1 The effects of hydrogen sulfide on metal components. If high tensile tubular systems are utilized, supervisory personnel will be trained in their special maintenance requirements.
- 2 Corrective action and shut in procedures, blowout prevention, and well control procedures while drilling a well.
- 3 The contents of the Hydrogen Sulfide Drilling Operations Plan.

There will be an initial training session prior to encountering a known hydrogen sulfide source. The initial training session shall include a review of the site specific Hydrogen Sulfide Drilling Operations Plan.

**3. Hydrogen Sulfide Safety Equipment and Systems**

All hydrogen sulfide safety equipment and systems will be installed, tested, and operational prior to drilling below the 9 5/8" intermediate casing.

1. Well Control Equipment
  - A. Choke manifold with minimum of one adjustable choke/remote choke.
  - B. Blowout preventers equipped with blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit
  - C. Auxiliary equipment including annular type blowout preventer.
2. Protective Equipment for Essential Personnel

Thirty minute self contained work unit located in the dog house and at briefing areas.

Additionally: If H<sub>2</sub>S is encountered in concentrations less than 10 ppm, fans will be placed in work areas to prevent the accumulation of hazardous amounts of poisonous gas. If higher concentrations of H<sub>2</sub>S are detected the well will be shut in and a rotating head, mud/gas separator, remote choke and flare line with igniter will be installed.

3. Hydrogen Sulfide Protection and Monitoring Equipment  
Two portable hydrogen sulfide monitors positioned on location for optimum coverage and detection. The units shall have audible sirens to notify personnel when hydrogen sulfide levels exceed 20 PPM.
4. Visual Warning Systems
  - A. Wind direction indicators as indicated on the wellsite diagram.
  - B. Caution signs shall be posted on roads providing access to location. Signs shall be painted a high visibility color with lettering of sufficient size to be readable at reasonable distances from potentially contaminated areas.

#### **4. Mud Program**

The mud program has been designed to minimize the amount of hydrogen sulfide entrained in the mud system. Proper mud weight, safe drilling practices, and the use of hydrogen sulfide scavengers will minimize hazards while drilling the well.

#### **5. Metallurgy**

All tubular systems, wellheads, blowout preventers, drilling spools, kill lines, choke manifolds, and valves shall be suitable for service in a hydrogen sulfide environment when chemically treated.

#### **6. Communications**

State & County Officials phone numbers are posted on rig floor and supervisors trailer. Communications in company vehicles and toolpushers are either two way radios or cellular phones.

#### **7. Well Testing**



Drill stem testing is not an anticipated requirement for evaluation of this well. If a drill stem test is required, it will be conducted with a minimum number of personnel in the immediate vicinity. The test will be conducted during daylight hours only.

#### **8. Emergency Phone Numbers**

<b>Eddy County Sheriff's Office</b>	<b>911 or 575-887-7551</b>
<b>Ambulance Service</b>	<b>911 or 575-885-2111</b>
<b>Carlsbad Fire Dept</b>	<b>911 or 575-885-2111</b>
<b>Loco Hills Volunteer Fire Dept.</b>	<b>911 or 575-677-3266</b>
<b>Closest Medical Facility - Columbia Medical Center of Carlsbad</b>	<b>575-492-5000</b>

<b>Mewbourne Oil Company</b>	<b>Hobbs District Office</b>	<b>575-393-5905</b>
	<b>Fax</b>	<b>575-397-6252</b>
	<b>2<sup>nd</sup> Fax</b>	<b>575-393-7259</b>

<b>District Manager</b>	<b>Robin Terrell</b>	<b>575-390-4816</b>
<b>Drilling Superintendent</b>	<b>Frosty Lathan</b>	<b>575-390-4103</b>
	<b>Bradley Bishop</b>	<b>575-390-6838</b>
<b>Drilling Foreman</b>	<b>Wesley Noseff</b>	<b>575-441-0729</b>

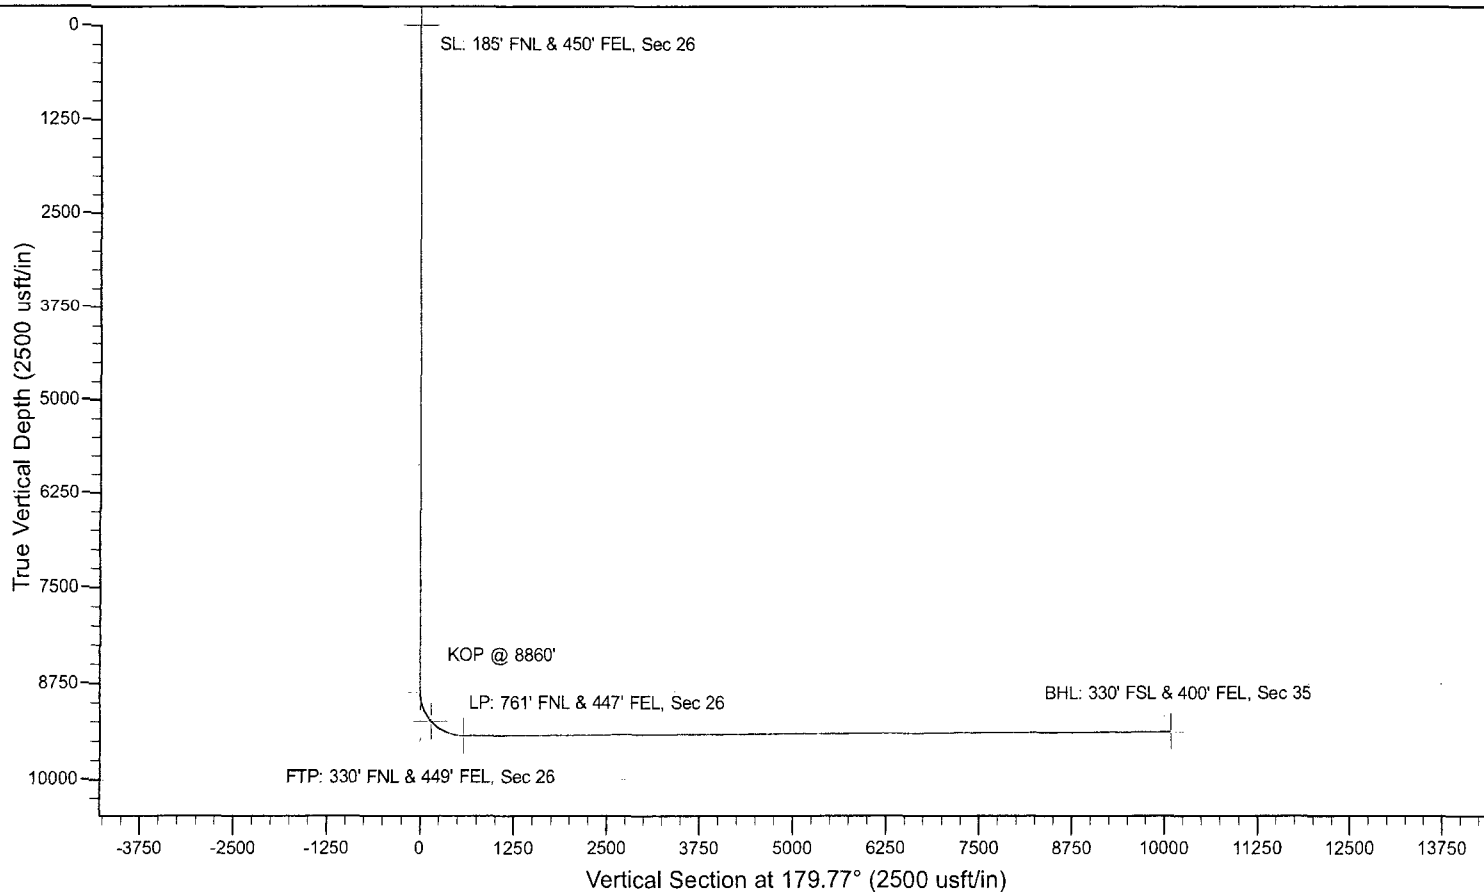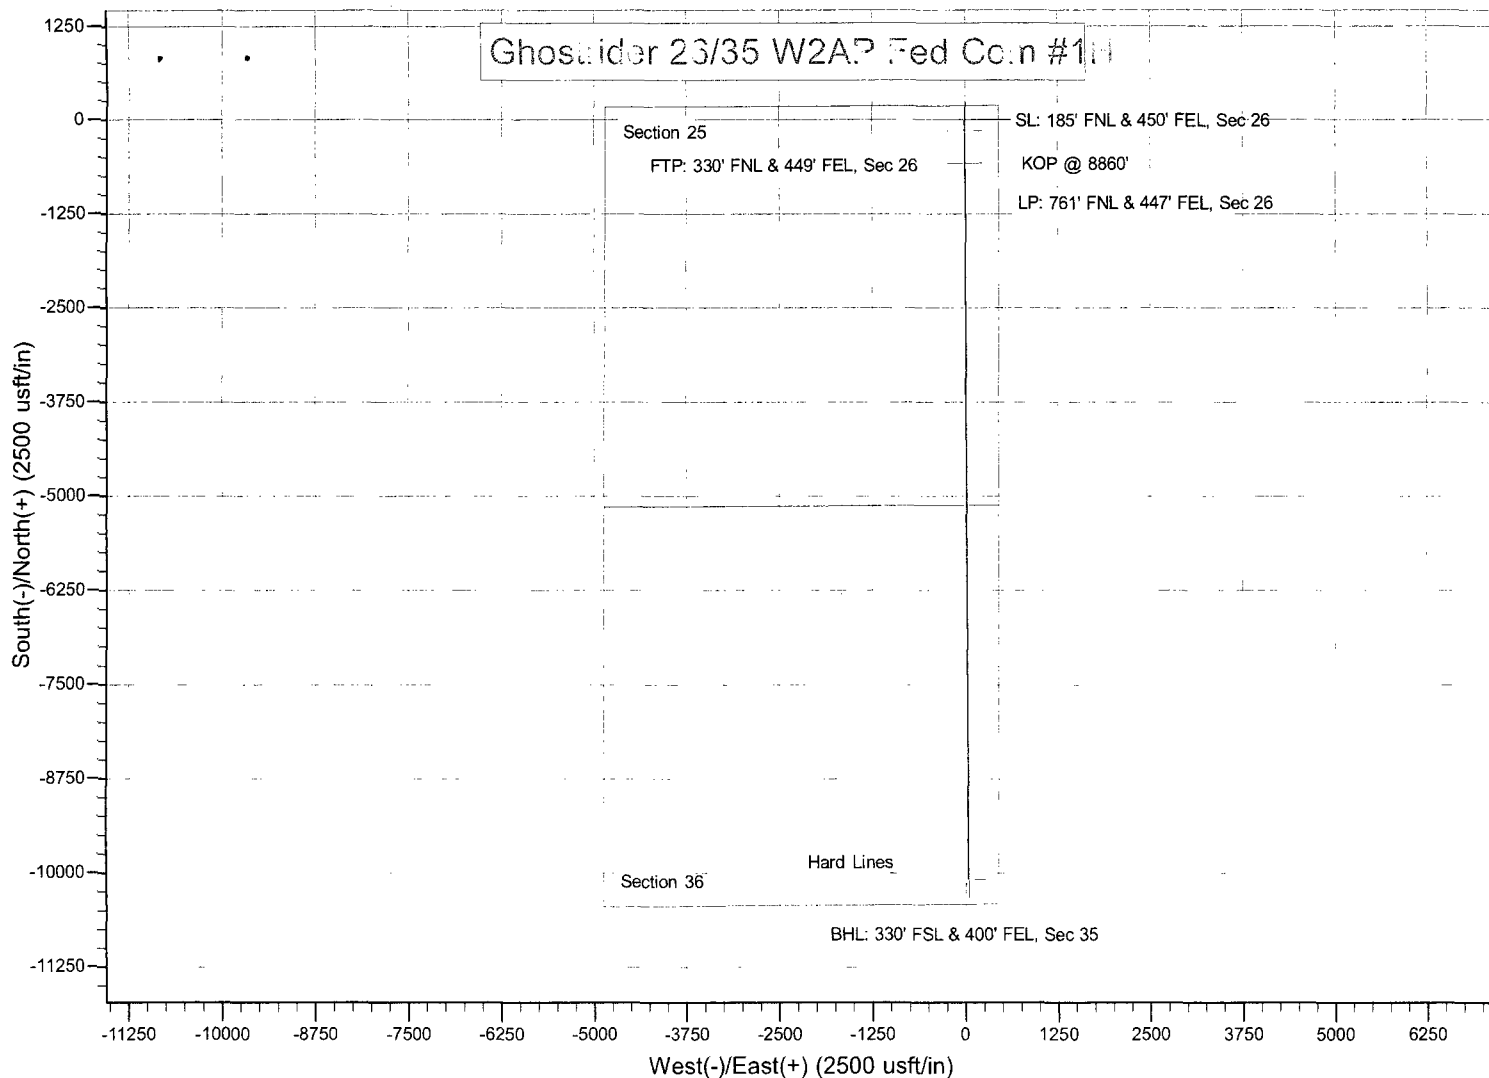

# **Mewbourne Oil Company**

**Eddy County, New Mexico**

**Ghostrider 26/35 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 26**

**BHL: 330' FSL & 400' FEL, Sec 35**

**Plan: Design #1**

## **Standard Planning Report**

**20 February, 2017**

# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

<b>Project</b>	Eddy County, New Mexico		
<b>Map System:</b>	US State Plane 1927 (Exact solution)	<b>System Datum:</b>	Mean Sea Level
<b>Geo Datum:</b>	NAD 1927 (NADCON CONUS)		
<b>Map Zone:</b>	New Mexico East 3001		

Site	Ghostrider 26/35 W2AP Fed Com #1H				
Site Position:		Northing:	466,396.00 usft	Latitude:	32° 16' 55.934 N
From:	Map	Easting:	529,210.00 usft	Longitude:	104° 14' 19.735 W
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.05 °

Well	Sec 25, T23S, R26E					
Well Position	+N/-S	0.0 usft	Northing:	466,396.00 usft	Latitude:	32° 16' 55.934 N
	+E/-W	0.0 usft	Easting:	529,210.00 usft	Longitude:	104° 14' 19.735 W
Position Uncertainty		0.0 usft	Wellhead Elevation:	3,248.0 usft	Ground Level:	3,221.0 usft

<b>Wellbore</b>	BHL: 330' FSL & 400' FEL, Sec 35				
<b>Magnetics</b>	<b>Model Name</b>	<b>Sample Date</b>	<b>Declination (°)</b>	<b>Dip Angle (°)</b>	<b>Field Strength (nT)</b>
	IGRF200510	12/31/2009	8.06	60.18	48,754

<b>Design</b>	Design #1				
<b>Audit Notes:</b>					
<b>Version:</b>	<b>Phase:</b>	PROTOTYPE	<b>Tie On Depth:</b>	0.0	
<b>Vertical Section:</b>	<b>Depth From (TVD)</b>	<b>+N/-S</b>	<b>+E/-W</b>	<b>Direction</b>	
	(usft)	(usft)	(usft)	(°)	
	0.0	0.0	0.0	179.77	

<b>Plan Sections</b>										
<b>Measured Depth</b>	<b>Inclination</b>	<b>Azimuth</b>	<b>Vertical Depth</b>	<b>+N/-S</b>	<b>+E/-W</b>	<b>Dogleg Rate</b>	<b>Build Rate</b>	<b>Turn Rate</b>	<b>TFO</b>	<b>Target</b>
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(°/100usft)	(°/100usft)	(°/100usft)	(°)	
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00	
8,860.0	0.00	0.00	8,860.0	0.0	0.0	0.00	0.00	0.00	0.00	KOP @ 8860'
9,763.1	90.31	179.77	9,433.0	-576.0	2.3	10.00	10.00	0.00	179.77	
19,273.3	90.31	179.77	9,382.0	-10,086.0	41.0	0.00	0.00	0.00	0.00	BHL: 330' FSL & 400'



# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>SL: 185' FNL &amp; 450' FEL, Sec 26</b>									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00

# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00
5,700.0	0.00	0.00	5,700.0	0.0	0.0	0.0	0.00	0.00	0.00
5,800.0	0.00	0.00	5,800.0	0.0	0.0	0.0	0.00	0.00	0.00
5,900.0	0.00	0.00	5,900.0	0.0	0.0	0.0	0.00	0.00	0.00
6,000.0	0.00	0.00	6,000.0	0.0	0.0	0.0	0.00	0.00	0.00
6,100.0	0.00	0.00	6,100.0	0.0	0.0	0.0	0.00	0.00	0.00
6,200.0	0.00	0.00	6,200.0	0.0	0.0	0.0	0.00	0.00	0.00
6,300.0	0.00	0.00	6,300.0	0.0	0.0	0.0	0.00	0.00	0.00
6,400.0	0.00	0.00	6,400.0	0.0	0.0	0.0	0.00	0.00	0.00
6,500.0	0.00	0.00	6,500.0	0.0	0.0	0.0	0.00	0.00	0.00
6,600.0	0.00	0.00	6,600.0	0.0	0.0	0.0	0.00	0.00	0.00
6,700.0	0.00	0.00	6,700.0	0.0	0.0	0.0	0.00	0.00	0.00
6,800.0	0.00	0.00	6,800.0	0.0	0.0	0.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,900.0	0.0	0.0	0.0	0.00	0.00	0.00
7,000.0	0.00	0.00	7,000.0	0.0	0.0	0.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,100.0	0.0	0.0	0.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,200.0	0.0	0.0	0.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,300.0	0.0	0.0	0.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,400.0	0.0	0.0	0.0	0.00	0.00	0.00
7,500.0	0.00	0.00	7,500.0	0.0	0.0	0.0	0.00	0.00	0.00
7,600.0	0.00	0.00	7,600.0	0.0	0.0	0.0	0.00	0.00	0.00
7,700.0	0.00	0.00	7,700.0	0.0	0.0	0.0	0.00	0.00	0.00
7,800.0	0.00	0.00	7,800.0	0.0	0.0	0.0	0.00	0.00	0.00
7,900.0	0.00	0.00	7,900.0	0.0	0.0	0.0	0.00	0.00	0.00
8,000.0	0.00	0.00	8,000.0	0.0	0.0	0.0	0.00	0.00	0.00
8,100.0	0.00	0.00	8,100.0	0.0	0.0	0.0	0.00	0.00	0.00
8,200.0	0.00	0.00	8,200.0	0.0	0.0	0.0	0.00	0.00	0.00
8,300.0	0.00	0.00	8,300.0	0.0	0.0	0.0	0.00	0.00	0.00
8,400.0	0.00	0.00	8,400.0	0.0	0.0	0.0	0.00	0.00	0.00
8,500.0	0.00	0.00	8,500.0	0.0	0.0	0.0	0.00	0.00	0.00
8,600.0	0.00	0.00	8,600.0	0.0	0.0	0.0	0.00	0.00	0.00
8,700.0	0.00	0.00	8,700.0	0.0	0.0	0.0	0.00	0.00	0.00
8,800.0	0.00	0.00	8,800.0	0.0	0.0	0.0	0.00	0.00	0.00
8,860.0	0.00	0.00	8,860.0	0.0	0.0	0.0	0.00	0.00	0.00
<b>KOP @ 8860'</b>									
8,900.0	4.00	179.77	8,900.0	-1.4	0.0	1.4	10.00	10.00	0.00
9,000.0	14.00	179.77	8,998.6	-17.0	0.1	17.0	10.00	10.00	0.00
9,100.0	24.00	179.77	9,093.0	-49.5	0.2	49.5	10.00	10.00	0.00
9,200.0	34.00	179.77	9,180.4	-97.9	0.4	97.9	10.00	10.00	0.00
9,276.8	41.68	179.77	9,241.0	-145.0	0.6	145.0	10.00	10.00	0.00
<b>FTP: 330' FNL &amp; 449' FEL, Sec 26</b>									
9,300.0	44.00	179.77	9,258.0	-160.8	0.7	160.8	10.00	10.00	0.00
9,400.0	54.00	179.77	9,323.6	-236.1	1.0	236.1	10.00	10.00	0.00
9,500.0	63.99	179.77	9,375.0	-321.7	1.3	321.7	10.00	10.00	0.00
9,600.0	73.99	179.77	9,410.8	-415.0	1.7	415.0	10.00	10.00	0.00
9,700.0	83.99	179.77	9,429.9	-513.0	2.1	513.0	10.00	10.00	0.00
9,763.1	90.30	179.77	9,433.0	-576.0	2.3	576.0	10.00	10.00	0.00
<b>LP: 761' FNL &amp; 447' FEL, Sec 26</b>									
9,800.0	90.31	179.77	9,432.8	-612.9	2.5	612.9	0.01	0.01	0.00
9,900.0	90.31	179.77	9,432.3	-712.9	2.9	712.9	0.00	0.00	0.00

# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,000.0	90.31	179.77	9,431.7	-812.9	3.3	812.9	0.00	0.00	0.00
10,100.0	90.31	179.77	9,431.2	-912.9	3.7	912.9	0.00	0.00	0.00
10,200.0	90.31	179.77	9,430.7	-1,012.9	4.1	1,012.9	0.00	0.00	0.00
10,300.0	90.31	179.77	9,430.1	-1,112.9	4.5	1,112.9	0.00	0.00	0.00
10,400.0	90.31	179.77	9,429.6	-1,212.9	4.9	1,212.9	0.00	0.00	0.00
10,500.0	90.31	179.77	9,429.0	-1,312.9	5.3	1,312.9	0.00	0.00	0.00
10,600.0	90.31	179.77	9,428.5	-1,412.9	5.7	1,412.9	0.00	0.00	0.00
10,700.0	90.31	179.77	9,428.0	-1,512.9	6.1	1,512.9	0.00	0.00	0.00
10,800.0	90.31	179.77	9,427.4	-1,612.9	6.6	1,612.9	0.00	0.00	0.00
10,900.0	90.31	179.77	9,426.9	-1,712.9	7.0	1,712.9	0.00	0.00	0.00
11,000.0	90.31	179.77	9,426.4	-1,812.9	7.4	1,812.9	0.00	0.00	0.00
11,100.0	90.31	179.77	9,425.8	-1,912.9	7.8	1,912.9	0.00	0.00	0.00
11,200.0	90.31	179.77	9,425.3	-2,012.9	8.2	2,012.9	0.00	0.00	0.00
11,300.0	90.31	179.77	9,424.8	-2,112.9	8.6	2,112.9	0.00	0.00	0.00
11,400.0	90.31	179.77	9,424.2	-2,212.9	9.0	2,212.9	0.00	0.00	0.00
11,500.0	90.31	179.77	9,423.7	-2,312.9	9.4	2,312.9	0.00	0.00	0.00
11,600.0	90.31	179.77	9,423.1	-2,412.9	9.8	2,412.9	0.00	0.00	0.00
11,700.0	90.31	179.77	9,422.6	-2,512.9	10.2	2,512.9	0.00	0.00	0.00
11,800.0	90.31	179.77	9,422.1	-2,612.9	10.6	2,612.9	0.00	0.00	0.00
11,900.0	90.31	179.77	9,421.5	-2,712.9	11.0	2,712.9	0.00	0.00	0.00
12,000.0	90.31	179.77	9,421.0	-2,812.9	11.4	2,812.9	0.00	0.00	0.00
12,100.0	90.31	179.77	9,420.5	-2,912.9	11.8	2,912.9	0.00	0.00	0.00
12,200.0	90.31	179.77	9,419.9	-3,012.9	12.2	3,012.9	0.00	0.00	0.00
12,300.0	90.31	179.77	9,419.4	-3,112.8	12.7	3,112.9	0.00	0.00	0.00
12,400.0	90.31	179.77	9,418.9	-3,212.8	13.1	3,212.9	0.00	0.00	0.00
12,500.0	90.31	179.77	9,418.3	-3,312.8	13.5	3,312.9	0.00	0.00	0.00
12,600.0	90.31	179.77	9,417.8	-3,412.8	13.9	3,412.9	0.00	0.00	0.00
12,700.0	90.31	179.77	9,417.3	-3,512.8	14.3	3,512.9	0.00	0.00	0.00
12,800.0	90.31	179.77	9,416.7	-3,612.8	14.7	3,612.9	0.00	0.00	0.00
12,900.0	90.31	179.77	9,416.2	-3,712.8	15.1	3,712.9	0.00	0.00	0.00
13,000.0	90.31	179.77	9,415.6	-3,812.8	15.5	3,812.9	0.00	0.00	0.00
13,100.0	90.31	179.77	9,415.1	-3,912.8	15.9	3,912.9	0.00	0.00	0.00
13,200.0	90.31	179.77	9,414.6	-4,012.8	16.3	4,012.9	0.00	0.00	0.00
13,300.0	90.31	179.77	9,414.0	-4,112.8	16.7	4,112.9	0.00	0.00	0.00
13,400.0	90.31	179.77	9,413.5	-4,212.8	17.1	4,212.9	0.00	0.00	0.00
13,500.0	90.31	179.77	9,413.0	-4,312.8	17.5	4,312.9	0.00	0.00	0.00
13,600.0	90.31	179.77	9,412.4	-4,412.8	17.9	4,412.9	0.00	0.00	0.00
13,700.0	90.31	179.77	9,411.9	-4,512.8	18.3	4,512.9	0.00	0.00	0.00
13,800.0	90.31	179.77	9,411.4	-4,612.8	18.8	4,612.9	0.00	0.00	0.00
13,900.0	90.31	179.77	9,410.8	-4,712.8	19.2	4,712.9	0.00	0.00	0.00
14,000.0	90.31	179.77	9,410.3	-4,812.8	19.6	4,812.9	0.00	0.00	0.00
14,100.0	90.31	179.77	9,409.7	-4,912.8	20.0	4,912.8	0.00	0.00	0.00
14,200.0	90.31	179.77	9,409.2	-5,012.8	20.4	5,012.8	0.00	0.00	0.00
14,300.0	90.31	179.77	9,408.7	-5,112.8	20.8	5,112.8	0.00	0.00	0.00
14,400.0	90.31	179.77	9,408.1	-5,212.8	21.2	5,212.8	0.00	0.00	0.00
14,500.0	90.31	179.77	9,407.6	-5,312.8	21.6	5,312.8	0.00	0.00	0.00
14,600.0	90.31	179.77	9,407.1	-5,412.8	22.0	5,412.8	0.00	0.00	0.00
14,700.0	90.31	179.77	9,406.5	-5,512.8	22.4	5,512.8	0.00	0.00	0.00
14,800.0	90.31	179.77	9,406.0	-5,612.8	22.8	5,612.8	0.00	0.00	0.00
14,900.0	90.31	179.77	9,405.5	-5,712.8	23.2	5,712.8	0.00	0.00	0.00
15,000.0	90.31	179.77	9,404.9	-5,812.8	23.6	5,812.8	0.00	0.00	0.00
15,100.0	90.31	179.77	9,404.4	-5,912.8	24.0	5,912.8	0.00	0.00	0.00
15,200.0	90.31	179.77	9,403.8	-6,012.8	24.4	6,012.8	0.00	0.00	0.00
15,300.0	90.31	179.77	9,403.3	-6,112.8	24.8	6,112.8	0.00	0.00	0.00

# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
15,400.0	90.31	179.77	9,402.8	-6,212.8	25.3	6,212.8	0.00	0.00	0.00
15,500.0	90.31	179.77	9,402.2	-6,312.8	25.7	6,312.8	0.00	0.00	0.00
15,600.0	90.31	179.77	9,401.7	-6,412.8	26.1	6,412.8	0.00	0.00	0.00
15,700.0	90.31	179.77	9,401.2	-6,512.8	26.5	6,512.8	0.00	0.00	0.00
15,800.0	90.31	179.77	9,400.6	-6,612.8	26.9	6,612.8	0.00	0.00	0.00
15,900.0	90.31	179.77	9,400.1	-6,712.8	27.3	6,712.8	0.00	0.00	0.00
16,000.0	90.31	179.77	9,399.6	-6,812.8	27.7	6,812.8	0.00	0.00	0.00
16,100.0	90.31	179.77	9,399.0	-6,912.8	28.1	6,912.8	0.00	0.00	0.00
16,200.0	90.31	179.77	9,398.5	-7,012.8	28.5	7,012.8	0.00	0.00	0.00
16,300.0	90.31	179.77	9,397.9	-7,112.8	28.9	7,112.8	0.00	0.00	0.00
16,400.0	90.31	179.77	9,397.4	-7,212.8	29.3	7,212.8	0.00	0.00	0.00
16,500.0	90.31	179.77	9,396.9	-7,312.8	29.7	7,312.8	0.00	0.00	0.00
16,600.0	90.31	179.77	9,396.3	-7,412.8	30.1	7,412.8	0.00	0.00	0.00
16,700.0	90.31	179.77	9,395.8	-7,512.7	30.5	7,512.8	0.00	0.00	0.00
16,800.0	90.31	179.77	9,395.3	-7,612.7	30.9	7,612.8	0.00	0.00	0.00
16,900.0	90.31	179.77	9,394.7	-7,712.7	31.4	7,712.8	0.00	0.00	0.00
17,000.0	90.31	179.77	9,394.2	-7,812.7	31.8	7,812.8	0.00	0.00	0.00
17,100.0	90.31	179.77	9,393.7	-7,912.7	32.2	7,912.8	0.00	0.00	0.00
17,200.0	90.31	179.77	9,393.1	-8,012.7	32.6	8,012.8	0.00	0.00	0.00
17,300.0	90.31	179.77	9,392.6	-8,112.7	33.0	8,112.8	0.00	0.00	0.00
17,400.0	90.31	179.77	9,392.0	-8,212.7	33.4	8,212.8	0.00	0.00	0.00
17,500.0	90.31	179.77	9,391.5	-8,312.7	33.8	8,312.8	0.00	0.00	0.00
17,600.0	90.31	179.77	9,391.0	-8,412.7	34.2	8,412.8	0.00	0.00	0.00
17,700.0	90.31	179.77	9,390.4	-8,512.7	34.6	8,512.8	0.00	0.00	0.00
17,800.0	90.31	179.77	9,389.9	-8,612.7	35.0	8,612.8	0.00	0.00	0.00
17,900.0	90.31	179.77	9,389.4	-8,712.7	35.4	8,712.8	0.00	0.00	0.00
18,000.0	90.31	179.77	9,388.8	-8,812.7	35.8	8,812.8	0.00	0.00	0.00
18,100.0	90.31	179.77	9,388.3	-8,912.7	36.2	8,912.8	0.00	0.00	0.00
18,200.0	90.31	179.77	9,387.8	-9,012.7	36.6	9,012.8	0.00	0.00	0.00
18,300.0	90.31	179.77	9,387.2	-9,112.7	37.0	9,112.8	0.00	0.00	0.00
18,400.0	90.31	179.77	9,386.7	-9,212.7	37.5	9,212.8	0.00	0.00	0.00
18,500.0	90.31	179.77	9,386.1	-9,312.7	37.9	9,312.8	0.00	0.00	0.00
18,600.0	90.31	179.77	9,385.6	-9,412.7	38.3	9,412.8	0.00	0.00	0.00
18,700.0	90.31	179.77	9,385.1	-9,512.7	38.7	9,512.8	0.00	0.00	0.00
18,800.0	90.31	179.77	9,384.5	-9,612.7	39.1	9,612.8	0.00	0.00	0.00
18,900.0	90.31	179.77	9,384.0	-9,712.7	39.5	9,712.8	0.00	0.00	0.00
19,000.0	90.31	179.77	9,383.5	-9,812.7	39.9	9,812.8	0.00	0.00	0.00
19,100.0	90.31	179.77	9,382.9	-9,912.7	40.3	9,912.8	0.00	0.00	0.00
19,200.0	90.31	179.77	9,382.4	-10,012.7	40.7	10,012.8	0.00	0.00	0.00
19,273.3	90.31	179.77	9,382.0	-10,086.0	41.0	10,086.1	0.00	0.00	0.00

BHL: 330' FSL & 400' FEL, Sec 35

# Planning Report

**Database:** Hobbs  
**Company:** Mewbourne Oil Company  
**Project:** Eddy County, New Mexico  
**Site:** Ghost rider 26/35 W2AP Fed Com #1H  
**Well:** Sec 25, T23S, R26E  
**Wellbore:** BHL: 330' FSL & 400' FEL, Sec 35  
**Design:** Design #1

**Local Co-ordinate Reference:** Site Ghost rider 26/35 W2AP Fed Com #1H  
**TVD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**MD Reference:** WELL @ 3248.0usft (Original Well Elev)  
**North Reference:** Grid  
**Survey Calculation Method:** Minimum Curvature

## Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SL: 185' FNL & 450' FEL - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	466,396.00	529,210.00	32° 16' 55.934 N	104° 14' 19.735 W
KOP @ 8860' - plan hits target center - Point	0.00	0.00	8,860.0	0.0	0.0	466,396.00	529,210.00	32° 16' 55.934 N	104° 14' 19.735 W
FTP: 330' FNL & 449' FE - plan hits target center - Point	0.00	0.00	9,241.0	-145.0	0.6	466,251.00	529,210.59	32° 16' 54.499 N	104° 14' 19.730 W
BHL: 330' FSL & 400' FE - plan hits target center - Point	0.00	0.00	9,382.0	-10,086.0	41.0	456,310.00	529,251.00	32° 15' 16.120 N	104° 14' 19.361 W
LP: 761' FNL & 447' FEL - plan hits target center - Point	0.00	0.00	9,433.0	-576.0	2.3	465,820.00	529,212.30	32° 16' 50.234 N	104° 14' 19.714 W

**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

**1. Geologic Formations**

TVD of target	9433'	Pilot hole depth	NA
MD at TD:	19275'	Deepest expected fresh water:	175'

**Basin**

<b>Formation</b>	<b>Depth (TVD) from KB</b>	<b>Water/Mineral Bearing/ Target Zone?</b>	<b>Hazards*</b>
Quaternary Fill	Surface		
Rustler		Water	
Castile	570		
Base Salt	1660		
San Andres		Oil/Gas	
Lamar	1890	Oil/Gas	
Bell Canyon	2005	Oil/Gas	
Cherry Canyon	2685	Oil/Gas	
Manzanita Marker	2810		
Brushy Canyon	4050	Oil/Gas	
Bone Spring	5320	Oil/Gas	
1 <sup>st</sup> Bone Spring Sand	6345		
2 <sup>nd</sup> Bone Spring Sand	6795		
3 <sup>rd</sup> Bone Spring Sand	8385		
Abo			
Wolfcamp	8725	Target Zone	
Devonian			
Fusselman			
Ellenburger			
Granite Wash			

\*H<sub>2</sub>S, water flows, loss of circulation, abnormal pressures, etc.

**Mewbourne Oil Company, Ghost Rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

**2. Casing Program**

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Jt Tension	SF Body Tension
	From	To								
17.5"	0'	475'	13.375"	48	H40	STC	3.12	7.00	14.12	23.73
12.25"	0'	1815'	9.625"	36	J55	LTC	2.14	3.73	6.93	8.63
8.75"	0'	9600'	7"	26	HCP110	LTC	1.69	2.16	2.50	3.27
6.125"	8860'	19275'	4.5"	13.5	P110	LTC	1.67	1.95	2.58	3.22
BLM Minimum Safety Factor			1.125	1	1.6 Dry 1.8 Wet	1.6 Dry 1.8 Wet				

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Is casing API approved? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	Y
If yes, are there two strings cemented to surface?	Y
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

**3. Cementing Program**

<b>Casing</b>	<b># Sks</b>	<b>Wt. lb/ gal</b>	<b>Yld ft<sup>3</sup>/ sack</b>	<b>H<sub>2</sub>O gal/ sk</b>	<b>500# Comp. Strength (hours)</b>	<b>Slurry Description</b>
Surf.	190	12.5	2.12	11	10	Lead: Class C + Salt + Gel + Extender + LCM
	200	14.8	1.34	6.3	8	Tail: Class C + Retarder
Inter.	230	12.5	2.12	11	10	Lead: Class C + Salt + Gel + Extender + LCM
	200	14.8	1.34	6.3	8	Tail: Class C + Retarder
Prod. Stg 1	385	12.5	2.12	11	9	Lead: Class C + Gel + Retarder + Defoamer + Extender
	400	15.6	1.18	5.2	10	Tail: Class H + Retarder + Fluid Loss + Defoamer
ECP/DV Tool @ 2810'						
Prod. Stg 2	60	12.5	2.12	11	10	Lead: Class C + Gel + Retarder + Defoamer + Extender
	100	14.8	1.34	6.3	8	Tail: Class C + Retarder
Liner	425	11.2	2.97	17	16	Class C + Salt + Gel + Fluid Loss + Retarder + Dispersant + Defoamer + Anti-Settling Agent

A copy of cement test will be available on location at time of cement job providing pump times, compressive strengths, etc.

<b>Casing String</b>	<b>TOC</b>	<b>% Excess</b>
Surface	0'	100%
Intermediate	0'	25%
Production	1615'	25%
Liner	8860'	25%

**4. Pressure Control Equipment**



**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

Variance: None
----------------

BOP installed and tested before drilling which hole?	Size?	System Rated WP	Type	✓	Tested to:
12-1/4"	13-5/8"	5M	Annular	X	2500#
			Blind Ram	X	5000#
			Pipe Ram	X	
			Double Ram		
			Other*		

\*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?
Y	A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.  <ul style="list-style-type: none"> <li>Provide description here: See attached schematic.</li> </ul>

## 5. Mud Program

**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

<b>Depth</b>		<b>Type</b>	<b>Weight (ppg)</b>	<b>Viscosity</b>	<b>Water Loss</b>
<b>From</b>	<b>To</b>				
0'	475'	Spud Mud	8.6-8.8	28-34	N/C
475'	1815'	Brine	10.0	28-34	N/C
1815'	8660'	FW w/ Polymer	8.6-9.7	28-34	N/C
8660'	19275'	OBM	10.0-12.0	30-40	<10cc

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	Pason/PVT/Visual Monitoring
---	-----------------------------

## 6. Logging and Testing Procedures

<b>Logging, Coring and Testing.</b>	
X	Will run GR/CNL from KOP (8860') to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

<b>Additional logs planned</b>		<b>Interval</b>
X	Gamma Ray	8860' (KOP) to TD
	Density	
	CBL	
	Mud log	
	PEX	

## 7. Drilling Conditions

**Mewbourne Oil Company, Ghost rider 25/36 W2AP Fed Com #1H**

**Sec 25, T23S, R26E**

**SL: 185' FNL & 450' FEL, Sec 25**

**BHL: 330' FSL & 400' FEL, Sec 36**

<b>Condition</b>	<b>Specify what type and where?</b>
BH Pressure at deepest TVD	5886 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers in surface hole. Weighted mud for possible over-pressure in Wolfcamp formation.

Hydrogen Sulfide (H2S) monitors will be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.	
	H2S is present
X	H2S Plan attached

**8. Water & Waste Volumes**

Fresh Water Required: 2825 bbl

Waste Water: 2825 bbl

Waste Solids: 1825 bbl

**9. Other facets of operation**

Is this a walking operation? If yes, describe.

Will be pre-setting casing? If yes, describe.

Attachments

\_\_\_ Directional Plan

\_\_\_ Other, describe



GATES E & S NORTH AMERICA, INC.  
134 44TH STREET  
CORPUS CHRISTI, TEXAS 78405

PHONE: 361-887-9807  
FAX: 361-887-0812  
EMAIL: [Tim.Cantu@gates.com](mailto:Tim.Cantu@gates.com)  
WEB: [www.gates.com](http://www.gates.com)

## 10K CEMENTING ASSEMBLY PRESSURE TEST CERTIFICATE

Customer :	AUSTIN DISTRIBUTING	Test Date:	4/30/2015
Customer Ref. :	4060578	Hose Serial No.:	D-043015-7
Invoice No. :	500506	Created By:	JUSTIN CROPPER

Product Description: 10K3.548.0CK4.1/1610KFLGE/E LE


End Fitting 1 :	4 1/16 10K FLG	End Fitting 2 :	4 1/16 10K FLG
Gates Part No. :	4773-6290	Assembly Code :	L36554102914D-043015-7
Working Pressure :	10,000 PSI	Test Pressure :	15,000 PSI

Gates E & S North America, Inc. certifies that the following hose assembly has been tested to the Gates Oilfield Roughneck Agreement/Specification requirements and passed the 15 minute hydrostatic test per API Spec 7K/Q1, Fifth Edition, June 2010, Test pressure 9.6.7 and per Table 9 to 15,000 psi in accordance with this product number. Hose burst pressure 9.6.7.2 exceeds the minimum of 2.5 times the working pressure per Table 9.

Quality Manager :	QUALITY	Production:	PRODUCTION
Date :	4/30/2015	Date :	4/30/2015
Signature :		Signature :	

Form PTC - 01 Rev.02




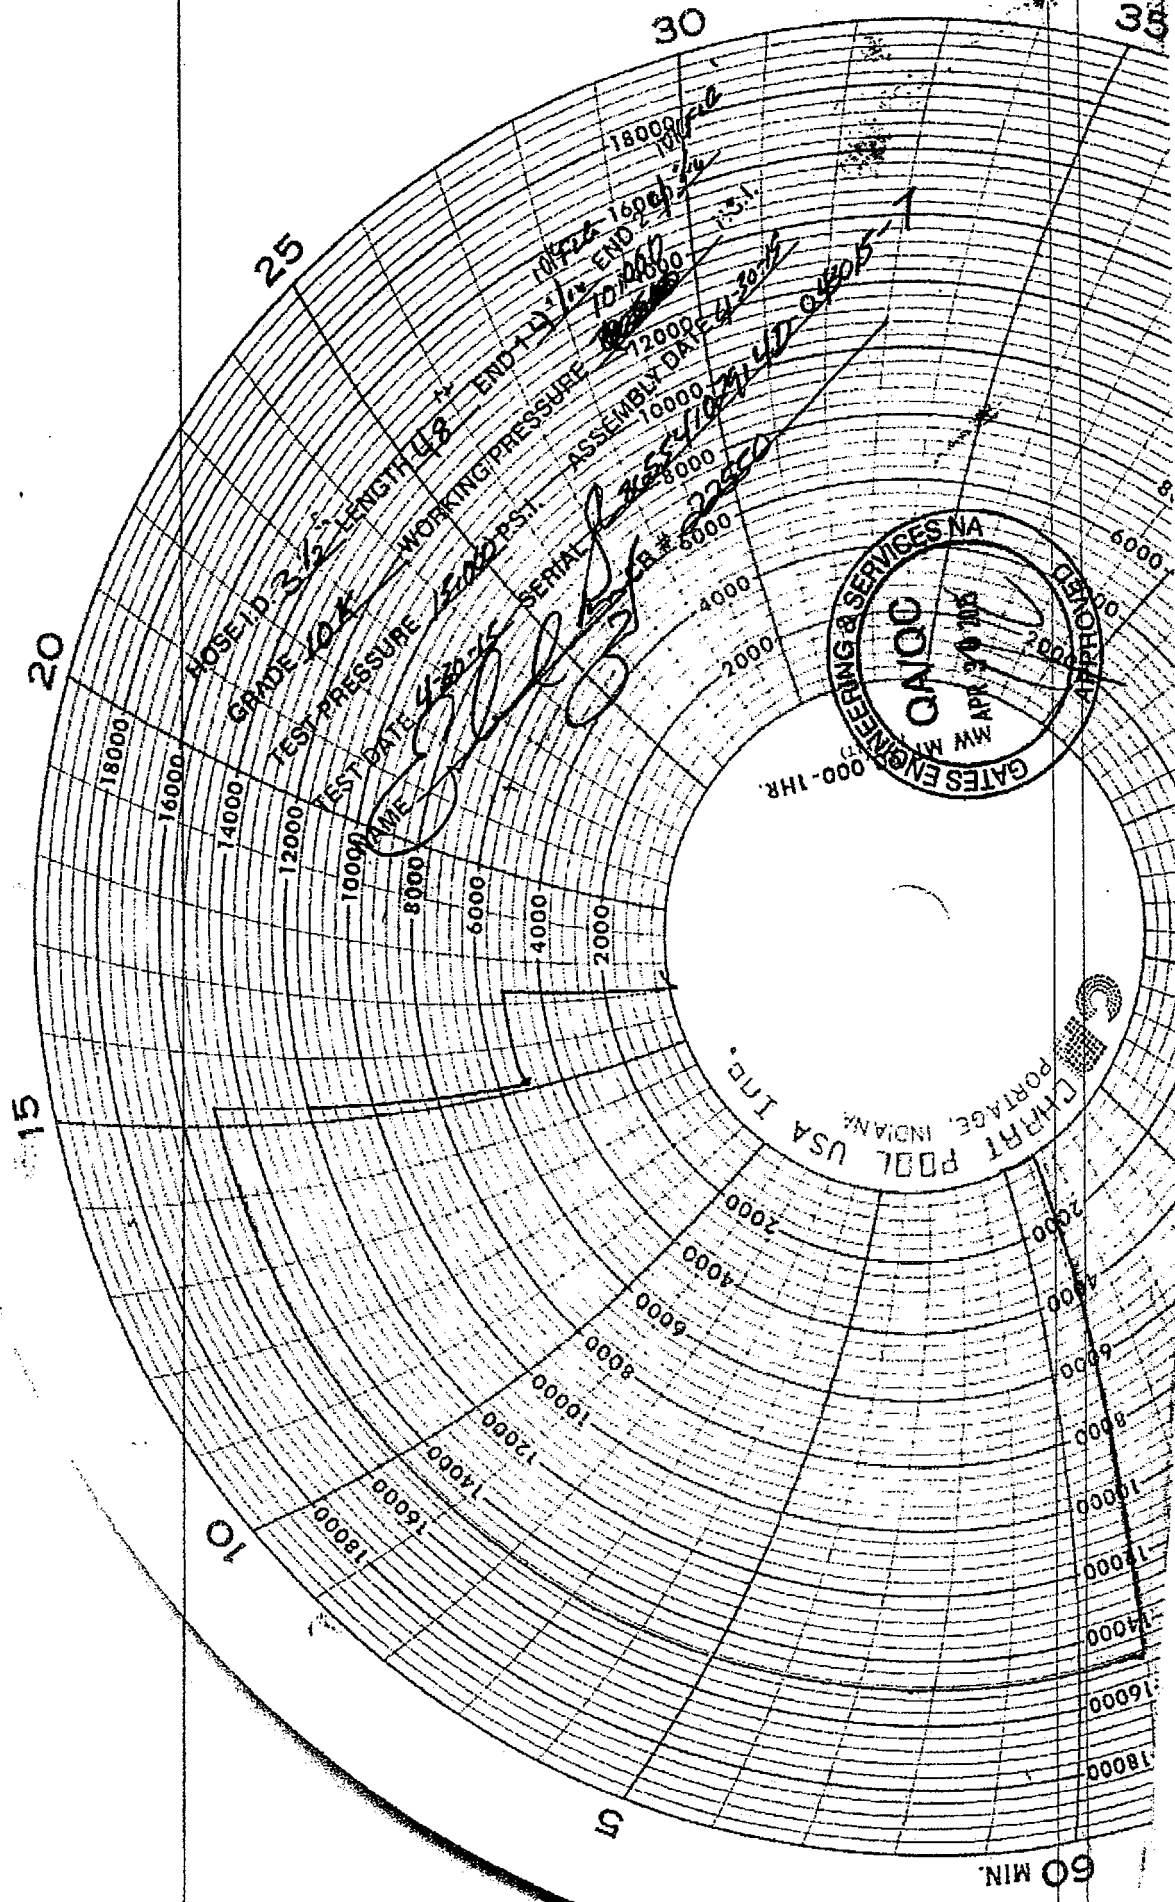

# CAMERON

A Schlumberger Company

## 13-5/8" MN-DS Wellhead System

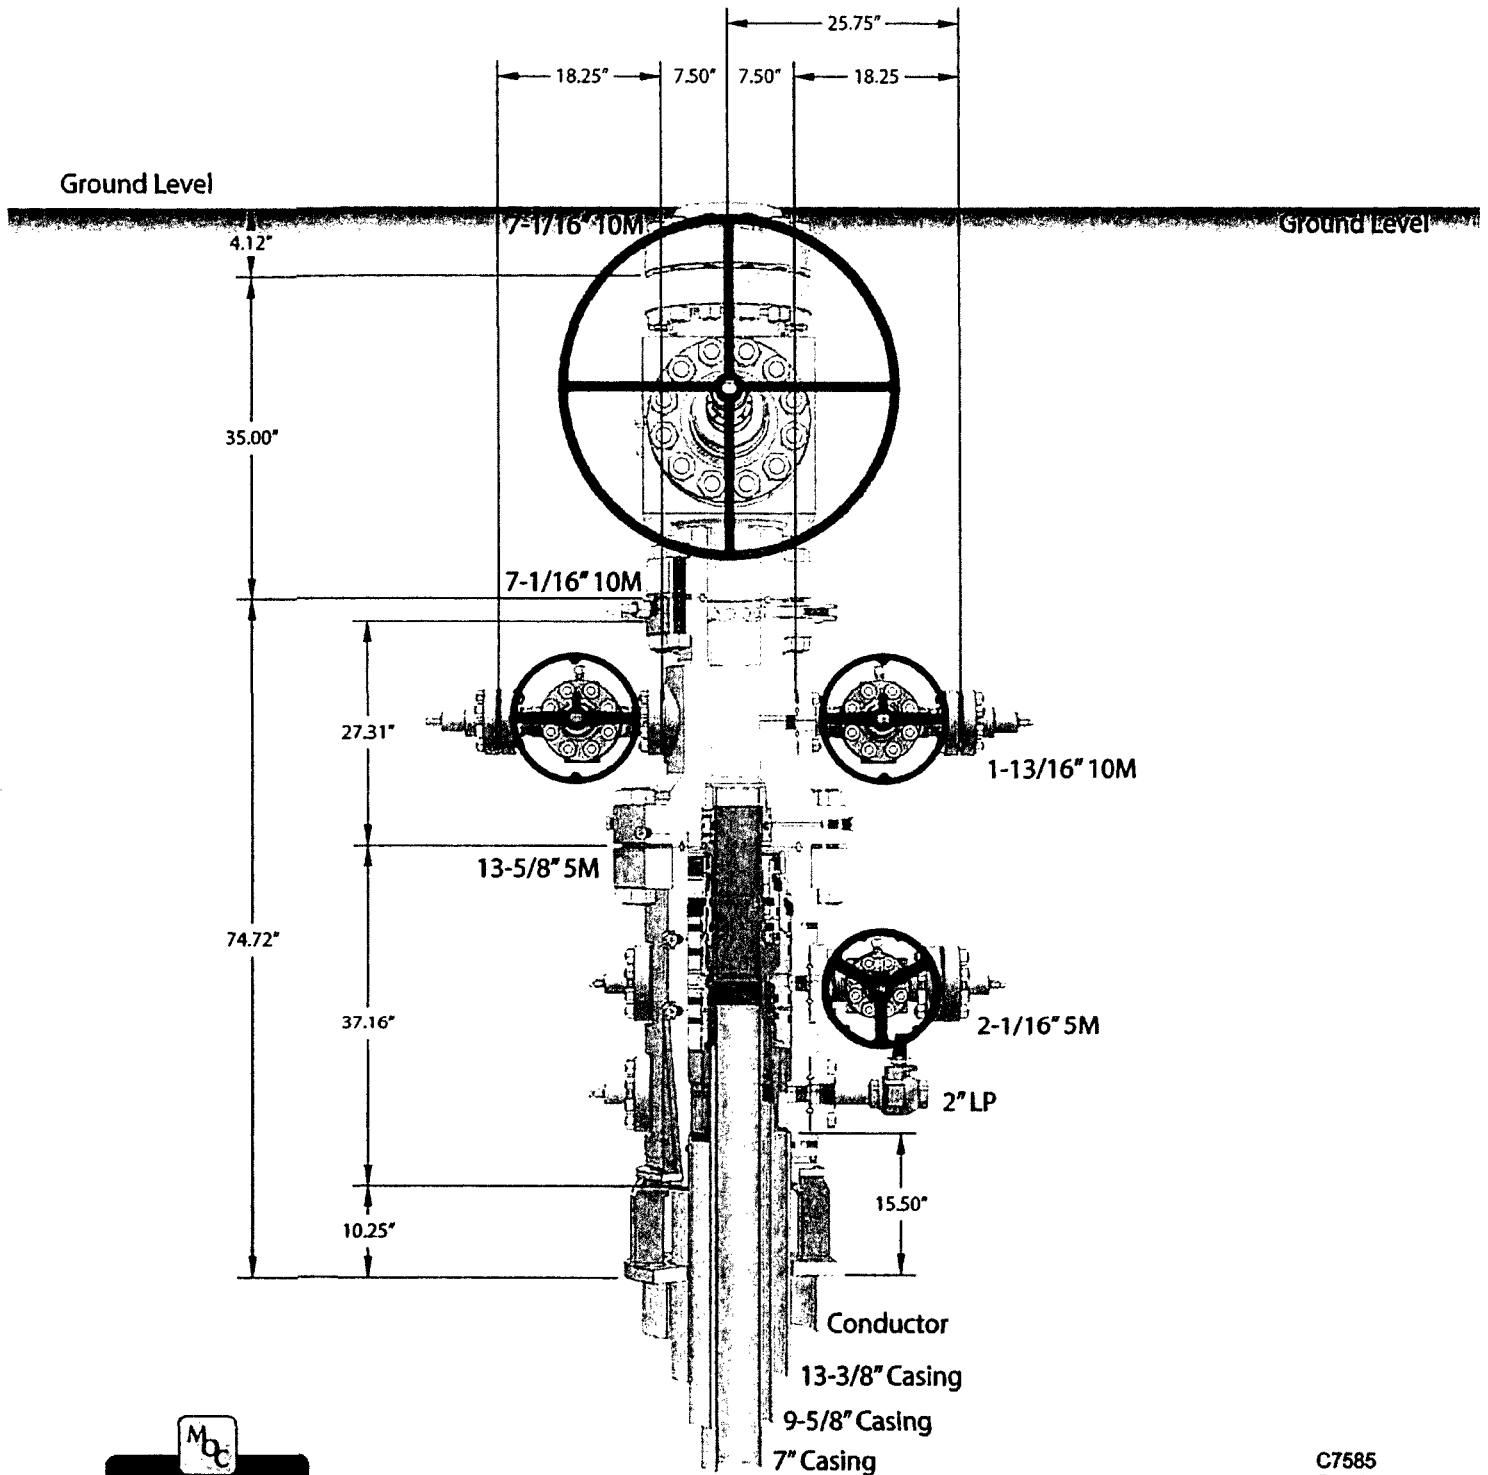

C7585  
Rev. 02

NOTE: All dimensions on this drawing are estimated measurements and should be evaluated by engineering.

*Coupling flange 57" conductor cut-off*  
*799*

**APD ID:** 10400011277

**Submission Date:** 02/24/2017

 Highlighted data  
 reflects the most  
 recent changes

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

[Show Final Text](#)
**Well Type:** CONVENTIONAL GAS WELL

**Well Work Type:** Drill

## Section 1 - Existing Roads

**Will existing roads be used?** YES

**Existing Road Map:**

Ghost rider 2536 W2AP Fed Com 1H\_existingroadmap\_02-24-2017.pdf

**Existing Road Purpose:** ACCESS,FLUID TRANSPORT

**Row(s) Exist?** NO

### ROW ID(s)

**ID:**
**Do the existing roads need to be improved?** NO

**Existing Road Improvement Description:**
**Existing Road Improvement Attachment:**

## Section 2 - New or Reconstructed Access Roads

**Will new roads be needed?** YES

**New Road Map:**

Ghost rider 2536 W2AP Fed Com 1H\_NEWroadmap\_02-24-2017.pdf

**New road type:** RESOURCE

**Length:** 1041.13

Feet

**Width (ft.):** 25

**Max slope (%):** 3

**Max grade (%):** 3

**Army Corp of Engineers (ACOE) permit required?** NO

**ACOE Permit Number(s):**
**New road travel width:** 14

**New road access erosion control:** None

**New road access plan or profile prepared?** NO

**New road access plan attachment:**
**Access road engineering design?** NO

**Access road engineering design attachment:**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Access surfacing type:** OTHER

**Access topsoil source:** OFFSITE

**Access surfacing type description:** Caliche

**Access onsite topsoil source depth:**

**Offsite topsoil source description:** Private pit

**Onsite topsoil removal process:**

**Access other construction information:**

**Access miscellaneous information:**

**Number of access turnouts:** 2

**Access turnout map:**

### **Drainage Control**

**New road drainage crossing:** OTHER

**Drainage Control comments:** NONE

**Road Drainage Control Structures (DCS) description:** None

**Road Drainage Control Structures (DCS) attachment:**

### **Access Additional Attachments**

**Additional Attachment(s):**

### **Section 3 - Location of Existing Wells**

**Existing Wells Map?** YES

**Attach Well map:**

Ghostrider 2536 W2AP Fed Com 1H\_existingwellmap\_02-24-2017.pdf

**Existing Wells description:**

### **Section 4 - Location of Existing and/or Proposed Production Facilities**

**Submit or defer a Proposed Production Facilities plan?** SUBMIT

**Estimated Production Facilities description:**

**Production Facilities description:** a. All permanent, lasting more than 6 months, above ground structures including but not limited to pumpjacks, storage tanks, pipeline risers, meter housing, etc. that are not subject to safety requirements will be painted a non-reflective paint color that blends in with the surrounding landscape. The paint color will be one of the colors from the BLM Standard Environmental Colors chart selected by the BLM authorized officer. b. All proposed production facilities that are located on the well pad will be strategically placed to allow for maximum interim reclamation, recontouring, and revegetation of the well location. c. Production from the proposed well will be located on the East edge of location. d. If any plans change regarding the production facility or other infrastructure (pipeline, electric line, etc.), we will submit a sundry notice or right of way (if applicable) prior to installation of construction. e. An electric line will be applied for through a sundry notice or BLM right of way at a later date.

**Production Facilities map:**



**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

Ghostrider 2536 W2AP Fed Com 1H\_prodfacilitymap\_02-24-2017.pdf

## Section 5 - Location and Types of Water Supply

### Water Source Table

**Water source use type:** CAMP USE, DUST CONTROL,  
INTERMEDIATE/PRODUCTION CASING, STIMULATION, SURFACE  
CASING

**Describe type:**

**Source latitude:** 32.32698

**Source datum:** NAD83

**Water source permit type:** WATER WELL

**Source land ownership:** PRIVATE

**Water source transport method:** TRUCKING

**Source transportation land ownership:** COMMERCIAL

**Water source volume (barrels):** 1940

**Source volume (gal):** 81480

**Water source type:** IRRIGATION

**Source longitude:** -104.21917

**Source volume (acre-feet):** 0.2500526

**Water source use type:** CAMP USE, DUST CONTROL,  
INTERMEDIATE/PRODUCTION CASING, STIMULATION, SURFACE  
CASING

**Describe type:**

**Source latitude:** 32.294674

**Source datum:** NAD83

**Water source permit type:** WATER WELL

**Source land ownership:** STATE

**Water source transport method:** TRUCKING

**Source transportation land ownership:** STATE

**Water source volume (barrels):** 1940

**Source volume (gal):** 81480

**Water source type:** IRRIGATION

**Source longitude:** -104.23564

**Source volume (acre-feet):** 0.2500526

**Water source and transportation map:**

Ghostrider 2536 W2AP Fed Com 1H\_watersourceandtransmap\_02-24-2017.pdf

**Water source comments:** Both sources shown on one map.

**New water well?** NO

### New Water Well Info

**Well latitude:**

**Well Longitude:**

**Well datum:**

**Well target aquifer:**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Est. depth to top of aquifer(ft):**

**Est thickness of aquifer:**

**Aquifer comments:**

**Aquifer documentation:**

**Well depth (ft):**

**Well casing type:**

**Well casing outside diameter (in.):**

**Well casing inside diameter (in.):**

**New water well casing?**

**Used casing source:**

**Drilling method:**

**Drill material:**

**Grout material:**

**Grout depth:**

**Casing length (ft.):**

**Casing top depth (ft.):**

**Well Production type:**

**Completion Method:**

**Water well additional information:**

**State appropriation permit:**

**Additional information attachment:**

## Section 6 - Construction Materials

**Construction Materials description:** Caliche - both sources shown on one map.

**Construction Materials source location attachment:**

Ghostrider 2536 W2AP Fed Com 1H\_calichesourceandtransmap\_02-24-2017.pdf

## Section 7 - Methods for Handling Waste

**Waste type:** DRILLING

**Waste content description:** Drill cuttings

**Amount of waste:** 940 barrels

**Waste disposal frequency :** One Time Only

**Safe containment description:** Drill cuttings will be properly contained in steel tanks (20 yard roll off bins.)

**Safe containmant attachment:**

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** PRIVATE

**Disposal type description:**

**Disposal location description:** NMOCD approved waste disposal locations are CRI or Lea Land, both facilities are located on HWY 62/180, Sec. 27 T20S R32E.

**Waste type:** SEWAGE

**Waste content description:** Human waste & grey water

**Amount of waste:** 1500 gallons

**Waste disposal frequency :** Weekly

**Safe containment description:** 2,000 gallon plastic container

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Safe containmant attachment:**

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY      **Disposal location ownership:** PRIVATE

**Disposal type description:**

**Disposal location description:** City of Carlsbad Water Treatment facility

**Waste type:** GARBAGE

**Waste content description:** Garbage & trash

**Amount of waste:** 1500                      pounds

**Waste disposal frequency :** One Time Only

**Safe containment description:** Enclosed trash trailer

**Safe containmant attachment:**

**Waste disposal type:** HAUL TO COMMERCIAL FACILITY      **Disposal location ownership:** PRIVATE

**Disposal type description:**

**Disposal location description:** Waste Management facility in Carlsbad.

### Reserve Pit

**Reserve Pit being used?** NO

**Temporary disposal of produced water into reserve pit?**

**Reserve pit length (ft.)**                      **Reserve pit width (ft.)**

**Reserve pit depth (ft.)**    **Reserve pit volume (cu. yd.)**

**Is at least 50% of the reserve pit in cut?**

**Reserve pit liner**

**Reserve pit liner specifications and installation description**

### Cuttings Area

**Cuttings Area being used?** NO

**Are you storing cuttings on location?** NO

**Description of cuttings location**

**Cuttings area length (ft.)**    **Cuttings area width (ft.)**

**Cuttings area depth (ft.)**    **Cuttings area volume (cu. yd.)**

**Is at least 50% of the cuttings area in cut?**

**WCuttings area liner**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

## Cuttings area liner specifications and installation description

### Section 8 - Ancillary Facilities

**Are you requesting any Ancillary Facilities?:** NO

**Ancillary Facilities attachment:**

**Comments:**

### Section 9 - Well Site Layout

**Well Site Layout Diagram:**

Ghostrider 2536 W2AP Fed Com 1H\_wellsitelayout\_02-24-2017.pdf

**Comments:**

### Section 10 - Plans for Surface Reclamation

**Type of disturbance:** NEW

**Recontouring attachment:**

**Drainage/Erosion control construction:** None

**Drainage/Erosion control reclamation:** None

**Wellpad long term disturbance (acres):** 3.312

**Wellpad short term disturbance (acres):** 3.822

**Access road long term disturbance (acres):** 0.717

**Access road short term disturbance (acres):** 0.717

**Pipeline long term disturbance (acres):** 0

**Pipeline short term disturbance (acres):** 0

**Other long term disturbance (acres):** 0

**Other short term disturbance (acres):** 0

**Total long term disturbance:** 4.029

**Total short term disturbance:** 4.539

**Reconstruction method:** The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

**Topsoil redistribution:** Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations including cuts & fills. To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

**Soil treatment:** NA

**Existing Vegetation at the well pad:** Various brush & grasses

**Existing Vegetation at the well pad attachment:**

**Existing Vegetation Community at the road:** Various brush & grasses

**Existing Vegetation Community at the road attachment:**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Existing Vegetation Community at the pipeline:** NA

**Existing Vegetation Community at the pipeline attachment:**

**Existing Vegetation Community at other disturbances:** NA

**Existing Vegetation Community at other disturbances attachment:**

**Non native seed used?** NO

**Non native seed description:**

**Seedling transplant description:**

**Will seedlings be transplanted for this project?** NO

**Seedling transplant description attachment:**

**Will seed be harvested for use in site reclamation?** NO

**Seed harvest description:**

**Seed harvest description attachment:**

## Seed Management

### Seed Table

**Seed type:**

**Seed source:**

**Seed name:**

**Source name:**

**Source address:**

**Source phone:**

**Seed cultivar:**

**Seed use location:**

**PLS pounds per acre:**

**Proposed seeding season:**

### Seed Summary

**Total pounds/Acre:**

**Seed Type**

**Pounds/Acre**

**Seed reclamation attachment:**

### Operator Contact/Responsible Official Contact Info

**First Name:** Bradley

**Last Name:** Bishop

**Phone:** (575)393-5905

**Email:** bbishop@mewbourne.com

**Seedbed prep:** Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

**Seed BMP:** To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used.

**Seed method:** drilling or broadcasting seed over entire reclaimed area.

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Existing invasive species?** NO

**Existing invasive species treatment description:**

**Existing invasive species treatment attachment:**

**Weed treatment plan description:** NA

**Weed treatment plan attachment:**

**Monitoring plan description:** vii. All reclaimed areas will be monitored periodically to ensure that revegetation occurs, that the area is not redisturbed, and that erosion and invasive/noxious weeds are controlled.

**Monitoring plan attachment:**

**Success standards:** regrowth within 1 full growing season of reclamation.

**Pit closure description:** NA

**Pit closure attachment:**

## Section 11 - Surface Ownership

**Disturbance type:** NEW ACCESS ROAD

**Describe:**

**Surface Owner:** PRIVATE OWNERSHIP,STATE GOVERNMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:** NEW MEXICO STATE LAND OFFICE

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

**Operator Name:** MEWBOURNE OIL COMPANY

**Well Name:** GHOSTRIDER 25/36 W2AP FED COM

**Well Number:** 1H

**Disturbance type:** WELL PAD

**Describe:**

**Surface Owner:** BUREAU OF LAND MANAGEMENT, PRIVATE OWNERSHIP, STATE GOVERNMENT

**Other surface owner description:**

**BIA Local Office:**

**BOR Local Office:**

**COE Local Office:**

**DOD Local Office:**

**NPS Local Office:**

**State Local Office:** NEW MEXICO STATE LAND OFFICE

**Military Local Office:**

**USFWS Local Office:**

**Other Local Office:**

**USFS Region:**

**USFS Forest/Grassland:**

**USFS Ranger District:**

## Section 12 - Other Information

**Right of Way needed?** NO

**Use APD as ROW?**

**ROW Type(s):**

### ROW Applications

**SUPO Additional Information:** NONE


**Use a previously conducted onsite?** YES

**Previous Onsite information:** Met with Brooke Wilson (BLM), Chris & Paul (Boone Arc), & RRC Surveying & staked location at 185' FNL & 400' FEL, Sec 25, T23S, R26E, Eddy, Co. NM. Location moved due to buried rancher water line. Moved location to 185' FNL & 450' FEL, Sec 25, T23S, R26E, Eddy Co., NM. (Elevation @ 3221'). This appears to be a drillable location with pit area to the N. Topsoil stockpiled 30' wide on S. Reclaim 60' SW & W. Battery will be on E side. This will be a 370' x 450' pad. Road off of NW corner. Ghost rider 25/36 W0AP Fed Com #2H staked 50' to the W.

### Other SUPO Attachment

Ghostrider 2536 W2AP Fed Com 1H\_prodfacilitymap\_02-24-2017.pdf

**MEWBOURNE OIL COMPANY**  
**OVERALL OF A SURVEY OF AN EXISTING LEASE ROAD FOR THE GHOSTRIDER WELL LOCATIONS**  
**SECTION 19 T23S, R27E & SECTION 24 T23S, R26E,**  
**N. M. P. M., EDDY CO., NEW MEXICO**

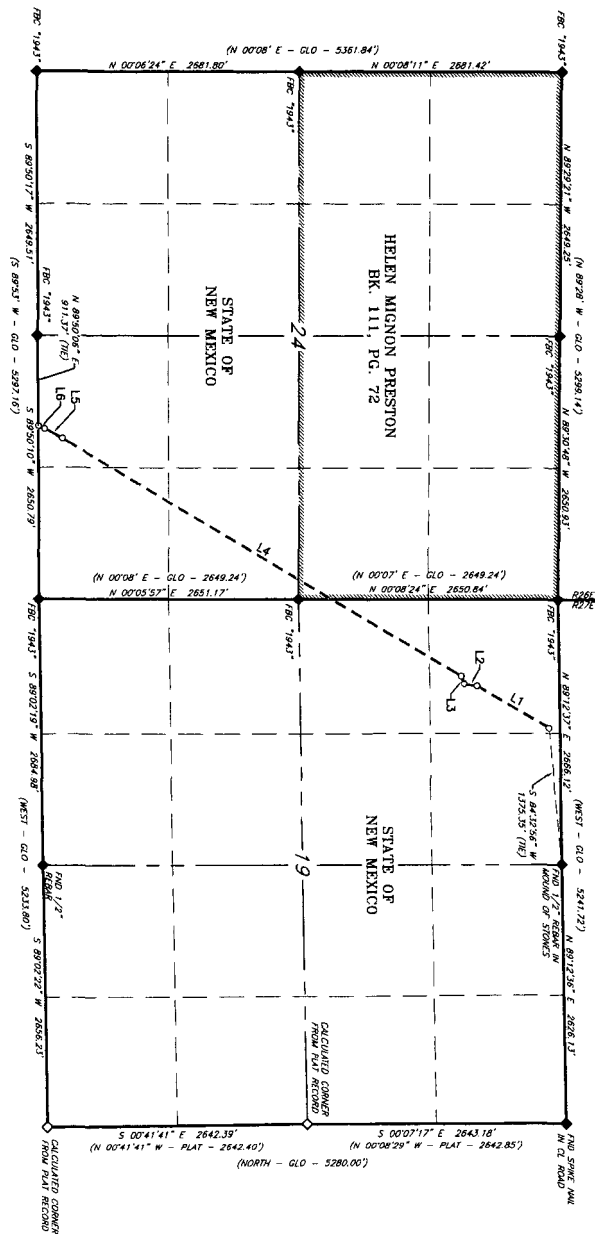

**LINE TABLE - EXISTING LEASE ROAD**

LINE	BEARING	LENGTH
L1	S 30°06'03" W	850.21'
L2	S 08°00'04" W	131.93'
L3	S 69°41'08" W	84.67'
L4	S 30°29'55" W	4,725.78'
L5	S 28°11'39" W	207.60'
L6	S 22°59'40" W	67.97'

SCALE: 1" = 1500'  
0 750' 1500'


BEARINGS ARE GRID MAG 27  
DISTANCES ARE HORIZ. GROUND.

LEGEND

( ) RECORD DATA - GLO  
◆ FOUND MONUMENT  
◇ AS NOTED  
◇ CALCULATED CORNER  
--- EXISTING LEASE ROAD

Firm No. TX 10193838 NM 4655451


Copyright 2016 - All Rights Reserved

<div align="center">  <p>REGULATORY RECORDS COMPANY</p> </div>			SCALE: 1" = 1500'
			DATE: 2-9-2017
			SURVEYED BY: BK/JF
			DRAWN BY: CMJ
			APPROVED BY: RMH
NO.	REVISION	DATE	SHEET: 1 OF 4
JOB NO.: LS1701033			
DWG. NO.: 8-1701033			

308 W. BROADWAY ST., HOBBS, NM 88240 (575) 964-8200



**MEWBOURNE OIL COMPANY**  
**SURVEY OF AN EXISTING LEASE ROAD FOR THE GHOSTRIDER WELL LOCATIONS**  
**SECTION 19 T23S, R27E,**  
**N. M. P. M., EDDY CO., NEW MEXICO**

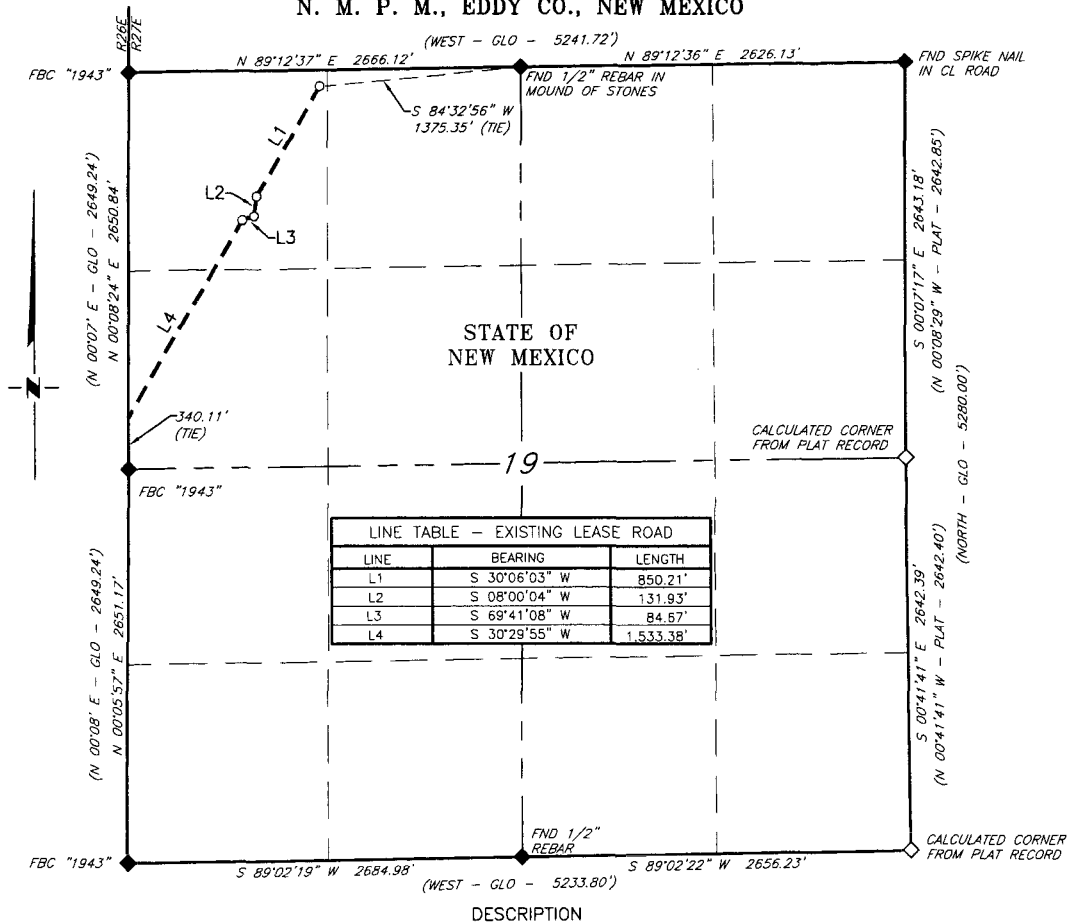

A strip of land 20 feet wide, being 2,600.19 feet or 157.587 rods in length, lying in Section 19 Township 23 South, Range 27 East, N. M. P. M., Eddy County, New Mexico, being 10 feet left and 10 feet right of the following described survey of a centerline across State of New Mexico land:

BEGINNING at a point in the Northwest quarter of Section 19, which bears, S 84°32'56" W, 1,375.35 feet from a 1/2" rebar in stone mound, found for the North quarter corner of Section 19;

Thence S 30°06'03" W, 850.21 feet;

Thence S 08°00'04" W, 131.93 feet;

Thence S 69°41'08" W, 84.67 feet;

Thence S 30°29'55" W, 1,533.38 feet, to a point on the West line of Section 19, which bears, N 00°08'24" E, 340.11 feet from a brass cap, stamped "1943", found for the West quarter corner of Section 19.

Said strip of land contains 1.194 acres, more or less, and is allocated by forties as follows:

SCALE: 1" = 1000'	NW 1/4 NW 1/4	87.688 Rods	0.664 Acres
0 500' 1000'	SW 1/4 NW 1/4	69.899 Rods	0.530 Acres


BEARINGS ARE GRID NAD 27  
 NM EAST  
 DISTANCES ARE HORIZ. GROUND.

- LEGEND
- ( ) RECORD DATA - GLO
  - ◆ FOUND MONUMENT AS NOTED
  - ◇ CALCULATED CORNER
  - EXISTING LEASE ROAD

Firm No. TX 10193838 NM 4655451

I, R. M. Howett, a N. M. Professional Surveyor, hereby certify that I prepared this plat from an actual survey made on the ground under my direct supervision, said survey and plat meet the Min. Stds. for Land Surveying in the State of N. M. and are true and correct to the best of my knowledge and belief.

Robert M. Howett NM PS 19680



Copyright 2016 - All Rights Reserved


NO.	REVISION	DATE
JOB NO.:	LS1701033	
DWG. NO.:	9-1701033	

**RRC**

308 W. BROADWAY ST., HOBBS, NM 88240 (575) 964-8200

SCALE: 1" = 1000'
DATE: 2-9-2017
SURVEYED BY: JF/BK
DRAWN BY: CMJ
APPROVED BY: RMH
SHEET: 2 OF 4

**MEWBOURNE OIL COMPANY**  
**SURVEY OF AN EXISTING LEASE ROAD FOR THE GHOSTRIDER WELL LOCATIONS**  
**SECTION 24 T23S, R26E,**  
**N. M. P. M., EDDY CO., NEW MEXICO**

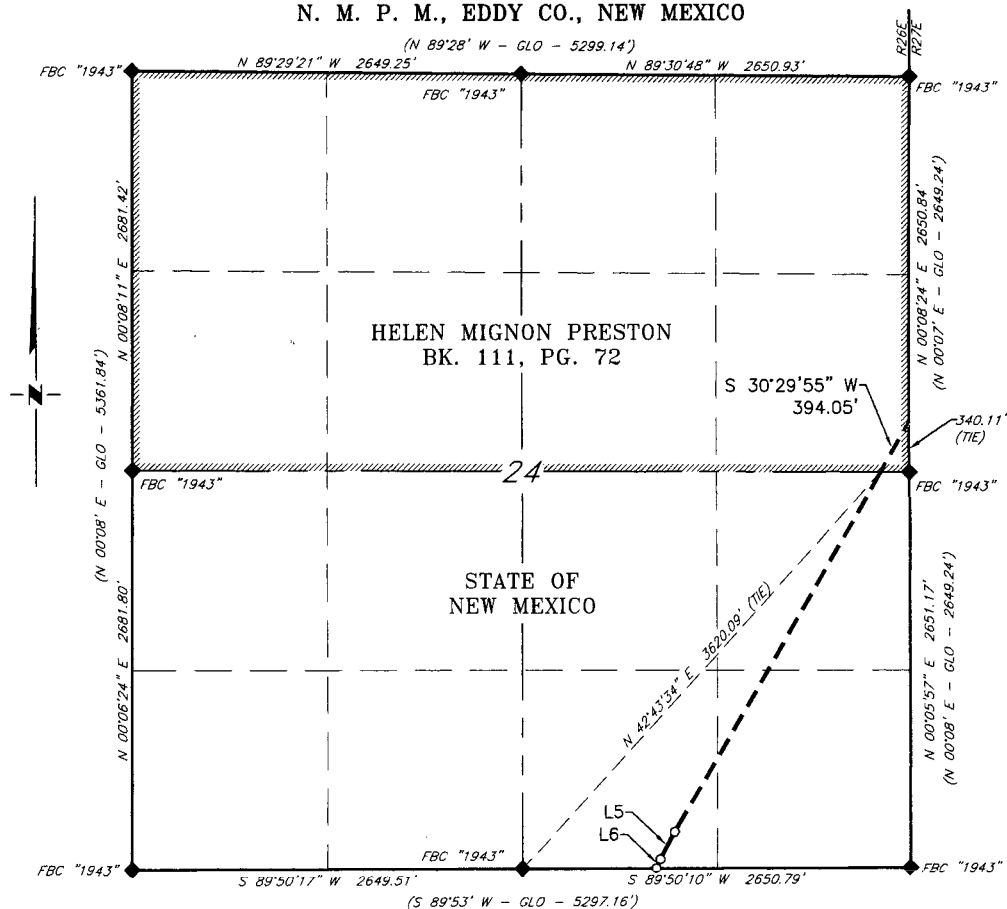

**DESCRIPTION**

A strip of land 20 feet wide, being 394.05 feet or 23.882 rods in length, lying in Section 24 Township 23 South, Range 26 East, N. M. P. M., Eddy County, New Mexico, being 10 feet left and 10 feet right of the following described survey of a centerline across lands of Helen Mignon Preston, according to a deed filed for record in Book 111, Page 72, of the deed records of Eddy County, New Mexico:

BEGINNING at a point on the East line of Section 24, which bears, N 00°08'24" E, 340.11 feet from a brass cap, stamped "1943", found for the East quarter corner of Section 24;

Thence S 30°29'55" W, 394.05 feet, to a point on the South line of the North half of Section 24, which bears, N 42°43'34" E, 3,620.09 feet from a brass cap, stamped "1943", found for the South quarter corner of Section 24.

Said strip of land contains 0.181 acres, more or less, and is allocated by forties as follows:

SE 1/4 NE 1/4      23.882 Rods      0.181 Acres

SCALE: 1" = 1000'

0      500'      1000'


BEARINGS ARE GRID NAD 27  
 NM EAST  
 DISTANCES ARE HORIZ. GROUND.

**LEGEND**

- ( ) RECORD DATA - GLO
- ◆ FOUND MONUMENT AS NOTED
- ◇ CALCULATED CORNER
- EXISTING LEASE ROAD

I, R. M. Howett, a N. M. Professional Surveyor, hereby certify that I prepared this plat from an actual survey made on the ground under my direct supervision, said survey and plat meet the Min. Stds. for Land Surveying in the State of N. M. and are true and correct to the best of my knowledge and belief.

Robert M. Howett      NM PS 19680



Firm No. TX 10193838 NM 4655451

Copyright 2016 - All Rights Reserved


NO.	REVISION	DATE
JOB NO.:	LS1701033	
DWG. NO.:	10-1701033	

**RRC**

308 W. BROADWAY ST., HOBBS, NM 88240 (575) 964-8200

SCALE: 1" = 1000'
DATE: 2-9-2017
SURVEYED BY: JF/BK
DRAWN BY: CMJ
APPROVED BY: RMH
SHEET: 3 OF 4

**MEWBOURNE OIL COMPANY**  
**SURVEY OF AN EXISTING LEASE ROAD FOR THE GHOSTRIDER WELL LOCATIONS**  
**SECTION 24 T23S, R26E,**  
**N. M. P. M., EDDY CO., NEW MEXICO**

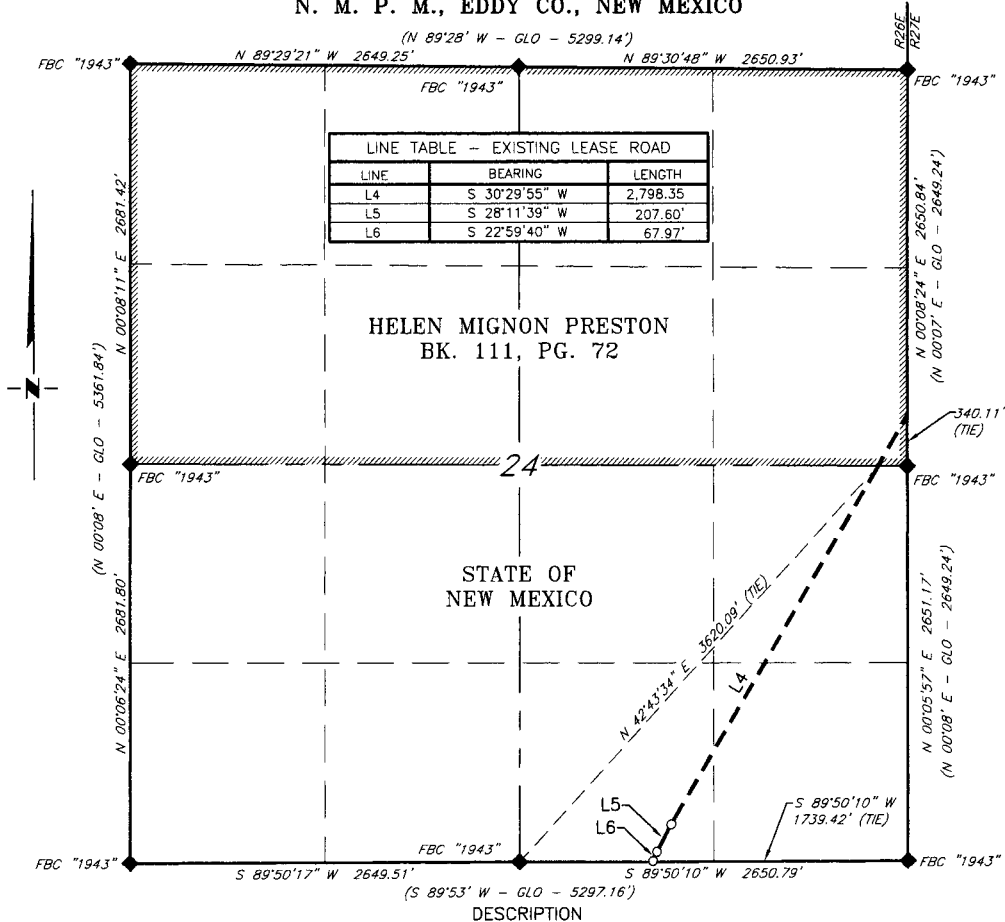

A strip of land 20 feet wide, being 3,073.92 feet or 186.298 rods in length, lying in Section 24 Township 23 South, Range 26 East, N. M. P. M., Eddy County, New Mexico, being 10 feet left and 10 feet right of the following described survey of a centerline across State of New Mexico land:

BEGINNING at a point on the North line of the South half Section 24, which bears, N 42°43'34" E, 3,620.09 feet from a brass cap, stamped "1943", found for the South quarter corner of Section 24;

Thence S 30°29'55" W, 2,798.35 feet;

Thence S 28°11'39" W, 207.60 feet;

Thence S 22°59'40" W, 67.97 feet, to the End of Survey, a point on the South line of Section 24, which bears, S 89°50'10" W, 1,739.42 feet from a brass cap, stamped "1943", found for the Southeast corner of Section 24.

Said strip of land contains 1.411 acres, more or less, and is allocated by forties as follows:

SCALE: 1" = 1000'	NE 1/4 SE 1/4	93.277 Rods	0.707 Acres
0 500' 1000'	SE 1/4 SE 1/4	41.579 Rods	0.315 Acres
	SW 1/4 SE 1/4	51.442 Rods	0.389 Acres


BEARINGS ARE GRID NAD 27  
 NM EAST  
 DISTANCES ARE HORIZ. GROUND.

- LEGEND**
- ( ) RECORD DATA -- GLO
  - ◆ FOUND MONUMENT AS NOTED
  - ◇ CALCULATED CORNER
  - EXISTING LEASE ROAD

Firm No.: TX 10193838 NM 4655451

I, R. M. Howett, a N. M. Professional Surveyor, hereby certify that I prepared this plat from an actual survey made on the ground under my direct supervision, said survey and plat meet the Min. Stds. for Land Surveying in the State of N. M. and are true and correct to the best of my knowledge and belief.

Robert M. Howett NM PS 19680



Copyright 2016 - All Rights Reserved


NO.	REVISION	DATE
JOB NO.:	LS1701033	
DWG. NO.:	11-1701033	



308 W. BROADWAY ST., HOBBS, NM 88240 (575) 964-8200

SCALE: 1" = 1000'
DATE: 2-9-2017
SURVEYED BY: JF/BK
DRAWN BY: CMJ
APPROVED BY: RMH
SHEET: 4 OF 4

**MEWBOURNE OIL COMPANY**  
**PROPOSED ACCESS ROAD FOR THE**  
**GHOSTRIDER 25/36 WOAP FEDERAL COM #2H & GHOSTRIDER 25/36**  
**W2AP FEDERAL COM #1H WELL LOCATIONS**  
**SECTION 25, T23S, R26E**  
**N. M. P. M., EDDY COUNTY, NEW MEXICO**

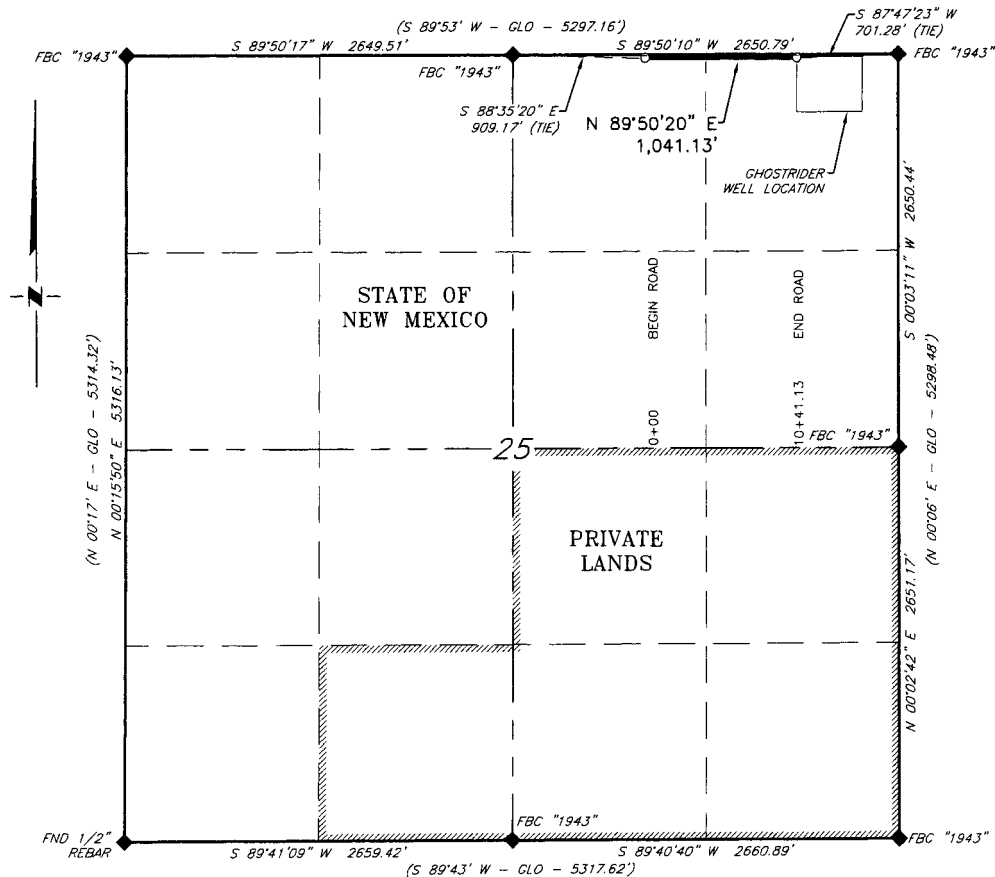

**DESCRIPTION**

A strip of land 20 feet wide, being 1,041.13 feet or 63.098 rods in length, lying in Section 25, Township 23 South, Range 26 East, N. M. P. M., Eddy County, New Mexico, being 10 feet left and 10 feet right of the following described survey of a centerline across State of New Mexico land:

BEGINNING at Engr. Sta. 0+00, a point in the Northeast quarter of Section 25, which bears, S 88°35'20" E, 909.17 feet from a brass cap, stamped "1943", found for the North quarter corner of Section 25;

Thence N 89°50'20" E, 1,041.13 feet, to Engr. Sta. 10+41.13, the End of Survey, a point in the Northeast quarter of Section 25, which bears, S 87°47'23" W, 701.28 feet from a brass cap, stamped "1943", found for the Northeast corner of Section 25.

Said strip of land contains 0.478 acres, more or less, and is allocated by forties as follows:

NW 1/4 NE 1/4	25.239 Rods	0.191 Acres
NW 1/4 NW 1/4	37.859 Rods	0.287 Acres

SCALE: 1" = 1000'  
 0 500' 1000'


BEARINGS ARE GRID NAD 27  
 NM EAST  
 DISTANCES ARE HORIZ. GROUND.

**LEGEND**

( ) RECORD DATA - GLO  
 ◆ FOUND MONUMENT AS NOTED  
 — PROPOSED ROAD

I, R. M. Howett, a N. M. Professional Surveyor, hereby certify that I prepared this plat from an actual survey made on the ground under my direct supervision, said survey and plat meet the Min. Stds. for Land Surveying in the State of N. M. and are true and correct to the best of my knowledge and belief.

Robert M. Howett NM PS 19680



Firm No. TX 10193838 NM 4655451


Copyright 2016 - All Rights Reserved

NO.	REVISION	DATE
JOB NO.:	LS1701042	
DWG. NO.:	1701042RD	


**RRC**

308 W. BROADWAY ST., HOBBS, NM 88240 (575) 964-8200


SCALE:	1" = 1000'
DATE:	2-9-2017
SURVEYED BY:	JF/BK
DRAWN BY:	CMJ
APPROVED BY:	RMH
SHEET:	1 OF 1

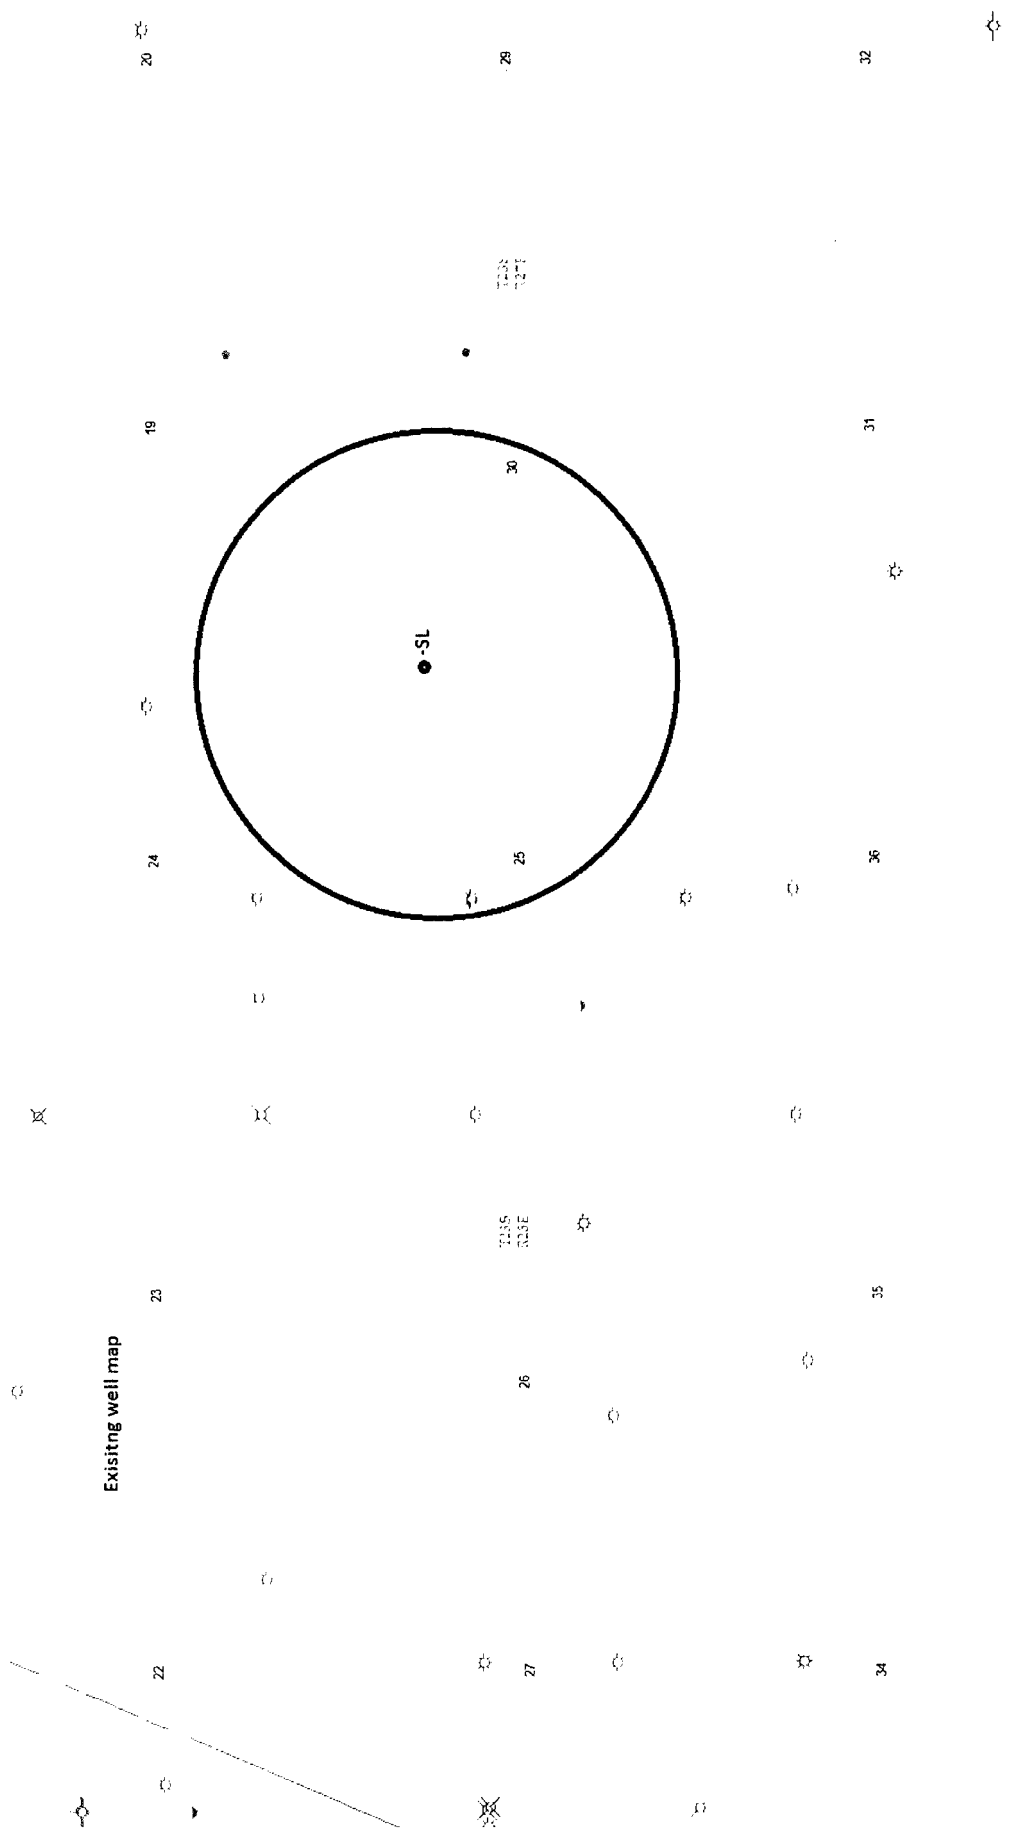


Production Facility Map & Interim Reclamation Map

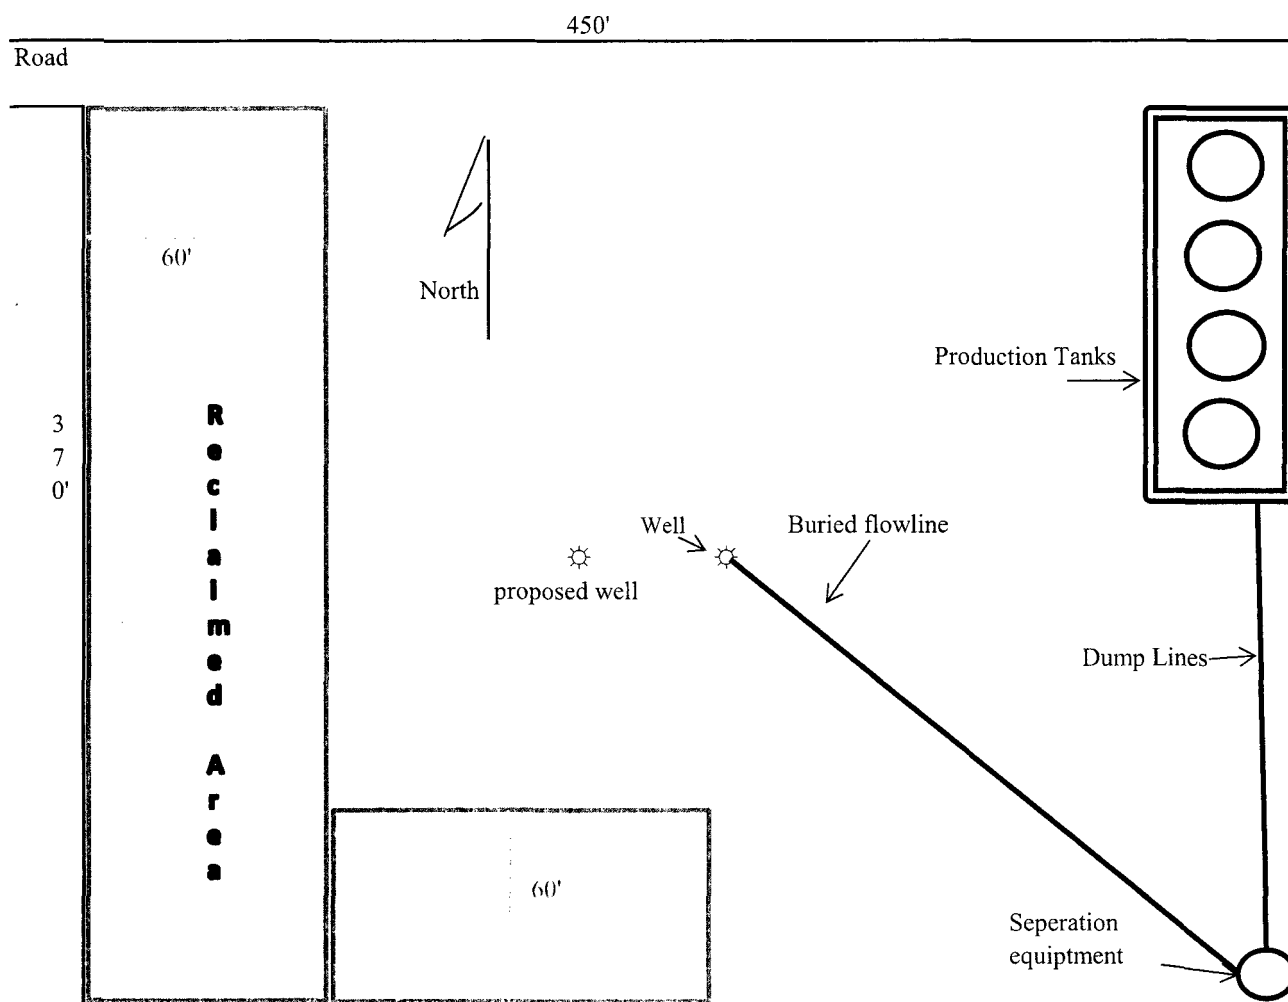

Mewbourne Oil Company  
Ghostrider 25/36 W2AP Fed Com #1H  
185' FNL & 450' FEL  
Sec 25 T23S R26E  
Eddy Co. NM



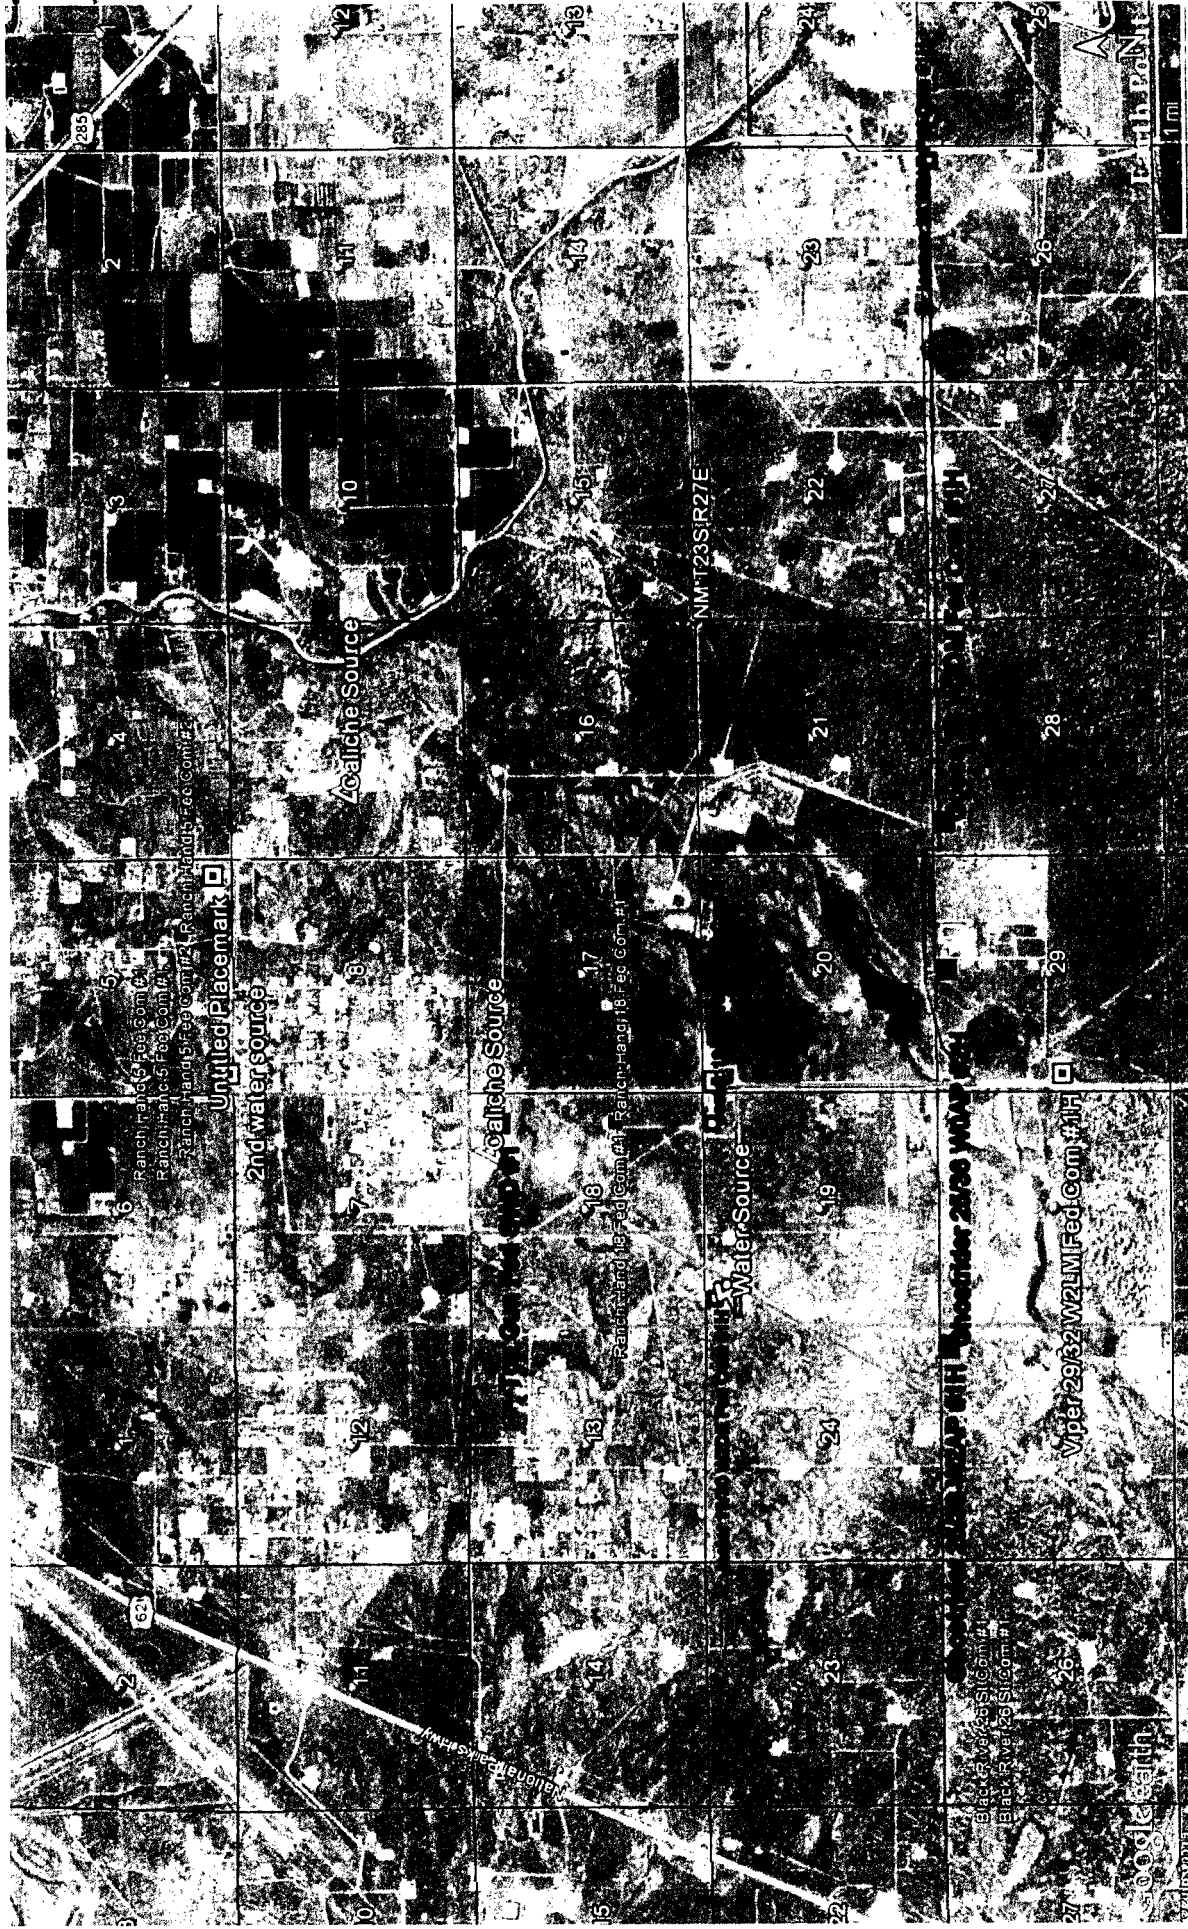




# MEWBOURNE OIL COMPANY

GHOSTRIDER 25/36 W2AP FEDERAL COM #1H

(185' FNL & 450' FEL)

SECTION 25, T23S, R26E

N. M. P. M., EDDY CO., NEW MEXICO

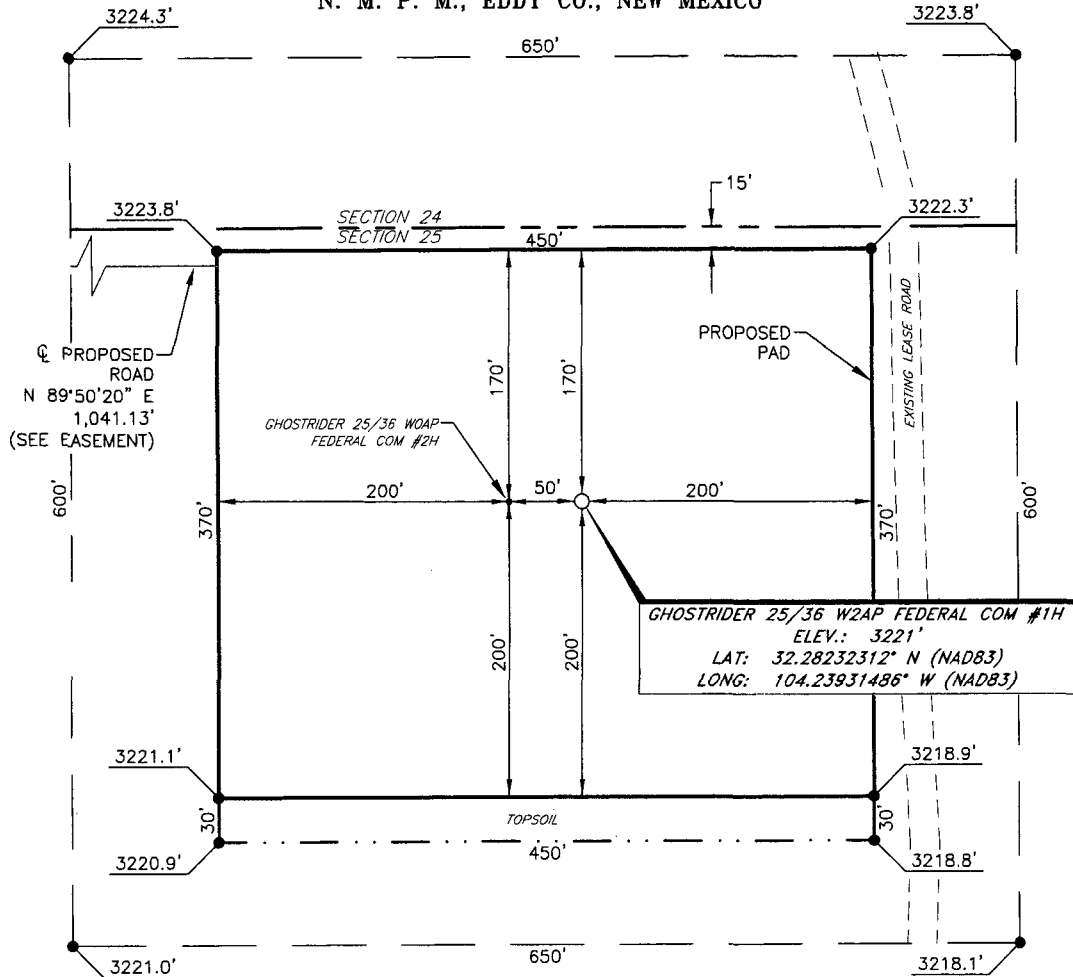

GHOSTRIDER 25/36 W2AP FEDERAL COM #1H  
ELEV.: 3221'  
LAT: 32.28232312° N (NAD83)  
LONG: 104.23931486° W (NAD83)

## DIRECTIONS TO LOCATION

From the intersection of CR-748 (Old Cavern Hwy) and CR-758 (Misty Lane);  
Go North on CR-748 for approx. 1.9 miles to lease road on the left;  
Turn left and go West approx. 0.6 miles to a lease road on the left;  
Turn left and go South approx. 2.2 miles to a proposed road on the left;  
Turn left and go East approx. 0.2 miles to this location.

THIS IS NOT A BOUNDARY SURVEY, APPARENT PROPERTY CORNERS AND PROPERTY LINES  
ARE SHOWN FOR INFORMATION ONLY. BOUNDARY DATA IS SHOWN FROM A PREVIOUS  
SURVEY REFERENCED HEREON.

I, R. M. Howett, a N. M. Professional Surveyor, hereby certify that I prepared this  
unclassified survey of a well location from an actual survey made on the ground  
under my direct supervision, said survey and plat meet the Min. Stds. for Land  
Surveying in the State of N. M. and are true and correct to the best of my  
knowledge and belief.

Robert M. Howett NM PS 19680

SCALE: 1" = 100'  
0 50 100  
BEARINGS ARE  
NAD 83 GRID - NM EAST  
DISTANCES ARE  
GROUND.

Firm No.: TX 10193838 NM 4655451

Copyright 2016 - All Rights Reserved

NO.	REVISION	DATE
JOB NO.:	LS1701037	
DWG. NO.:	1701037PAD	

**RRC**

308 W. BROADWAY ST., HOBBBS, NM 88240 (575) 964-8200



SCALE: 1" = 100'
DATE: 2-9-2017
SURVEYED BY: JF/BK
DRAWN BY: CMJ
APPROVED BY: RMH
SHEET: 1 OF 1

**Section 1 - General**

Would you like to address long-term produced water disposal? NO

**Section 2 - Lined Pits**

Would you like to utilize Lined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

### Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Unlined pit bond number:

Unlined pit bond amount:

Additional bond information attachment:

### Section 4 - Injection

Would you like to utilize Injection PWD options? NO

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Injection PWD discharge volume (bbl/day):

Injection well mineral owner:

**Injection well type:**

**Injection well number:**

**Injection well name:**

**Assigned injection well API number?**

**Injection well API number:**

**Injection well new surface disturbance (acres):**

**Minerals protection information:**

**Mineral protection attachment:**

**Underground Injection Control (UIC) Permit?**

**UIC Permit attachment:**

## **Section 5 - Surface Discharge**

**Would you like to utilize Surface Discharge PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Surface discharge PWD discharge volume (bbl/day):**

**Surface Discharge NPDES Permit?**

**Surface Discharge NPDES Permit attachment:**

**Surface Discharge site facilities information:**

**Surface discharge site facilities map:**

## **Section 6 - Other**

**Would you like to utilize Other PWD options? NO**

**Produced Water Disposal (PWD) Location:**

**PWD surface owner:**

**PWD disturbance (acres):**

**Other PWD discharge volume (bbl/day):**

**Other PWD type description:**

**Other PWD type attachment:**

**Have other regulatory requirements been met?**

**Other regulatory requirements attachment:**

## Bond Information

Federal/Indian APD: FED

BLM Bond number: NM1693

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment: