


30-015-33472

COG Operating LLC

Closed Loop Equipment Diagram –
Yeso Horizontal Reentry

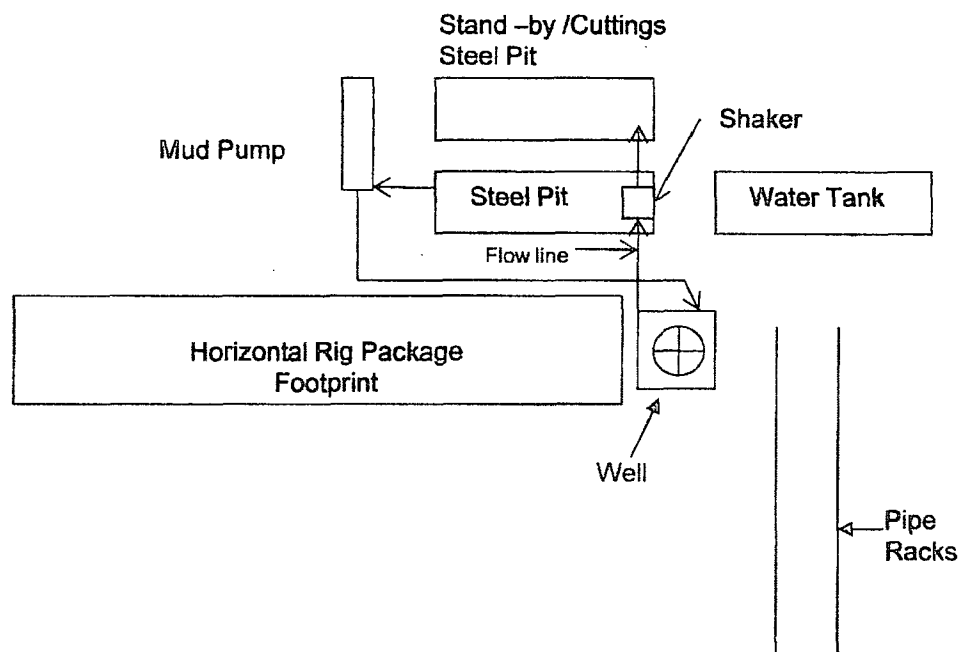

Closed Loop Operation & Maintenance Procedure

All drilling fluids are circulated over shakers and through steel work-over tanks.

Fines from shaker are dropped into stand by metal tank.

Additional tanks are used to capture unused drilling fluid or cement returns from casing jobs, as necessary.

At end of job, drilling fluid is disposed in a proper off location 3rd party injection well while fines are disposed of at a proper 3rd party waste disposal site.

This equipment will be maintained by rig crews that are on location.