

17-249

Form 3160-3
(March 2012)NM OIL CONSERVATION
ARTESIA DISTRICT

NOV 22 2017

RECEIVED

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

5. Lease Serial No.
NMNM-004825 NMNM-1292616. If Indian, Allottee or Tribe Name
N/A7. If Unit or CA Agreement, Name and No.
N/A8. Lease Name and Well No.
PENNZOIL 32 FED 111H 3200779. API Well No.
30-015- 4457210. Field and Pool, or Exploratory
GETTY; BONE SPRING11. Sec., T. R. M. or Blk. and Survey or Area
SHL: NWNW 33-20S-29E NMPM
BHL: NWNW 32-20S-29E NMPM12. County or Parish
EDDY13. State
NM3a. Address 5400 LBJ FREEWAY, SUITE 1500
DALLAS, TX 752403b. Phone No. (include area code)
972 371 52414. Location of Well (Report location clearly and in accordance with any State requirements.)*
At surface 330' FNL & 220' FWL 33-20S-29E
At proposed prod. zone 330' FNL & 240' FWL 32-20S-29E14. Distance in miles and direction from nearest town or post office*
12 MILES NE OF CARLSBAD, NM15. Distance from proposed*
location to nearest SHL: 220'
property or lease line, ft. BHL: 240'
(Also to nearest drig. unit line, if any)16. No. of acres in lease
SHL = 1711.45 acres
BHL = 320.00 acres17. Spacing Unit dedicated to this well
N2N2 32-20S-29E18. Distance from proposed location*
to nearest well, drilling, completed,
applied for, on this lease, ft. SHL: 3656' (Fed. C 1-28)
BHL: 110' (Gulf 1)19. Proposed Depth
TVD: 7145'
MD: 12194'20. BLM/BIA Bond No. on file
BLM NMB-00107921. Elevations (Show whether DF, KDB, RT, GL, etc.)
3264' UNGRADED22. Approximate date work will start*
02/01/201723. Estimated duration
3 MONTHS

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature

Name (Printed/Typed)

BRIAN WOOD (PHONE: 505 466-8120)

Date

11/08/2016

Title

CONSULTANT

(FAX: 505 466-9682)

Approved by (Signature)

Name (Printed/Typed)

FIELD MANAGER

Date

11/10/17

Title

Field Manager

Office

CARLSBAD FIELD OFFICE

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Capitan Controlled Water Basin

SEE ATTACHED FOR
CONDITIONS OF APPROVALApproval Subject to General Requirements
& Special Stipulations Attached

RUP 12-4-17

**PECOS DISTRICT
DRILLING OPERATIONS
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMNM04825
WELL NAME & NO.:	111H-Pennzoil 32 Fed
SURFACE HOLE FOOTAGE:	330'/N & 220'/W
BOTTOM HOLE FOOTAGE:	330'/N & 240'/W, 32
LOCATION:	Section 33, T.20 S., R.29 E., NMPM
COUNTY:	Eddy County, New Mexico

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Although Hydrogen Sulfide has not been reported in the area, it is always a potential hazard. It is recommended that monitoring equipment be onsite for potential Hydrogen Sulfide. If H₂S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, report measured amounts and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM**

Mixture 4, for Gypsum Sites

The holder shall seed all the disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Alkli Sacaton (<i>Sporobolus airoides</i>)	1.5
DWS~ Four-wing saltbush (<i>Atriplex canescens</i>)	8.0

~DWS: DeWinged Seed

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) for Water Basin:

After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements.

Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

High Cave/Karst

Capitan Reef

Possible water flows in the Artesia Group and Salado.

Possibility of lost circulation in the Artesia Group, Rustler, Capitan Reef, and Delaware.

A MINIMUM OF TWO CASING STRINGS CEMENTED TO SURFACE IS REQUIRED IN HIGH CAVE/KARST AREAS. THE CEMENT MUST BE IN A SOLID SHEATH. THEREFORE, ONE INCH OPERATIONS ARE NOT SUFFICIENT TO PROTECT CAVE KARST RESOURCES. A CASING DESIGN THAT HAS A ONE INCH JOB PERFORMED DOES NOT COUNT AS A SOLID SHEATH.

1. The **20 inch** surface casing shall be set at approximately **400 feet** (a minimum of 25 feet into the Rustler Anhydrite and above the salt) and cemented to the surface. **If salt is encountered, set casing at least 25 feet above the salt.**

- a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.

- b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**

- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

- d. If cement falls back, remedial cementing will be done prior to drilling out that string.

2. The minimum required fill of cement behind the **13-3/8 inch** 1st intermediate casing is:

☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst.**

3. The minimum required fill of cement behind the **9-5/8 inch** 2nd intermediate casing is:

☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Capitan Reef.**

4. The minimum required fill of cement behind the **5-1/2 inch** production casing is:

☒ Cement should tie-back at least **50 feet above the Capitan Reef which is 1350 feet (Top of Capitan Reef at 1400 feet).** **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to Capitan Reef.** Operator shall provide method of verification. **Excess calculated to 22% - additional cement might be required.**

5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a

larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. **Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.** If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **20** inch surface casing shoe shall be **2000 (2M) annular**.

Option 1:

- i. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13-3/8** inch first intermediate casing shoe shall be **2000 (2M)** psi.
- ii. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** inch second intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

- i. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the first intermediate casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **13-3/8** inch first intermediate casing shoe shall be **3000 (3M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
 - d. The results of the test shall be reported to the appropriate BLM office.
 - e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**

- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

F. SPECIAL REQUIREMENT(S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

Well Name

Operator must submit sundry to add "Com" to the well name.

MHH 06282017

**PECOS DISTRICT
SURFACE USE
CONDITIONS OF APPROVAL**

OPERATOR'S NAME:	Matador Production Company
LEASE NO.:	NMNM04825
WELL NAME & NO.:	111H-Pennzoil 32 Fed
SURFACE HOLE FOOTAGE:	330'/N & 220'/W
BOTTOM HOLE FOOTAGE	330'/N & 240'/W, 32
LOCATION:	Section 33, T.20 S., R.29 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Cave/Karst
 - Watershed
- ☐ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
- ☐ **Interim Reclamation**
- ☐ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Cave and Karst Conditions of Approval for APDs

****** Depending on location, additional Drilling, Casing, and Cementing procedures may be required by engineering to protect critical karst groundwater recharge areas.

Cave/Karst Surface Mitigation

The following stipulations will be applied to minimize impacts during construction, drilling and production.

Construction:

In the advent that any underground voids are opened up during construction activities, construction activities will be halted and the BLM will be notified immediately.

No Blasting:

No blasting will be utilized for pad construction. The pad will be constructed and leveled by adding the necessary fill and caliche.

Pad Berming:

The entire perimeter of the well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad.

- The compacted berm shall be constructed at a minimum of 12 inches high with impermeable mineral material (e.g. caliche).
- No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad.
- The topsoil stockpile shall be located outside the bermed well pad.
- Topsoil, either from the well pad or surrounding area, shall not be used to construct the berm.
- No storm drains, tubing or openings shall be placed in the berm.
- If fluid collects within the bermed area, the fluid must be vacuumed into a safe container and disposed of properly at a state approved facility.
- The integrity of the berm shall be maintained around the surfaced pad throughout the life of the well and around the downsized pad after interim reclamation has been completed.
- Any access road entering the well pad shall be constructed so that the integrity of the berm height surrounding the well pad is not compromised. (Any access road crossing the berm cannot be lower than the berm height.)

Tank Battery Liners and Berms:

Tank battery locations and all facilities will be lined and bermed. A 20 mil permanent liner will be installed with a 4 oz. felt backing, or equivalent, to prevent tears or punctures. Tank battery berms must be large enough to contain 1 ½ times the content of the largest tank.

Leak Detection System:

A method of detecting leaks is required. The method could incorporate gauges to measure loss, siting valves and lines so they can be visually inspected, or installing electronic sensors to alarm when a leak is present. Leak detection plan will be submitted to BLM for approval.

Automatic Shut-off Systems:

Automatic shut off, check valves, or similar systems will be installed for pipelines and tanks to minimize the effects of catastrophic line failures used in production or drilling.

Cave/Karst Subsurface Mitigation

The following stipulations will be applied to protect cave/karst and ground water concerns:

Rotary Drilling with Fresh Water:

Fresh water will be used as a circulating medium in zones where caves or karst features are expected. SEE ALSO: Drilling COAs for this well.

Directional Drilling:

Kick off for directional drilling will occur at least 100 feet below the bottom of the cave occurrence zone. SEE ALSO: Drilling COAs for this well.

Lost Circulation:

ALL lost circulation zones from the surface to the base of the cave occurrence zone will be logged and reported in the drilling report.

Regardless of the type of drilling machinery used, if a void of four feet or more and circulation losses greater than 70 percent occur simultaneously while drilling in any cave-bearing zone, the BLM will be notified immediately by the operator. The BLM will assess the situation and work with the operator on corrective actions to resolve the problem.

Abandonment Cementing:

Upon well abandonment in high cave karst areas additional plugging conditions of approval may be required. The BLM will assess the situation and work with the operator to ensure proper plugging of the wellbore.

Pressure Testing:

Annual pressure monitoring will be performed by the operator on all casing annuli and reported in a sundry notice. If the test results indicated a casing failure has occurred, remedial action will be undertaken to correct the problem to the BLM's approval.

MITIGATING MEASURES for ROADS:

- A two (2) foot sand bag berm will be constructed along the north side of the road at segments A and B reroute around a sinkhole. The berm will be maintained for the life of the project.
- Roads will be routed around sinkholes and other karst features to avoid or lessen the possibility of encountering near surface voids and to minimize changes to runoff or possible leaks and spills from entering karst systems.
- The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, cave passages, or voids are penetrated during construction and no further construction will be done until clearance has been issued by the Authorized Officer.
- Turnout ditches and drainage leadoffs will not be constructed in such a manner as to increase or decrease the natural flow of water into or out of cave or karst features.
- Special restoration stipulations or realignment may be required.
- All spills or leaks will be reported to the BLM immediately for their immediate and proper treatment.

Watershed

- The entire well pad will be bermed to prevent oil, salt, and other chemical contaminants from leaving the well pad. Topsoil shall not be used to construct the berm. No water flow from the uphill side(s) of the pad shall be allowed to enter the well pad. The berm shall be maintained through the life of the well and after interim reclamation has been completed.
- Any water erosion that may occur due to the construction of the well pad during the life of the well will be quickly corrected and proper measures will be taken to prevent future erosion.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall strip the top portion of the soil (root zone) from the entire well pad area and stockpile the topsoil along the edge of the well pad as depicted in the APD. The root zone is typically six (6) inches in depth. All the stockpiled topsoil will be redistributed over the interim reclamation areas. Topsoil shall not be used for berming the pad or facilities. For final reclamation, the topsoil shall be spread over the entire pad area for seeding preparation.

Other subsoil (below six inches) stockpiles must be completely segregated from the topsoil stockpile. Large rocks or subsoil clods (not evident in the surrounding terrain) must be buried within the approved area for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation. The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For examples of exclosure fencing design, refer to BLM's Oil and Gas Gold Book, Exclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS**Road Width**

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts


Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall conform to Figure 1; cross section and plans for typical road construction.

Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

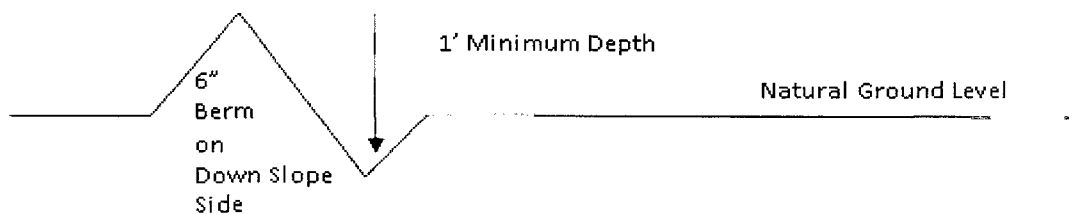

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattle guards

An appropriately sized cattle guard sufficient to carry out the project shall be installed and maintained at fence/road crossings. Any existing cattle guards on the access road route shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattle guards that are in place and are utilized during lease operations.

Fence Requirement

Where entry is granted across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fences.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Construction Steps

1. Salvage topsoil
2. Construct road

3. Redistribute topsoil
4. Revegetate slopes

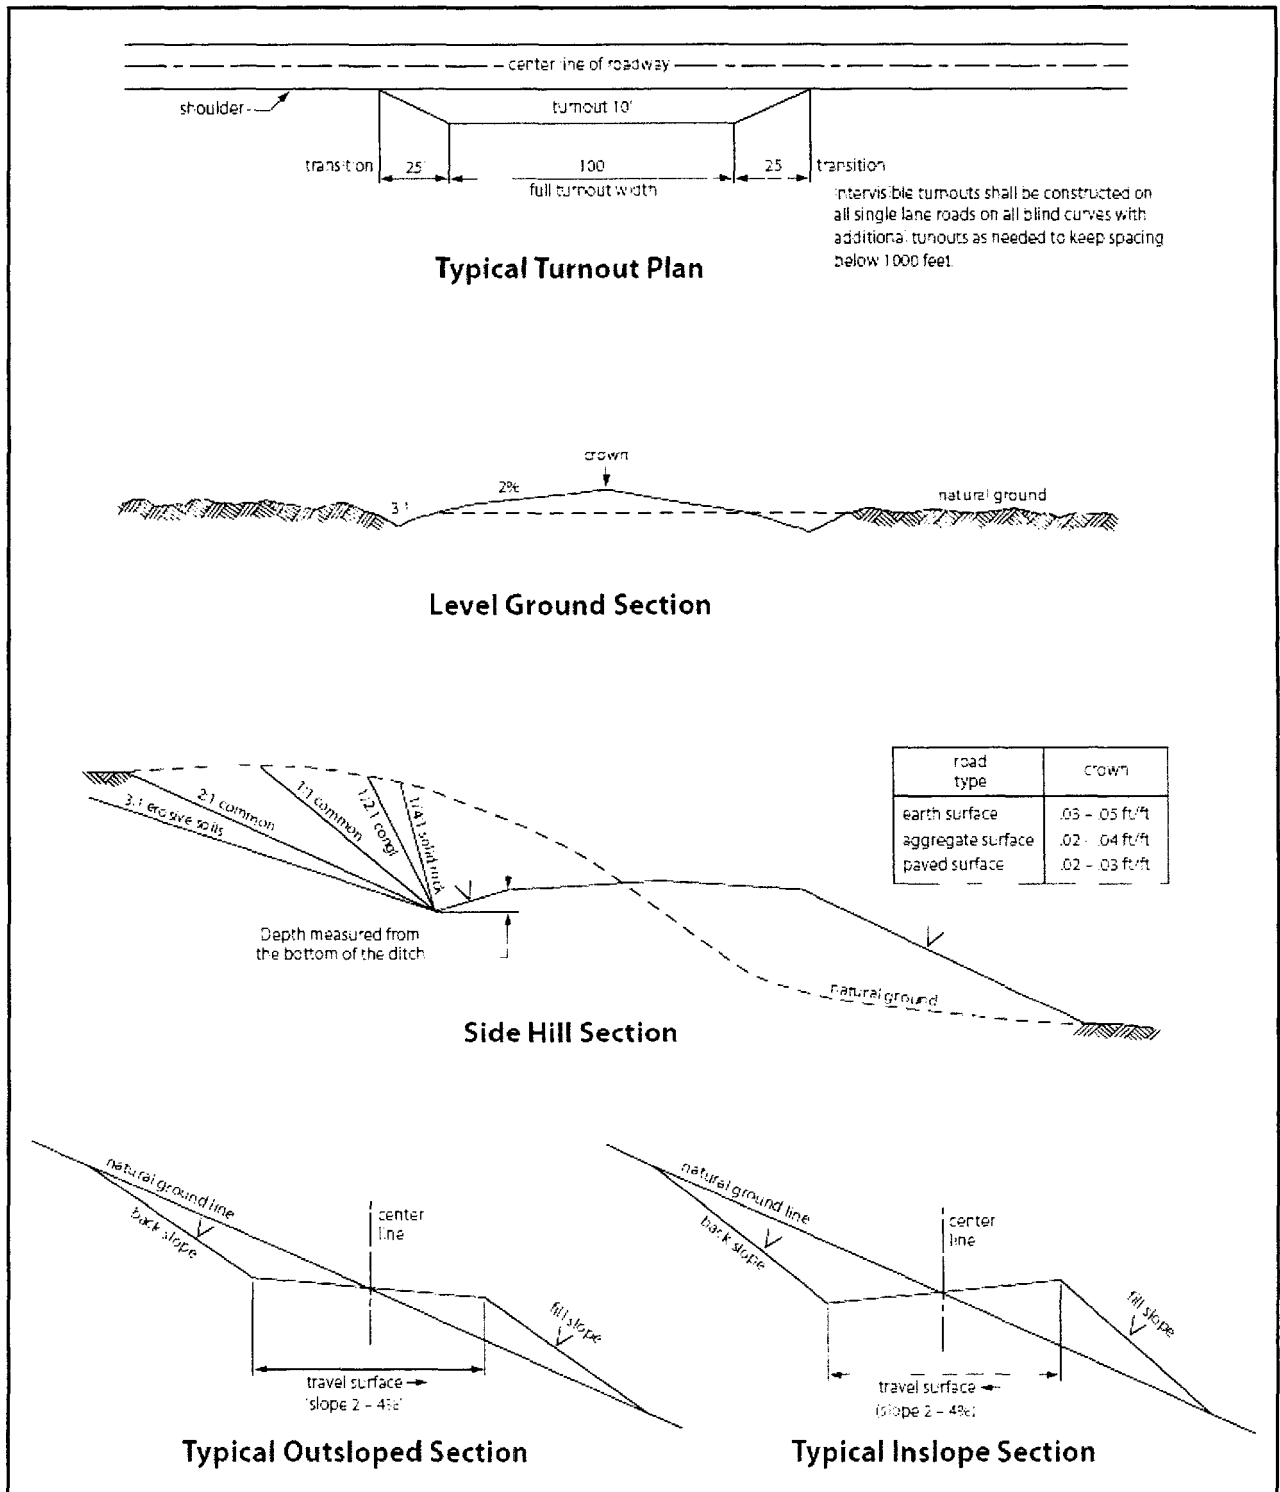


Figure 1. Cross-sections and plans for typical road sections representative of BLM resource or FS local and higher-class roads.

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

B. PIPELINES

BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of

the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.

6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.

7. The maximum allowable disturbance for construction in this right-of-way will be 30 feet:

- Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (*Blading is defined as the complete removal of brush and ground vegetation.*)
- Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (*Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.*)
- The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (*Compressing can be caused by vehicle tires, placement of equipment, etc.*)

8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.

9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.

<input type="checkbox"/> seed mixture 1	<input type="checkbox"/> seed mixture 3
<input type="checkbox"/> seed mixture 2	<input checked="" type="checkbox"/> seed mixture 4
<input type="checkbox"/> seed mixture 2/LPC	<input type="checkbox"/> Aplomado Falcon Mixture

13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2.

14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.

15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.

16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.

17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

18. Escape Ramps - The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:

- a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
- b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.

VIII. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

IX. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

DRILL PLAN PAGE 1

Drilling Program

1. ESTIMATED TOPS

Formation Name	TVD	Bearing
Rustler	Surface	silt., gyp., SS, dolo.
Yates	1065'	gypsum
Seven Rivers	1390'	dolomite
Capitan Reef	1400'	water
Cherry Canyon	3275'	hydrocarbons
Brushy Canyon	4520'	hydrocarbons
Bone Spring Lime	6005'	hydrocarbons
1 st Bone Spring Carbonate	6665'	hydrocarbons
1 st Bone Spring Sand	7020'	hydrocarbons & goal
TD (MD = 12194')	7145'	hydrocarbons

2. NOTABLE ZONES

First Bone Spring sand is the goal. Hole will extend west of the last perforation point to allow for pump installation. All perforations will be $\geq 330'$ from the dedication perimeter. Closest water well (CP 00759) is 5703' northeast. Depth to water is 90' in this 205' deep well.

3. PRESSURE CONTROL

Matador requests a variance for a speed head and for a 2000 psi annular to be installed after running 20" surface casing.

After 20" surface casing, a BOP stack consisting of 3 rams with 2 pipe rams, 1 blind ram, and 1 annular preventer will be installed. The BOP will be used below intermediate casing 1 to TD. See attached BOP and choke manifold diagrams.

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

DRILL PLAN PAGE 2

An accumulator complying with Onshore Order 2 requirements for the BOP stack pressure rating will be present. Rotating head will be installed as needed.

Pressure tests will be conducted before drilling out from under all casing strings. BOP will be inspected and operated as required in Onshore Order 2. Kelly cock and sub equipped with a full opening valve sized to fit the drill pipe and collars will be available on the rig floor in the open position.

A third party company will test the BOPs. high. Intermediate 2 casing pressure tests will be made to 250 psi low and 3000 psi high. Annular preventer will be tested to 250 psi low and 2500 psi high on the intermediate 1 casing and tested to 250 psi low and 2500 psi high on the intermediate 2 casing. In the case of running a speed head with landing mandrel for 9-5/8" casing, initial intermediate 1 casing test pressures will be 250 psi low and 3000 psi high, with wellhead seals tested to 5000 psi once the 9-5/8" casing has been landed and cemented.

Matador requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached. Manufacturer does not require the hose to be anchored. If the specific hose is not available, then one of equal or higher rating will be used.

4. CASING & CEMENT

Hole O. D.	Set @ (MD)	Casing O. D.	Age	Weight (lb/ft)	Grade	Thread Collar	Collapse	Burst	Tension
26"	400'	Surface 20"	New	94	K-55	BTC	1.125	1.125	1.8
17.5"	1200'	Inter. 1 13.375"	New	54.5	J-55	BTC	1.125	1.125	1.8
12.25"	3100'	Inter. 2 9.625"	New	40	J-55	BTC	1.125	1.125	1.8
8.75"	12194'	Product. 5.5"	New	20	P-110	DWC/C	1.125	1.125	1.8

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

DRILL PLAN PAGE 3

Casing Name	Type	Sacks	Yield	Cu. Ft.	Weight	Blend
Surface	Tail	873	1.38	1204	14.8	Class C + 5% NaCl + LCM
TOC = GL		100% Excess			centralizers per Onshore Order 2.III.B.1f	
Intermediate 1	Lead	528	2.09	1103	12.6	Class C + Bentonite + 1% CaCl ₂ + 8% NaCl + LCM
	Tail	302	1.38	416	14.8	Class C + 5% NaCl + LCM
TOC = GL		100% Excess			2 on btm jt, 1 on 2nd jt, 1 every 4th jt to GL	
Intermediate 2	Lead	499	2.48	1237	11.9	Class C + Bentonite + 2% CaCl ₂ + 3% NaCl + LCM
	Tail	308	1.26	388	14.4	Class C + 5% NaCl +
TOC = GL		100% Excess			2 on btm jt, 1 on 2nd jt, 1 every 4th jt to GL	
Production	Lead	490	2.25	1102	11.5	TXI + Fluid Loss + Dispersant + Retarder + LCM
	Tail	1636	1.38	2257	13.2	TXI + Fluid Loss + Dispersant + Retarder + LCM
TOC = 2100'		35% Excess			2 on btm jt, 1 on 2nd jt, 1 every other jt to top of tail cement (1000' above TOC)	

5. MUD PROGRAM

An electronic Pason mud monitoring system satisfying the requirements of Onshore Order 1 will be used. All necessary mud products for weight addition and fluid loss control will be on location at all times. Mud program is subject to change due to hole conditions.

Name	Hole Size	Mud Weight	Visc	Fluid Loss	Type Mud
Surface	26"	8.40	28	NC	fresh water spud mud
Intermediate 1	17.5"	10.00	30-32	NC	brine water
Intermediate 2	12.25"	8.4 - 8.6	28-30	NC	fresh water
Production	8.75"	9.00	30-32	NC	fresh water / cut brine

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

DRILL PLAN PAGE 4

6. CORES, TESTS, & LOGS

No core or drill stem test is planned.

A 2-person mud-logging program will be used from $\approx 1200'$ to TD.

No electric logs are planned. GR will be collected through the MWD tools from intermediate 2 casing to TD. CBL with CCL will be run as far as gravity will let it fall to TOC.

7. DOWN HOLE CONDITIONS

No abnormal pressure or temperature is expected. Maximum expected bottom hole pressure is ≈ 3572 psi. Expected bottom hole temperature is $\approx 135^\circ$ F.

In accordance with Onshore Order 6, Matador does not anticipate that there will be enough H_2S from the surface to the Bone Spring to meet the BLM's minimum requirements for the submission of an " H_2S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since Matador has an H_2S safety package on all wells, an " H_2S Drilling Operations Plan" is attached. Adequate flare lines will be installed off the mud/gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

8. OTHER INFORMATION


Spud date is upon approval. It will take ≈ 3 months to drill and complete the well.

Matador Production Company owns the majority working interest in this well. Per its discussions with its potential partners, Matador will be named operator upon execution of the final Operating Agreements signed by the partners or the issuance of a pooling order by the State.

MATADOR PROD. CO.

HO-35272

Matador requesting
variance to use
speed head

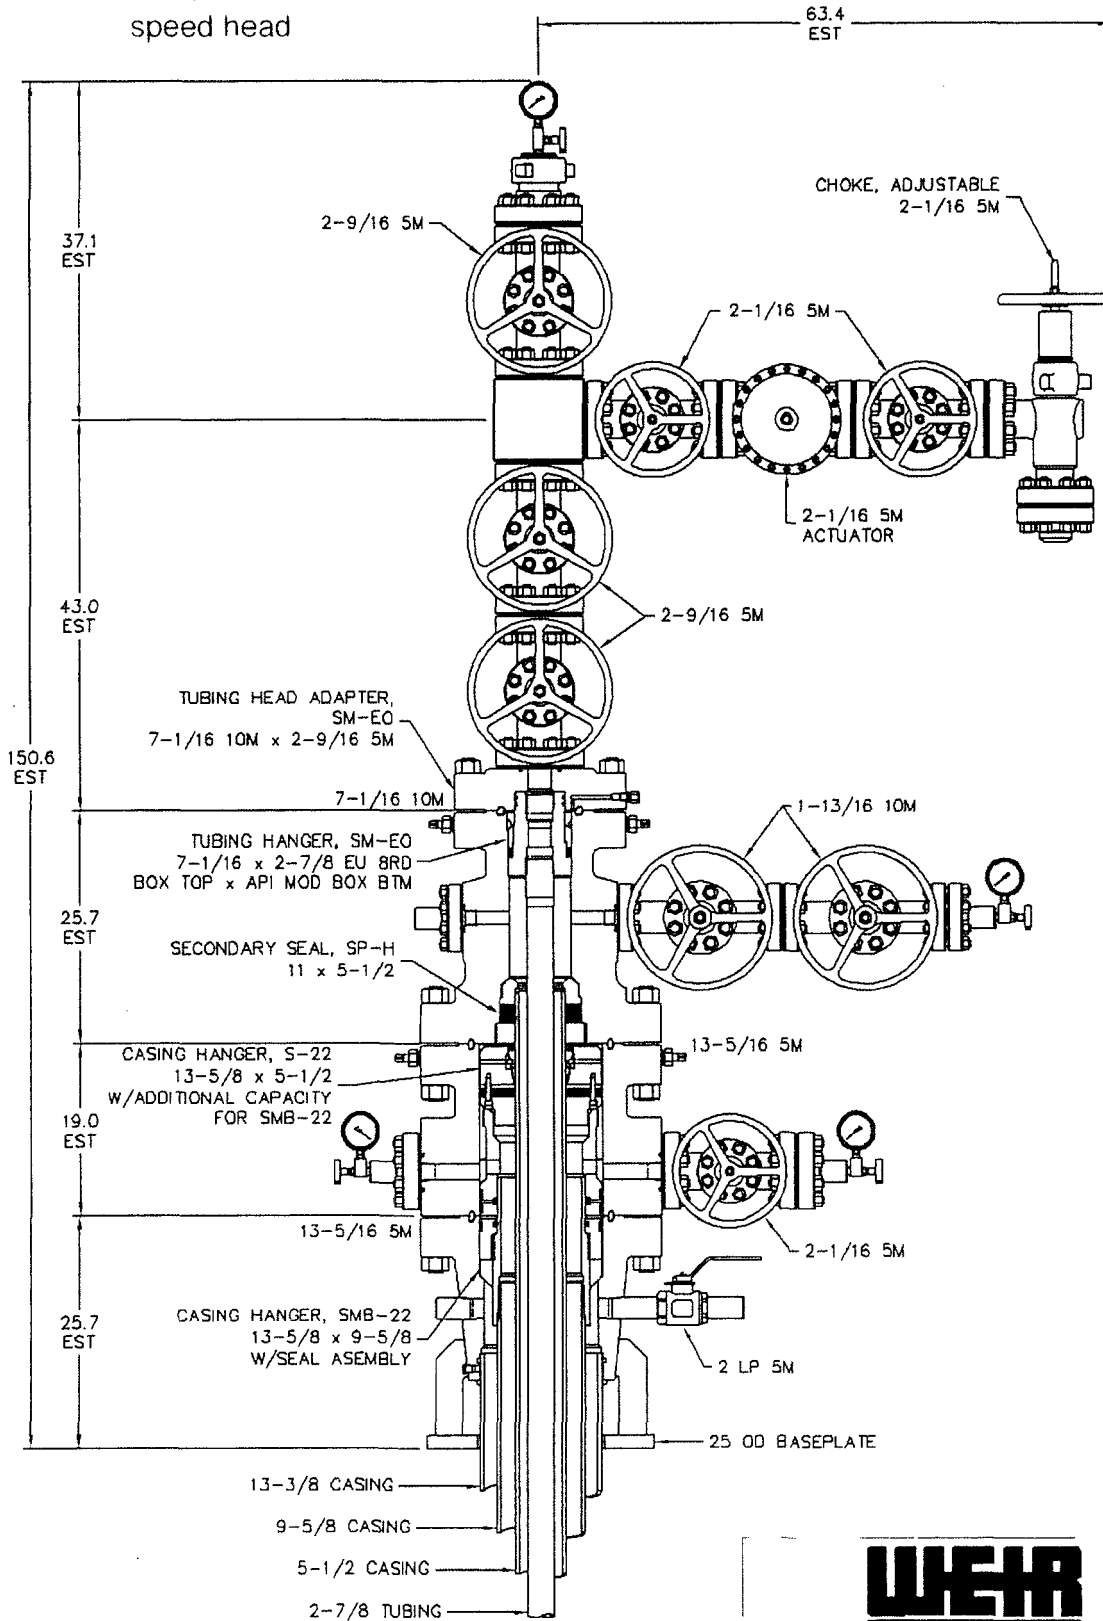

NOTE:
DIMENSIONS SHOWN ON THIS DRAWING ARE
ESTIMATES ONLY AND CAN VARY SIGNIFICANTLY
DEPENDING ON RAW MATERIAL LENGTHS.
NO GUARANTEE OF STACKUP HEIGHT IS IMPLIED.
DIMENSIONS SHOWN SHOULD BE CONSIDERED
FOR REFERENCE PURPOSES ONLY.

RESTRICTED CONFIDENTIAL DOCUMENT

THIS DRAWING AND ALL INFORMATION SHOWN HEREON ARE THE
EXCLUSIVE PROPERTY OF SEASOARD INTERNATIONAL, INC. AND ARE
SUBMITTED ON A CONFIDENTIAL BASIS ONLY. THE RECIPIENT AGREES
NOT TO REPRODUCE THE DRAWING, TO RETURN IT UPON REQUEST, AND
THAT NO DISCLOSURE OF THE DRAWING OR THE INFORMATION SHOWN
HEREON WILL BE MADE TO A THIRD PARTY WITHOUT PRIOR WRITTEN
CONSENT OF SEASOARD INTERNATIONAL, INC.

WEH
OIL & GAS



5,000 PSI WELLHEAD ASSEMBLY
13-3/8 x 9-5/8 x 5-1/2 x 2-7/8

DESIGN BY	RPL	SCALE	1:13	DATE	17 APR 15	REV	
CHECKED BY		DRAWING NO.					
APPROVED BY		QD-000475					



PATTERSON-UTI

Well Control

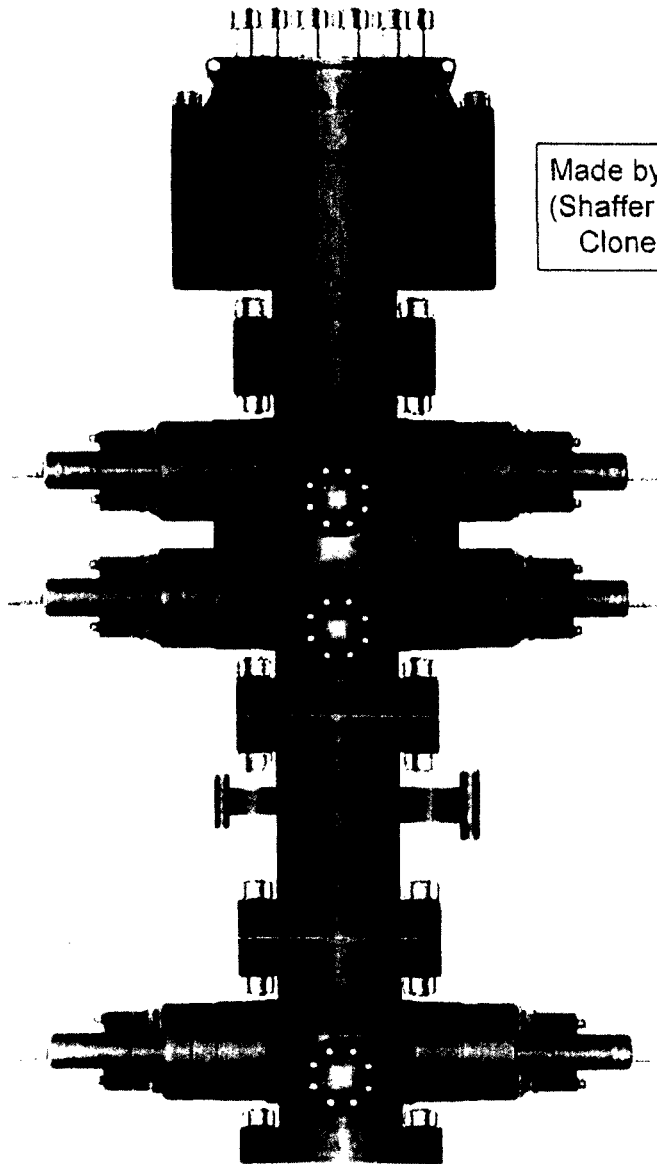

Made by Cameron
(Shaffer Spherical)
Clone Annular

PATTERSON-UTI # PS2-628

STYLE: New Shaffer Spherical

BORE 13 5/8" PRESSURE 5,000

HEIGHT: 48 1/2" WEIGHT: 13,800 lbs

PATTERSON-UTI # PC2-128

STYLE: New Cameron Type U

BORE 13 5/8" PRESSURE 10,000

RAMS: TOP 5" Pipe BTM Blinds

HEIGHT: 66 5/8" WEIGHT: 24,000 lbs

Length 40" Outlets 4" 10M

DSA 4" 10M x 2" 10M

PATTERSON-UTI # PC2-228

STYLE: New Cameron Type U

BORE 13 5/8" PRESSURE 10,000

RAMS: 5" Pipe

HEIGHT: 41 5/8" WEIGHT: 13,000 lbs

2" Minimum Kill Line

WING VALVES

3" Minimum Choke Line




2" Check Valve




2" Manual Valve




2" Manual Valve



4" Manual Valve



4" Hydraulic Valve

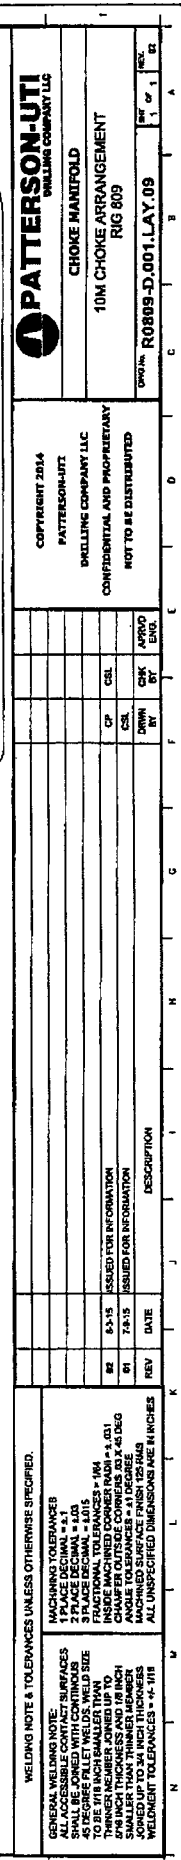



Midwest Hose
& Specialty, Inc.


Internal Hydrostatic Test Graph

Customer: Patterson B&E

Pick Ticket #: 296283

Hose Specifications		Verification	
Hose Type	Length	Type of Fitting	Coupling Method
Mud	50'	2"1502	Swage
I.D.	O.D.	Die Size	Final O.D.
2"	3.47"	97MM	4.03"
Working Pressure	Burst Pressure	Hose Serial #	Hose Assembly Serial #
10000 PSI	Standard Safety Multiplier Applies	11839	296283

Pressure Test

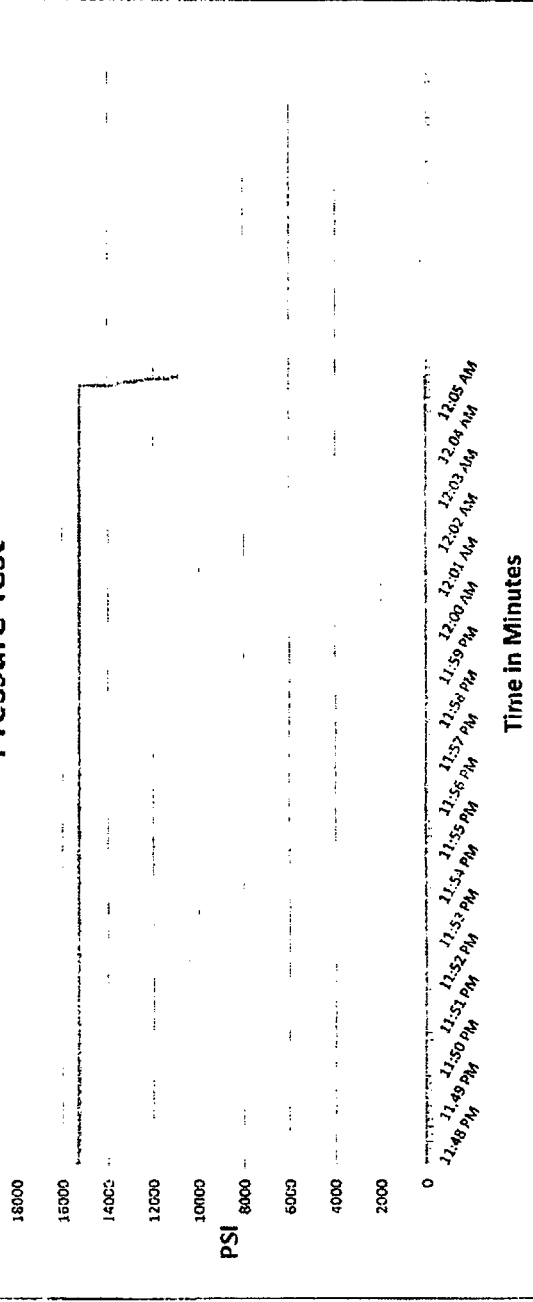

Test Pressure 15000 PSI
Time Held at Test Pressure 17 3/4 Minutes
Actual Burst Pressure 15361 PSI
Peak Pressure 15361 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Richard Davis

Approved By: Ryan Adams

Richard Davis

Ryan Adams

2809

March 10, 2015



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K/FSL Level 2
Date Assembled	3/10/2015	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	245805	Hose Lot # and Date Code	11839-11/14
Customer Purchase Order #	270590	Hose I.D. (Inches)	2"
Assembly Serial # (Pick Ticket #)	296283	Hose O.D. (Inches)	3.99"
Hose Assembly Length	50'	Armor (yes/no)	YES

Fittings

End A		End B	
Stem (Part and Revision #)	R2.0X32M1502	Stem (Part and Revision #)	RF2.0 32F1502
Stem (Heat #)	11104510	Stem (Heat #)	A144853
Ferrule (Part and Revision #)	RF2.0 10K	Ferrule (Part and Revision #)	RF2.0 10K
Ferrule (Heat #)	41044	Ferrule (Heat #)	41044
Connection (Flange Hammer Union Part)		Connection (Flange Hammer Union Part)	
Connection (Heat #)		Connection (Heat #)	
Nut (Part #)	2" 1502 H2S	Nut (Part #)	
Nut (Heat #)		Nut (Heat #)	
Dies Used	77102	Dies Used	97MM

Hydrostatic Test Requirements

Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.
Test Pressure Hold Time (minutes)	17 3/4	

Date Tested	Tested By	Approved By
3/10/2015		



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **PATTERSON B&E**

Customer P.O.# **270590**

Sales Order # **245805**

Date Assembled: **3/10/2015**

Specifications

Hose Assembly Type: **Choke & Kill**

Assembly Serial # **296283**

Hose Lot # and Date Code **11839-11/14**

Hose Working Pressure (psi) **10000**

Test Pressure (psi) **15000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Date

3/19/2015



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

Customer: Patterson

Pick Ticket #: 286159

Midwest Hose
& Specialty, Inc.

Hose Specifications

Hose Type
CK
I.D.
2"
Working Pressure
10000 PSI
Standard Safety Multiplier Applies


Length
50'
O.D.
3.55"

Type of Fitting
2" 1502
Die Size
97MM
Hose Serial #
11784

Verification

Coupling Method
Swage
Final O.D.
3.98"
Hose Assembly Serial #
286159

Pressure Test

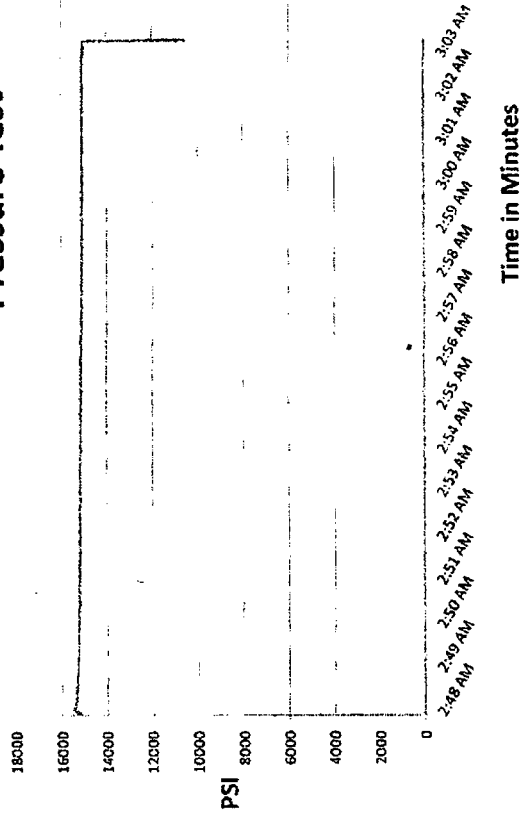

Test Pressure
15000 PSI

Time Held at Test Pressure
15 1/4 Minutes

Actual Burst Pressure

Peak Pressure
15410 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Tyler Hill

Approved By: Ryan Adams



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K/FSL Level 2
Date Assembled	12/23/2014	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	237566	Hose Lot # and Date Code	11784-10/14
Customer Purchase Order #	261581	Hose I.D. (Inches)	2"
Assembly Serial # (Pick Ticket #)	286159	Hose O.D. (Inches)	4.00"
Hose Assembly Length	50'	Armor (yes/no)	YES
Fittings			
End A		End B	
Stem (Part and Revision #)	R2.0X32M1502	Stem (Part and Revision #)	R2.0X32M1502
Stem (Heat #)	M14104546	Stem (Heat #)	M14101226
Ferrule (Part and Revision #)	RF2.0 10K	Ferrule (Part and Revision #)	RF2.0 10K
Ferrule (Heat #)	41044	Ferrule (Heat #)	41044
Connection - Flange Hammer Union Part	2"1502	Connection (Part #)	
Connection (Heat #)	2866	Connection (Heat #)	
Nut (Part #)		Nut (Part #)	
Nut (Heat #)		Nut (Heat #)	
Dies Used	97MM	Dies Used	97MM
Hydrostatic Test Requirements			
Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	15 1/4		
Date Tested	Tested By		Approved By
12/24/2014	Tyler Hill		Gar Adams



Midwest Hose
& Specialty, Inc.

Certificate of Conformity

Customer: **PATTERSON B&E**

Customer P.O.# **261581**

Sales Order # **237566**

Date Assembled: **12/23/2014**

Specifications

Hose Assembly Type: **Choke & Kill**

Assembly Serial # **286159**

Hose Lot # and Date Code **11784-10/14**

Hose Working Pressure (psi) **10000**

Test Pressure (psi) **15000**

We hereby certify that the above material supplied for the referenced purchase order to be true according to the requirements of the purchase order and current industry standards.

Supplier:

Midwest Hose & Specialty, Inc.

3312 S I-35 Service Rd

Oklahoma City, OK 73129

Comments:

Approved By

Date

12/29/2014




Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Certificate

General Information		Hose Specifications	
Customer	PATTERSON B&E	Hose Assembly Type	Choke & Kill
MWH Sales Representative	AMY WHITE	Certification	API 7K/FSL Level 2
Date Assembled	3/10/2015	Hose Grade	MUD
Location Assembled	OKC	Hose Working Pressure	10000
Sales Order #	245805	Hose Lot # and Date Code	11839-11/14
Customer Purchase Order #	270590	Hose I.D. (Inches)	2"
Assembly Serial # (Pick Ticket #)	296283	Hose O.D. (Inches)	3.99"
Hose Assembly Length	50'	Armor (yes/no)	YES
Fittings			
End A		End B	
Stem (Part and Revision #)	R2.0X32M1502	Stem (Part and Revision #)	RF2.0 32F1502
Stem (Heat #)	14104546	Stem (Heat #)	A144853
Ferrule (Part and Revision #)	RF2.0 10K	Ferrule (Part and Revision #)	RF2.0 10K
Ferrule (Heat #)	41044	Ferrule (Heat #)	41044
Connection - Flange Hammer Union Part		Connection (Part #)	
Connection (Heat #)		Connection (Heat #)	
Nut (Part #)	2" 1502 H2S	Nut (Part #)	
Nut (Heat #)		Nut (Heat #)	
Dies Used	97MM	Dies Used	97MM
Hydrostatic Test Requirements			
Test Pressure (psi)	15,000	Hose assembly was tested with ambient water temperature.	
Test Pressure Hold Time (minutes)	17 3/4		
Date Tested	Tested By		Approved By
3/10/2015			

Closed-Loop System

Matador Production Company
Pennzoil 32 Fed wells
SHL: 33-20S-29E
BHL: 32-20S-29E
Eddy County, NM

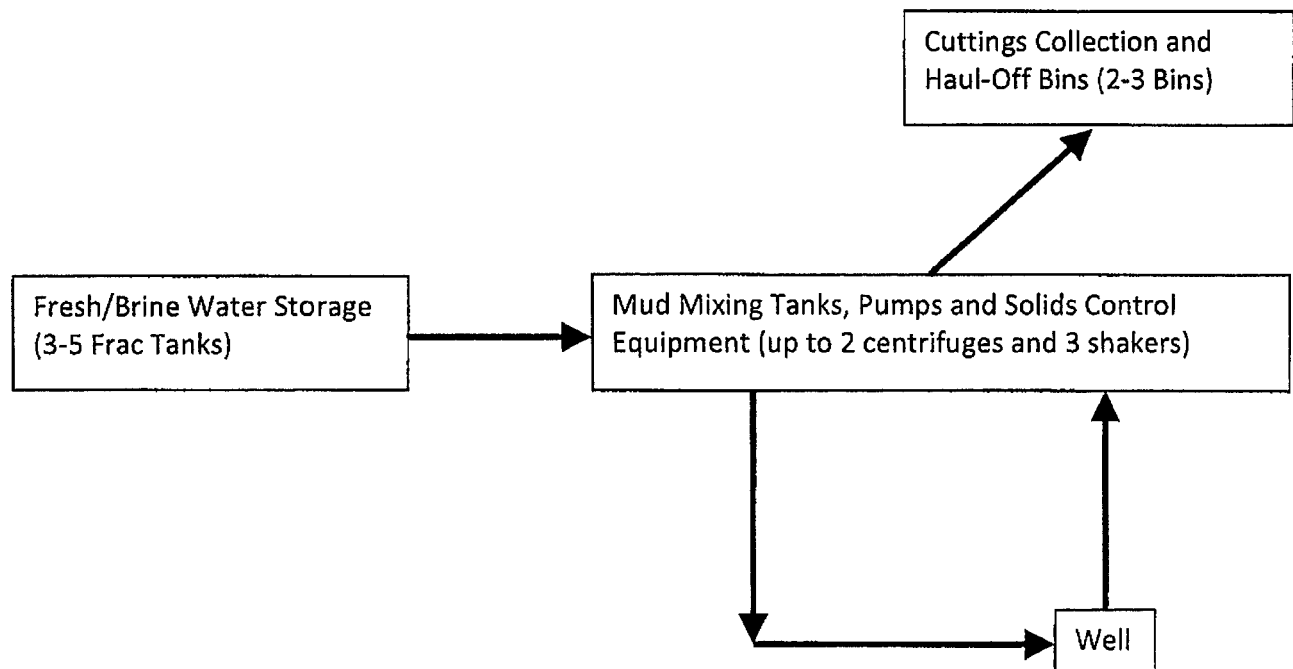


Operating and Maintenance Plan:

During drilling operations, third party service companies will use solids control equipment to remove cuttings from the drilling fluids and collect it in haul-off bins. Equipment will be closely monitored at all times while drilling by the derrick man and the service company employees.

Closure Plan:


During drilling operations, third party service companies will haul off drill solids and fluids to an approved disposal facility. At the end of the well, all closed loop equipment will be removed from the location.

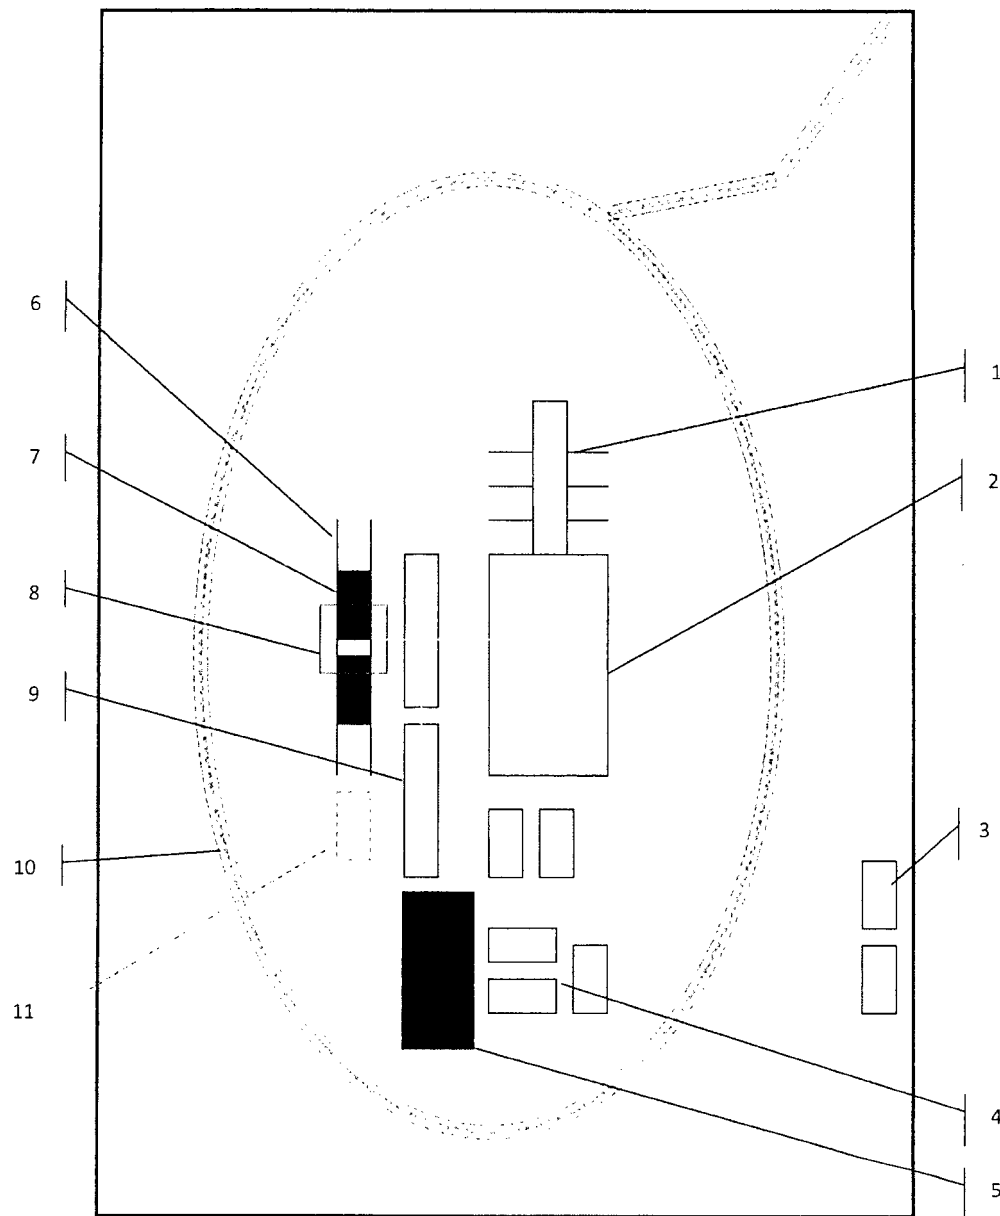

Schematic Closed Loop Drilling Rig*

1. Pipe Rack
2. Drill Rig
3. House Trailers/ Offices
4. Generator/Fuel/Storage
5. Overflow-Frac Tank
6. Skids
7. Roll Offs
8. Hopper or Centrifuge
9. Mud Tanks
10. Loop Drive
11. Generator (only for use with centrifuge)

*Not drawn to scale: Closed loop system requires at least 30 feet beyond mud tanks. Ideally 60 feet would be available

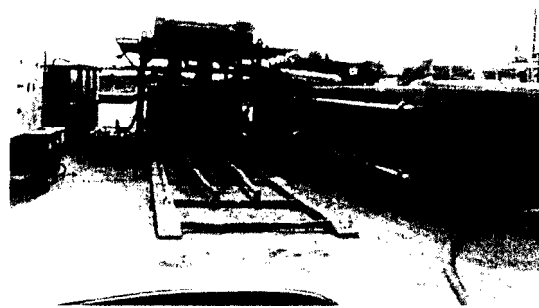


Above: Centrifugal Closed Loop System



Closed Loop Drilling System: Mud tanks to right (1)
 Hopper in air to settle out solids (2)
 Water return pipe (3)
 Shaker between hopper and mud tanks (4)
 Roll offs on skids (5)

Flow Chart for Drilling Fluids and Solids

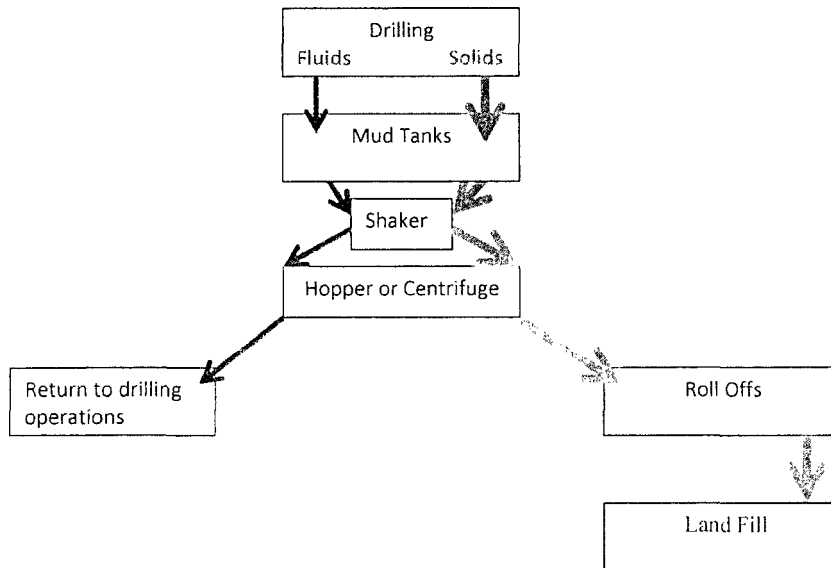

Photos Courtesy of Gandy Corporation Oil
 Field Service

Rig Layout


Pennzoil 32 Fed 111H
Eddy County, NM
(not to scale)

Wind Direction
Indicator

H2S Monitors

Briefing Areas

Condition
Warning
Sign

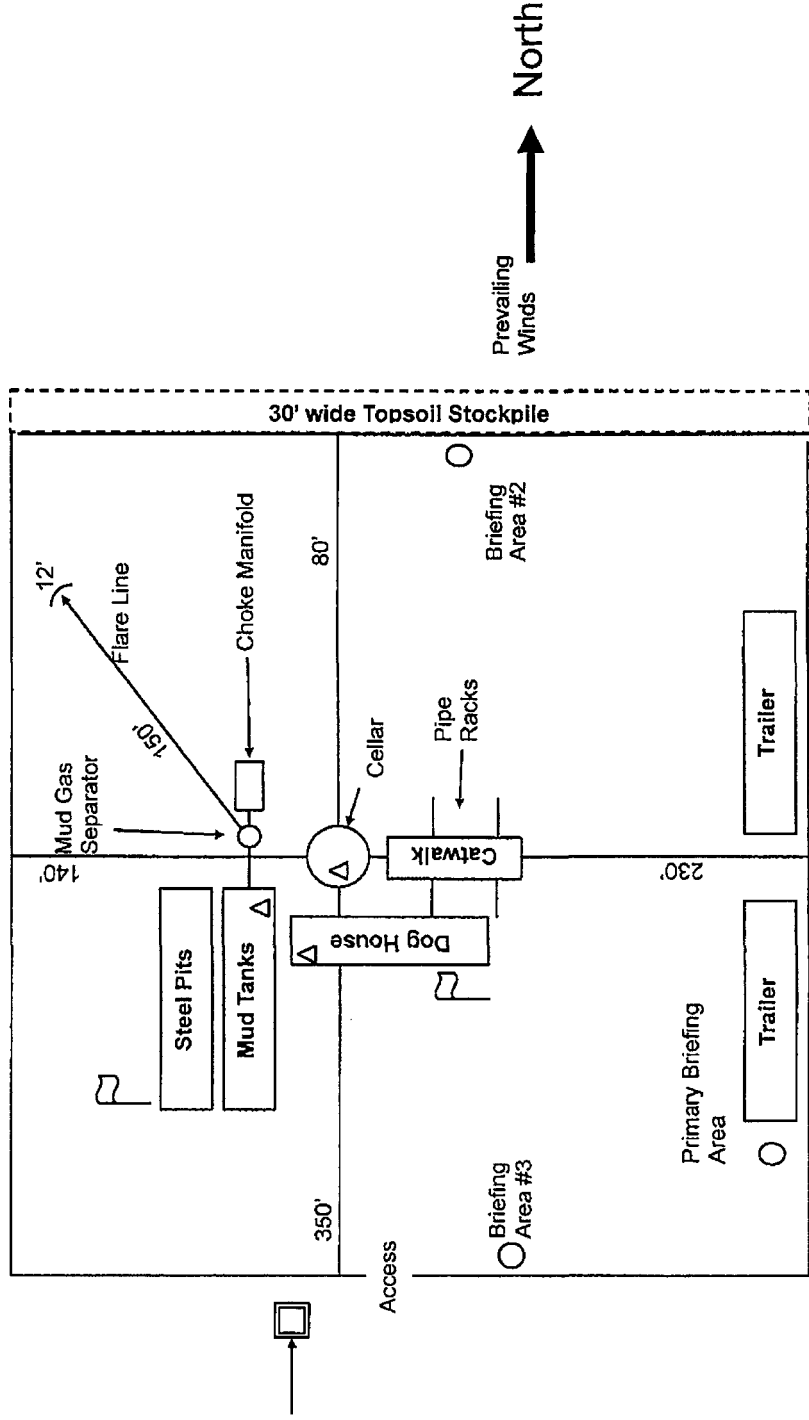

Prevailing
Winds → North



Hydrogen Sulfide Drilling

Operations Plan

Matador Resources

1 H2S safety instructions to the following:

- Characteristics of H2S
- Physical effects and hazards
- Principal and operation of H2S detectors, warning system, and briefing areas
- Evacuation procedures, routes, and first aid
- Proper use of safety equipment & life support systems
- Essential personnel meeting medical evaluation criteria will receive additional training on the proper use of 30-minute pressure demand air packs.

2 H2S Detection and Alarm Systems:

- H2S sensor/detectors will be located on the drilling rig floor, in the base of the sub structure / cellar area, and on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary.
- An audio alarm system will be installed on the derrick floor and in the doghouse.

3 Windssocks and / Wind Streamers:

- Windssocks at mud pit area should be high enough to be visible.
- Windssock on the rig floor and / top of doghouse should be high enough to be visible.

4 Condition Flags and Signs:

- Warning sign on access road to location
- Flags to be displayed on sign at entrance to location
 - Green Flag – Normal Safe Operation Condition
 - Yellow Flag – Potential Pressure and Danger
 - Red Flag – Danger (H2S present in dangerous concentrations) Only H2S trained personnel admitted on location

5 Well Control Equipment:

- See APD

6 Communication:

- While working under masks, chalkboards will be used for communications.
- Hand signals will be used where chalkboard is inappropriate.
- Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.



7 Drill Stem Testing:

- No DST or cores are planned at this time.

8 Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubulars good and other mechanical equipment.

9 If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

11 Emergency Contacts





- See APD

H2S Contingency Plan Emergency Contacts
Matador Production Company
T20S, R29E, Eddy County, NM

Company Office			
Matador Production Company		(972)-371-5200	
Key Personnel			
Name	Title	Office	Mobile
Billy Goodwin	Vice President Drilling	972-371-5210	817-522-2928
Gary Martin	Drilling Superintendent		601-669-1774
Dee Smith	Drilling Superintendent	972-371-5447	972-822-1010
Aaron Byrd	Drilling Engineer	972-371-5267	214-507-2333
	Construction Superintendent		
	Construction Superintendent		
Artesia			
Ambulance			911
State Police		575-746-2703	
City Police		575-746-2703	
Sheriff's Office		575-746-9888	
Fire Department		575-746-2701	
Local Emergency Planning Committee		575-746-2122	
New Mexico Oil Conservation Division		575-748-1283	
Carlsbad			
Ambulance			911
State Police		575-885-3137	
City Police		575-885-2111	
Sheriff's Office		575-887-7551	
Fire Department		575-887-3798	
Local Emergency Planning Committee		575-885-3581	
Santa Fe			
New Mexico Emergency Response Commission (Santa Fe)		505-476-9600	
New Mexico Emergency Response Commission (Santa Fe) 24 hrs		505-827-9126	
New Mexico State Emergency Operations Center		505-476-9635	
National			
Carlsbad BLM		575-234-5972	
National Emergency Response Center (Washington, D.C.)		800-424-8802	
Medical			
Flight for Life- 4000 24th St.; Lubbock, TX		806-743-9911	
Aerocare- R3, Box 49F; Lubbock, TX		806-747-8923	
Med Flight Air Amb- 2301 Yale Blvd S.E., D3; Albuquerque, NM		505-842-4433	
SB Air Med Service- 2505 Clark Carr Loop S.E.; Albuquerque, NM		505-842-4949	
Other			
Boots & Coots IWC		800-256-9688	or 281-931-8884
Cudd Pressure Control		432-699-0139	or 432-563-3356
Haliburton		575-746-2757	
B.J. Services		575-746-3569	

H2S Rig Layout

Pennzoil 32 Fed 111H
Eddy County, NM
(not to scale)

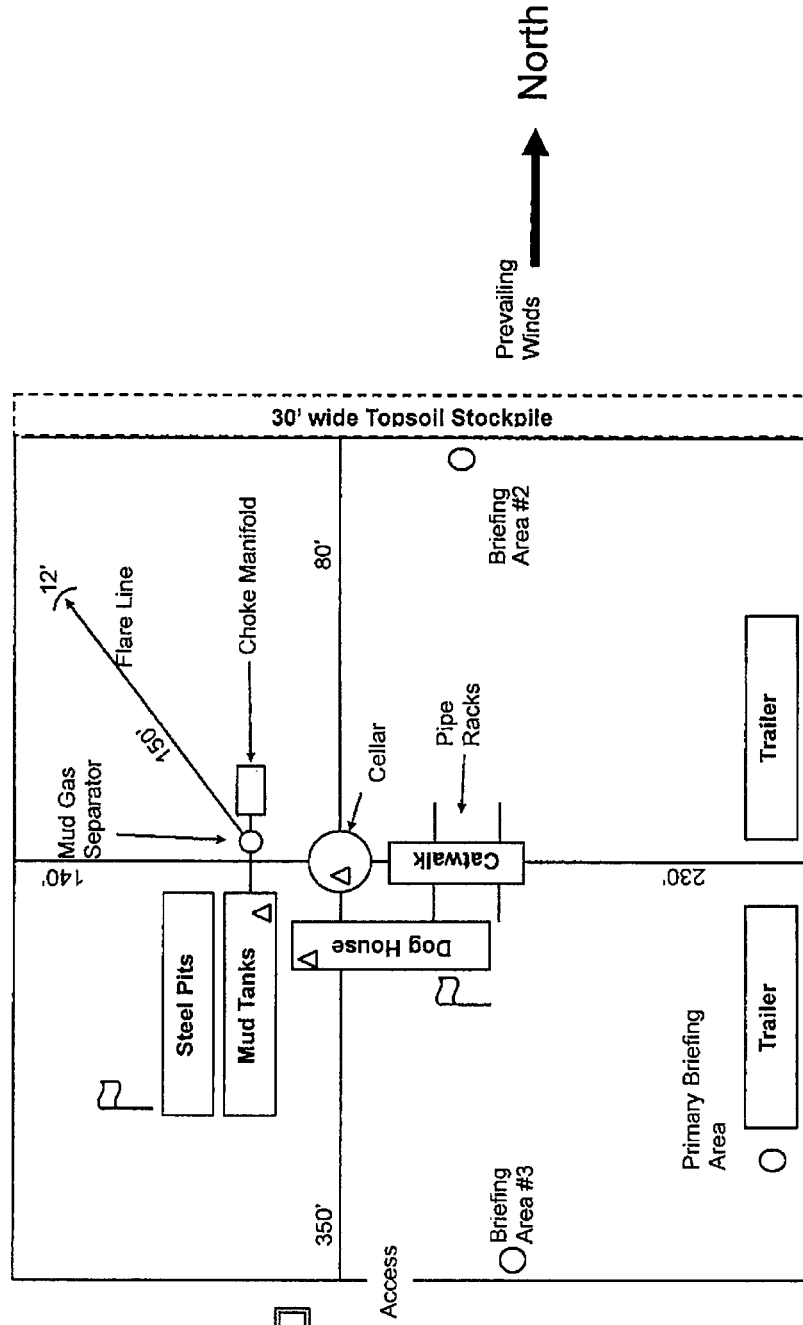


Prevailing Winds
North

Matador Production Company

Pennzoil Fed 32 #111H
H2S Contingency Plan:
1 Mile Radius Map

Section 33, Township 20S, Range 29E
Eddy County, New Mexico



⊙ Surface Hole Location




NAD 1927 New Mexico State Plane East
FIPS 3001 Feet

PERMIT

Prepared by Permis West, Inc. July 29, 2016
for Matador Production Company

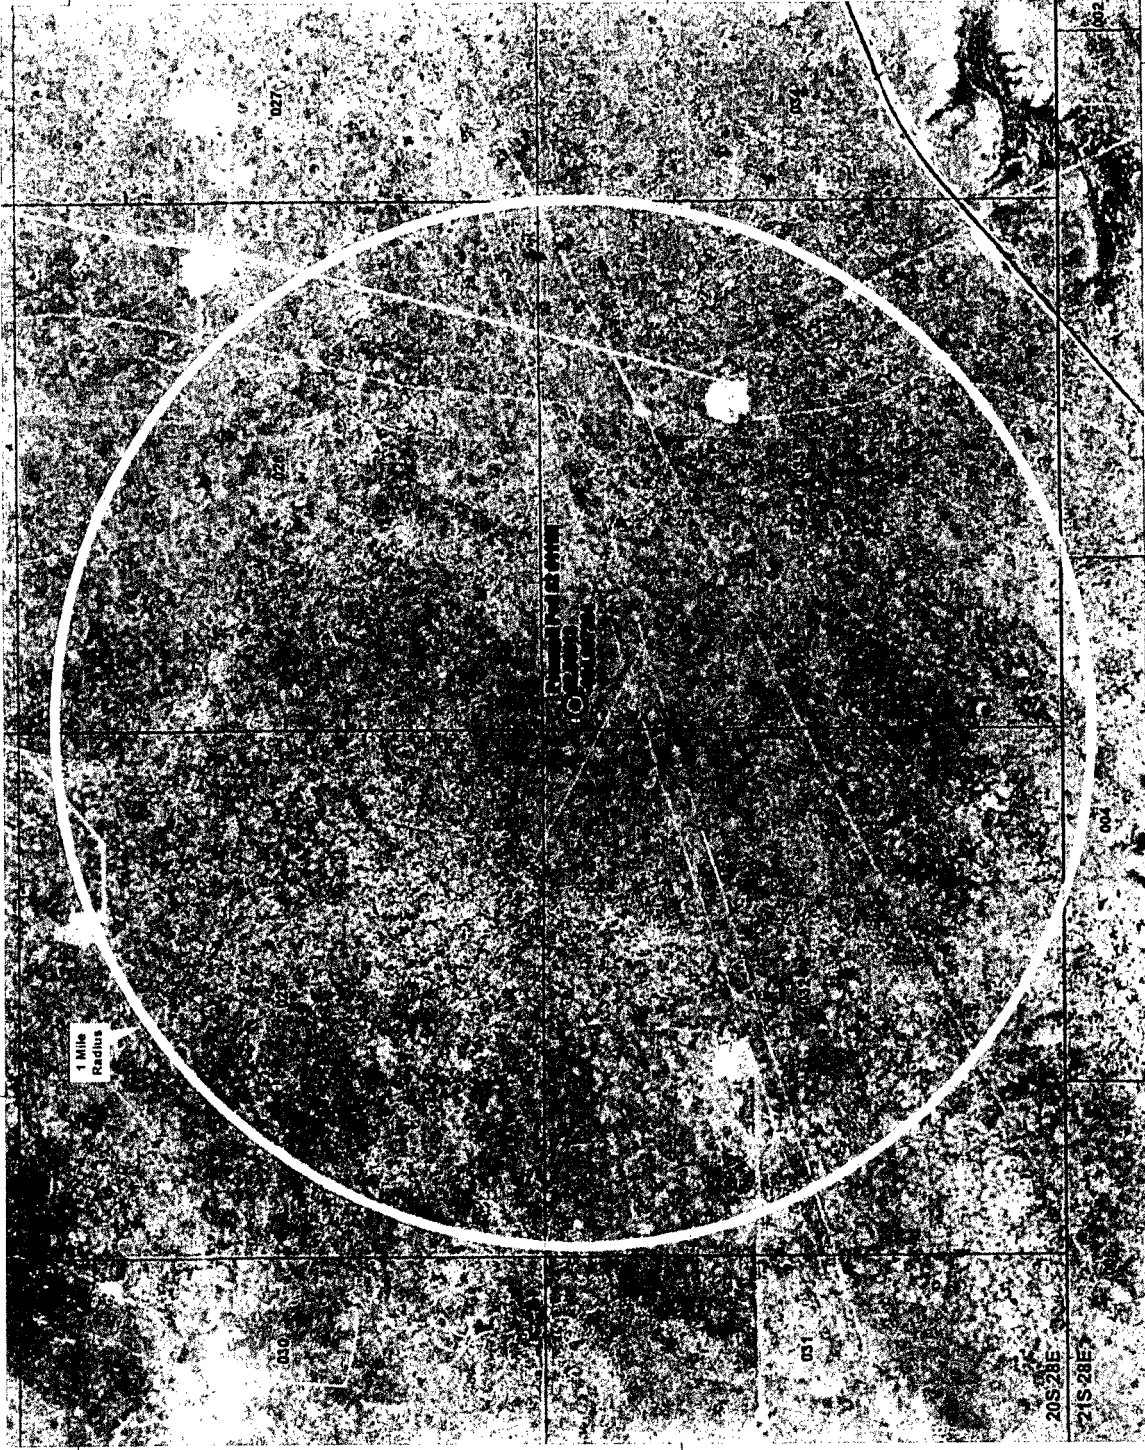

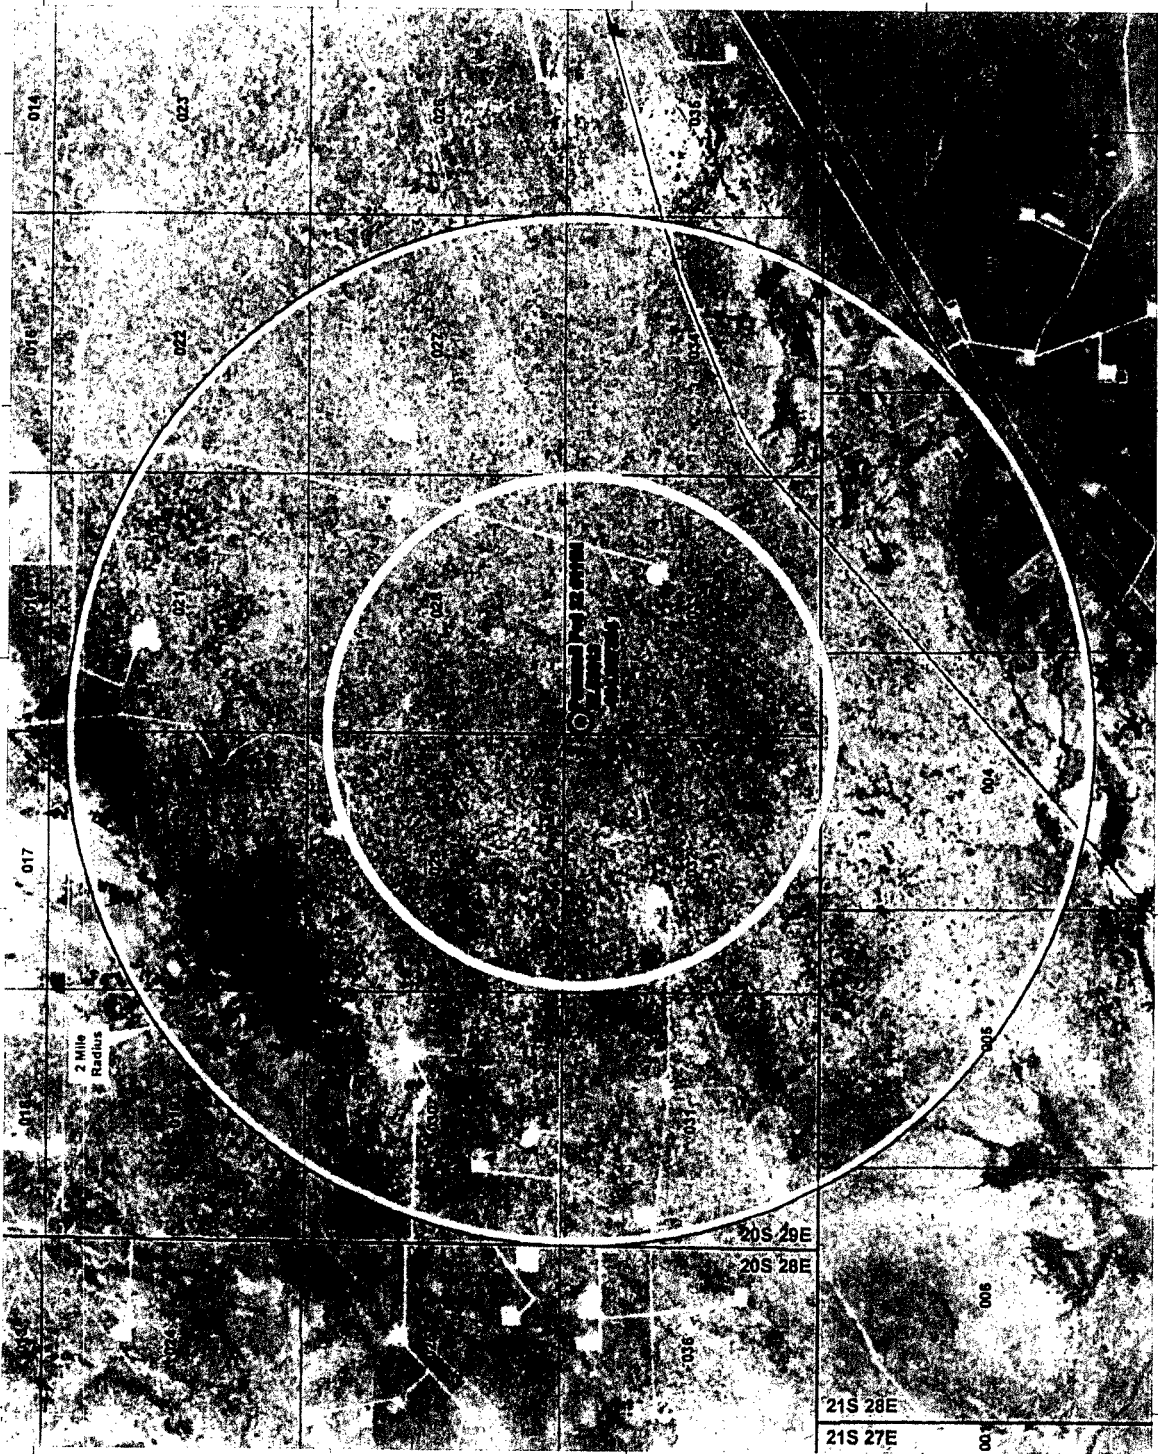


Matador Production Company

Pennzoil Fed 32 #111H
H&S Contingency Plan:
2 Mile Radius Map

Section 33, Township 20S, Range 29E
Eddy County, New Mexico


⊙ Surface Hole Location



NAD 1927 New Mexico State Plane East
FPS 3001 Feet

FLYNN WYATT

Prepared by Permits West, Inc., October 9, 2016
for Matador Production Company





Pro Directional Survey Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well No. 111H
Project:	Eddy County, NM	TVD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Site:	Pennzoil Federal 32 (111-121-131-201)	MD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Well:	No. 111H	North Reference:	Grid
Wellbore:	OH	Survey Calculation Method:	Minimum Curvature
Design:	Prelim Plan A	Database:	Well_Planner1

Project	Eddy County, NM
Map System:	US State Plane 1927 (Exact solution)
Geo Datum:	NAD 1927 (NADCON CONUS)
Map Zone:	New Mexico East 3001
System Datum:	Mean Sea Level

Site Pennzoil Federal 32 (111-121-131-201)

Site Position:		Northing:	558,844.00 usft	Latitude:	32° 32' 10.069 N
From:	Map	Easting:	575,796.00 usft	Longitude:	104° 5' 14.584 W
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "	Grid Convergence:	0.13 °

Well No. 111H

Well Position	+N/-S	0.00 usft	Northing:	558,844.00 usft	Latitude:	32° 32' 10.069 N
	+E/-W	0.00 usft	Easting:	575,796.00 usft	Longitude:	104° 5' 14.584 W
Position Uncertainty		0.00 usft	Wellhead Elevation:	0.00 usft	Ground Level:	3,264.00 usft

Wellbore OH

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	HDGM	8/30/2016	7.47	60.40	48,282

Design Prelim Plan A

Audit Notes:

Version:	Phase:	PLAN	Tie On Depth:	0.00
-----------------	---------------	------	----------------------	------

Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	270.02

Survey Tool Program Date 8/30/2016

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	2,000.00	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG
2,000.00	6,500.00	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG
6,500.00	12,193.69	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
[PennzFed32#111H]FPP - [PennzFed32#111H]LPP									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00



Pro Directional Survey Report



Company: Matador Resources
Project: Eddy County, NM

Site: Pennzoil Federal 32 (111-121-131-201)

Well: No. 111H

Wellbore: OH

Design: Prelim Plan A

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Database:

Well No. 111H

Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))

Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))

Grid

Minimum Curvature

Well_Planner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
Start Build 2.00									
600.00	2.00	90.00	599.98	0.00	1.75	-1.75	2.00	2.00	0.00
700.00	4.00	90.00	699.84	0.00	6.98	-6.98	2.00	2.00	0.00
750.00	5.00	90.00	749.68	0.00	10.90	-10.90	2.00	2.00	0.00
Start 2.26 hold at 750.00 MD									
752.26	5.00	90.00	751.94	0.00	11.10	-11.10	0.00	0.00	0.00
Start Drop -2.00									
800.00	4.05	90.00	799.53	0.00	14.86	-14.86	2.00	-2.00	0.00
900.00	2.05	90.00	899.38	0.00	20.17	-20.17	2.00	-2.00	0.00
1,002.26	0.00	0.00	1,001.62	0.00	22.00	-22.00	2.00	-2.00	0.00
Start 5570.38 hold at 1002.26 MD									
1,100.00	0.00	0.00	1,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,199.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,599.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,699.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,799.36	0.00	22.00	-22.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,899.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,000.00	0.00	0.00	1,999.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,100.00	0.00	0.00	2,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,199.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,599.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,699.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,799.36	0.00	22.00	-22.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,899.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,000.00	0.00	0.00	2,999.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,200.00	0.00	0.00	3,199.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,300.00	0.00	0.00	3,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,600.00	0.00	0.00	3,599.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,699.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,799.36	0.00	22.00	-22.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,899.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,000.00	0.00	0.00	3,999.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,200.00	0.00	0.00	4,199.36	0.00	22.00	-22.00	0.00	0.00	0.00



Pro Directional Survey Report



Company: Matador Resources
Project: Eddy County, NM

Site: Pennzoil Federal 32 (111-121-131-201)

Well: No. 111H

Wellbore: OH

Design: Prelim Plan A

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Database:

Well No. 111H

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Grid

Minimum Curvature

Well_Planner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,300.00	0.00	0.00	4,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,599.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,699.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,799.36	0.00	22.00	-22.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,899.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,000.00	0.00	0.00	4,999.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,199.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,599.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,699.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,799.36	0.00	22.00	-22.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,899.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,000.00	0.00	0.00	5,999.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,099.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,200.00	0.00	0.00	6,199.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,299.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,399.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,499.36	0.00	22.00	-22.00	0.00	0.00	0.00
6,572.64	0.00	0.00	6,572.00	0.00	22.00	-22.00	0.00	0.00	0.00
Start DLS 10.00 TFO 270.02									
6,600.00	2.74	270.02	6,599.35	0.00	21.35	-21.35	10.00	10.00	0.00
6,650.00	7.74	270.02	6,649.12	0.00	16.79	-16.79	10.00	10.00	0.00
6,700.00	12.74	270.02	6,698.31	0.01	7.90	-7.90	10.00	10.00	0.00
6,750.00	17.74	270.02	6,746.54	0.01	-5.23	5.23	10.00	10.00	0.00
6,800.00	22.74	270.02	6,793.44	0.02	-22.52	22.52	10.00	10.00	0.00
6,850.00	27.74	270.02	6,838.65	0.02	-43.83	43.83	10.00	10.00	0.00
6,900.00	32.74	270.02	6,881.84	0.03	-69.00	69.00	10.00	10.00	0.00
6,950.00	37.74	270.02	6,922.66	0.05	-97.84	97.84	10.00	10.00	0.00
7,000.00	42.74	270.02	6,960.82	0.06	-130.12	130.12	10.00	10.00	0.00
7,050.00	47.74	270.02	6,996.02	0.07	-165.61	165.61	10.00	10.00	0.00
7,100.00	52.74	270.02	7,027.99	0.09	-204.04	204.04	10.00	10.00	0.00
7,150.00	57.74	270.02	7,056.49	0.10	-245.10	245.10	10.00	10.00	0.00
7,200.00	62.74	270.02	7,081.30	0.12	-288.49	288.49	10.00	10.00	0.00
7,250.00	67.74	270.02	7,102.24	0.13	-333.88	333.88	10.00	10.00	0.00
7,300.00	72.74	270.02	7,119.14	0.15	-380.92	380.92	10.00	10.00	0.00
7,350.00	77.74	270.02	7,131.88	0.17	-429.25	429.25	10.00	10.00	0.00
7,400.00	82.74	270.02	7,140.36	0.19	-478.51	478.51	10.00	10.00	0.00



Pro Directional Survey Report



Company: Matador Resources
Project: Eddy County, NM

Site: Pennzoil Federal 32 (111-121-131-201)

Well: No. 111H
Wellbore: OH
Design: Prelim Plan A

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: Well_Planner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
7,450.00	87.74	270.02	7,144.51	0.21	-528.32	528.32	10.00	10.00	0.00
7,472.64	90.00	270.02	7,144.96	0.22	-550.95	550.95	10.00	10.00	0.00
LP									
7,500.00	90.00	270.02	7,144.96	0.23	-578.31	578.31	0.00	0.00	0.00
7,600.00	90.00	270.02	7,144.96	0.26	-678.31	678.31	0.00	0.00	0.00
7,700.00	90.00	270.02	7,144.96	0.30	-778.31	778.31	0.00	0.00	0.00
7,800.00	90.00	270.02	7,144.96	0.34	-878.31	878.31	0.00	0.00	0.00
7,900.00	90.00	270.02	7,144.96	0.38	-978.31	978.31	0.00	0.00	0.00
8,000.00	90.00	270.02	7,144.96	0.42	-1,078.31	1,078.31	0.00	0.00	0.00
8,100.00	90.00	270.02	7,144.96	0.45	-1,178.31	1,178.31	0.00	0.00	0.00
8,200.00	90.00	270.02	7,144.96	0.49	-1,278.31	1,278.31	0.00	0.00	0.00
8,300.00	90.00	270.02	7,144.97	0.53	-1,378.31	1,378.31	0.00	0.00	0.00
8,400.00	90.00	270.02	7,144.97	0.57	-1,478.31	1,478.31	0.00	0.00	0.00
8,500.00	90.00	270.02	7,144.97	0.60	-1,578.31	1,578.31	0.00	0.00	0.00
8,600.00	90.00	270.02	7,144.97	0.64	-1,678.31	1,678.31	0.00	0.00	0.00
8,700.00	90.00	270.02	7,144.97	0.68	-1,778.31	1,778.31	0.00	0.00	0.00
8,800.00	90.00	270.02	7,144.97	0.72	-1,878.31	1,878.31	0.00	0.00	0.00
8,900.00	90.00	270.02	7,144.97	0.76	-1,978.31	1,978.31	0.00	0.00	0.00
9,000.00	90.00	270.02	7,144.97	0.79	-2,078.31	2,078.31	0.00	0.00	0.00
9,100.00	90.00	270.02	7,144.97	0.83	-2,178.31	2,178.31	0.00	0.00	0.00
9,200.00	90.00	270.02	7,144.97	0.87	-2,278.31	2,278.31	0.00	0.00	0.00
9,300.00	90.00	270.02	7,144.97	0.91	-2,378.31	2,378.31	0.00	0.00	0.00
9,400.00	90.00	270.02	7,144.98	0.94	-2,478.31	2,478.31	0.00	0.00	0.00
9,500.00	90.00	270.02	7,144.98	0.98	-2,578.31	2,578.31	0.00	0.00	0.00
9,600.00	90.00	270.02	7,144.98	1.02	-2,678.31	2,678.31	0.00	0.00	0.00
9,700.00	90.00	270.02	7,144.98	1.06	-2,778.31	2,778.31	0.00	0.00	0.00
9,800.00	90.00	270.02	7,144.98	1.10	-2,878.31	2,878.31	0.00	0.00	0.00
9,900.00	90.00	270.02	7,144.98	1.13	-2,978.31	2,978.31	0.00	0.00	0.00
10,000.00	90.00	270.02	7,144.98	1.17	-3,078.31	3,078.31	0.00	0.00	0.00
10,100.00	90.00	270.02	7,144.98	1.21	-3,178.31	3,178.31	0.00	0.00	0.00
10,200.00	90.00	270.02	7,144.98	1.25	-3,278.31	3,278.31	0.00	0.00	0.00
10,300.00	90.00	270.02	7,144.98	1.28	-3,378.31	3,378.31	0.00	0.00	0.00
10,400.00	90.00	270.02	7,144.98	1.32	-3,478.31	3,478.31	0.00	0.00	0.00
10,500.00	90.00	270.02	7,144.99	1.36	-3,578.31	3,578.31	0.00	0.00	0.00
10,600.00	90.00	270.02	7,144.99	1.40	-3,678.31	3,678.31	0.00	0.00	0.00
10,700.00	90.00	270.02	7,144.99	1.44	-3,778.31	3,778.31	0.00	0.00	0.00
10,800.00	90.00	270.02	7,144.99	1.47	-3,878.31	3,878.31	0.00	0.00	0.00
10,900.00	90.00	270.02	7,144.99	1.51	-3,978.31	3,978.31	0.00	0.00	0.00
11,000.00	90.00	270.02	7,144.99	1.55	-4,078.31	4,078.31	0.00	0.00	0.00
11,100.00	90.00	270.02	7,144.99	1.59	-4,178.31	4,178.31	0.00	0.00	0.00
11,200.00	90.00	270.02	7,144.99	1.62	-4,278.31	4,278.31	0.00	0.00	0.00
11,300.00	90.00	270.02	7,144.99	1.66	-4,378.31	4,378.31	0.00	0.00	0.00



Pro Directional Survey Report



Company: Matador Resources
Project: Eddy County, NM
Site: Pennzoil Federal 32 (111-121-131-201)
Well: No. 111H
Wellbore: OH
Design: Prelim Plan A

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Database: Well_Planner1

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
11,400.00	90.00	270.02	7,144.99	1.70	-4,478.31	4,478.31	0.00	0.00	0.00
11,500.00	90.00	270.02	7,144.99	1.74	-4,578.31	4,578.31	0.00	0.00	0.00
11,600.00	90.00	270.02	7,144.99	1.78	-4,678.31	4,678.31	0.00	0.00	0.00
11,700.00	90.00	270.02	7,145.00	1.81	-4,778.31	4,778.31	0.00	0.00	0.00
11,800.00	90.00	270.02	7,145.00	1.85	-4,878.31	4,878.31	0.00	0.00	0.00
11,900.00	90.00	270.02	7,145.00	1.89	-4,978.31	4,978.31	0.00	0.00	0.00
12,000.00	90.00	270.02	7,145.00	1.93	-5,078.31	5,078.31	0.00	0.00	0.00
12,100.00	90.00	270.02	7,145.00	1.96	-5,178.31	5,178.31	0.00	0.00	0.00
12,193.69	90.00	270.02	7,145.00	2.00	-5,272.00	5,272.00	0.00	0.00	0.00
TD at 12193.69 - [PennzFed32#111H]BHL									

Design Targets

Target Name

- hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
[PennzFed32#111H]FPF - plan misses target center by 550.00usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E) - Point	0.00	0.00	0.00	0.00	-550.00	558,844.00	575,246.00	32° 32' 10.082 N	104° 5' 21.009 W
[PennzFed32#111H]LPF - plan misses target center by 5182.00usft at 0.00usft MD (0.00 TVD, 0.00 N, 0.00 E) - Point	0.00	0.00	0.00	2.00	-5,182.00	558,846.00	570,614.00	32° 32' 10.204 N	104° 6' 15.117 W
[PennzFed32#111H]BHL - plan hits target center - Point	0.00	0.00	7 145.00	2.00	-5,272.00	558,846.00	570,524.00	32° 32' 10.205 N	104° 6' 16.169 W

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
500	500	0	0	Start Build 2.00
750	750	0	11	Start 2.26 hold at 750.00 MD
752	752	0	11	Start Drop -2.00
1002	1002	0	22	Start 5570.38 hold at 1002.26 MD
6573	6572	0	22	Start DLS 10.00 TFO 270.02
7473	7145	0	-551	LP
12,194	7145	2	-5272	TD at 12193.69

Checked By: _____ Approved By: _____ Date: _____



Pro Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well No. 111H
Project:	Eddy County, NM	TVD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Reference Site:	Pennzoil Federal 32 (111-121-131-201)	MD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	No. 111H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Well_Planner1
Reference Design:	Prelim Plan A	Offset TVD Reference:	Offset Datum

Reference	Prelim Plan A		
Filter type:	NO GLOBAL FILTER: Using user defined selection & filtering criteria		
Interpolation Method:	Stations	Error Model:	ISCWSA
Depth Range:	Unlimited	Scan Method:	Closest Approach 3D
Results Limited by:	Maximum center-center distance of 2,000.00 usft	Error Surface:	Elliptical Conic
Warning Levels Evaluated at:	2.00 Sigma	Casing Method:	Not applied

Survey Tool Program Date 8/30/2016

From (usft)	To (usft)	Survey (Wellbore)	Tool Name	Description
0.00	2,000.00	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG
2,000.00	6,500.00	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG
6,500.00	12,193.69	Prelim Plan A (OH)	MWD - OWSG	MWD - OWSG

Summary

Site Name	Reference Measured Depth (usft)	Offset Measured Depth (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Separation Factor	Warning
Offset Well - Wellbore - Design						
Pennzoil Federal 32 (111-121-131-201)						
No. 121H - OH - Prelim Plan A	1,067.27	1,067.77	22.16	15.00	3.093	CC
No. 121H - OH - Prelim Plan A	1,100.00	1,100.38	22.34	14.94	3.020	ES
No. 121H - OH - Prelim Plan A	6,572.64	6,576.12	75.00	40.34	2.164	SF
No. 131H - OH - Prelim Plan A	1,289.04	1,290.00	49.41	40.65	5.642	CC
No. 131H - OH - Prelim Plan A	1,300.00	1,300.93	49.42	40.58	5.592	ES
No. 131H - OH - Prelim Plan A	6,572.64	6,579.64	150.00	115.50	4.347	SF
No. 201H - OH - Prelim Plan A	1,514.17	1,515.62	77.03	66.65	7.423	CC
No. 201H - OH - Prelim Plan A	1,600.00	1,601.12	77.39	66.39	7.036	ES
No. 201H - OH - Prelim Plan A	2,000.00	1,999.60	87.90	74.03	6.336	SF

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 121H - OH - Prelim Plan A

Survey Program: 0-MWD - OWSG 2000-MWD - OWSG, 6500-MWD - OWSG

Offset Site Error: 0.00 usft

Offset Well Error: 0.00 usft

Reference Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Semi Major Axis Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Distance Between Centres (usft)	Distance Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	180.00	-30.00	0.00	30.00				
100.00	100.00	100.00	100.00	0.13	0.13	180.00	-30.00	0.00	30.00	29.74	0.26	117.047	
200.00	200.00	200.00	200.00	0.49	0.49	180.00	-30.00	0.00	30.00	29.03	0.97	30.825	
300.00	300.00	300.00	300.00	0.85	0.85	180.00	-30.00	0.00	30.00	28.31	1.69	17.749	
400.00	400.00	400.00	400.00	1.20	1.20	180.00	-30.00	0.00	30.00	27.59	2.41	12.463	
500.00	500.00	500.00	500.00	1.56	1.56	180.00	-30.00	0.00	30.00	26.88	3.12	9.603	
500.02	500.02	500.02	500.02	1.56	1.56	-180.00	-30.00	0.00	30.00	26.88	3.12	9.602	
600.00	599.98	599.98	599.98	1.91	1.92	93.33	-30.00	0.00	30.05	26.22	3.83	7.840	
700.00	699.84	700.34	700.32	2.26	2.27	100.23	-29.48	1.68	29.96	25.42	4.54	6.603	
750.00	749.68	750.56	750.49	2.44	2.45	103.96	-28.83	3.78	29.71	24.82	4.89	6.073	
752.26	751.94	752.83	752.76	2.45	2.46	104.13	-28.80	3.89	29.69	24.79	4.91	6.050	
800.00	799.53	800.81	800.65	2.62	2.63	106.37	-27.92	6.72	29.11	23.86	5.25	5.545	
900.00	899.38	901.01	900.50	2.98	2.99	102.29	-25.47	14.66	26.08	20.11	5.97	4.371	
1,002.26	1,001.62	1,003.01	1,002.11	3.34	3.36	177.10	-22.84	23.16	22.87	16.17	6.70	3.414	
1,067.27	1,066.62	1,067.77	1,066.62	3.57	3.60	162.82	-21.17	28.55	22.16	15.00	7.17	3.093	CC

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Reference Site: Pennzoil Federal 32 (111-121-131-201)

North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: Well_Planner1
Offset TVD Reference: Offset Datum

Site Error: 0.00 usft

Reference Well: No. 111H

Well Error: 0.00 usft

Reference Wellbore: OH

Reference Design: Prelim Plan A

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 121H - OH - Prelim Plan A												Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG 2000-MWD - OWSG, 6500-MWD - OWSG												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
1,100.00	1,099.36	1,100.38	1,099.11	3.69	3.72	155.51	-20.33	31.26	22.34	14.94	7.40	3.020	ES
1,200.00	1,199.36	1,200.00	1,198.35	4.04	4.09	135.34	-17.77	39.56	25.00	16.89	8.11	3.084	
1,300.00	1,299.36	1,299.62	1,297.59	4.40	4.46	120.45	-15.20	47.85	30.04	21.23	8.81	3.410	
1,400.00	1,399.36	1,399.24	1,396.83	4.75	4.83	110.31	-12.64	56.15	36.50	26.98	9.51	3.836	
1,500.00	1,499.36	1,498.86	1,496.07	5.11	5.21	103.35	-10.07	64.44	43.74	33.52	10.22	4.280	
1,600.00	1,599.36	1,598.48	1,595.31	5.46	5.58	98.41	-7.50	72.74	51.45	40.52	10.93	4.707	
1,700.00	1,699.36	1,698.10	1,694.55	5.82	5.96	94.78	-4.94	81.03	59.43	47.79	11.64	5.105	
1,800.00	1,799.36	1,798.46	1,794.55	6.18	6.34	92.06	-2.41	89.20	67.41	55.05	12.36	5.454	
1,900.00	1,899.36	1,900.68	1,896.59	6.54	6.71	90.53	-0.67	94.83	72.88	59.80	13.09	5.569	
2,000.00	1,999.36	2,003.18	1,999.07	6.89	7.07	90.01	-0.01	96.98	74.98	61.18	13.80	5.434	
2,100.00	2,099.36	2,103.47	2,099.36	7.07	7.10	90.00	0.00	97.00	75.00	60.99	14.01	5.354	
2,200.00	2,199.36	2,203.47	2,199.36	7.09	7.13	90.00	0.00	97.00	75.00	60.95	14.05	5.337	
2,300.00	2,299.36	2,303.47	2,299.36	7.13	7.17	90.00	0.00	97.00	75.00	60.87	14.13	5.306	
2,400.00	2,399.36	2,403.47	2,399.36	7.18	7.23	90.00	0.00	97.00	75.00	60.75	14.25	5.263	
2,500.00	2,499.36	2,503.47	2,499.36	7.25	7.31	90.00	0.00	97.00	75.00	60.60	14.40	5.207	
2,600.00	2,599.36	2,603.47	2,599.36	7.34	7.41	90.00	0.00	97.00	75.00	60.41	14.59	5.141	
2,700.00	2,699.36	2,703.47	2,699.36	7.45	7.52	90.00	0.00	97.00	75.00	60.19	14.81	5.066	
2,800.00	2,799.36	2,803.47	2,799.36	7.56	7.65	90.00	0.00	97.00	75.00	59.95	15.05	4.982	
2,900.00	2,899.36	2,903.47	2,899.36	7.70	7.79	90.00	0.00	97.00	75.00	59.67	15.33	4.891	
3,000.00	2,999.36	3,003.47	2,999.36	7.85	7.94	90.00	0.00	97.00	75.00	59.36	15.64	4.795	
3,100.00	3,099.36	3,103.47	3,099.36	8.01	8.11	90.00	0.00	97.00	75.00	59.03	15.97	4.696	
3,200.00	3,199.36	3,203.47	3,199.36	8.18	8.29	90.00	0.00	97.00	75.00	58.67	16.33	4.593	
3,300.00	3,299.36	3,303.47	3,299.36	8.37	8.48	90.00	0.00	97.00	75.00	58.29	16.71	4.488	
3,400.00	3,399.36	3,403.47	3,399.36	8.57	8.68	90.00	0.00	97.00	75.00	57.89	17.11	4.383	
3,500.00	3,499.36	3,503.47	3,499.36	8.78	8.89	90.00	0.00	97.00	75.00	57.47	17.53	4.277	
3,600.00	3,599.36	3,603.47	3,599.36	8.99	9.11	90.00	0.00	97.00	75.00	57.02	17.98	4.172	
3,700.00	3,699.36	3,703.47	3,699.36	9.22	9.34	90.00	0.00	97.00	75.00	56.57	18.43	4.069	
3,800.00	3,799.36	3,803.47	3,799.36	9.45	9.58	90.00	0.00	97.00	75.00	56.09	18.91	3.967	
3,900.00	3,899.36	3,903.47	3,899.36	9.69	9.82	90.00	0.00	97.00	75.00	55.60	19.40	3.866	
4,000.00	3,999.36	4,003.47	3,999.36	9.94	10.07	90.00	0.00	97.00	75.00	55.10	19.90	3.769	
4,100.00	4,099.36	4,103.47	4,099.36	10.20	10.33	90.00	0.00	97.00	75.00	54.58	20.42	3.674	
4,200.00	4,199.36	4,203.47	4,199.36	10.46	10.60	90.00	0.00	97.00	75.00	54.06	20.94	3.581	
4,300.00	4,299.36	4,303.47	4,299.36	10.73	10.87	90.00	0.00	97.00	75.00	53.52	21.48	3.491	
4,400.00	4,399.36	4,403.47	4,399.36	11.00	11.14	90.00	0.00	97.00	75.00	52.97	22.03	3.404	
4,500.00	4,499.36	4,503.47	4,499.36	11.28	11.42	90.00	0.00	97.00	75.00	52.41	22.59	3.320	
4,600.00	4,599.36	4,603.47	4,599.36	11.56	11.70	90.00	0.00	97.00	75.00	51.84	23.16	3.239	
4,700.00	4,699.36	4,703.47	4,699.36	11.84	11.99	90.00	0.00	97.00	75.00	51.27	23.73	3.160	
4,800.00	4,799.36	4,803.47	4,799.36	12.13	12.28	90.00	0.00	97.00	75.00	50.69	24.31	3.085	
4,900.00	4,899.36	4,903.47	4,899.36	12.42	12.57	90.00	0.00	97.00	75.00	50.10	24.90	3.012	
5,000.00	4,999.36	5,003.47	4,999.36	12.72	12.87	90.00	0.00	97.00	75.00	49.50	25.50	2.941	
5,100.00	5,099.36	5,103.47	5,099.36	13.02	13.17	90.00	0.00	97.00	75.00	48.90	26.10	2.873	
5,200.00	5,199.36	5,203.47	5,199.36	13.32	13.47	90.00	0.00	97.00	75.00	48.29	26.71	2.808	
5,300.00	5,299.36	5,303.47	5,299.36	13.63	13.78	90.00	0.00	97.00	75.00	47.68	27.32	2.745	
5,400.00	5,399.36	5,403.47	5,399.36	13.94	14.09	90.00	0.00	97.00	75.00	47.06	27.94	2.684	
5,500.00	5,499.36	5,503.47	5,499.36	14.25	14.40	90.00	0.00	97.00	75.00	46.44	28.56	2.626	
5,600.00	5,599.36	5,603.47	5,599.36	14.56	14.71	90.00	0.00	97.00	75.00	45.81	29.19	2.569	
5,700.00	5,699.36	5,703.47	5,699.36	14.87	15.03	90.00	0.00	97.00	75.00	45.18	29.82	2.515	
5,800.00	5,799.36	5,803.47	5,799.36	15.19	15.35	90.00	0.00	97.00	75.00	44.54	30.46	2.462	
5,900.00	5,899.36	5,903.47	5,899.36	15.51	15.66	90.00	0.00	97.00	75.00	43.90	31.10	2.412	
6,000.00	5,999.36	6,003.47	5,999.36	15.83	15.98	90.00	0.00	97.00	75.00	43.26	31.74	2.363	
6,100.00	6,099.36	6,103.47	6,099.36	16.15	16.31	90.00	0.00	97.00	75.00	42.62	32.38	2.316	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Reference Site: Pennzoil Federal 32 (111-121-131-201)

North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: Well_Planner1
Offset TVD Reference: Offset Datum

Site Error: 0.00 usft
Reference Well: No. 111H
Well Error: 0.00 usft
Reference Wellbore: OH
Reference Design: Prelim Plan A

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 121H - OH - Prelim Plan A												Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG, 6500-MWD - OWSG												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
6,200.00	6,199.36	6,203.47	6,199.36	16.47	16.63	90.00	0.00	97.00	75.00	41.97	33.03	2.271	
6,300.00	6,299.36	6,303.47	6,299.36	16.80	16.95	90.00	0.00	97.00	75.00	41.32	33.68	2.227	
6,400.00	6,399.36	6,403.47	6,399.36	17.12	17.28	90.00	0.00	97.00	75.00	40.67	34.33	2.185	
6,500.00	6,499.36	6,503.47	6,499.36	17.29	17.43	90.00	0.00	97.00	75.00	40.35	34.65	2.164	
6,572.64	6,572.00	6,576.12	6,572.00	17.29	17.44	90.00	0.00	97.00	75.00	40.34	34.66	2.164 SF	
6,600.00	6,599.35	6,603.46	6,599.35	17.29	17.44	179.98	0.00	97.00	75.65	40.98	34.67	2.182	
6,650.00	6,649.12	6,653.24	6,649.12	17.30	17.45	179.98	0.00	97.00	80.21	45.53	34.68	2.313	
6,700.00	6,698.31	6,702.43	6,698.31	17.31	17.46	179.98	0.00	97.00	89.10	54.39	34.70	2.567	
6,750.00	6,746.54	6,750.65	6,746.54	17.33	17.47	179.98	0.00	97.00	102.23	67.50	34.73	2.943	
6,800.00	6,793.44	6,797.55	6,793.44	17.35	17.48	179.99	0.00	97.00	119.52	84.76	34.76	3.438	
6,850.00	6,838.65	6,842.77	6,838.65	17.37	17.49	179.99	0.00	97.00	140.83	106.03	34.80	4.047	
6,900.00	6,881.84	6,885.95	6,881.84	17.41	17.50	179.99	0.00	97.00	166.00	131.16	34.84	4.764	
6,950.00	6,922.66	6,926.78	6,922.66	17.49	17.52	179.99	0.00	97.00	194.84	159.95	34.89	5.585	
7,000.00	6,960.82	6,964.93	6,960.82	17.61	17.53	179.99	0.00	97.00	227.12	192.19	34.94	6.501	
7,050.00	6,996.02	7,000.13	6,996.02	17.78	17.54	179.99	0.00	97.00	262.61	227.63	34.99	7.506	
7,100.00	7,027.99	7,032.10	7,027.99	18.02	17.56	179.99	0.00	97.00	301.04	266.00	35.04	8.592	
7,150.00	7,056.49	7,060.61	7,056.49	18.34	17.57	179.99	0.00	97.00	342.10	307.01	35.09	9.750	
7,200.00	7,081.30	7,085.42	7,081.30	18.74	17.58	179.99	0.00	97.00	385.49	350.35	35.13	10.972	
7,250.00	7,102.24	7,106.36	7,102.24	19.24	17.59	179.99	0.00	97.00	430.88	395.70	35.18	12.249	
7,300.00	7,119.14	7,123.26	7,119.14	19.85	17.60	179.99	0.00	97.00	477.92	442.70	35.21	13.572	
7,350.00	7,131.88	7,136.00	7,131.88	20.55	17.61	179.99	0.00	97.00	526.25	491.00	35.24	14.931	
7,400.00	7,140.36	7,144.47	7,140.36	21.34	17.61	179.98	0.00	97.00	575.51	540.24	35.27	16.319	
7,450.00	7,144.51	7,148.63	7,144.51	22.20	17.61	179.93	0.00	97.00	625.32	590.04	35.28	17.724	
7,472.64	7,144.96	7,149.07	7,144.96	22.62	17.61	101.55	0.00	97.00	647.95	612.67	35.28	18.364	
7,500.00	7,144.96	7,149.07	7,144.96	23.14	17.61	102.03	0.00	97.00	675.31	640.03	35.29	19.138	
7,600.00	7,144.96	8,408.47	7,874.96	25.16	26.80	180.00	0.29	-678.31	730.00	713.28	16.72	43.670	
7,700.00	7,144.96	8,508.47	7,874.96	27.35	29.05	180.00	0.33	-778.31	730.00	712.33	17.67	41.309	
7,800.00	7,144.96	8,608.47	7,874.96	29.68	31.41	180.00	0.36	-878.31	730.00	711.29	18.71	39.016	
7,900.00	7,144.96	8,708.47	7,874.96	32.12	33.87	180.00	0.40	-978.31	730.00	710.18	19.82	36.834	
8,000.00	7,144.96	8,808.47	7,874.96	34.64	36.41	180.00	0.44	-1,078.31	730.00	709.01	20.99	34.785	
8,100.00	7,144.96	8,908.47	7,874.96	37.23	39.01	180.00	0.48	-1,178.31	730.00	707.80	22.20	32.878	
8,200.00	7,144.96	9,008.47	7,874.97	39.87	41.66	180.00	0.51	-1,278.31	730.00	706.54	23.46	31.114	
8,300.00	7,144.97	9,108.47	7,874.97	42.55	44.35	180.00	0.55	-1,378.31	730.00	705.24	24.76	29.487	
8,400.00	7,144.97	9,208.47	7,874.97	45.27	47.07	180.00	0.59	-1,478.31	730.00	703.92	26.08	27.990	
8,500.00	7,144.97	9,308.47	7,874.97	48.02	49.82	180.00	0.62	-1,578.31	730.00	702.57	27.43	26.613	
8,600.00	7,144.97	9,408.47	7,874.97	50.80	52.60	180.00	0.66	-1,678.31	730.00	701.20	28.80	25.345	
8,700.00	7,144.97	9,508.47	7,874.97	53.60	55.40	180.00	0.70	-1,778.31	730.00	699.81	30.19	24.177	
8,800.00	7,144.97	9,608.47	7,874.97	56.41	58.21	180.00	0.74	-1,878.31	730.00	698.40	31.60	23.100	
8,900.00	7,144.97	9,708.47	7,874.97	59.24	61.04	180.00	0.77	-1,978.31	730.00	696.98	33.02	22.105	
9,000.00	7,144.97	9,808.47	7,874.97	62.08	63.88	180.00	0.81	-2,078.31	730.00	695.54	34.46	21.184	
9,100.00	7,144.97	9,908.47	7,874.97	64.94	66.73	180.00	0.85	-2,178.31	730.00	694.09	35.91	20.331	
9,200.00	7,144.97	10,008.47	7,874.97	67.80	69.60	180.00	0.88	-2,278.31	730.00	692.64	37.36	19.538	
9,300.00	7,144.97	10,108.47	7,874.97	70.68	72.47	180.00	0.92	-2,378.31	730.00	691.17	38.83	18.801	
9,400.00	7,144.98	10,208.47	7,874.98	73.56	75.35	180.00	0.96	-2,478.31	730.00	689.70	40.30	18.114	
9,500.00	7,144.98	10,308.47	7,874.98	76.45	78.24	180.00	1.00	-2,578.31	730.00	688.22	41.78	17.472	
9,600.00	7,144.98	10,408.47	7,874.98	79.34	81.13	180.00	1.03	-2,678.31	730.00	686.73	43.27	16.872	
9,700.00	7,144.98	10,508.47	7,874.98	82.24	84.03	180.00	1.07	-2,778.31	730.00	685.24	44.76	16.310	
9,800.00	7,144.98	10,608.47	7,874.98	85.15	86.93	180.00	1.11	-2,878.31	730.00	683.74	46.26	15.782	
9,900.00	7,144.98	10,708.47	7,874.98	88.06	89.84	180.00	1.15	-2,978.31	730.00	682.24	47.76	15.285	
10,000.00	7,144.98	10,808.47	7,874.98	90.97	92.75	180.00	1.18	-3,078.31	730.00	680.74	49.26	14.818	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Reference Site: Pennzoil Federal 32 (111-121-131-201)

Site Error: 0.00 usft

Reference Well: No. 111H

Well Error: 0.00 usft

Reference Wellbore: OH

Reference Design: Prelim Plan A

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Output errors are at

Database:

Offset TVD Reference:

Well No. 111H

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Grid

Minimum Curvature

2.00 sigma

Well_Planner1

Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 121H - OH - Prelim Plan A												Offset Site Error:	0.00 usft
Survey Program: 0-MWD - CWSG 2000-MWD - OWSG 6500-MWD - OWSG												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
10,100.00	7,144.98	10,908.47	7,874.98	93.89	95.67	180.00	1.22	-3,178.31	730.00	679.23	50.77	14.378	
10,200.00	7,144.98	11,008.47	7,874.98	96.81	98.58	180.00	1.26	-3,278.31	730.00	677.71	52.29	13.962	
10,300.00	7,144.98	11,108.47	7,874.98	99.73	101.51	180.00	1.29	-3,378.31	730.00	676.20	53.80	13.568	
10,400.00	7,144.98	11,208.47	7,874.98	102.66	104.43	180.00	1.33	-3,478.31	730.00	674.68	55.32	13.195	
10,500.00	7,144.99	11,308.47	7,874.99	105.59	107.36	180.00	1.37	-3,578.31	730.00	673.16	56.84	12.842	
10,600.00	7,144.99	11,408.47	7,874.99	108.52	110.29	180.00	1.41	-3,678.31	730.00	671.63	58.37	12.507	
10,700.00	7,144.99	11,508.47	7,874.99	111.45	113.22	180.00	1.44	-3,778.31	730.00	670.10	59.90	12.188	
10,800.00	7,144.99	11,608.47	7,874.99	114.39	116.16	180.00	1.48	-3,878.31	730.00	668.57	61.43	11.884	
10,900.00	7,144.99	11,708.47	7,874.99	117.32	119.09	180.00	1.52	-3,978.31	730.00	667.04	62.96	11.595	
11,000.00	7,144.99	11,808.47	7,874.99	120.26	122.03	180.00	1.56	-4,078.31	730.00	665.51	64.49	11.320	
11,100.00	7,144.99	11,908.47	7,874.99	123.20	124.97	180.00	1.59	-4,178.31	730.00	663.98	66.02	11.057	
11,200.00	7,144.99	12,008.47	7,874.99	126.15	127.91	180.00	1.63	-4,278.31	730.00	662.44	67.56	10.805	
11,300.00	7,144.99	12,108.47	7,874.99	129.09	130.85	180.00	1.67	-4,378.31	730.00	660.90	69.10	10.565	
11,400.00	7,144.99	12,208.47	7,874.99	132.03	133.79	180.00	1.70	-4,478.31	730.00	659.36	70.64	10.335	
11,500.00	7,144.99	12,308.47	7,874.99	134.98	136.74	180.00	1.74	-4,578.31	730.00	657.82	72.18	10.114	
11,600.00	7,144.99	12,408.47	7,874.99	137.93	139.69	180.00	1.78	-4,678.31	730.00	656.28	73.72	9.902	
11,700.00	7,145.00	12,508.47	7,875.00	140.87	142.63	180.00	1.82	-4,778.31	730.00	654.74	75.26	9.699	
11,800.00	7,145.00	12,608.47	7,875.00	143.82	145.58	180.00	1.85	-4,878.31	730.00	653.19	76.81	9.504	
11,900.00	7,145.00	12,708.47	7,875.00	146.77	148.53	180.00	1.89	-4,978.31	730.00	651.65	78.35	9.317	
12,000.00	7,145.00	12,808.47	7,875.00	149.72	151.48	180.00	1.93	-5,078.31	730.00	650.10	79.90	9.137	
12,100.00	7,145.00	12,908.47	7,875.00	152.68	154.43	180.00	1.97	-5,178.31	730.00	648.56	81.44	8.963	
12,193.69	7,145.00	13,002.15	7,875.00	155.44	157.20	180.00	2.00	-5,271.99	730.00	647.11	82.99	8.806	



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM
Reference Site: Pennzoil Federal 32 (111-121-131-201)
Site Error: 0.00 usft
Reference Well: No. 111H
Well Error: 0.00 usft
Reference Wellbore: OH
Reference Design: Prelim Plan A

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at: 2.00 sigma
Database: Well_Planner1
Offset TVD Reference: Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 131H - OH - Prelim Plan A													Offset Site Error: 0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG, 6500-MWD - OWSG													Offset Well Error: 0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
0.00	0.00	0.00	0.00	0.00	0.00	180.00	-60.00	0.00	60.00				
100.00	100.00	100.00	100.00	0.13	0.13	180.00	-60.00	0.00	60.00	59.74	0.26	234.094	
200.00	200.00	200.00	200.00	0.49	0.49	180.00	-60.00	0.00	60.00	59.03	0.97	61.649	
300.00	300.00	300.00	300.00	0.85	0.85	180.00	-60.00	0.00	60.00	58.31	1.69	35.499	
400.00	400.00	400.00	400.00	1.20	1.20	180.00	-60.00	0.00	60.00	57.59	2.41	24.926	
500.00	500.00	500.00	500.00	1.56	1.56	180.00	-60.00	0.00	60.00	56.88	3.12	19.206	
500.01	500.01	500.01	500.01	1.56	1.56	-180.00	-60.00	0.00	60.00	56.88	3.12	19.205	
600.00	599.98	599.98	599.98	1.91	1.92	91.67	-60.00	0.00	60.03	56.19	3.83	15.660	
700.00	699.84	699.84	699.84	2.26	2.28	96.62	-60.00	0.00	60.40	55.86	4.54	13.305	
750.00	749.68	750.20	750.20	2.44	2.46	99.94	-59.86	0.42	60.77	55.87	4.90	12.412	
752.26	751.94	752.49	752.48	2.45	2.46	100.09	-59.84	0.45	60.78	55.87	4.91	12.374	
800.00	799.53	800.67	800.65	2.62	2.63	102.56	-59.42	1.67	60.87	55.62	5.25	11.586	
900.00	899.38	901.78	901.62	2.98	2.99	103.21	-57.66	6.71	59.25	53.29	5.97	9.928	
1,002.26	1,001.62	1,004.32	1,003.80	3.34	3.36	-172.48	-54.85	14.76	55.37	48.67	6.70	8.267	
1,100.00	1,099.36	1,101.69	1,100.79	3.69	3.71	179.15	-52.05	22.78	52.08	44.68	7.40	7.042	
1,200.00	1,199.36	1,201.31	1,200.03	4.04	4.08	169.66	-49.20	30.97	50.01	41.90	8.12	6.163	
1,289.04	1,288.39	1,290.00	1,288.39	4.36	4.40	160.77	-46.65	38.27	49.41	40.65	8.76	5.642 CC	
1,300.00	1,299.36	1,300.93	1,299.27	4.40	4.44	159.67	-46.34	39.17	49.42	40.58	8.84	5.592 ES	
1,400.00	1,399.36	1,400.55	1,398.51	4.75	4.81	149.73	-43.48	47.37	50.34	40.79	9.56	5.268	
1,500.00	1,499.36	1,500.17	1,497.75	5.11	5.19	140.43	-40.62	55.57	52.72	42.44	10.27	5.132	
1,600.00	1,599.36	1,599.78	1,596.99	5.46	5.56	132.11	-37.76	63.77	56.35	45.37	10.99	5.130	
1,700.00	1,699.36	1,699.40	1,696.24	5.82	5.93	124.93	-34.90	71.96	61.02	49.33	11.70	5.218	
1,800.00	1,799.36	1,799.02	1,795.48	6.18	6.31	118.85	-32.04	80.16	66.51	54.11	12.41	5.362	
1,900.00	1,899.36	1,898.64	1,894.72	6.54	6.69	113.73	-29.18	88.36	72.64	59.52	13.11	5.539	
2,000.00	1,999.36	1,998.26	1,993.96	6.89	7.06	109.44	-26.32	96.56	79.25	65.43	13.82	5.733	
2,100.00	2,099.36	2,097.88	2,093.20	7.07	7.27	105.83	-23.46	104.76	86.24	72.05	14.19	6.079	
2,200.00	2,199.36	2,197.50	2,192.44	7.09	7.32	102.76	-20.60	112.95	93.51	79.29	14.22	6.574	
2,300.00	2,299.36	2,297.12	2,291.68	7.13	7.39	100.14	-17.74	121.15	101.02	86.72	14.30	7.066	
2,400.00	2,399.36	2,396.74	2,390.92	7.18	7.47	97.89	-14.88	129.35	108.70	94.30	14.40	7.548	
2,500.00	2,499.36	2,496.36	2,490.16	7.25	7.57	95.94	-12.02	137.55	116.53	101.99	14.54	8.012	
2,600.00	2,599.36	2,595.98	2,589.40	7.34	7.69	94.23	-9.16	145.74	124.48	109.76	14.72	8.457	
2,700.00	2,699.36	2,695.60	2,688.64	7.45	7.83	92.73	-6.30	153.94	132.53	117.60	14.93	8.878	
2,800.00	2,799.36	2,795.47	2,788.13	7.56	7.99	91.40	-3.43	162.16	140.65	125.48	15.17	9.273	
2,900.00	2,899.36	2,900.19	2,892.61	7.70	8.15	90.44	-1.12	168.78	146.94	131.48	15.46	9.505	
3,000.00	2,999.36	3,005.28	2,997.65	7.85	8.32	90.03	-0.07	171.80	149.81	134.05	15.76	9.505	
3,100.00	3,099.36	3,106.99	3,099.36	8.01	8.47	90.00	0.00	172.00	150.00	133.92	16.08	9.329	
3,200.00	3,199.36	3,206.99	3,199.36	8.18	8.63	90.00	0.00	172.00	150.00	133.58	16.42	9.135	
3,300.00	3,299.36	3,306.99	3,299.36	8.37	8.80	90.00	0.00	172.00	150.00	133.21	16.79	8.935	
3,400.00	3,399.36	3,406.99	3,399.36	8.57	8.99	90.00	0.00	172.00	150.00	132.82	17.18	8.733	
3,500.00	3,499.36	3,506.99	3,499.36	8.78	9.18	90.00	0.00	172.00	150.00	132.42	17.58	8.530	
3,600.00	3,599.36	3,606.99	3,599.36	8.99	9.39	90.00	0.00	172.00	150.00	131.99	18.01	8.327	
3,700.00	3,699.36	3,706.99	3,699.36	9.22	9.60	90.00	0.00	172.00	150.00	131.54	18.46	8.126	
3,800.00	3,799.36	3,806.99	3,799.36	9.45	9.82	90.00	0.00	172.00	150.00	131.08	18.92	7.927	
3,900.00	3,899.36	3,906.99	3,899.36	9.69	10.05	90.00	0.00	172.00	150.00	130.60	19.40	7.732	
4,000.00	3,999.36	4,006.99	3,999.36	9.94	10.29	90.00	0.00	172.00	150.00	130.11	19.89	7.540	
4,100.00	4,099.36	4,106.99	4,099.36	10.20	10.53	90.00	0.00	172.00	150.00	129.60	20.40	7.353	
4,200.00	4,199.36	4,206.99	4,199.36	10.46	10.78	90.00	0.00	172.00	150.00	129.08	20.92	7.171	
4,300.00	4,299.36	4,306.99	4,299.36	10.73	11.04	90.00	0.00	172.00	150.00	128.55	21.45	6.994	
4,400.00	4,399.36	4,406.99	4,399.36	11.00	11.30	90.00	0.00	172.00	150.00	128.01	21.99	6.822	
4,500.00	4,499.36	4,506.99	4,499.36	11.28	11.57	90.00	0.00	172.00	150.00	127.46	22.54	6.655	
4,600.00	4,599.36	4,606.99	4,599.36	11.56	11.84	90.00	0.00	172.00	150.00	126.90	23.10	6.494	

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Local Co-ordinate Reference: Well No. 111H
TVD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
MD Reference: Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Reference Site: Pennzoil Federal 32 (111-121-131-201)

North Reference: Grid
Survey Calculation Method: Minimum Curvature
Output errors are at 2.00 sigma
Database: Well_Planner1
Offset TVD Reference: Offset Datum

Site Error: 0.00 usft

Reference Well: No. 111H

Well Error: 0.00 usft

Reference Wellbore: OH

Reference Design: Prelim Plan A

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 131H - OH - Prelim Plan A													Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG, 6500-MWD - OWSG													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Offset Wellbore Centre		Distance		Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		+N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)				
4,700.00	4,699.36	4,706.99	4,699.36	11.84	12.12	90.00	0.00	172.00	150.00	126.33	23.67	6.338		
4,800.00	4,799.36	4,806.99	4,799.36	12.13	12.40	90.00	0.00	172.00	150.00	125.76	24.24	6.188		
4,900.00	4,899.36	4,906.99	4,899.36	12.42	12.68	90.00	0.00	172.00	150.00	125.18	24.82	6.042		
5,000.00	4,999.36	5,006.99	4,999.36	12.72	12.97	90.00	0.00	172.00	150.00	124.59	25.41	5.902		
5,100.00	5,099.36	5,106.99	5,099.36	13.02	13.26	90.00	0.00	172.00	150.00	123.99	26.01	5.767		
5,200.00	5,199.36	5,206.99	5,199.36	13.32	13.55	90.00	0.00	172.00	150.00	123.39	26.61	5.636		
5,300.00	5,299.36	5,306.99	5,299.36	13.63	13.85	90.00	0.00	172.00	150.00	122.78	27.22	5.510		
5,400.00	5,399.36	5,406.99	5,399.36	13.94	14.15	90.00	0.00	172.00	150.00	122.17	27.83	5.389		
5,500.00	5,499.36	5,506.99	5,499.36	14.25	14.46	90.00	0.00	172.00	150.00	121.55	28.45	5.272		
5,600.00	5,599.36	5,606.99	5,599.36	14.56	14.76	90.00	0.00	172.00	150.00	120.93	29.07	5.159		
5,700.00	5,699.36	5,706.99	5,699.36	14.87	15.07	90.00	0.00	172.00	150.00	120.30	29.70	5.050		
5,800.00	5,799.36	5,806.99	5,799.36	15.19	15.38	90.00	0.00	172.00	150.00	119.67	30.33	4.945		
5,900.00	5,899.36	5,906.99	5,899.36	15.51	15.69	90.00	0.00	172.00	150.00	119.03	30.97	4.844		
6,000.00	5,999.36	6,006.99	5,999.36	15.83	16.01	90.00	0.00	172.00	150.00	118.40	31.60	4.746		
6,100.00	6,099.36	6,106.99	6,099.36	16.15	16.32	90.00	0.00	172.00	150.00	117.75	32.25	4.652		
6,200.00	6,199.36	6,206.99	6,199.36	16.47	16.64	90.00	0.00	172.00	150.00	117.11	32.89	4.561		
6,300.00	6,299.36	6,306.99	6,299.36	16.80	16.96	90.00	0.00	172.00	150.00	116.46	33.54	4.473		
6,400.00	6,399.36	6,406.99	6,399.36	17.12	17.27	90.00	0.00	172.00	150.00	115.82	34.18	4.389		
6,500.00	6,499.36	6,506.99	6,499.36	17.29	17.42	90.00	0.00	172.00	150.00	115.51	34.49	4.349		
6,572.64	6,572.00	6,579.64	6,572.00	17.29	17.43	90.00	0.00	172.00	150.00	115.50	34.50	4.347 SF		
6,600.00	6,599.35	6,606.98	6,599.35	17.29	17.43	179.98	0.00	172.00	150.65	116.14	34.51	4.366		
6,650.00	6,649.12	6,656.76	6,649.12	17.30	17.44	179.98	0.00	172.00	155.21	120.69	34.52	4.496		
6,700.00	6,698.31	6,705.95	6,698.31	17.31	17.44	179.98	0.00	172.00	164.10	129.55	34.54	4.750		
6,750.00	6,746.54	6,754.17	6,746.54	17.33	17.45	179.98	0.00	172.00	177.23	142.66	34.57	5.126		
6,800.00	6,793.44	6,801.07	6,793.44	17.35	17.46	179.98	0.00	172.00	194.52	159.92	34.60	5.621		
6,850.00	6,838.65	6,846.29	6,838.65	17.37	17.48	179.98	0.00	172.00	215.83	181.19	34.64	6.230		
6,900.00	6,881.84	6,889.47	6,881.84	17.41	17.49	179.98	0.00	172.00	241.00	206.32	34.68	6.948		
6,950.00	6,922.66	6,930.30	6,922.66	17.49	17.50	179.98	0.00	172.00	269.84	235.11	34.73	7.770		
7,000.00	6,960.82	6,968.46	6,960.82	17.61	17.52	179.99	0.00	172.00	302.12	267.35	34.78	8.687		
7,050.00	6,996.02	7,003.65	6,996.02	17.78	17.53	179.99	0.00	172.00	337.61	302.78	34.83	9.693		
7,100.00	7,027.99	7,035.63	7,027.99	18.02	17.55	179.99	0.00	172.00	376.04	341.16	34.88	10.781		
7,150.00	7,056.49	7,064.13	7,056.49	18.34	17.56	179.99	0.00	172.00	417.10	382.17	34.93	11.941		
7,200.00	7,081.30	7,088.94	7,081.30	18.74	17.57	179.98	0.00	172.00	460.49	425.51	34.98	13.165		
7,250.00	7,102.24	7,109.88	7,102.24	19.24	17.58	179.98	0.00	172.00	505.88	470.86	35.02	14.445		
7,300.00	7,119.14	7,126.78	7,119.14	19.85	17.59	179.98	0.00	172.00	552.92	517.86	35.06	15.772		
7,350.00	7,131.88	7,139.52	7,131.88	20.55	17.59	179.97	0.00	172.00	601.25	566.16	35.09	17.135		
7,400.00	7,140.36	7,147.99	7,140.36	21.34	17.60	179.96	0.00	172.00	650.51	615.40	35.11	18.527		
7,450.00	7,144.51	7,152.15	7,144.51	22.20	17.60	179.88	0.00	172.00	700.32	665.20	35.12	19.938		
7,472.64	7,144.96	7,152.59	7,144.96	22.62	17.60	96.51	0.00	172.00	722.95	687.82	35.13	20.580		
7,500.00	7,144.96	7,152.59	7,144.96	23.14	17.60	96.75	0.00	172.00	750.31	715.18	35.13	21.358		
7,600.00	7,144.96	7,152.60	7,144.96	25.16	17.60	97.64	0.00	172.00	850.31	815.17	35.14	24.197		
7,700.00	7,144.96	7,152.60	7,144.96	27.35	17.60	98.53	0.00	172.00	950.31	915.16	35.15	27.035		
7,800.00	7,144.96	7,152.60	7,144.96	29.68	17.60	99.41	0.00	172.00	1,050.31	1,015.15	35.16	29.869		
7,900.00	7,144.96	7,152.60	7,144.96	32.12	17.60	100.29	0.00	172.00	1,150.31	1,115.14	35.18	32.699		
8,000.00	7,144.96	7,152.60	7,144.96	34.64	17.60	101.16	0.00	172.00	1,250.31	1,215.12	35.19	35.527		
8,100.00	7,144.96	7,152.60	7,144.96	37.23	17.60	102.03	0.00	172.00	1,350.31	1,315.10	35.21	38.350		
8,200.00	7,144.96	7,152.60	7,144.96	39.87	17.60	102.89	0.00	172.00	1,450.31	1,415.09	35.23	41.169		
8,300.00	7,144.97	7,152.60	7,144.97	42.55	17.60	103.74	0.00	172.00	1,550.31	1,515.07	35.25	43.983		
8,400.00	7,144.97	7,152.60	7,144.97	45.27	17.60	104.59	0.00	172.00	1,650.31	1,615.05	35.27	46.793		
8,500.00	7,144.97	7,152.60	7,144.97	48.02	17.60	105.44	0.00	172.00	1,750.31	1,715.02	35.29	49.597		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well No. 111H
Project:	Eddy County, NM	TVD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Reference Site:	Pennzoil Federal 32 (111-121-131-201)	MD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	No. 111H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Well_Planner1
Reference Design:	Prelim Plan A	Offset TVD Reference:	Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 131H - OH - Prelim Plan A												Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG 6500-MWD - OWSG												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							Warning
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	
8,600.00	7,144.97	7,152.60	7,144.97	50.80	17.60	106.27	0.00	172.00	1,850.31	1,815.00	35.31	52.396	
8,700.00	7,144.97	7,152.60	7,144.97	53.60	17.60	107.10	0.00	172.00	1,950.31	1,914.98	35.34	55.189	



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Reference Site: Pennzoil Federal 32 (111-121-131-201)

Site Error: 0.00 usft

Reference Well: No. 111H

Well Error: 0.00 usft

Reference Wellbore: OH

Reference Design: Prelim Plan A

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Output errors are at

Database:

Offset TVD Reference:

Well No. 111H

Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))

Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))

Grid

Minimum Curvature

2.00 sigma

Well_Planner1

Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 201H - OH - Prelim Plan A													Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG, 6500-MWD - OWSG													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor		
0.00	0.00	0.00	0.00	0.00	0.00	180.00	-90.00	0.00	90.00					
100.00	100.00	100.00	100.00	0.13	0.13	180.00	-90.00	0.00	90.00	89.74	0.26	351.141		
200.00	200.00	200.00	200.00	0.49	0.49	180.00	-90.00	0.00	90.00	89.03	0.97	92.474		
300.00	300.00	300.00	300.00	0.85	0.85	180.00	-90.00	0.00	90.00	88.31	1.69	53.248		
400.00	400.00	400.00	400.00	1.20	1.20	180.00	-90.00	0.00	90.00	87.59	2.41	37.389		
500.00	500.00	500.00	500.00	1.56	1.56	180.00	-90.00	0.00	90.00	86.88	3.12	28.808		
500.02	500.02	500.02	500.02	1.56	1.56	-180.00	-90.00	0.00	90.00	86.88	3.12	28.807		
600.00	599.98	599.98	599.98	1.91	1.92	91.11	-90.00	0.00	90.02	86.18	3.83	23.484		
700.00	699.84	699.84	699.84	2.26	2.28	94.42	-90.00	0.00	90.27	85.73	4.54	19.883		
750.00	749.68	749.68	749.68	2.44	2.46	96.88	-90.00	0.00	90.66	85.76	4.90	18.514		
752.26	751.94	751.94	751.94	2.45	2.47	97.00	-90.00	0.00	90.68	85.77	4.91	18.458		
800.00	799.53	799.53	799.53	2.62	2.64	99.35	-90.00	0.00	91.22	85.96	5.26	17.358		
900.00	899.38	901.09	901.07	2.98	2.99	101.72	-89.39	1.68	91.30	85.33	5.97	15.287		
1,002.26	1,001.62	1,004.96	1,004.78	3.34	3.36	-170.20	-87.49	6.89	88.84	82.14	6.70	13.260		
1,100.00	1,099.36	1,103.02	1,102.50	3.69	3.71	-175.00	-84.69	14.58	85.07	77.67	7.39	11.504		
1,200.00	1,199.36	1,202.64	1,201.74	4.04	4.07	179.48	-81.71	22.74	81.75	73.64	8.11	10.081		
1,300.00	1,299.36	1,302.26	1,300.98	4.40	4.43	173.55	-78.74	30.90	79.26	70.43	8.83	8.977		
1,400.00	1,399.36	1,401.88	1,400.22	4.75	4.80	167.31	-75.77	39.06	77.67	68.12	9.55	8.132		
1,500.00	1,499.36	1,501.50	1,499.46	5.11	5.17	160.89	-72.80	47.22	77.04	66.76	10.28	7.498		
1,514.17	1,513.53	1,515.62	1,513.53	5.16	5.22	159.98	-72.37	48.37	77.03	66.65	10.38	7.423 CC		
1,600.00	1,599.36	1,601.12	1,598.71	5.46	5.54	154.45	-69.82	55.37	77.39	66.39	11.00	7.036 ES		
1,700.00	1,699.36	1,700.74	1,697.95	5.82	5.91	148.15	-66.85	63.53	78.71	66.99	11.72	6.716		
1,800.00	1,799.36	1,800.36	1,797.19	6.18	6.29	142.12	-63.88	71.69	80.96	68.52	12.44	6.507		
1,900.00	1,899.36	1,899.98	1,896.43	6.54	6.66	136.48	-60.91	79.85	84.05	70.89	13.16	6.387		
2,000.00	1,999.36	1,999.60	1,995.67	6.89	7.04	131.27	-57.93	88.00	87.90	74.03	13.87	6.336 SF		
2,100.00	2,099.36	2,099.22	2,094.91	7.07	7.24	126.54	-54.96	96.16	92.42	78.18	14.24	6.491		
2,200.00	2,199.36	2,198.84	2,194.15	7.09	7.29	122.27	-51.99	104.32	97.50	83.22	14.28	6.828		
2,300.00	2,299.36	2,298.46	2,293.39	7.13	7.35	118.45	-49.02	112.48	103.07	88.72	14.35	7.181		
2,400.00	2,399.36	2,398.08	2,392.63	7.18	7.43	115.02	-46.04	120.64	109.06	94.60	14.46	7.541		
2,500.00	2,499.36	2,497.69	2,491.87	7.25	7.53	111.97	-43.07	128.79	115.39	100.79	14.60	7.901		
2,600.00	2,599.36	2,597.31	2,591.11	7.34	7.65	109.23	-40.10	136.95	122.02	107.24	14.78	8.256		
2,700.00	2,699.36	2,696.93	2,690.35	7.45	7.79	106.78	-37.13	145.11	128.90	113.91	14.99	8.600		
2,800.00	2,799.36	2,796.55	2,789.59	7.56	7.94	104.58	-34.15	153.27	135.99	120.76	15.23	8.931		
2,900.00	2,899.36	2,896.17	2,888.83	7.70	8.11	102.61	-31.18	161.42	143.26	127.76	15.50	9.245		
3,000.00	2,999.36	2,995.79	2,988.07	7.85	8.29	100.82	-28.21	169.58	150.68	134.89	15.79	9.542		
3,100.00	3,099.36	3,095.41	3,087.31	8.01	8.49	99.20	-25.24	177.74	158.23	142.12	16.11	9.819		
3,200.00	3,199.36	3,195.03	3,186.55	8.18	8.70	97.74	-22.26	185.90	165.90	149.43	16.46	10.077		
3,300.00	3,299.36	3,294.65	3,285.79	8.37	8.91	96.40	-19.29	194.05	173.66	156.83	16.83	10.316		
3,400.00	3,399.36	3,394.27	3,385.03	8.57	9.14	95.17	-16.32	202.21	181.52	164.29	17.23	10.536		
3,500.00	3,499.36	3,493.89	3,484.27	8.78	9.38	94.05	-13.35	210.37	189.44	171.80	17.64	10.738		
3,600.00	3,599.36	3,593.51	3,583.51	8.99	9.63	93.02	-10.37	218.53	197.44	179.36	18.07	10.923		
3,700.00	3,699.36	3,693.13	3,682.75	9.22	9.89	92.07	-7.40	226.69	205.49	186.97	18.53	11.092		
3,800.00	3,799.36	3,792.75	3,781.99	9.45	10.15	91.19	-4.43	234.84	213.60	194.60	18.99	11.246		
3,900.00	3,899.36	3,896.31	3,887.25	9.69	10.44	90.44	-1.68	242.38	220.72	201.22	19.51	11.315		
4,000.00	3,999.36	4,006.10	3,994.94	9.94	10.71	90.05	-0.22	246.41	224.45	204.43	20.02	11.209		
4,100.00	4,099.36	4,110.52	4,099.36	10.20	10.96	90.00	0.00	247.00	225.00	204.47	20.53	10.961		
4,200.00	4,199.36	4,210.52	4,199.36	10.46	11.19	90.00	0.00	247.00	225.00	203.96	21.04	10.695		
4,300.00	4,299.36	4,310.52	4,299.36	10.73	11.44	90.00	0.00	247.00	225.00	203.44	21.56	10.436		
4,400.00	4,399.36	4,410.52	4,399.36	11.00	11.69	90.00	0.00	247.00	225.00	202.91	22.09	10.184		
4,500.00	4,499.36	4,510.52	4,499.36	11.28	11.94	90.00	0.00	247.00	225.00	202.36	22.64	9.940		
4,600.00	4,599.36	4,610.52	4,599.36	11.56	12.20	90.00	0.00	247.00	225.00	201.81	23.19	9.703		

CC - Min centre to center distance or convergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional Anticollision Report



Company:	Matador Resources	Local Co-ordinate Reference:	Well No. 111H
Project:	Eddy County, NM	TVD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Reference Site:	Pennzoil Federal 32 (111-121-131-201)	MD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	No. 111H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Well_Planner1
Reference Design:	Prelim Plan A	Offset TVD Reference:	Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 201H - OH - Prelim Plan A												Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSC, 2000-MWD - OWSC, 6500-MWD - OWSC												Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Distance							
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)	Highside Toolface (°)	Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)	Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning
4,700.00	4,699.36	4,710.52	4,699.36	11.84	12.47	90.00	0.00	247.00	225.00	201.25	23.75	9.474	
4,800.00	4,799.36	4,810.52	4,799.36	12.13	12.74	90.00	0.00	247.00	225.00	200.68	24.32	9.252	
4,900.00	4,899.36	4,910.52	4,899.36	12.42	13.01	90.00	0.00	247.00	225.00	200.10	24.90	9.037	
5,000.00	4,999.36	5,010.52	4,999.36	12.72	13.29	90.00	0.00	247.00	225.00	199.52	25.48	8.830	
5,100.00	5,099.36	5,110.52	5,099.36	13.02	13.57	90.00	0.00	247.00	225.00	198.93	26.07	8.630	
5,200.00	5,199.36	5,210.52	5,199.36	13.32	13.86	90.00	0.00	247.00	225.00	198.33	26.67	8.436	
5,300.00	5,299.36	5,310.52	5,299.36	13.63	14.15	90.00	0.00	247.00	225.00	197.73	27.27	8.250	
5,400.00	5,399.36	5,410.52	5,399.36	13.94	14.44	90.00	0.00	247.00	225.00	197.12	27.88	8.070	
5,500.00	5,499.36	5,510.52	5,499.36	14.25	14.73	90.00	0.00	247.00	225.00	196.51	28.49	7.896	
5,600.00	5,599.36	5,610.52	5,599.36	14.56	15.03	90.00	0.00	247.00	225.00	195.89	29.11	7.729	
5,700.00	5,699.36	5,710.52	5,699.36	14.87	15.33	90.00	0.00	247.00	225.00	195.26	29.74	7.567	
5,800.00	5,799.36	5,810.52	5,799.36	15.19	15.63	90.00	0.00	247.00	225.00	194.64	30.36	7.411	
5,900.00	5,899.36	5,910.52	5,899.36	15.51	15.94	90.00	0.00	247.00	225.00	194.01	30.99	7.260	
6,000.00	5,999.36	6,010.52	5,999.36	15.83	16.25	90.00	0.00	247.00	225.00	193.37	31.63	7.114	
6,100.00	6,099.36	6,110.52	6,099.36	16.15	16.55	90.00	0.00	247.00	225.00	192.74	32.26	6.974	
6,200.00	6,199.36	6,210.52	6,199.36	16.47	16.87	90.00	0.00	247.00	225.00	192.09	32.91	6.838	
6,300.00	6,299.36	6,310.52	6,299.36	16.80	17.18	90.00	0.00	247.00	225.00	191.45	33.55	6.706	
6,400.00	6,399.36	6,410.52	6,399.36	17.12	17.48	90.00	0.00	247.00	225.00	190.82	34.18	6.583	
6,500.00	6,499.36	6,510.52	6,499.36	17.29	17.82	90.00	0.00	247.00	225.00	190.51	34.49	6.524	
6,572.64	6,572.00	6,583.16	6,572.00	17.29	17.63	90.00	0.00	247.00	225.00	190.50	34.50	6.522	
6,600.00	6,599.35	6,610.51	6,599.35	17.29	17.63	179.98	0.00	247.00	225.65	191.15	34.51	6.540	
6,650.00	6,649.12	6,660.28	6,649.12	17.30	17.64	179.98	0.00	247.00	230.21	195.69	34.52	6.669	
6,700.00	6,698.31	6,709.47	6,698.31	17.31	17.64	179.98	0.00	247.00	239.10	204.55	34.54	6.922	
6,750.00	6,746.54	6,757.70	6,746.54	17.33	17.65	179.98	0.00	247.00	252.23	217.66	34.57	7.296	
6,800.00	6,793.44	6,804.60	6,793.44	17.35	17.66	179.98	0.00	247.00	269.52	234.92	34.60	7.789	
6,850.00	6,838.65	6,849.81	6,838.65	17.37	17.68	179.98	0.00	247.00	290.83	256.19	34.64	8.396	
6,900.00	6,881.84	6,893.00	6,881.84	17.41	17.69	179.98	0.00	247.00	316.00	281.32	34.68	9.111	
6,950.00	6,922.66	6,933.82	6,922.66	17.49	17.70	179.98	0.00	247.00	344.84	310.11	34.73	9.930	
7,000.00	6,960.82	6,971.98	6,960.82	17.61	17.72	179.98	0.00	247.00	377.12	342.35	34.78	10.844	
7,050.00	6,996.02	7,007.18	6,996.02	17.78	17.73	179.98	0.00	247.00	412.61	377.79	34.83	11.847	
7,100.00	7,027.99	7,039.15	7,027.99	18.02	17.75	179.98	0.00	247.00	451.04	416.16	34.88	12.931	
7,150.00	7,056.49	7,067.65	7,056.49	18.34	17.76	179.98	0.00	247.00	492.10	457.17	34.93	14.089	
7,200.00	7,081.30	7,092.46	7,081.30	18.74	17.77	179.98	0.00	247.00	535.49	500.51	34.98	15.310	
7,250.00	7,102.24	7,113.40	7,102.24	19.24	17.78	179.98	0.00	247.00	580.88	545.86	35.02	16.588	
7,300.00	7,119.14	7,130.30	7,119.14	19.85	17.79	179.97	0.00	247.00	627.92	592.86	35.06	17.912	
7,350.00	7,131.88	7,143.04	7,131.88	20.55	17.79	179.97	0.00	247.00	676.25	641.16	35.09	19.274	
7,400.00	7,140.36	7,151.52	7,140.36	21.34	17.80	179.95	0.00	247.00	725.51	690.40	35.11	20.664	
7,450.00	7,144.51	7,155.67	7,144.51	22.20	17.80	179.84	0.00	247.00	775.32	740.20	35.12	22.074	
7,472.64	7,144.96	7,156.12	7,144.96	22.62	17.80	94.80	0.00	247.00	797.95	762.83	35.13	22.716	
7,500.00	7,144.96	7,156.12	7,144.96	23.14	17.80	94.96	0.00	247.00	825.31	790.19	35.13	23.494	
7,600.00	7,144.96	7,156.12	7,144.96	25.16	17.80	95.56	0.00	247.00	925.31	890.18	35.14	26.333	
7,700.00	7,144.96	7,156.12	7,144.96	27.35	17.80	96.15	0.00	247.00	1,025.31	990.16	35.15	29.169	
7,800.00	7,144.96	7,156.12	7,144.96	29.68	17.80	96.75	0.00	247.00	1,125.31	1,090.15	35.16	32.003	
7,900.00	7,144.96	7,156.12	7,144.96	32.12	17.80	97.34	0.00	247.00	1,225.31	1,190.14	35.18	34.833	
8,000.00	7,144.96	7,156.12	7,144.96	34.64	17.80	97.94	0.00	247.00	1,325.31	1,290.12	35.19	37.659	
8,100.00	7,144.96	7,156.12	7,144.96	37.23	17.80	98.53	0.00	247.00	1,425.31	1,390.11	35.21	40.481	
8,200.00	7,144.96	7,156.12	7,144.96	39.87	17.80	99.11	0.00	247.00	1,525.31	1,490.09	35.23	43.299	
8,300.00	7,144.97	7,156.13	7,144.97	42.55	17.80	99.70	0.00	247.00	1,625.31	1,590.07	35.25	46.113	
8,400.00	7,144.97	7,156.13	7,144.97	45.27	17.80	100.28	0.00	247.00	1,725.31	1,690.05	35.27	48.921	
8,500.00	7,144.97	7,156.13	7,144.97	48.02	17.80	100.87	0.00	247.00	1,825.31	1,790.03	35.29	51.725	

CC - Min centre to center distance or covergent point, SF - min separation factor, ES - min ellipse separation



Pro Directional

Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Reference Site: Pennzoil Federal 32 (111-121-131-201)

Site Error: 0.00 usft

Reference Well: No. 111H

Well Error: 0.00 usft

Reference Wellbore: OH

Reference Design: Prelim Plan A

Local Co-ordinate Reference:

TVD Reference:

MD Reference:

North Reference:

Survey Calculation Method:

Output errors are at

Database:

Offset TVD Reference:

Well No. 111H

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))

Grid

Minimum Curvature

2.00 sigma

Well_Planner1

Offset Datum

Offset Design Pennzoil Federal 32 (111-121-131-201) - No. 201H - OH - Prelim Plan A													Offset Site Error:	0.00 usft
Survey Program: 0-MWD - OWSG, 2000-MWD - OWSG, 6500-MWD - OWSG													Offset Well Error:	0.00 usft
Reference		Offset		Semi Major Axis		Highside Toolface (°)	Distance		Between Centres (usft)	Between Ellipses (usft)	Minimum Separation (usft)	Separation Factor	Warning	
Measured Depth (usft)	Vertical Depth (usft)	Measured Depth (usft)	Vertical Depth (usft)	Reference (usft)	Offset (usft)		Offset Wellbore Centre +N/-S (usft)	+E/-W (usft)						
8,600.00	7,144.97	7,156.13	7,144.97	50.80	17.80	101.45	0.00	247.00	1,925.31	1,890.00	35.31	54.522		



Pro Directional Anticollision Report




Company:	Matador Resources	Local Co-ordinate Reference:	Well No. 111H
Project:	Eddy County, NM	TVD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Reference Site:	Pennzoil Federal 32 (111-121-131-201)	MD Reference:	Well @ 3292.50usft (GL: 3264' + KB: 28.5' (Patt809))
Site Error:	0.00 usft	North Reference:	Grid
Reference Well:	No. 111H	Survey Calculation Method:	Minimum Curvature
Well Error:	0.00 usft	Output errors are at	2.00 sigma
Reference Wellbore	OH	Database:	Well_Planner1
Reference Design:	Prelim Plan A	Offset TVD Reference:	Offset Datum

Reference Depths are relative to Well @ 3292.50usft (GL: 3264' + KB:
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: No. 111H
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.13°

Ladder Plot

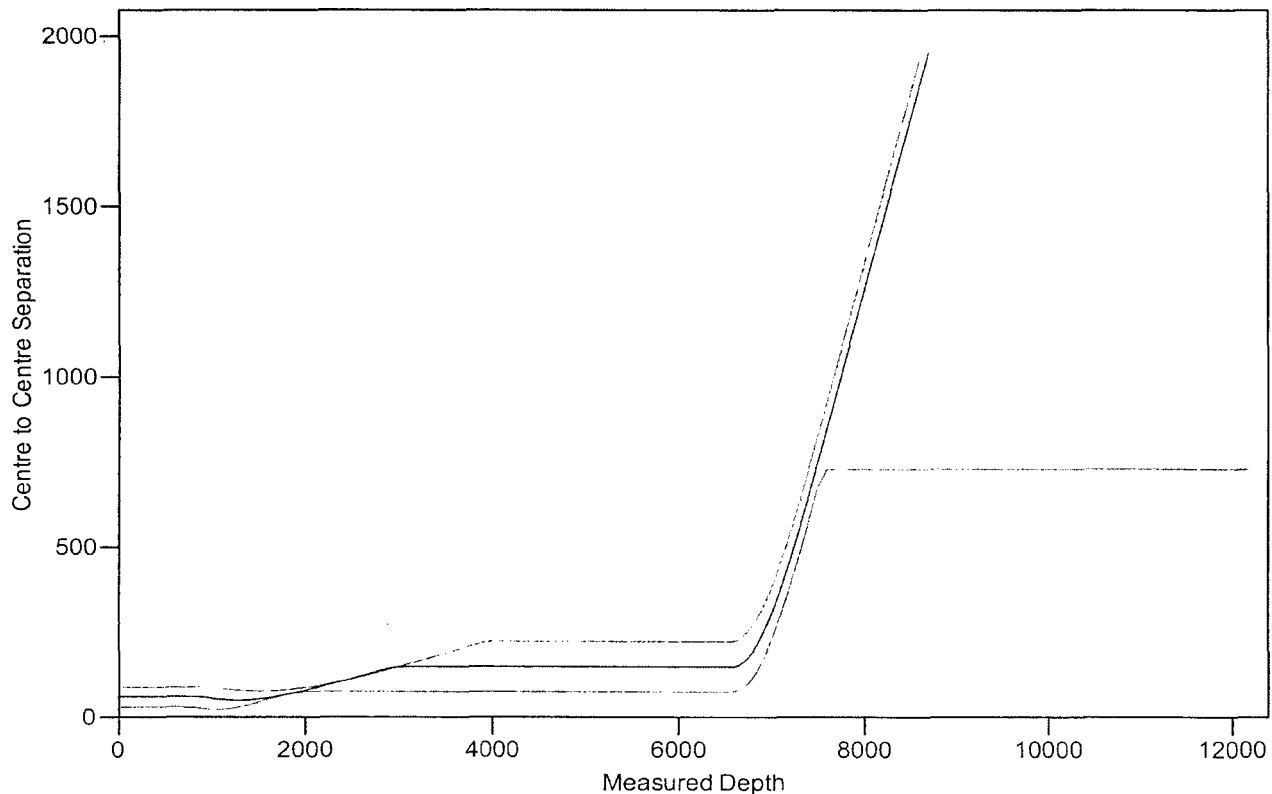

LEGEND

◆ No. 201H, OH, Prelim Plan A V0 ✕ No. 121H, OH, Prelim Plan A V0 ▲ No. 131H, OH, Prelim Plan A V0



Pro Directional Anticollision Report



Company: Matador Resources
Project: Eddy County, NM

Reference Site: Pennzoil Federal 32 (111-121-131-201)

Site Error: 0.00 usft
Reference Well: No. 111H
Well Error: 0.00 usft
Reference Wellbore: OH
Reference Design: Prelim Plan A

Local Co-ordinate Reference:
TVD Reference:

MD Reference:


North Reference:
Survey Calculation Method:
Output errors are at
Database:
Offset TVD Reference:

Well No. 111H
Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))
Well @ 3292.50usft (GL: 3264' + KB: 28.5'
(Patt809))
Grid
Minimum Curvature
2.00 sigma
Well_Planner1
Offset Datum

Reference Depths are relative to Well @ 3292.50usft (GL: 3264' + KB:
Offset Depths are relative to Offset Datum
Central Meridian is 104° 20' 0.000 W

Coordinates are relative to: No. 111H
Coordinate System is US State Plane 1927 (Exact solution), New Mexico East 30
Grid Convergence at Surface is: 0.13°

Separation Factor Plot

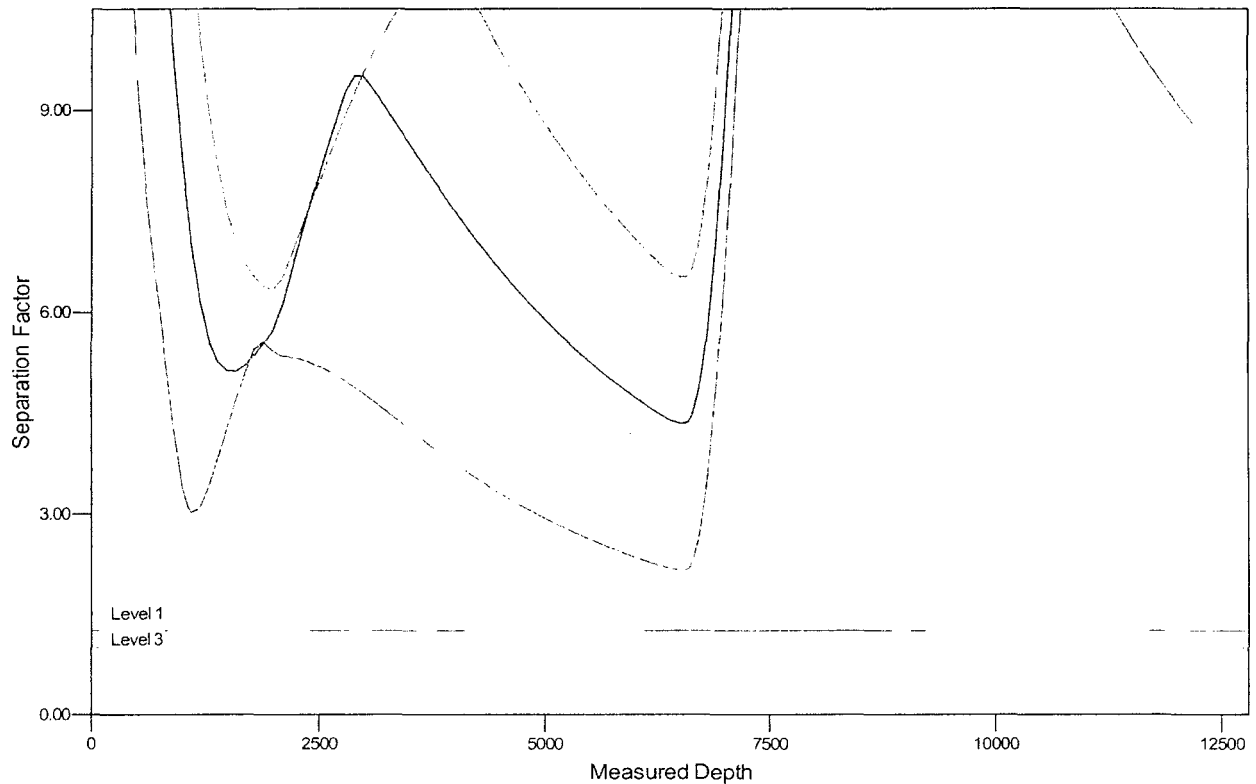

LEGEND

— No. 201H, OH, Prelim Plan AV0 — No. 121H, OH, Prelim Plan AV0 — No. 131H, OH, Prelim Plan AV0

MRC Production Company

One Lincoln Centre • 5400 LBJ Freeway • Suite 1500 • Dallas, Texas 75240
Telephone 972.371.5440 • Fax 972.371.5201
chahn@matadorresources.com

Cassie Hahn
Associate Landman

January 18, 2017

Via Certified Mail
Bureau of Land Management
c/o Cody Layton
620 E. Green Street,
Carlsbad, NM 88220-6292

Re: 111H – Pennzoil 32 Federal #111H, Lease NMNM04825,
Sec. 033 T.020 S., R 029 E., Eddy County, NM

Dear Mr. Layton:

In response to the Bureau of Land Management's letter dated January 03, 2017, (3160, NMNM04825), please find enclosed three copies of materials responsive to your requests with regards to the pending Pennzoil 32 Federal #111H application for permit to drill. In addition, below is a brief response to each of the deficiencies described in the letter dated January 03, 2017.

Adjudication Comments:

Operating Rights: Please find enclosed letter stating we have operating rights.

Surface Comments

Location and Type of Water Supply:

We have supplied two water sources, C 03570 and C 03607, on page 5 of the proposed APD, labeled as "Map 1".

Construction Materials Deficiency:

We have supplied one source of caliche on page 5 of proposed APD, labeled as "Map 1", as required by Onshore Order 1.

Plans for Surface Reclamation:

Please find enclosed revised reclamation plat.


Engineering Comments:

BOP Requirements: Please find enclosed a 2m Annular BOP diagram.

Casing Design: Please find enclosed casing spec for 5 ½' 20# P- 11- DWC/C.

We hope these materials are responsive to your requests and please do not hesitate to contact me at any time should you have any questions.

With kind regards,
MRC PRODUCTION COMPANY


Cassie Hahn

MRC Production Company

One Lincoln Centre • 5400 LBJ Freeway • Suite 1500 • Dallas, Texas 75240
Telephone 972.371.5440 • Fax 972.371.5201
chahn@matadorresources.com

Cassie Hahn
Associate Landman

January 18, 2017

Via Certified Mail
Bureau of Land Management
c/o Cody Layton
620 E. Green Street,
Carlsbad, NM 88220-6292


Re: Operating Rights- Lease NMNM04825, Lease NMNM129261
Sec. 032 T.020 S., R 029 E., Eddy County, NM
Sec. 033 T.020 S., R 029 E., Eddy County, NM

Dear Mr. Layton:

In response to the Bureau of Land Management's letter dated January 03, 2017, (3160, NMNM04825), Matador confirms that it acquired operating rights in lease NMNM129261, from Nadel and Gussman HEYCO, LLC. Matador also confirms that it owns a working interest in lease NMNM04825, and therefore has operating rights to this lease as well.

Please do not hesitate to contact me at any time should you have any questions.

With kind regards,
MRC PRODUCTION COMPANY



Cassie Hahn



MAP 6

SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

DETAIL VIEW
SCALE: 1" = 100'

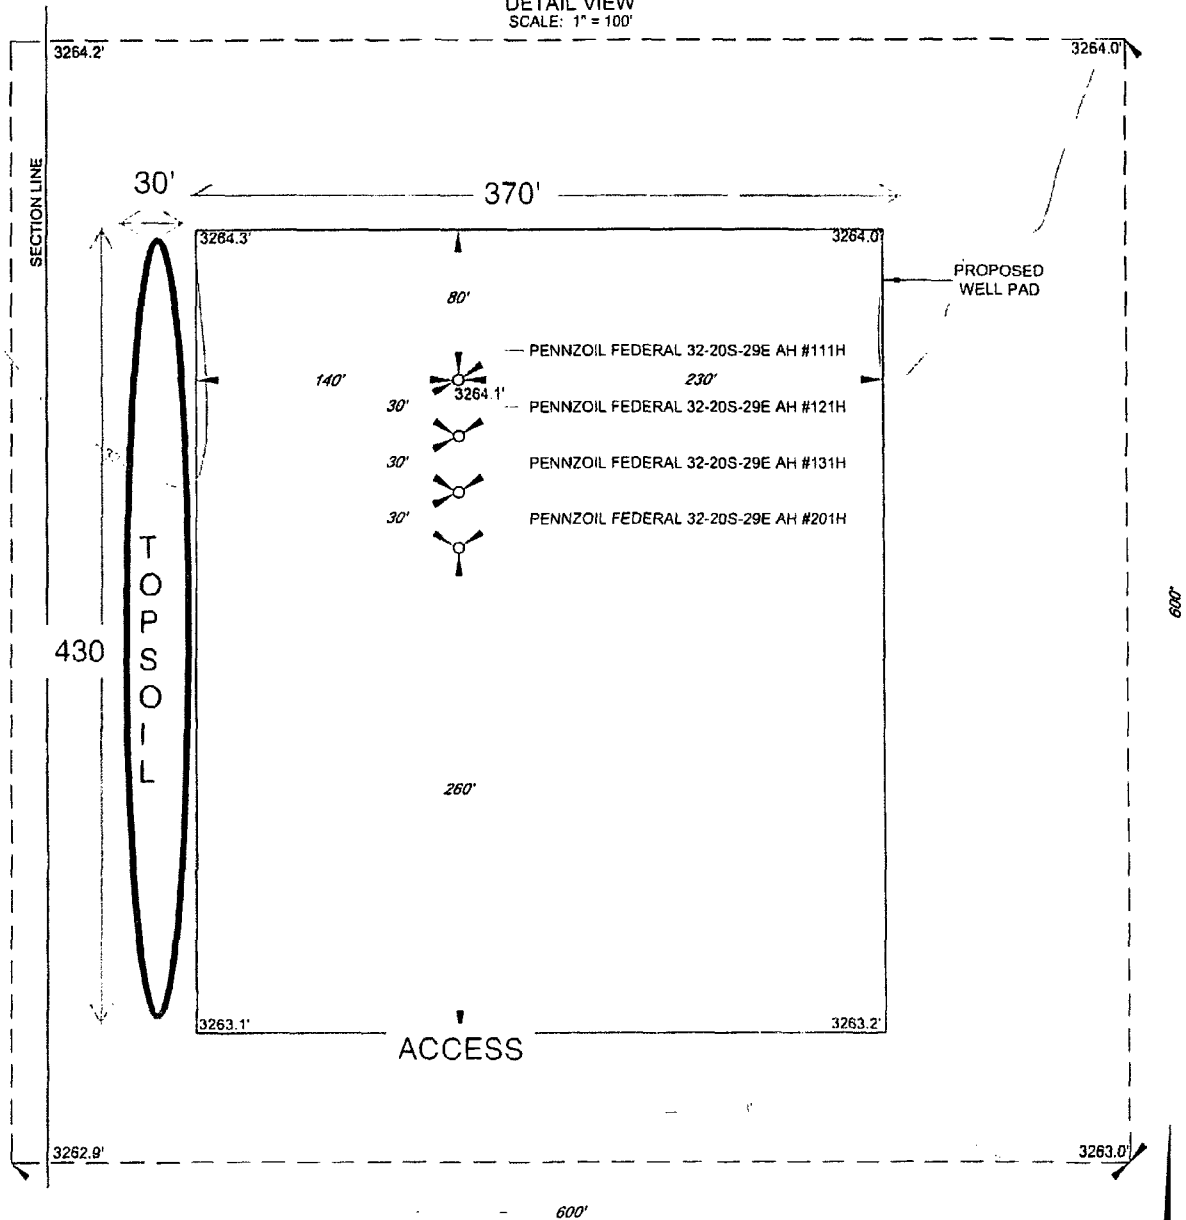

LEGEND

SECTION LINE
ARCH SITE

LEASE NAME & WELL NO.: PENNZOIL FEDERAL 32-20S-29E AH #111H

#111H LATITUDE N 32.5361307 #111H LONGITUDE W 104.0873843

SCALE: 1" = 100'
0' 50' 100'

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER
MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY,
AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.




WWW.TOPOGRAPHIC.COM

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

S:\SURVEY\MATADOR RESOURCES\PENNZOIL FEDERAL 32-20S-29E AH 111H\FINAL PRODUCTS\O PENNZOIL FEDERAL 32-20S-29E AH 111H REV1.DWG 8/2/2016 12:04:24 PM -Randy

Rig Layout


Pennzoil 32 Fed 111H
Eddy County, NM
(not to scale)

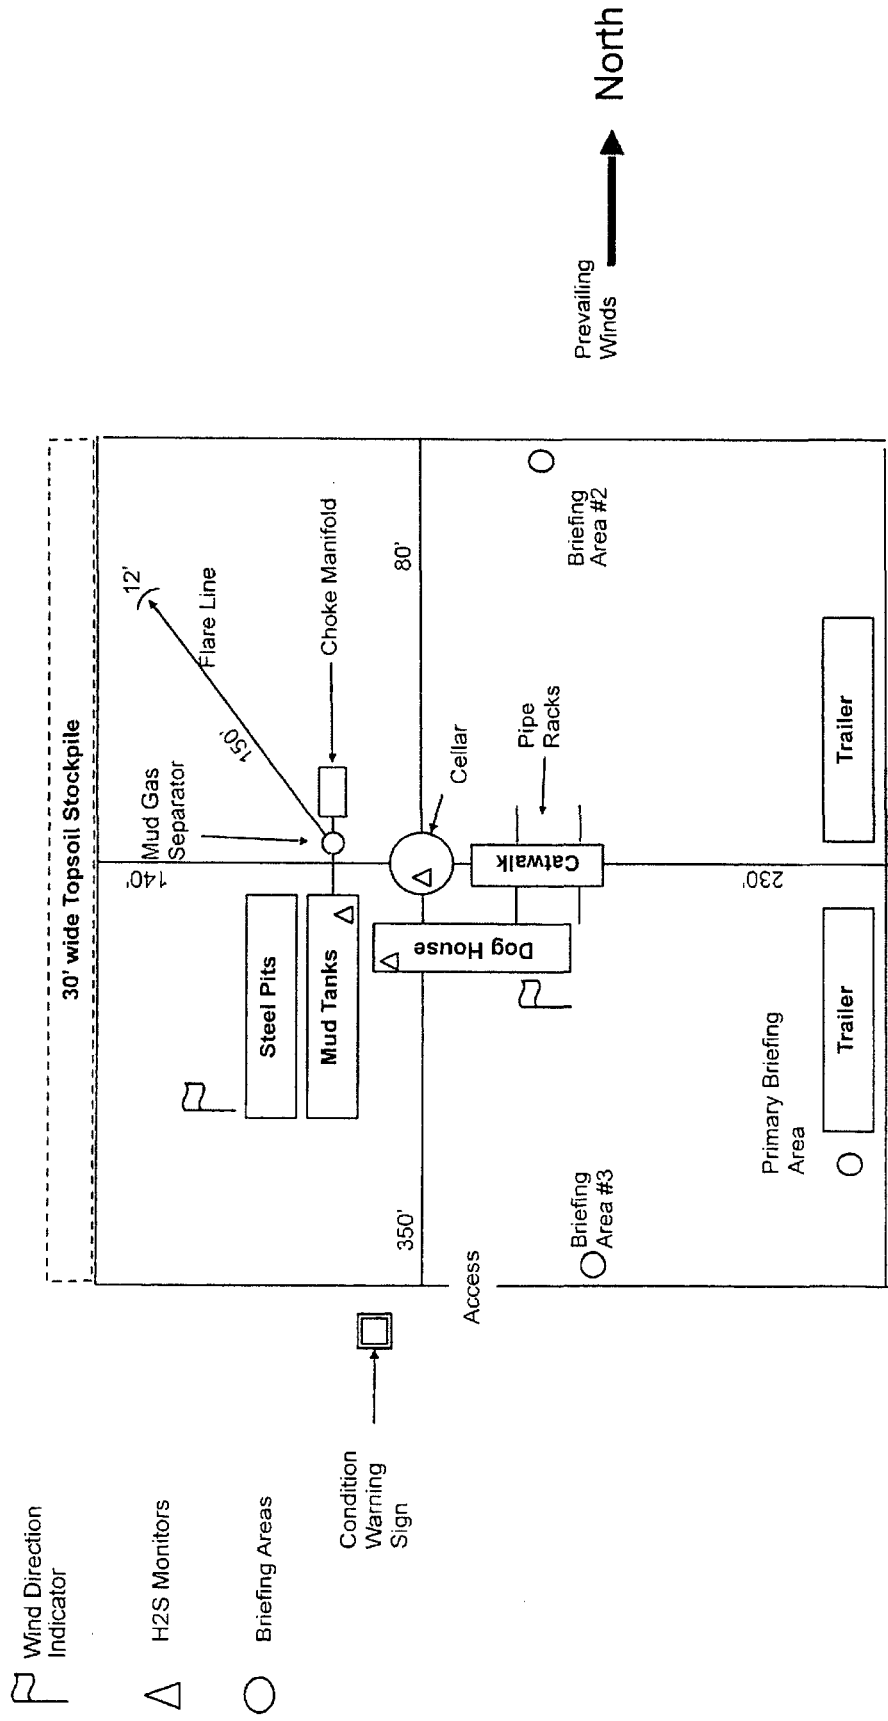


Prevailing Winds
North

H2S Rig Layout

Pennzoil 32 Fed 111H
Eddy County, NM
(not to scale)

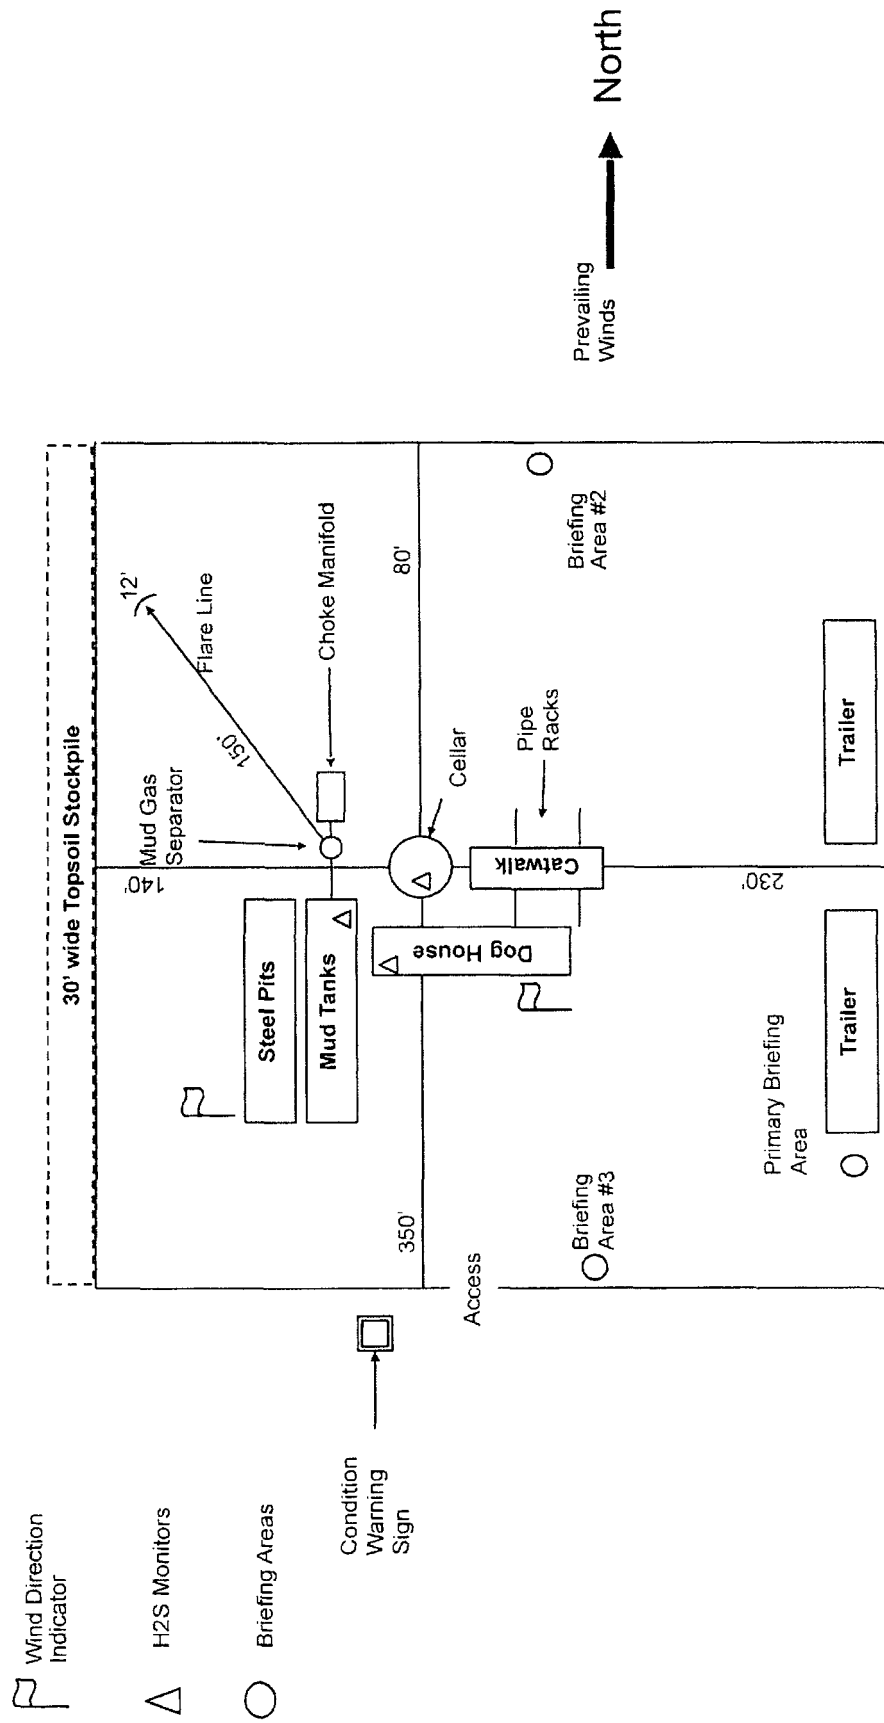

SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

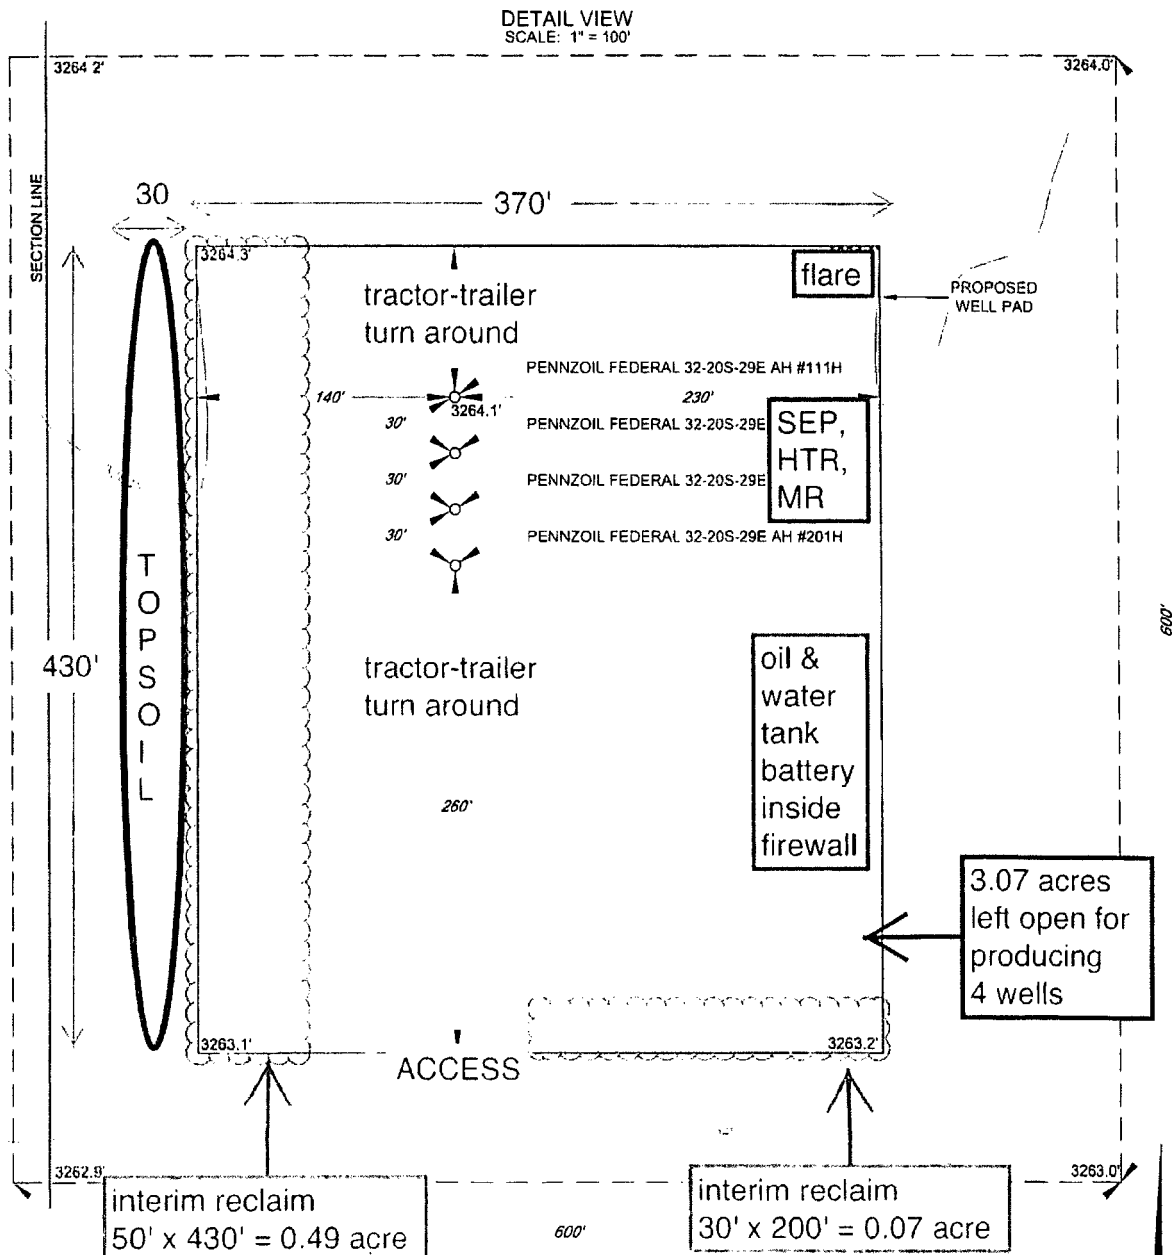

LEGEND

LEASE NAME & WELL NO.: PENNZOIL FEDERAL 32-20S-29E AH #111H

#111H LATITUDE N 32.5361307


#111H LONGITUDE W 104.0873843

SECTION LINE

ARCH SITE

PRODUCTION FACILITY & INTERIM RECLAMATION DIAGRAM

SCALE: 1" = 100'



0' 50' 100'

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



TOPOGRAPHIC

WWW.TOPOGRAPHIC.COM

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

S:\SURVEY\MATADOR RESOURCES\PENNZON FEDERAL 32-20S-20F 4H 111\HIFINAL PRODUCTS\O PENNZON FEDERAL 32-20S-20F 4H 111\H REV1.DWG 01/07/18 13:04 34 044 200000

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

SURFACE PLAN PAGE 2

3. EXISTING WELLS (See MAP 2)

Gas and P & A wells are within a mile. No oil, injection, disposal, or water well is within a mile.

4. PROPOSED PRODUCTION FACILITIES (See MAPS 3 & 5)

A tank battery will be built on the east side of the pad. A $\approx 6"$ O. D. steel gas line will be buried 4354.61' parallel to the new road. Power line plans have not been finalized.

5. WATER SUPPLY (See MAPS 1-4)


Water will be trucked from existing water wells (C 0370 & C 03607) on private land in NENE 24-21s-27e.

6. CONSTRUCTION MATERIALS & METHODS (See MAPS 10 & 11)

NM One Call (811) will be notified before construction starts. Top $\approx 6"$ of soil and brush will be stockpiled west of the pad. Pipe racks will be to the east. A closed loop drilling system will be used. Caliche will be hauled from the existing Constructors, Inc. pit on private land in NWNE 34-21s-27e.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to the Eddy County landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to CRI's state approved (NM-01-0006) disposal site. Human waste will be disposed of in chemical toilets and hauled to the Carlsbad wastewater treatment plant.

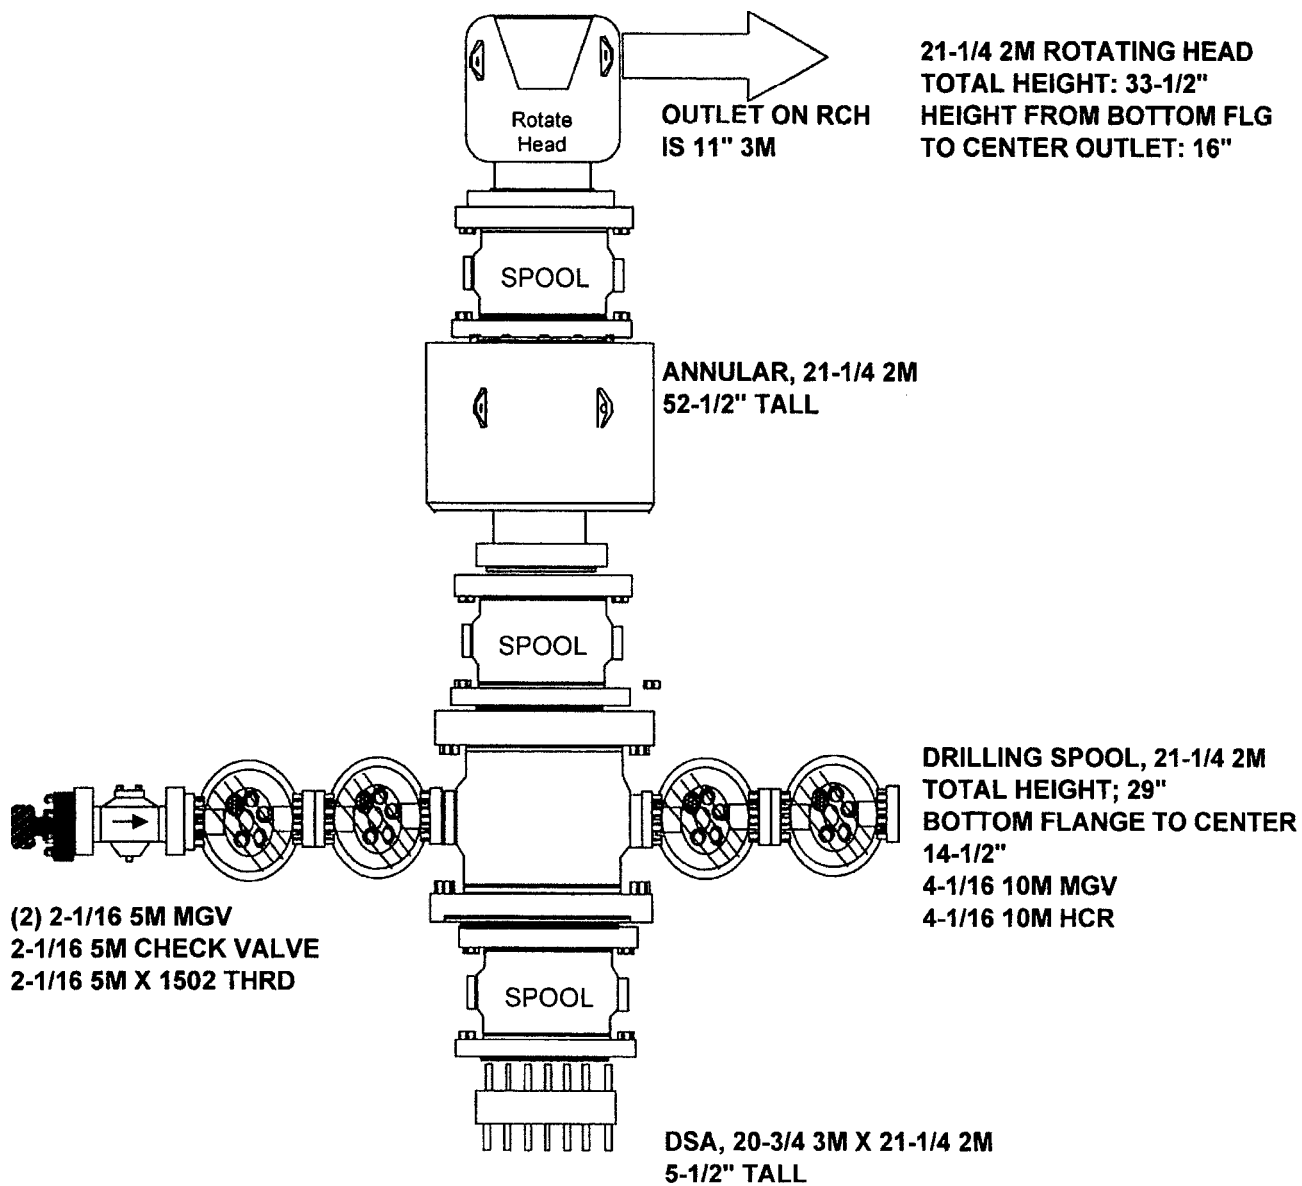

SPOOL HEIGHTS CAN BE ADJUSTED AS NEEDED*

Technical Specifications

Connection Type:	Size(O.D.):	Weight (Wall):	Grade:
DWC/C-IS PLUS Casing standard	5-1/2 in	20.00 lb/ft (0.361 in)	VST P110 EC

Material	
VST P110 EC	Grade
125,000	Minimum Yield Strength (psi)
135,000	Minimum Ultimate Strength (psi)

Pipe Dimensions	
5.500	Nominal Pipe Body O.D. (in)
4.778	Nominal Pipe Body I.D.(in)
0.361	Nominal Wall Thickness (in)
20.00	Nominal Weight (lbs/ft)
19.83	Plain End Weight (lbs/ft)
5.828	Nominal Pipe Body Area (sq in)

Pipe Body Performance Properties	
729,000	Minimum Pipe Body Yield Strength (lbs)
12,090	Minimum Collapse Pressure (psi)
14,360	Minimum Internal Yield Pressure (psi)
13,100	Hydrostatic Test Pressure (psi)


Connection Dimensions	
6.300	Connection O.D. (in)
4.778	Connection I.D. (in)
4.653	Connection Drift Diameter (in)
4.13	Make-up Loss (in)
5.828	Critical Area (sq in)
100.0	Joint Efficiency (%)

Connection Performance Properties	
729,000	Joint Strength (lbs)
26,040	Reference String Length (ft) 1.4 Design Factor
728,000	API Joint Strength (lbs)
729,000	Compression Rating (lbs)
12,090	API Collapse Pressure Rating (psi)
14,360	API Internal Pressure Resistance (psi)
104.2	Maximum Uniaxial Bend Rating [degrees/100 ft]

Approximated Field End Torque Values	
16,600	Minimum Final Torque (ft-lbs)
19,100	Maximum Final Torque (ft-lbs)
21,600	Connection Yield Torque (ft-lbs)



VAM USA
4424 W. Sam Houston Pkwy. Suite 150
Houston, TX 77041
Phone: 713-479-3200
Fax: 713-479-3234
E-mail: VAMUSAsales@vam-usa.com

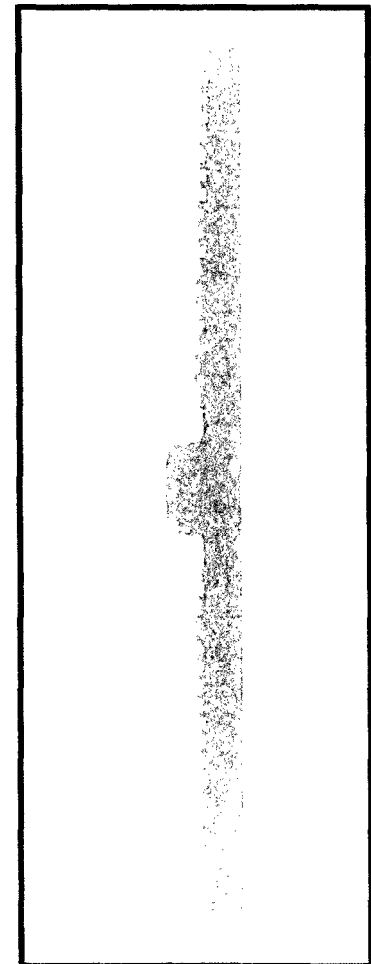

For detailed information on performance properties, refer to DWC Connection Data Notes on following page(s).


Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.

All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.



DWC Connection Data Notes:

1. DWC connections are available with a seal ring (SR) option.
2. All standard DWC/C connections are interchangeable for a give pipe OD. DWC connections are interchangeable with DWC/C-SR connections of the same OD and wall.
3. Connection performance properties are based on nominal pipe body and connection dimensions.
4. DWC connection internal and external pressure resistance is calculated using the API rating for buttress connections. API Internal pressure resistance is calculated from formulas 31, 32, and 35 in the API Bulletin 5C3.
5. DWC joint strength is the minimum pipe body yield strength multiplied by the connection critical area.
6. API joint strength is for reference only. It is calculated from formulas 42 and 43 in the API Bulletin 5C3.
7. Bending efficiency is equal to the compression efficiency.
8. The torque values listed are recommended. The actual torque required may be affected by field conditions such as temperature, thread compound, speed of make-up, weather conditions, etc.
9. Connection yield torque is not to be exceeded.
10. Reference string length is calculated by dividing the joint strength by both the nominal weight in air and a design factor (DF) of 1.4. These values are offered for reference only and do not include load factors such as bending, buoyancy, temperature, load dynamics, etc.
11. DWC connections will accommodate API standard drift diameters.

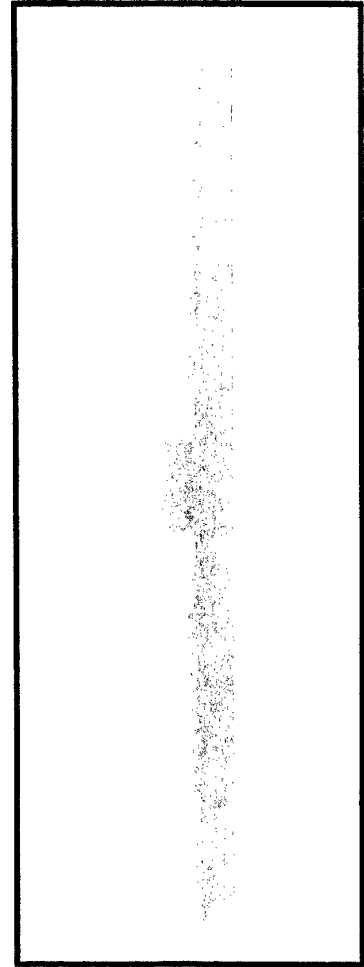

Connection specifications within the control of VAM USA were correct as of the date printed. Specifications are subject to change without notice. Certain connection specifications are dependent on the mechanical properties of the pipe. Mechanical properties of mill proprietary pipe grades were obtained from mill publications and are subject to change. Properties of mill proprietary grades should be confirmed with the mill. Users are advised to obtain current connection specifications and verify pipe mechanical properties for each application.


All information is provided by VAM USA or its affiliates at user's sole risk, without liability for loss, damage or injury resulting from the use thereof; and on an "AS IS" basis without warranty or representation of any kind, whether express or implied, including without limitation any warranty of merchantability, fitness for purpose or completeness. This document and its contents are subject to change without notice. In no event shall VAM USA or its affiliates be responsible for any indirect, special, incidental, punitive, exemplary or consequential loss or damage (including without limitation, loss of use, loss of bargain, loss of revenue, profit or anticipated profit) however caused or arising, and whether such losses or damages were foreseeable or VAM USA or its affiliates was advised of the possibility of such damages.

4/14/2015



SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

DETAIL VIEW
SCALE: 1" = 100'

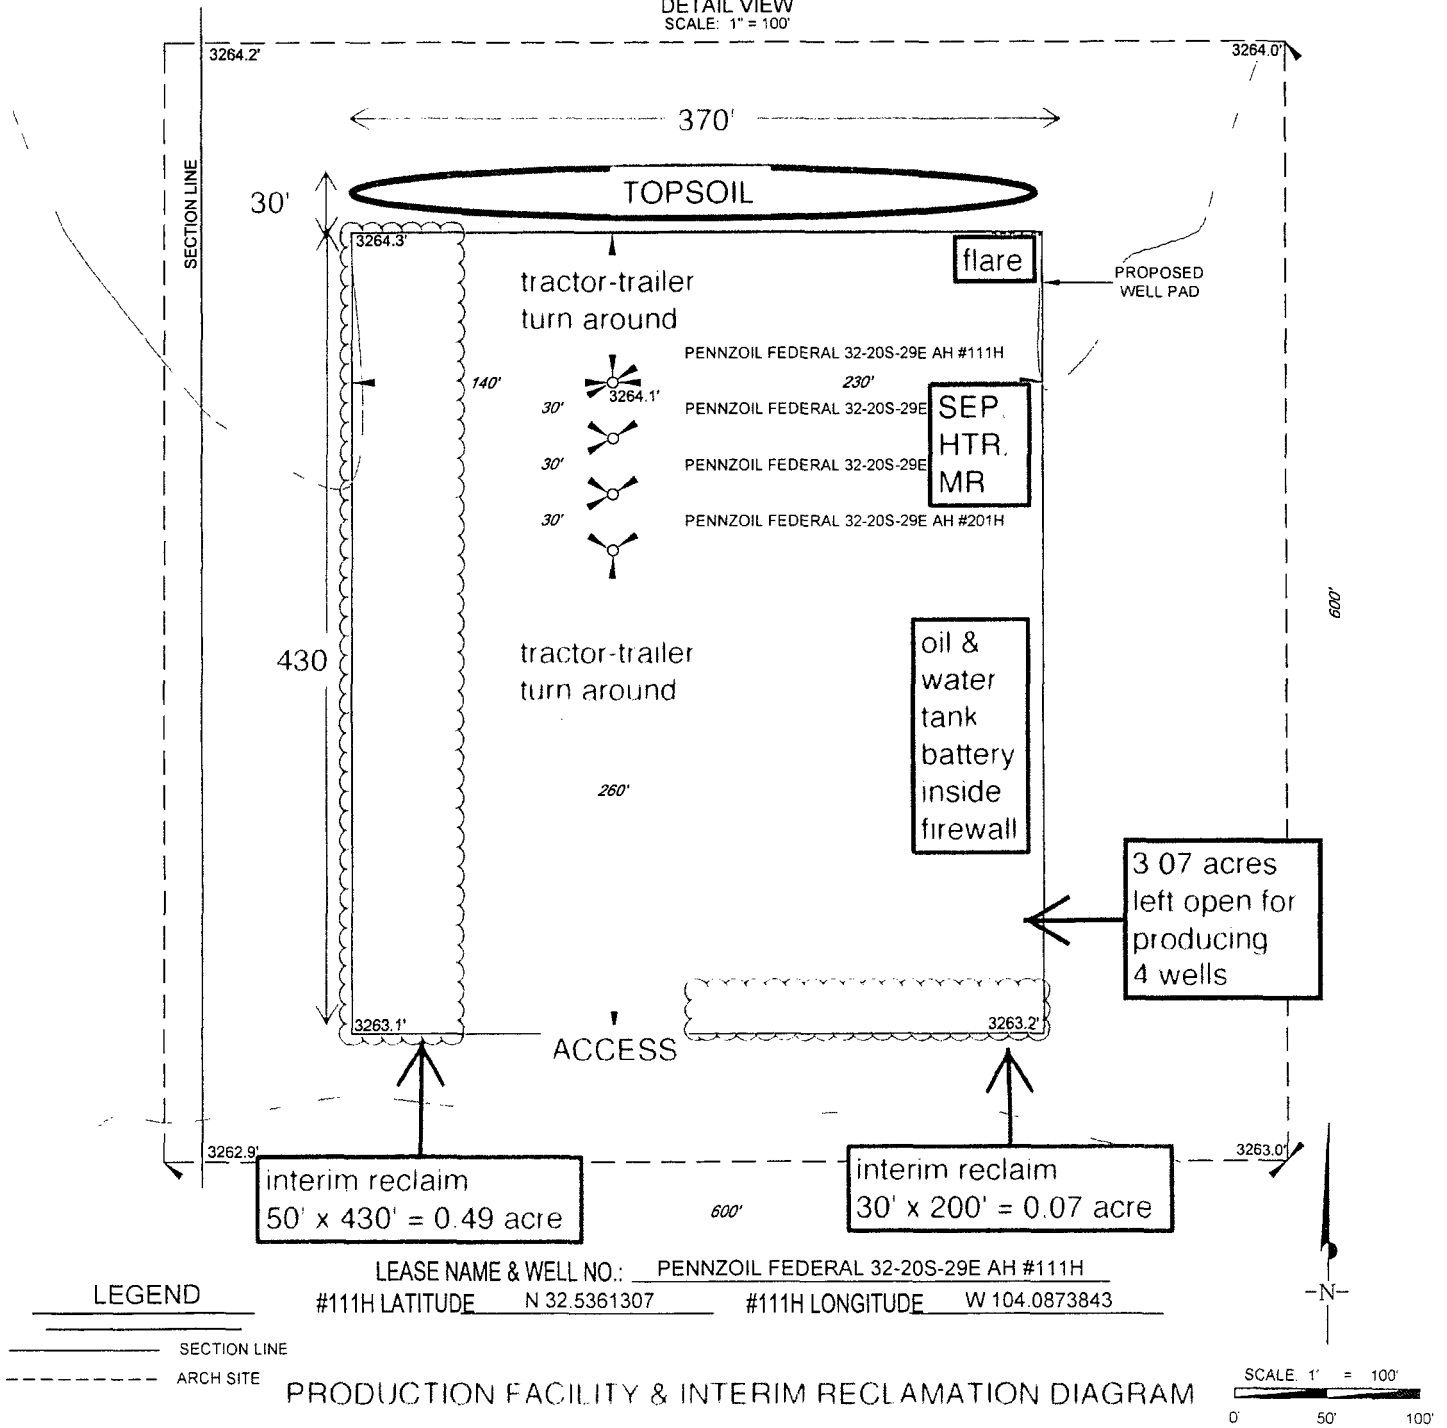

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER
MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY,
AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



WWW.TOPOGRAPHIC.COM

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

S:\SURVEY\MATADOR_RESOURCES\PENNZOIL_FEDERAL_32-20S-29E_AH_111H\FINAL_PRODUCTS\LO_PENNZOIL_FEDERAL_32-20S-29E_AH_111H_REV1.DWG 8/2/2016 12:04 24 PM affores

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

SURFACE PLAN PAGE 1

Surface Use Plan

1. ROAD DIRECTIONS & DESCRIPTIONS (See MAPS 1-4)

From the junction of US 285 and US 62/180 in Carlsbad...
Go East 14.4 miles on paved US 62/180 to the equivalent of Mile Post 49.4
Then turn left and go North 2.1 miles on paved County Road 238
Then turn left and go West 1.95 mile on paved County Road 238
Then turn left and go South 1.95 mile on a caliche road.
Then turn right and go Southwest 3844.67' cross-country
Then turn right and go Northwest 550.31' cross-country to the proposed pad

Non-county roads will be maintained as needed to Gold Book standards. This includes pulling ditches, preserving the crown, and cleaning culverts. This will be done at least once a year, and more often as needed. Caliche will be hauled from the existing Constructors, Inc. pit on private land in NWNE 34-21s-27e.

2. ROAD TO BE BUILT OR UPGRADED (See MAPS 2-4)

The 4394.98' of new road to the well will be crowned and ditched, have a 14' wide driving surface, and be surfaced with caliche. Maximum disturbed width = 30'. Maximum grade = 1%. Maximum cut or fill = 2'.

A cattle guard and gate will be installed in the fence that is crossed (segment A5). Straw wattles will be installed on the north side of the road along segments A2 and A3. Borrow ditches will turn out every ≈500', except on the north side of Segments A2 and A3. No culvert or vehicle turn out is needed.

Upgrading of will consist of filling potholes with caliche on the existing road.

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

SURFACE PLAN PAGE 2

3. EXISTING WELLS (See MAP 2)

Gas and P & A wells are within a mile. No oil, injection, disposal, or water well is within a mile.

4. PROPOSED PRODUCTION FACILITIES (See MAPS 3 & 5)

A tank battery will be built on the east side of the pad. A $\approx 6"$ O. D. steel gas line will be buried 4354.61' parallel to the new road. Power line plans have not been finalized.

5. WATER SUPPLY (See MAPS 1-4)

Water will be trucked from existing water wells (C 0370 & C 03607) on private land in NENE 24-21s-27e.

6. CONSTRUCTION MATERIALS & METHODS (See MAPS 10 & 11)

NM One Call (811) will be notified before construction starts. Top $\approx 6"$ of soil and brush will be stockpiled north of the pad. Pipe racks will be to the east. A closed loop drilling system will be used. Caliche will be hauled from the existing Constructors, Inc. pit on private land in NWNE 34-21s-27e.

7. WASTE DISPOSAL

All trash will be placed in a portable trash cage. It will be hauled to the Eddy County landfill. There will be no trash burning. Contents (drill cuttings, mud, salts, and other chemicals) of the mud tanks will be hauled to CRI's state approved (NM-01-0006) disposal site. Human waste will be disposed of in chemical toilets and hauled to the Carlsbad wastewater treatment plant.

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

SURFACE PLAN PAGE 3

8. ANCILLARY FACILITIES

There will be no airstrip or camp. Camper trailers will be on location for the company man, tool pusher, or mud logger.

9. WELL SITE LAYOUT

See Rig Diagram for depictions of the well pad, trash cage, access onto the location, parking, living facilities, and rig orientation.

10. RECLAMATION

Interim reclamation will consist of shrinking the pad $\approx 16\%$ by removing caliche and reclaiming the west side (30' x 430') and southeast corner (30' x 200'), leaving 3.07 acres around the production equipment. Disturbed areas will be contoured to match pre-construction grades. Soil and brush will be evenly spread over disturbed areas. Disturbed areas will be seeded in accordance with BLM requirements. Enough stockpiled topsoil will be retained to cover the remainder of the pad when the wells are plugged. Once the last well is plugged, then the remainder of the pad and new road will be similarly reclaimed. Noxious weeds will be controlled.

11. SURFACE OWNER

All construction will be on BLM

12. OTHER INFORMATION


On site inspection was held with Vance Wolf and Stan Allison (both BLM) on June 16, 2016. Matador will contribute to the archaeology fund.

Matador Production Company
Pennzoil 32 Fed 111H
SHL 330' FNL & 220' FWL Sec. 33
BHL 330' FNL & 240' FWL Sec. 32
T. 20 S., R. 29 E., Eddy County, NM

SURFACE PLAN PAGE 4

CERTIFICATION

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U. S. C. 1001 for the filing of false statements. Executed this 8th day of November, 2016.




Brian Wood, Consultant
Permits West, Inc.
37 Verano Loop, Santa Fe, NM 87508
(505) 466-8120 FAX: (505) 466-9682

Cellular: (505) 699-2276

Field representative will be:
Sam Pryor, Senior Staff Landman
Matador Production Company
5400 LBJ Freeway, Suite 1500
Dallas TX 75240
Phone: (972) 371-5241
FAX: (214) 866-4841

LOCATION & ELEVATION VERIFICATION MAP

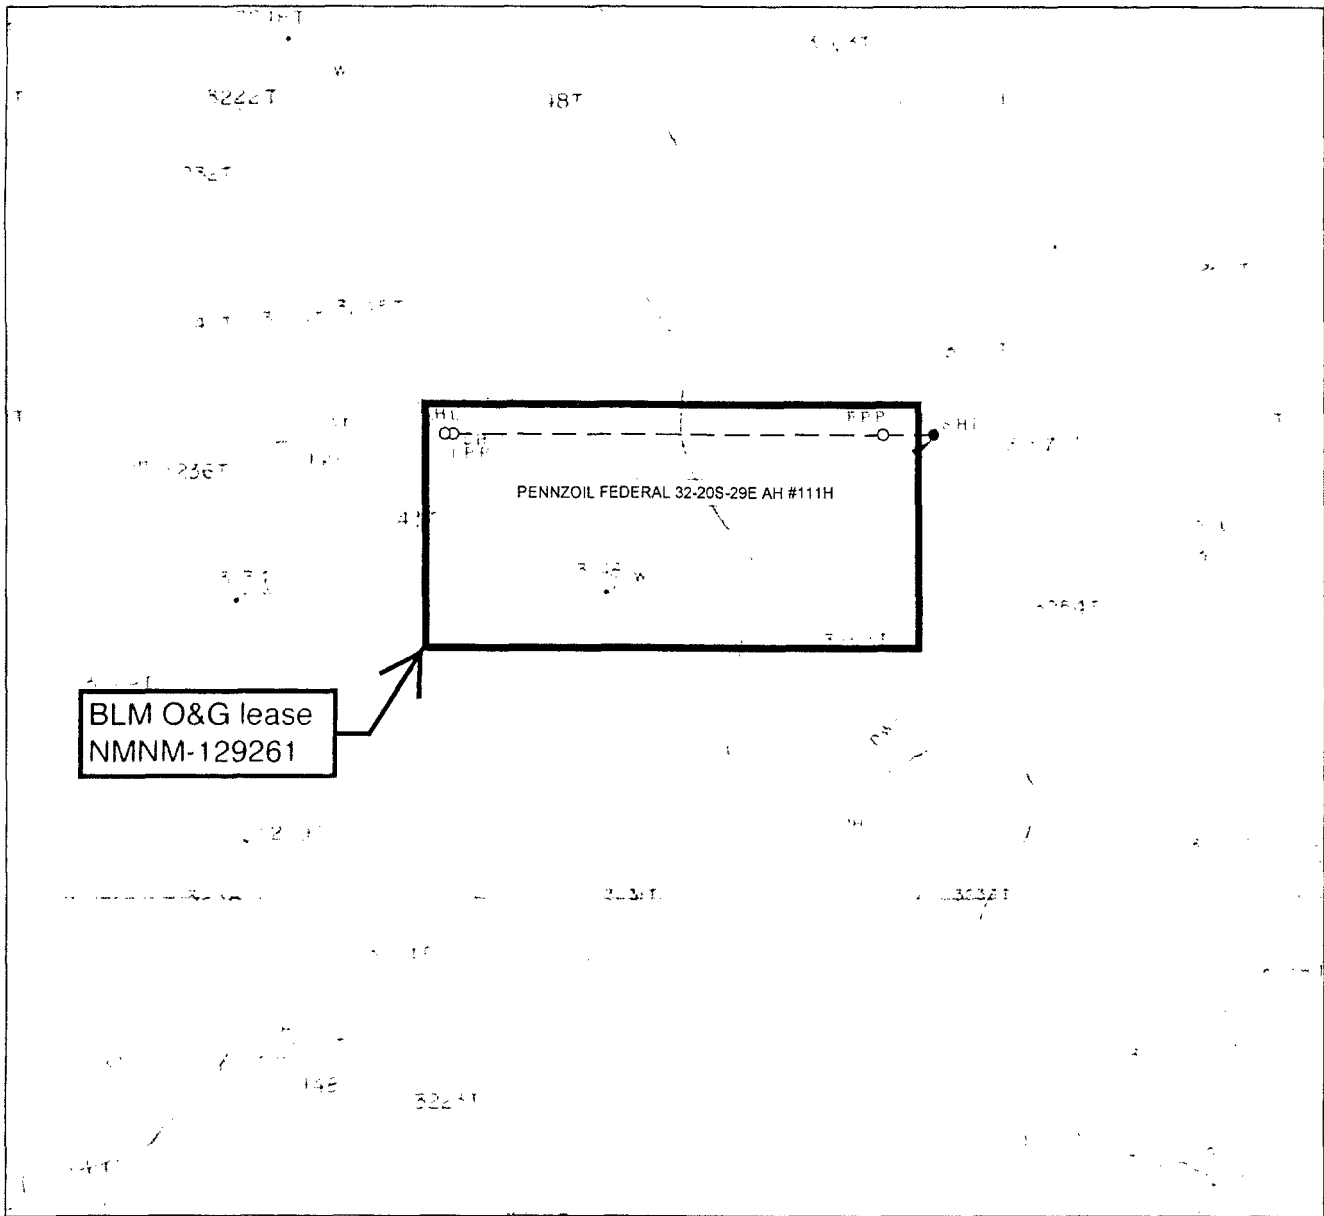

LEASE NAME & WELL NO.: PENNZOIL FEDERAL 32-20S-29E AH #111H

SECTION 33 TWP 20-S RGE 29-E SURVEY N.M.P.M.
 COUNTY EDDY STATE NM ELEVATION 3264'
 DESCRIPTION 330' FNL & 220' FWL

LATITUDE N 32.5361307 LONGITUDE W 104.0873843



SCALE: 1" = 2000'
 0' 1000' 2000'

THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET.




WWW.TOPOGRAPHIC.COM

SCALE: 1" = 1000'
0' 500' 1000'



SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

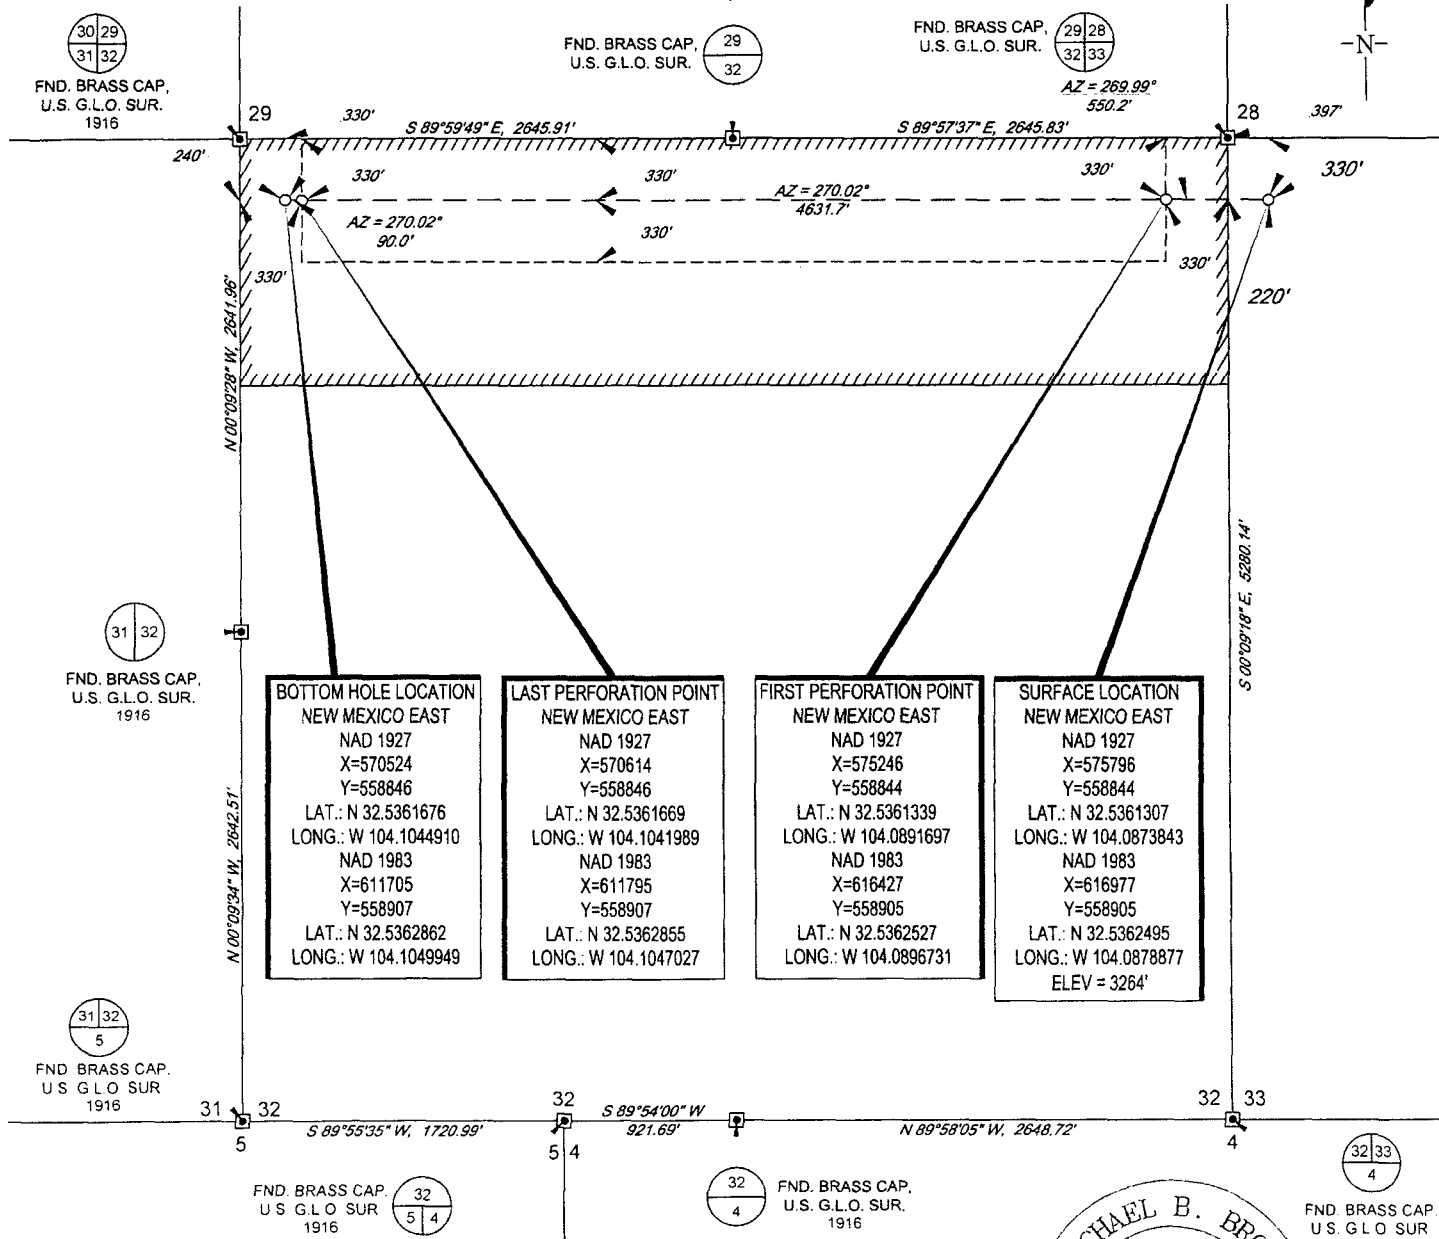

BOTTOM HOLE LOCATION
NEW MEXICO EAST
NAD 1927
X=570524
Y=558846
LAT.: N 32.5361676
LONG.: W 104.1044910
NAD 1983
X=611705
Y=558907
LAT.: N 32.5362862
LONG.: W 104.1049949

LAST PERFORATION POINT
NEW MEXICO EAST
NAD 1927
X=570614
Y=558846
LAT.: N 32.5361669
LONG.: W 104.1041989
NAD 1983
X=611795
Y=558907
LAT.: N 32.5362855
LONG.: W 104.1047027

FIRST PERFORATION POINT
NEW MEXICO EAST
NAD 1927
X=575246
Y=558844
LAT.: N 32.5361339
LONG.: W 104.0891697
NAD 1983
X=616427
Y=558905
LAT.: N 32.5362527
LONG.: W 104.0896731

SURFACE LOCATION
NEW MEXICO EAST
NAD 1927
X=575796
Y=558844
LAT.: N 32.5361307
LONG.: W 104.0873843
NAD 1983
X=616977
Y=558905
LAT.: N 32.5362495
LONG.: W 104.0878877
ELEV = 3264'

LEASE NAME & WELL NO.: PENNZOIL FEDERAL 32-20S-29E AH #111H

SECTION 33 TWP 20-S RGE 29-E SURVEY N.M.P.M.

COUNTY EDDY STATE NM

DESCRIPTION 330' FNL & 220' FWL

DISTANCE & DIRECTION

FROM INT. OF US-285 AND US-180/US-62 E/W GREENE ST. GO EAST ON


.....

.....

FEET NORTHEAST OF THE LOCATION

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET. THIS EASEMENT/SERVITUDE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY, AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.

AS OF THE DATE OF SURVEY, ALL ABOVE GROUND APPURTENANCES WITHIN 300' OF THE STAKED LOCATION ARE SHOWN HEREON.




Michael B. Brown, P.S. No. 18329

AUGUST 1, 2016



WWW.TOPOGRAPHIC.COM

TOPOI map printed on 11/08/16 from "Untitled.tpo"

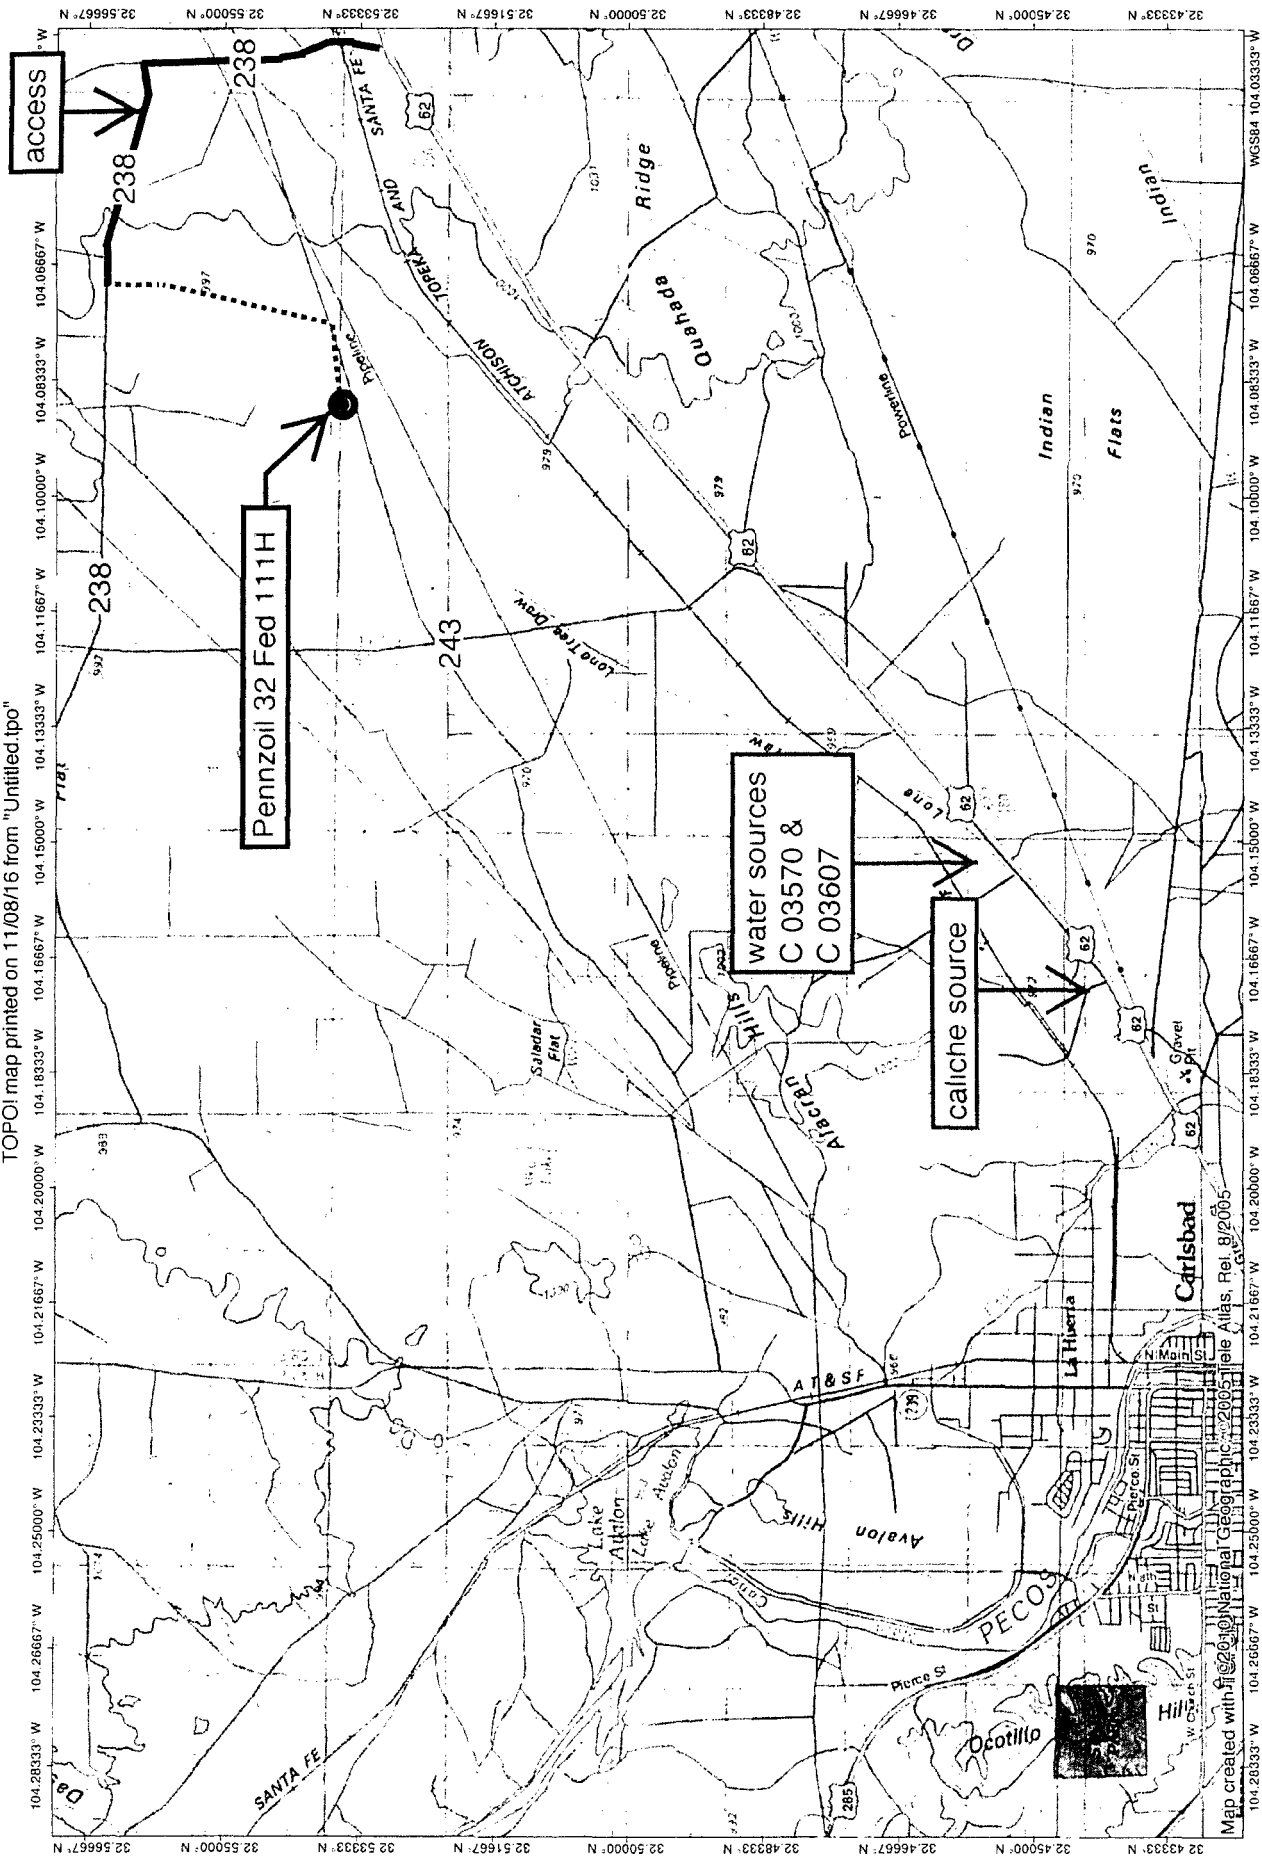

NATIONAL
GEOGRAPHIC




MAP 1

TINMAN

11/08/16

MAP 2

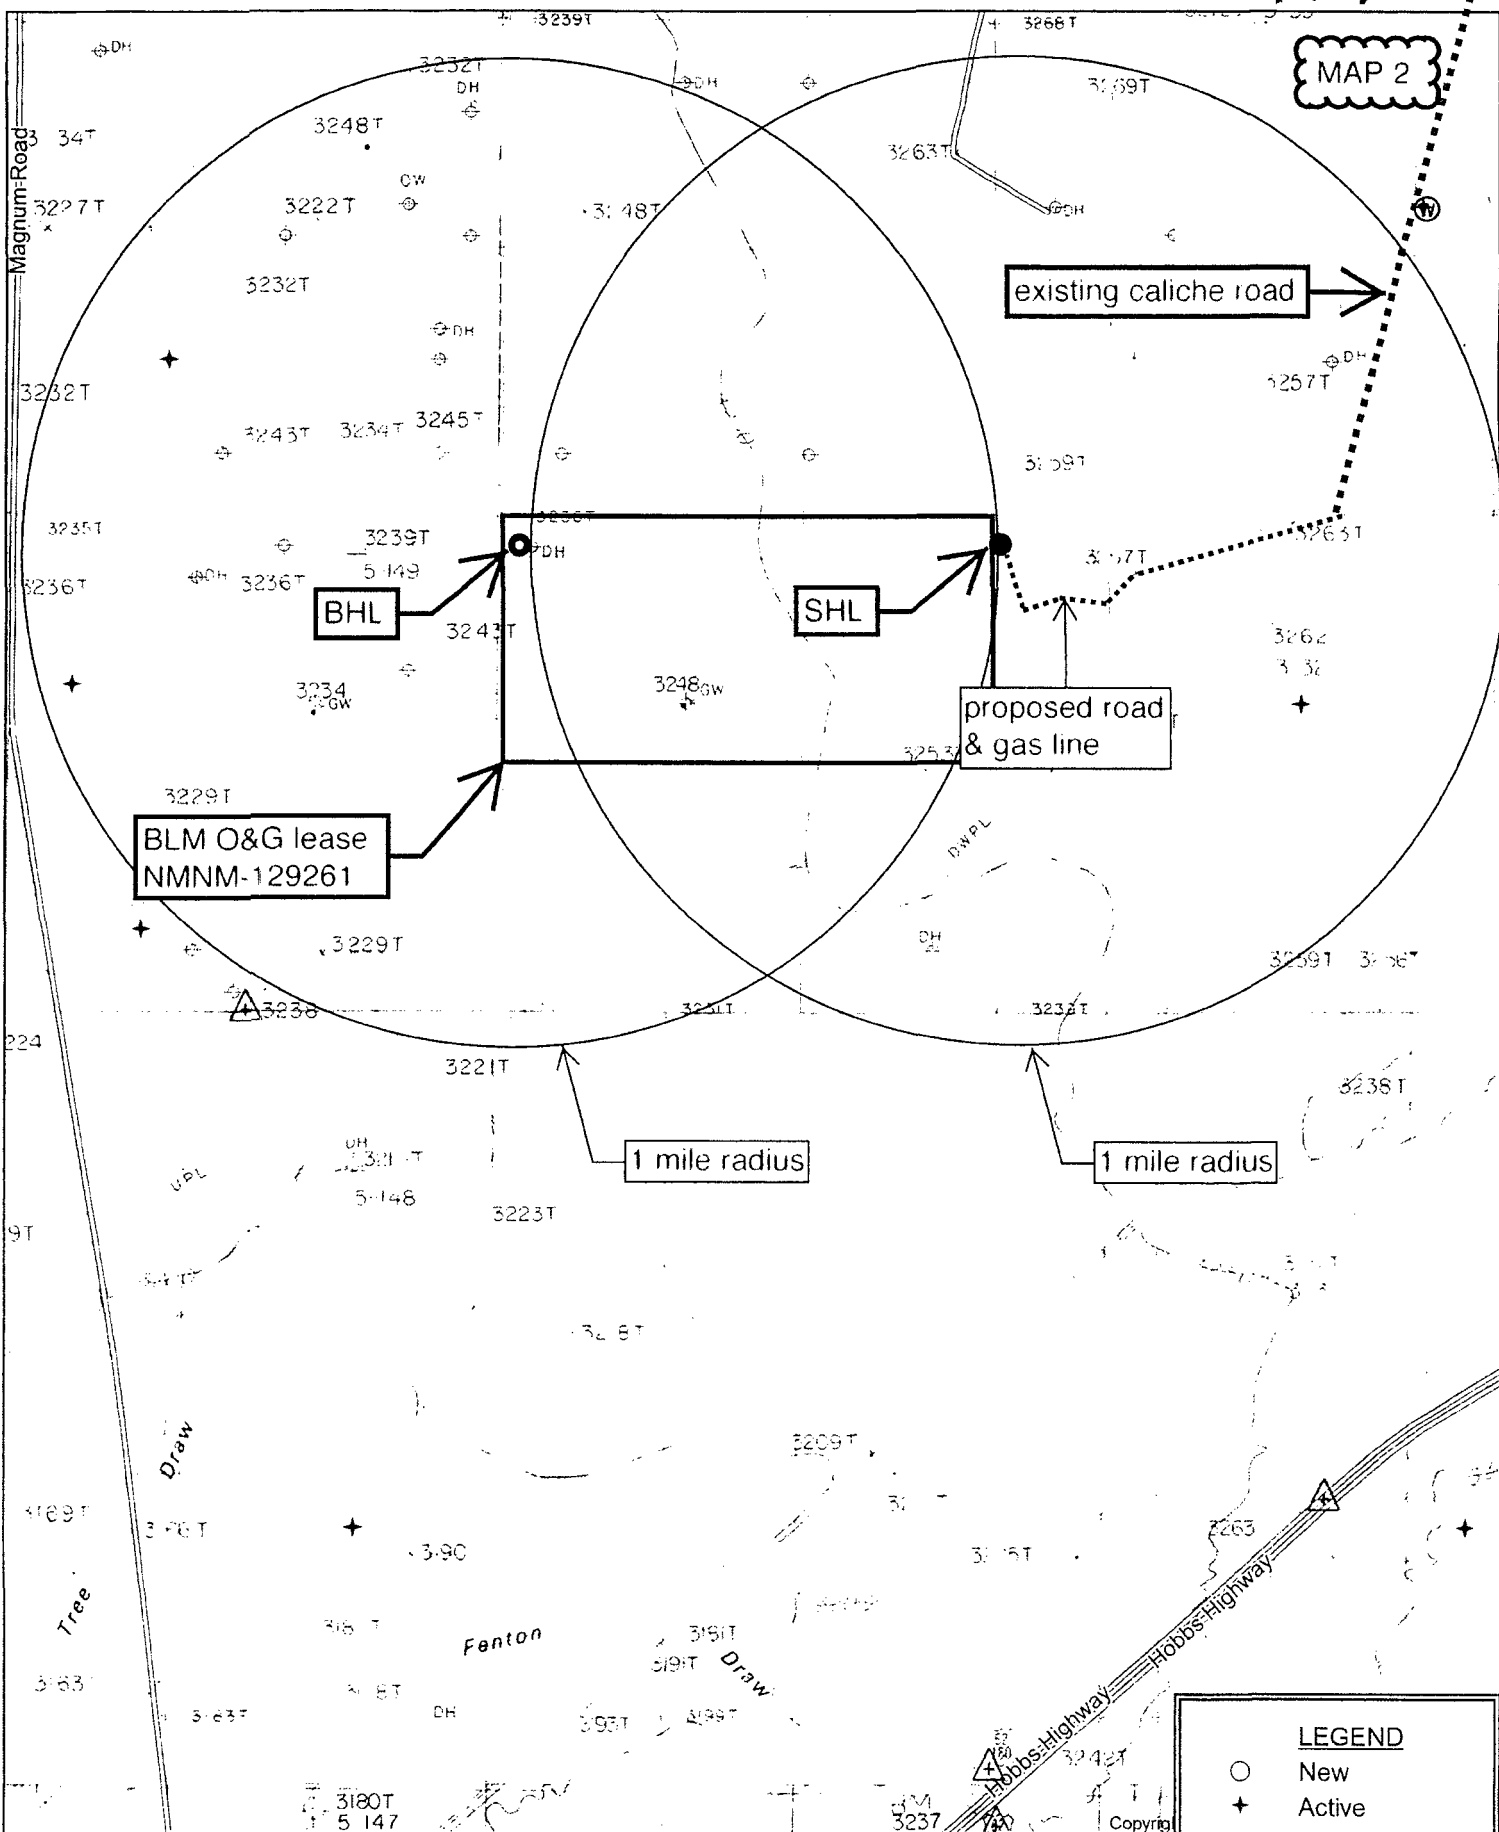

1 mile radius

1 mile radius

BLM O&G lease
NMNM-129261

existing caliche road

proposed road
& gas line


BHL

SHL



Quad: ILLINOIS CAMP SE
Scale: 1 inch = 2,000 ft.

LEGEND	
○	New
+	Active
⊖	P&A
⊙	INJ
⊙	SWD
⊙	Water

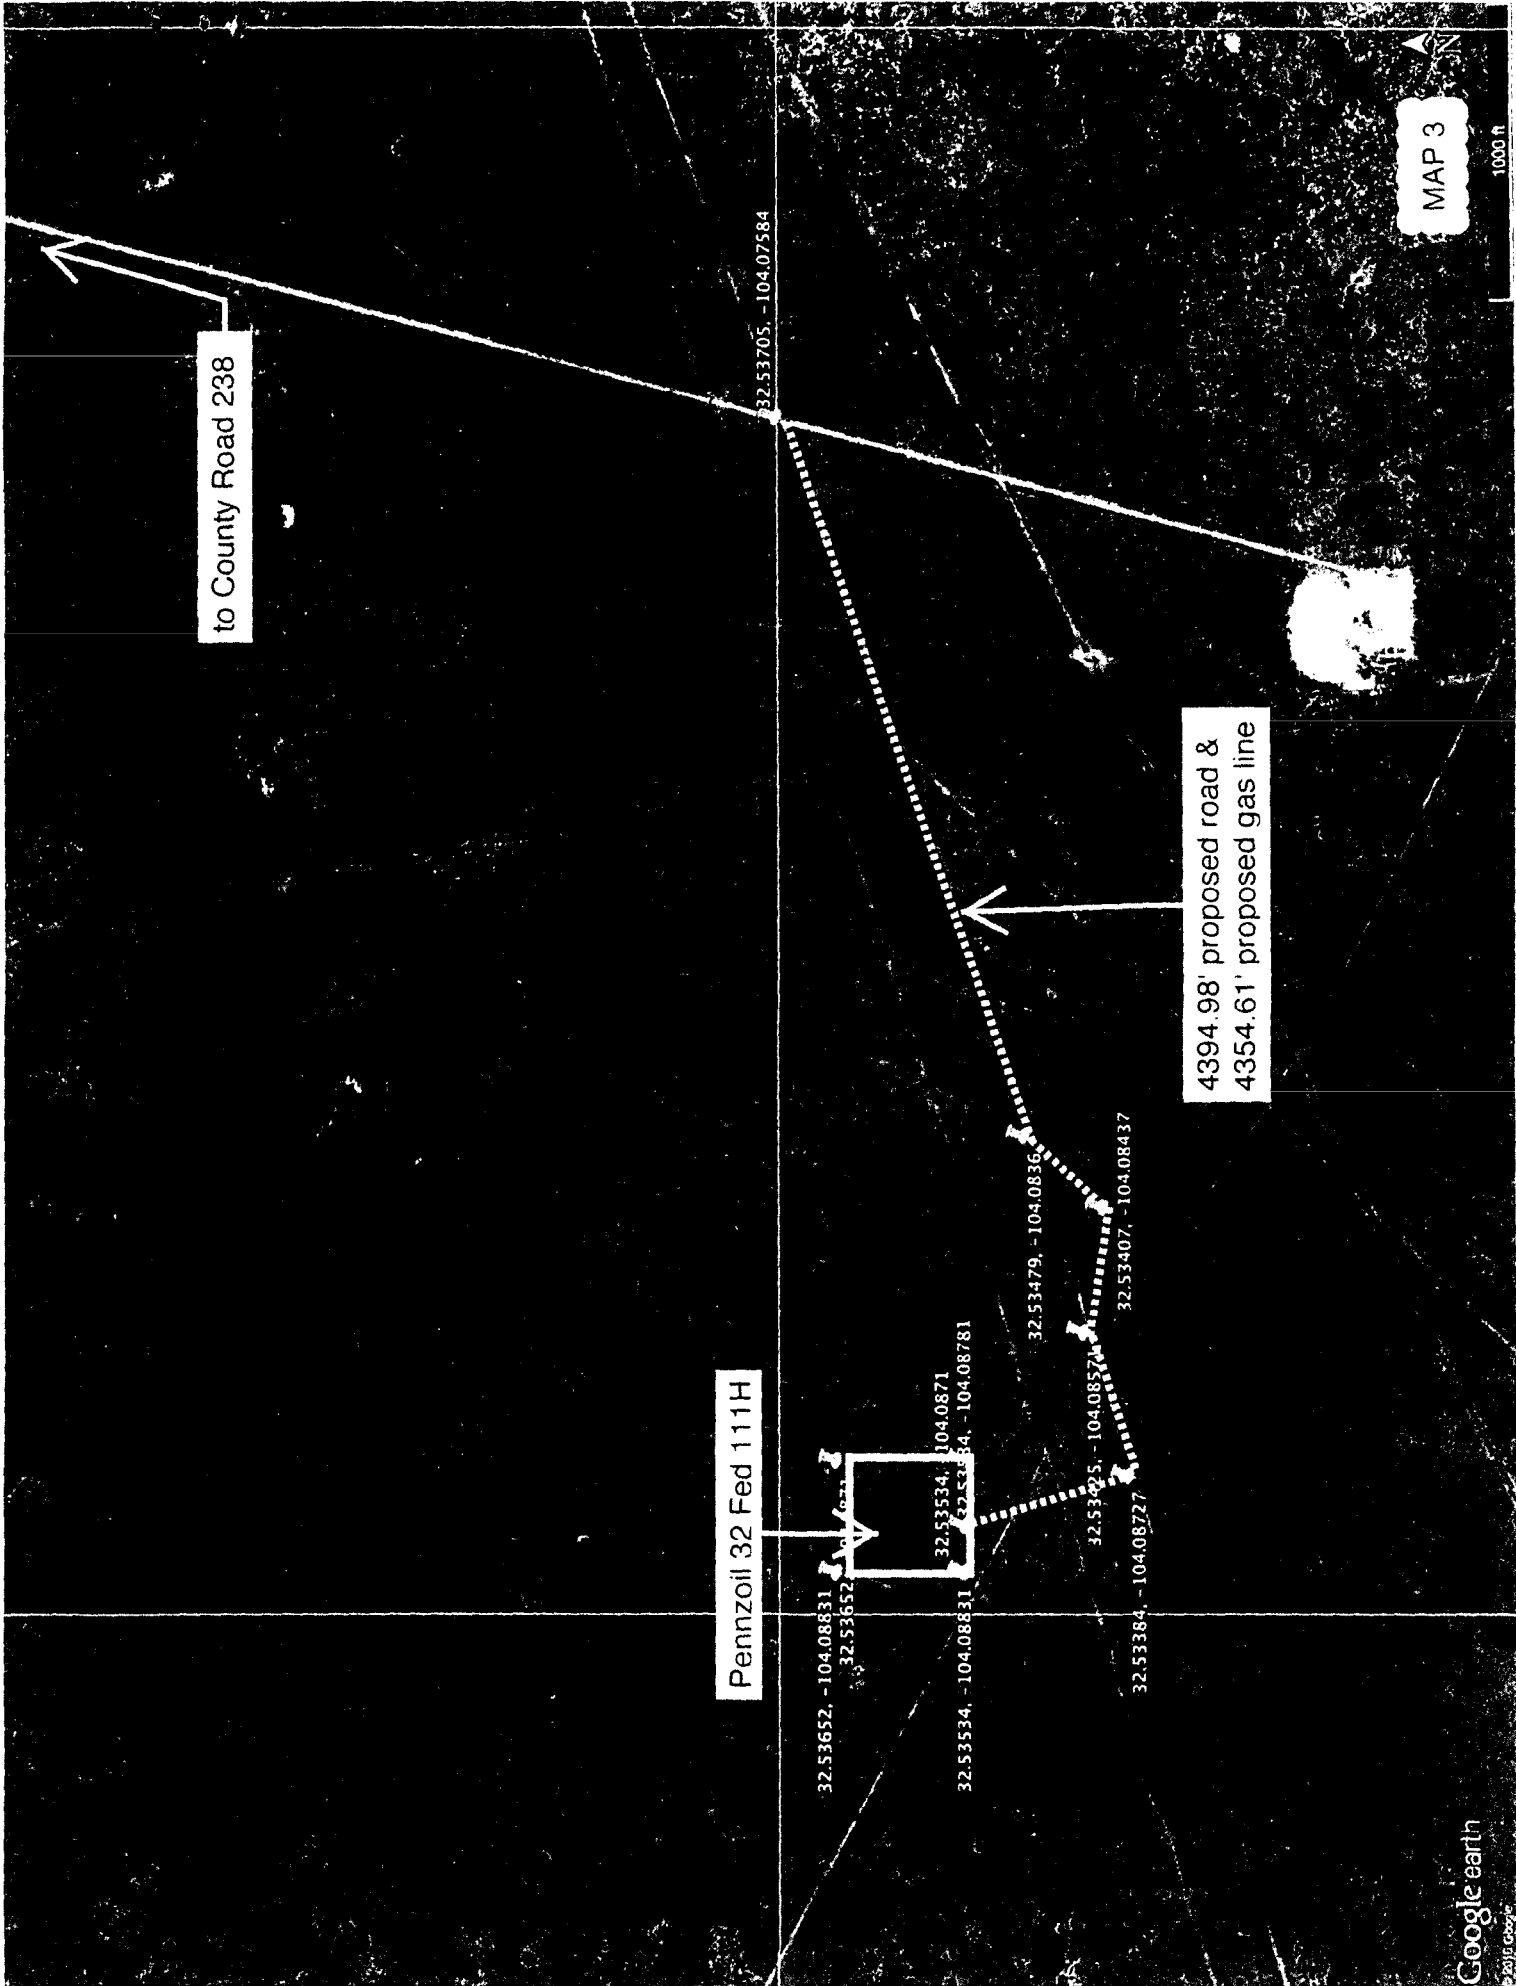

to County Road 238

Pennzoil 32 Fed 111H

4394.98' proposed road &
4354.61' proposed gas line

MAP 3

1000 ft

Google earth

32.53705, -104.07584

32.53652, -104.08831

32.53652, -104.08831

32.53534, -104.0871

32.53534, -104.08831

32.53534, -104.0871

32.53479, -104.0836

32.53425, -104.0857

32.53407, -104.08437


32.53384, -104.08727

SCALE: 1" = 1000'

0' 500' 1000'

SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

MAP 4

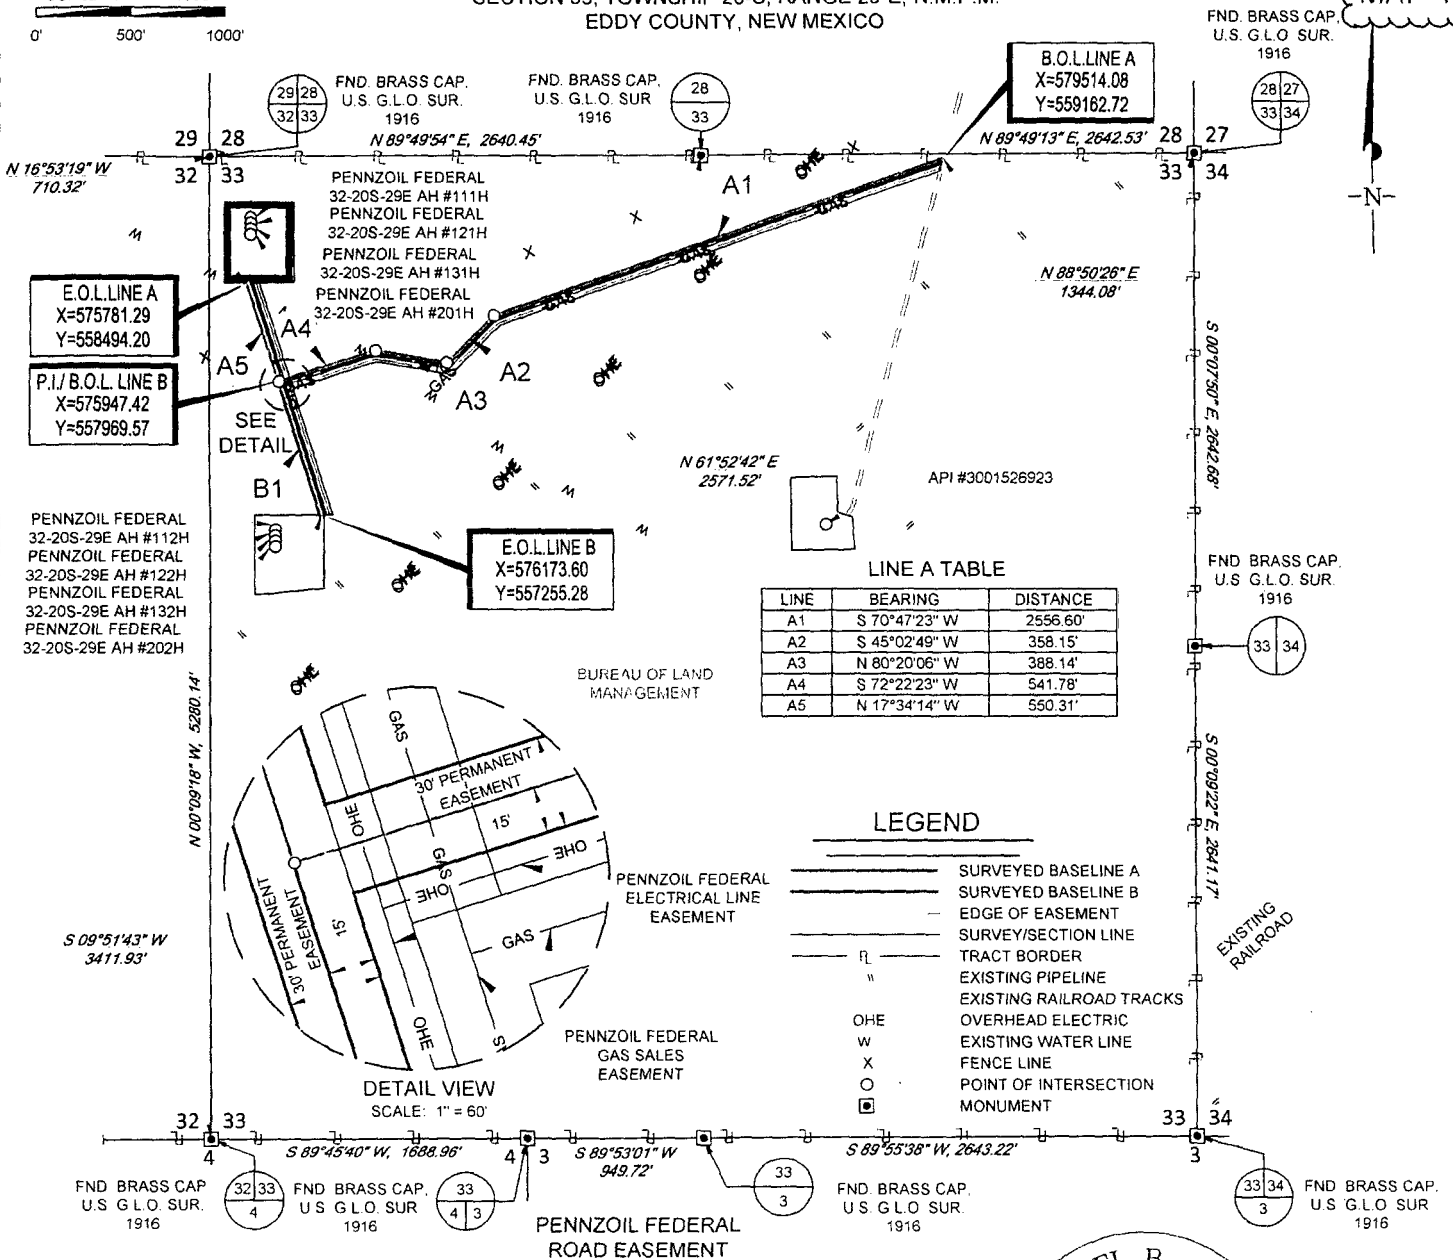

LINE A TABLE


LINE	BEARING	DISTANCE
A1	S 70°47'23" W	2556.60'
A2	S 45°02'49" W	358.15'
A3	N 80°20'06" W	388.14'
A4	S 72°22'23" W	541.78'
A5	N 17°34'14" W	550.31'

LEGEND

- SURVEYED BASELINE A
- SURVEYED BASELINE B
- - - EDGE OF EASEMENT
- SURVEY/SECTION LINE
- TRACT BORDER
- EXISTING PIPELINE
- EXISTING RAILROAD TRACKS
- OHE OVERHEAD ELECTRIC
- W EXISTING WATER LINE
- X FENCE LINE
- POINT OF INTERSECTION
- MONUMENT

DETAIL VIEW

SCALE: 1" = 60'

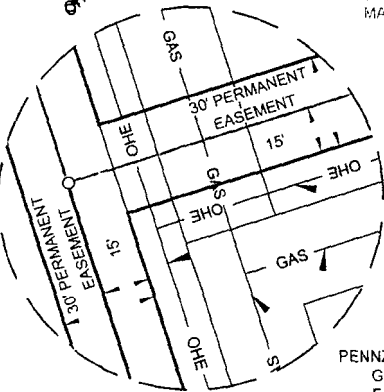


Being a proposed road easement being 30 feet in width, 15 feet left, and 15 feet right of the above platted centerline total line footage containing 5144.22 feet or 311.77 rods, containing 3.54 acres more or less



TOPOGRAPHIC
LOYALTY INNOVATION LEGACY

1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX: (817) 744-7548
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1653 • FAX: (432) 682-1743
WWW.TOPOGRAPHIC.COM

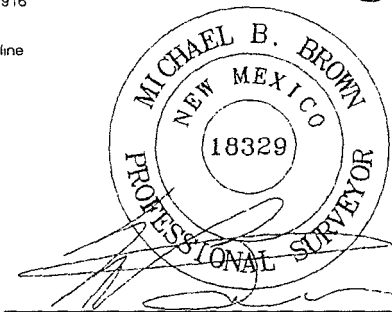


Michael Blake Brown, P.S. No. 18329
AUGUST 01, 2016

PENNZOIL FEDERAL ROAD EASEMENT	REVISION:		NOTES:
	INT	DATE	
DATE: 08/01/16			<p>1. ORIGINAL DOCUMENT SIZE 8.5" X 11"</p> <p>2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927</p> <p>3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR PRODUCTION COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.</p> <p>4. B.O.L. = BEGINNING OF LINE</p> <p>5. E.O.L. = END OF LINE</p> <p>6. P.I. = POINT OF INTERSECTION</p>
FILE: EP_PENNZOIL_FEDERAL_ROAD_REV1			
DRAWN BY: MML			
SHEET: 1 OF 1			

SCALE: 1" = 1000'

SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

MAP 5

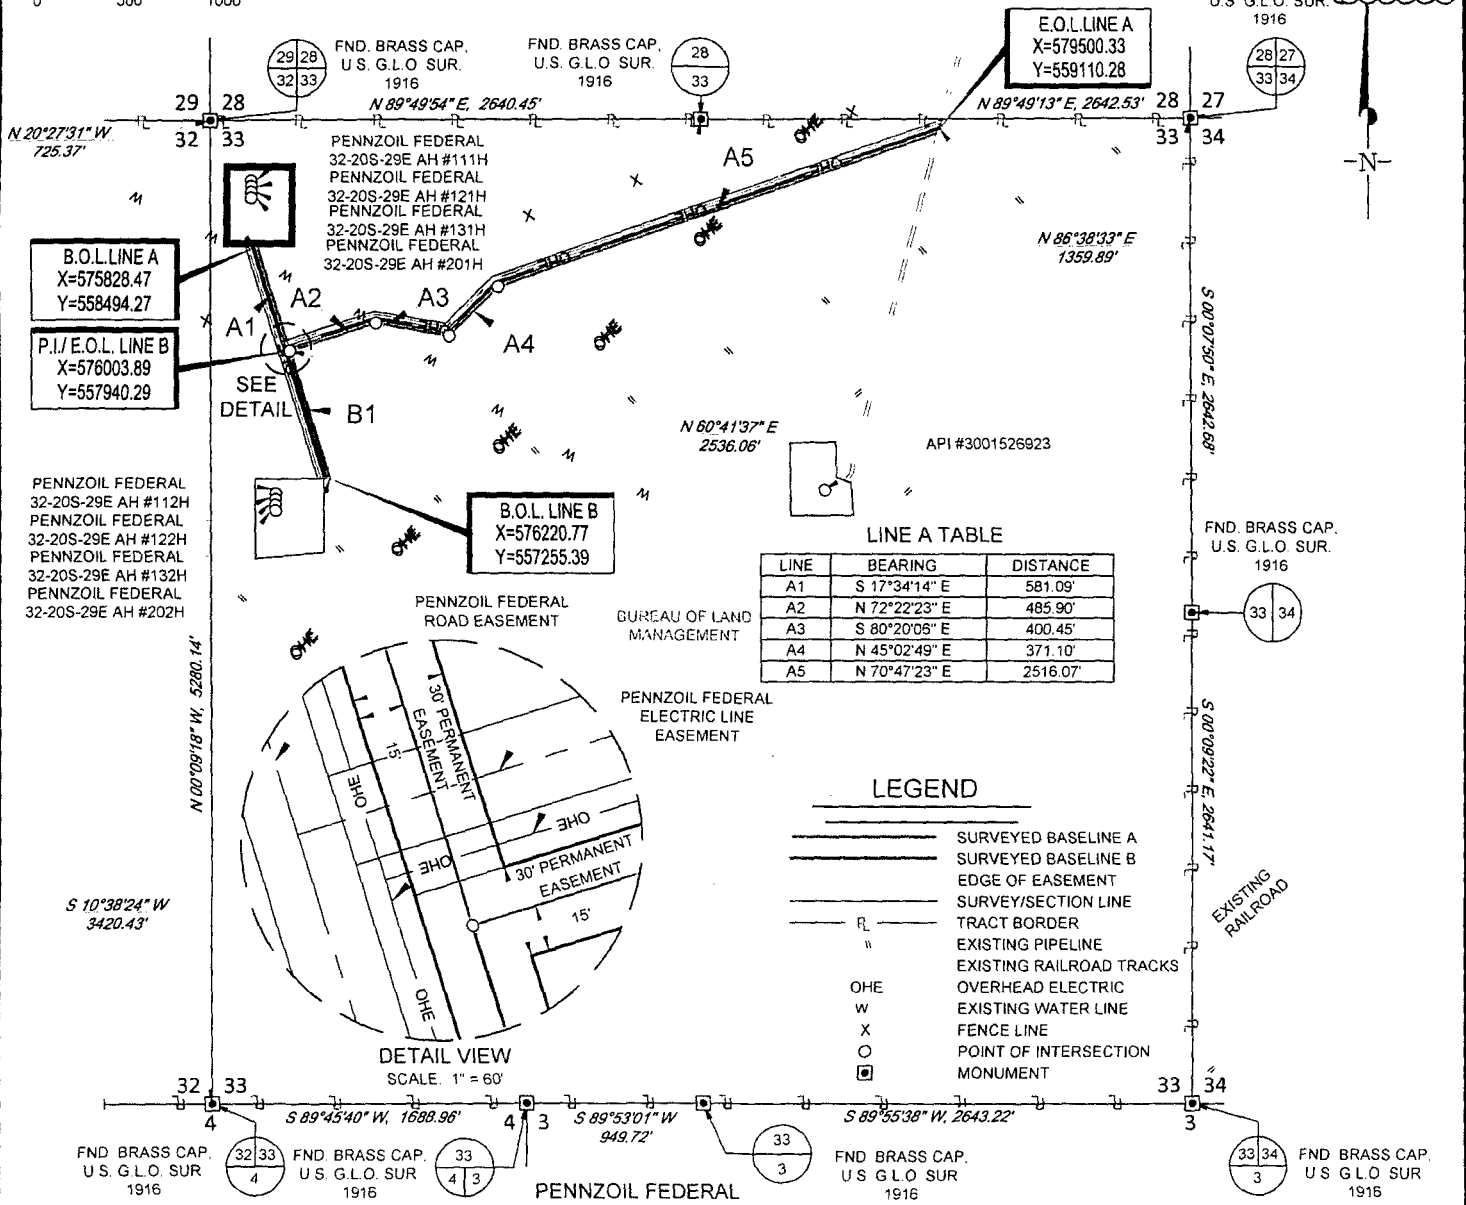


LINE A TABLE

LINE	BEARING	DISTANCE
A1	S 17°34'14" E	581.09'
A2	N 72°22'23" E	485.90'
A3	S 80°20'06" E	400.45'
A4	N 45°02'49" E	371.10'
A5	N 70°47'23" E	2516.07'

LEGEND

	SURVEYED BASELINE A
	SURVEYED BASELINE B
	EDGE OF EASEMENT
	SURVEY/SECTION LINE
	TRACT BORDER
	EXISTING PIPELINE
	EXISTING RAILROAD TRACKS
	OVERHEAD ELECTRIC
	EXISTING WATER LINE
	FENCE LINE
	POINT OF INTERSECTION
	MONUMENT

Being a proposed gas sales line easement being 30 feet in width, 15 feet left, and 15 feet right of the above platted centerline total line footage containing 5073.03 feet or 307.46 rods, containing 3.49 acres more or less



Michael Blake Brown, P.S. No. 18329
AUGUST 01, 2016



TOPOGRAPHIC
LOYALTY INNOVATION LEGACY
1400 EVERMAN PARKWAY, Ste. 197 • FT. WORTH, TEXAS 76140
TELEPHONE: (817) 744-7512 • FAX (817) 744-7548
2903 NORTH BIG SPRING • MIDLAND, TEXAS 79705
TELEPHONE: (432) 682-1653 OR (800) 767-1553 • FAX (432) 682-1743
WWW.TOPOGRAPHIC.COM

PENNZOIL FEDERAL GAS SALES LINE EASEMENT DATE: 08/01/16 FILE: EP_PENNZOIL_FEDERAL_GAS_SALES_LINE_REV1 DRAWN BY: MML SHEET: 1 OF 1	REVISION:	
	INT	DATE


- NOTES**
1. ORIGINAL DOCUMENT SIZE 8 5/8" X 11"
 2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927
 3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR PRODUCTION COMPANY; ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY
 4. B.O.L. = BEGINNING OF LINE
 5. E.O.L. = END OF LINE
 6. P = POINT OF INTERSECTION



MAP 6

SECTION 33, TOWNSHIP 20-S, RANGE 29-E, N.M.P.M.
EDDY COUNTY, NEW MEXICO

DETAIL VIEW
SCALE: 1" = 100'

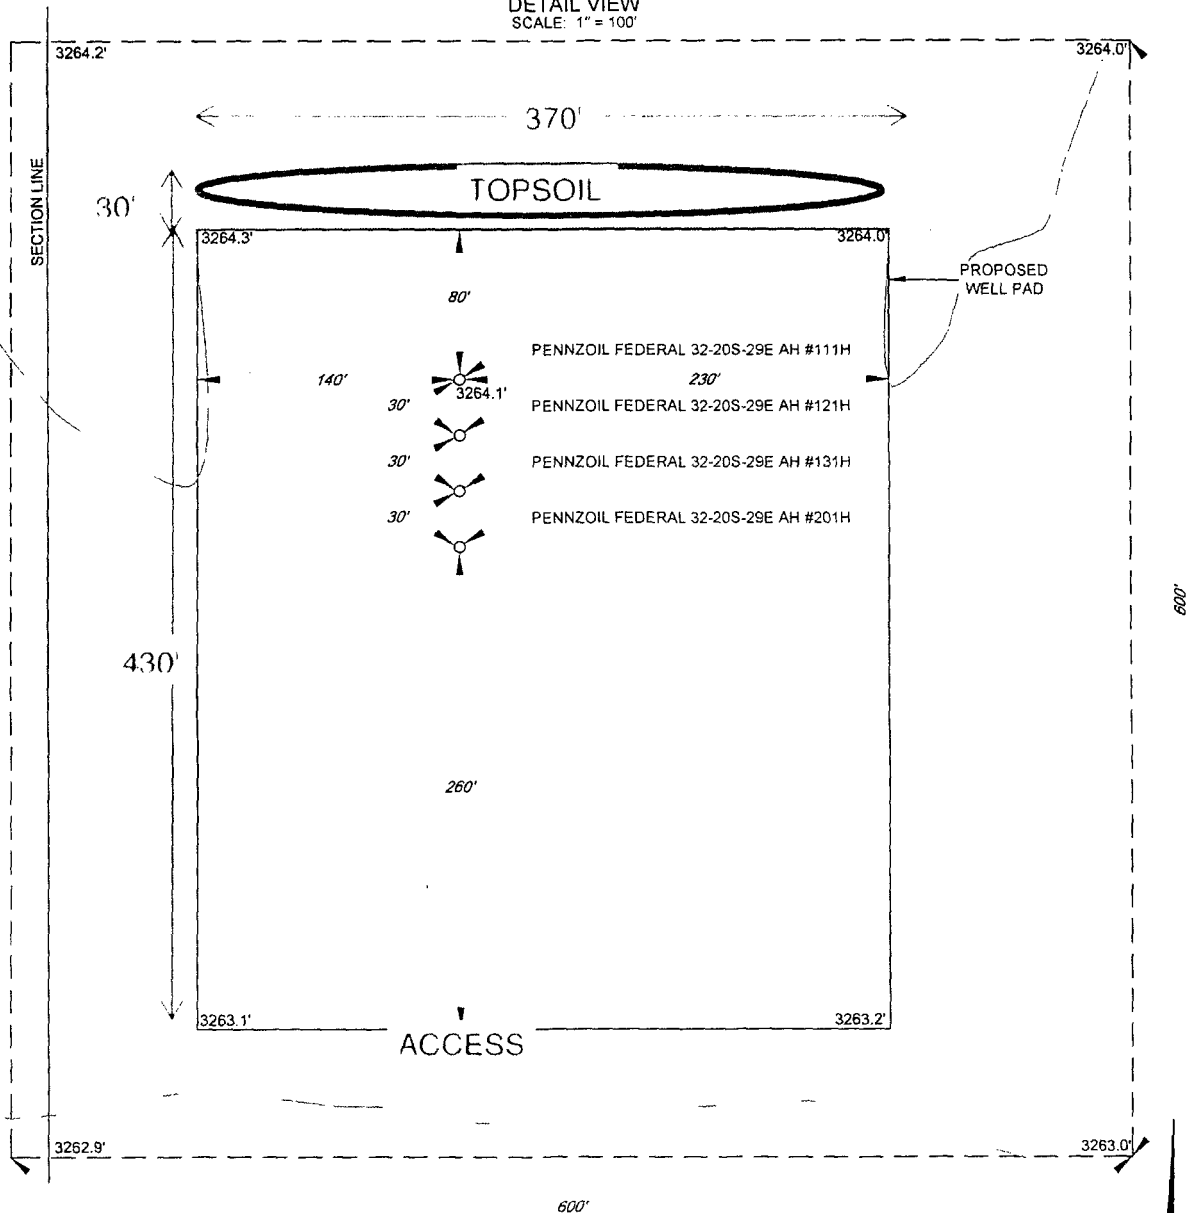

LEGEND

- SECTION LINE
- ARCH SITE

LEASE NAME & WELL NO.: PENNZOIL FEDERAL 32-20S-29E AH #111H

#111H LATITUDE N 32.5361307 #111H LONGITUDE W 104.0873843

SCALE: 1" = 100'
0' 50' 100'

ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREON ARE GRID
BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE OF THE
NORTH AMERICAN DATUM 1927, U.S. SURVEY FEET

THIS PROPOSED PAD SITE LOCATION SHOWN HEREON HAS BEEN SURVEYED ON THE GROUND UNDER
MY SUPERVISION AND PREPARED ACCORDING TO THE EVIDENCE FOUND AT THE TIME OF SURVEY,
AND DATA PROVIDED BY MATADOR PRODUCTION COMPANY. THIS CERTIFICATION IS MADE AND
LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS
NON-TRANSFERABLE. THIS SURVEY IS CERTIFIED FOR THIS TRANSACTION ONLY.



WWW.TOPOGRAPHIC.COM

ORIGINAL DOCUMENT SIZE: 8.5" X 11"

SCALE: 1" = 200'




0' 100' 200'



TOP OF PAD ELEVATION:
3263.76'

BALANCE TOLERANCE (C.Y.): 0.00
CUT SWELL FACTOR: 1.00
FILL SHRINK FACTOR: 1.00

PAD EARTHWORK VOLUMES
CUT 20,320.5 C.F. 752.61 C.Y.
FILL 20,320.5 C.F. 752.61 C.Y.
AREA: 160912.6 SQ.FT. 3.694 ACRES

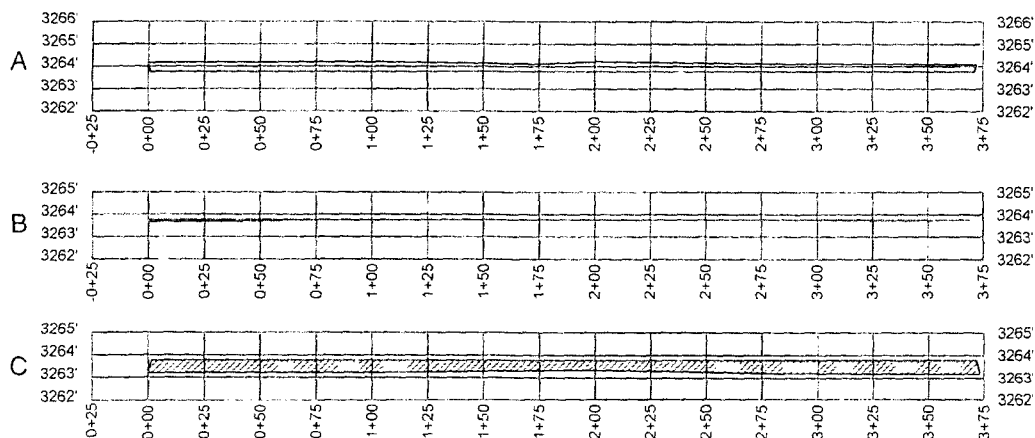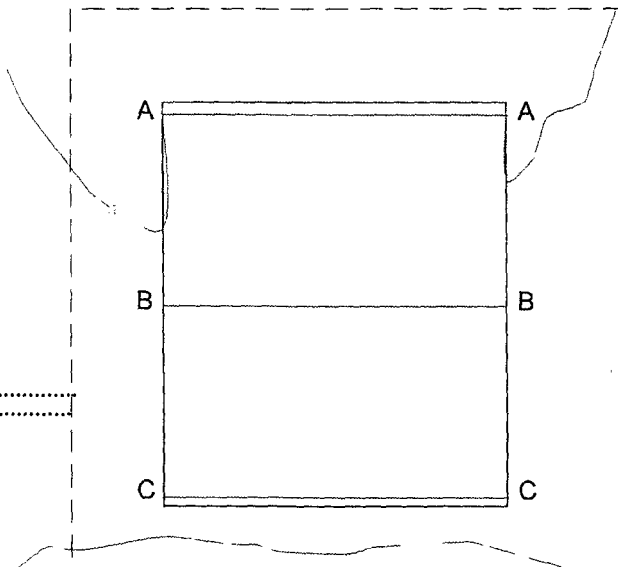

Horizontal Scale = 1/50
Vertical Scale = 1/5



Michael Blake Brown, P.S., No. 18329

AUGUST 2, 2016

Field note description of even date accompanies this plat.

TEXAS FIRM REGISTRATION NO. 10042504
WWW.TOPOGRAPHIC.COM

PENNZOIL FEDERAL 32-20S-29E AH 111H SURFACE PAD SITE PRO	REVISION:	
	A.V.F	08/02/2016
DATE: 04/19/16		
FILE: 00 PENNZOIL FEDERAL 32-20S-29E AH 111H SURFACE PAD SITE PRO		
DRAWN BY: SRJ		
SHEET: 1 OF 1		

NOTES:

1. ORIGINAL DOCUMENT SIZE: 8.5" X 11"
2. ALL BEARINGS, DISTANCES, AND COORDINATE VALUES CONTAINED HEREIN ARE GRID BASED UPON THE NEW MEXICO STATE PLANE COORDINATE SYSTEM, EAST ZONE, U.S. SURVEY FEET, NORTH AMERICAN DATUM 1927.
3. CERTIFICATION IS MADE ONLY TO THE LOCATION OF THIS EASEMENT, IN RELATION TO THE EVIDENCE FOUND DURING A FIELD SURVEY, MADE ON THE GROUND, UNDER MY SUPERVISION, AND USING DOCUMENTATION PROVIDED BY MATADOR RESOURCE COMPANY. ONLY UTILITIES/EASEMENTS THAT WERE VISIBLE ON THE DATE OF THIS SURVEY, WITHIN/ADJOINING THIS EASEMENT, HAVE BEEN LOCATED AS SHOWN HEREON OF WHICH I HAVE KNOWLEDGE. THIS CERTIFICATION IS LIMITED TO THOSE PERSONS OR ENTITIES SHOWN ON THE FACE OF THIS PLAT AND IS NON-TRANSFERABLE, AND MADE FOR THIS TRANSACTION ONLY.

District I
1625 N French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Conservation, Minerals & Natural Resources
Department
NOV 22 2017
RECEIVED
CONSERVATION DIVISION
1220 South St. Francis Dr.
Sante Fe, NM 87505

FORM C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1st Bone Spring sand

¹ API Number 30-015-44572	² Acres 27470	³ Section GETTY BONE SPRING
⁴ Property Code 320077	⁵ Operator Name MATADOR PRODUCTION COMPANY	⁶ Well Number #111H
⁷ GRID No. 228937		⁸ Elevation 3264'

¹⁰Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	33	20-S	29-E	-	330'	NORTH	220'	WEST	EDDY

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
D	32	20-S	29-E	-	330'	NORTH	240'	WEST	EDDY

¹² Dedicated Acres 160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

				<p>¹⁷OPERATOR CERTIFICATION</p> <p>I, the undersigned, being duly sworn, depose and say that the foregoing is a true and correct copy of the original as the same appears in my files and is a true and correct copy of the original as the same appears in my files and is a true and correct copy of the original as the same appears in my files.</p> <p>Signature: <i>Brian Wood</i> Date: 11-8-16</p> <p>Printed Name: BRIAN WOOD</p> <p>E-mail Address: brian@permitswest.com</p> <p>E-mail Address: (505) 466-8120</p>
<p>¹⁸SURVEYOR CERTIFICATION</p> <p>I, the undersigned, being duly sworn, depose and say that the foregoing is a true and correct copy of the original as the same appears in my files and is a true and correct copy of the original as the same appears in my files and is a true and correct copy of the original as the same appears in my files.</p> <p>Date of Survey: 07/27/2016</p> <p>Signature and Seal of Professional Surveyor: <i>Michael B. Brown</i></p> <p>Certificate Number: 18329</p>				

<p>BOTTOM HOLE LOCATION NEW MEXICO EAST NAD 1927 X=570524 Y=558846 LAT.: N 32.5361676 LONG.: W 104.1044910 NAD 1983 X=611705 Y=558907 LAT.: N 32.5362862 LONG.: W 104.1049949</p>	<p>LAST PERFORATION POINT NEW MEXICO EAST NAD 1927 X=570614 Y=558846 LAT.: N 32.5361669 LONG.: W 104.1041989 NAD 1983 X=611795 Y=558907 LAT.: N 32.5362855 LONG.: W 104.1047027</p>	<p>FIRST PERFORATION POINT NEW MEXICO EAST NAD 1927 X=575246 Y=558844 LAT.: N 32.5361339 LONG.: W 104.0891697 NAD 1983 X=616427 Y=558905 LAT.: N 32.5362527 LONG.: W 104.0896731</p>	<p>SURFACE LOCATION NEW MEXICO EAST NAD 1927 X=575796 Y=558844 LAT.: N 32.5361307 LONG.: W 104.0873843 NAD 1983 X=616977 Y=558905 LAT.: N 32.5362495 LONG.: W 104.0878877</p>
--	--	---	--

Mixture 4, for Gypsum Sites

The holder shall seed all the disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Alkli Sacaton (<i>Sporobolus airoides</i>)	1.5
DWS~ Four-wing saltbush (<i>Atriplex canescens</i>)	8.0
~DWS: DeWinged Seed	

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed