


UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER

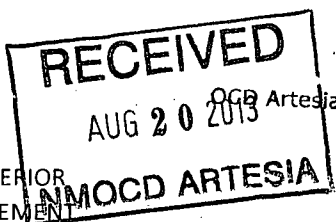

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

TES
8/20/2013

1a. Type of Work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		UNORTHODOX LOCATION	
1b. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone			
2. Name of Operator COG Operating LLC. <229137>			
3a. Address 2208 West Main Street Artesia, NM 88210		3b. Phone No. (include area code) 575-748-6940	
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 1740' FNL & 125' FEL Unit Letter H (SENE) SHL Sec 5-T19S-R31E At proposed prod. Zone 1980' FNL & 330' FWL Unit Letter E (SWNW)' BHL Sec 5-T19S-R31E		5. Lease Serial No. SHL: NMLC0069033, BHL: NMNM100858 Unit Letter G: NMNM0009003B Unit Letter F: NMLC0069033	
14. Distance in miles and direction from nearest town or post office* Approximately 18 miles from Carlsbad		6. If Indian, Allottee or Tribe Name	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. Unit line, if any) 125'		7. If Unit or CA Agreement, Name and No.	
16. No. of acres in lease SHL & UL "F": 639.22 UL "G": 79.600 BHL: 159.58		8. Lease Name and Well No. <358197> Blue Thunder 5 Federal Com #6H	
17. Spacing Unit dedicated to this well 160		9. API Well No. 30-015-41614	
18. Distance from location* to nearest well, drilling, completed, SHL: 586' BHL: 990' applied for, on this lease, ft. Closest to horizontal: > or = 102'		10. Field and Pool, or Exploratory <910567> Hackberry; Bone Spring, North	
19. Proposed Depth TVD: 8,830' MD: 13,457'		11. Sec., T.R.M. or Blk and Survey or Area Sec. 5 - T19S - R31E	
20. BLM/BIA Bond No. on file NMB000740 & NMB000215		12. County or Parish Eddy County	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3586.2		13. State NM	
22. Approximate date work will start* 8/1/2013		23. Estimated duration 30 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- | | |
|---|--|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the authorized officer. |

25. Signature 	Name (Printed/Typed) Mayte Reyes	Date 5/29/2013
-------------------	-------------------------------------	-------------------

Approved by (Signature) /s/George MacDonell		Name (Printed/Typed)	Date
Title FIELD MANAGER		Office CARLSBAD FIELD OFFICE	

Application approval does not warrant or certify that the applicant holds legan or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

APPROVAL FOR TWO YEARS

Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

Capitan Controlled Water Basin (Continued on page 2)

Approval Subject to General Requirements
& Special Stipulations Attached

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015- 41614	² Pool Code 97056	³ Pool Name Hackeberry; Bone Spring, North
⁴ Property Code 35819	⁵ Property Name BLUE THUNDER 5 FEDERAL COM	
⁷ OGRID No. 229137	⁸ Operator Name COG OPERATING, LLC.	⁶ Well Number 6H ⁹ Elevation 3586.2

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
H	5	19 S	31 E		1740	NORTH	125	EAST	EDDY

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
E	5	19 S	31 E		1980	NORTH	330	WEST	EDDY

¹² Dedicated Acres 160	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

<p>S89°40'23"W 2640.74 FT</p> <p>NW CORNER SEC. 5 LAT. = 32°41'47.935"N LONG. = 103°54'00.640"W NMSP EAST (FT) N = 617446.70 E = 674580.86</p> <p>N Q CORNER SEC. 5 LAT. = 32°41'47.977"N LONG. = 103°53'29.744"W NMSP EAST (FT) N = 617461.77 E = 677221.55</p> <p>NE CORNER SEC. 5 LAT. = 32°41'48.031"N LONG. = 103°52'58.862"W NMSP EAST (FT) N = 617478.39 E = 679861.04</p>		<p>S89°38'22"W 2639.54 FT</p> <p>N Q CORNER SEC. 5 LAT. = 32°41'47.977"N LONG. = 103°53'29.744"W NMSP EAST (FT) N = 617461.77 E = 677221.55</p> <p>NE CORNER SEC. 5 LAT. = 32°41'48.031"N LONG. = 103°52'58.862"W NMSP EAST (FT) N = 617478.39 E = 679861.04</p>	
<p>S00°24'04"E 2628.64 FT</p> <p>NMN100858 BOTTOM OF HOLE 330'</p> <p>W Q CORNER SEC. 5 LAT. = 32°41'21.950"N LONG. = 103°54'00.551"W NMSP EAST (FT) N = 614820.12 E = 674599.25</p>		<p>NMLC0069033 BLUE THUNDER 5 FEDERAL #6H ELEV. = 3586.2' SURFACE LOCATION 125'</p> <p>NMLC0069033 BOTTOM OF HOLE LAT. = 32°41'28.374"N LONG. = 103°53'56.77"W NMSP EAST (FT) N = 615468.63 E = 674924.72</p> <p>NMN0009003B E Q CORNER SEC. 5 LAT. = 32°41'22.027"N LONG. = 103°52'58.771"W NMSP EAST (FT) N = 614849.83 E = 679880.02</p>	
<p>S00°24'01"E 2641.41 FT</p> <p>SW CORNER SEC. 5 LAT. = 32°40'55.819"N LONG. = 103°54'00.461"W NMSP EAST (FT) N = 612178.78 E = 674617.70</p>		<p>N00°25'07"W 2640.59 FT</p> <p>SE CORNER SEC. 5 LAT. = 32°40'55.904"N LONG. = 103°52'58.676"W NMSP EAST (FT) N = 612209.32 E = 679899.31</p>	
<p>N89°40'07"E 2640.85 FT</p> <p>COMPUTED</p> <p>N89°40'07"E 2640.85 FT</p>			

¹⁷ OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or released mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Melanie Barker 6/20/13
Signature Date

Melanie Barker
Printed Name

m.barker@concho.com
E-mail Address

¹⁸ SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 16, 2012
Date of Survey


[Signature]
Signature and Seal of Professional Surveyor

Certificate Number: PL 12797
SURVEY NO. 993

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

OPERATOR CERTIFICATION

I hereby certify that I, or persons under my direct supervision, have inspected the drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or COG Operating, LLC, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements. Executed this 29th day of May, 2013.

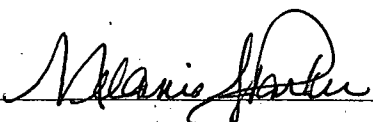Signed:  _____

Printed Name: Melanie J. Parker

Position: Regulatory Coordinator


Address: 2208 W. Main Street, Artesia, NM 88210

Telephone: (575) 748-6940

Field Representative (if not above signatory): Rand French

E-mail: mparker@concho.com

SECTION 5, TOWNSHIP 19 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

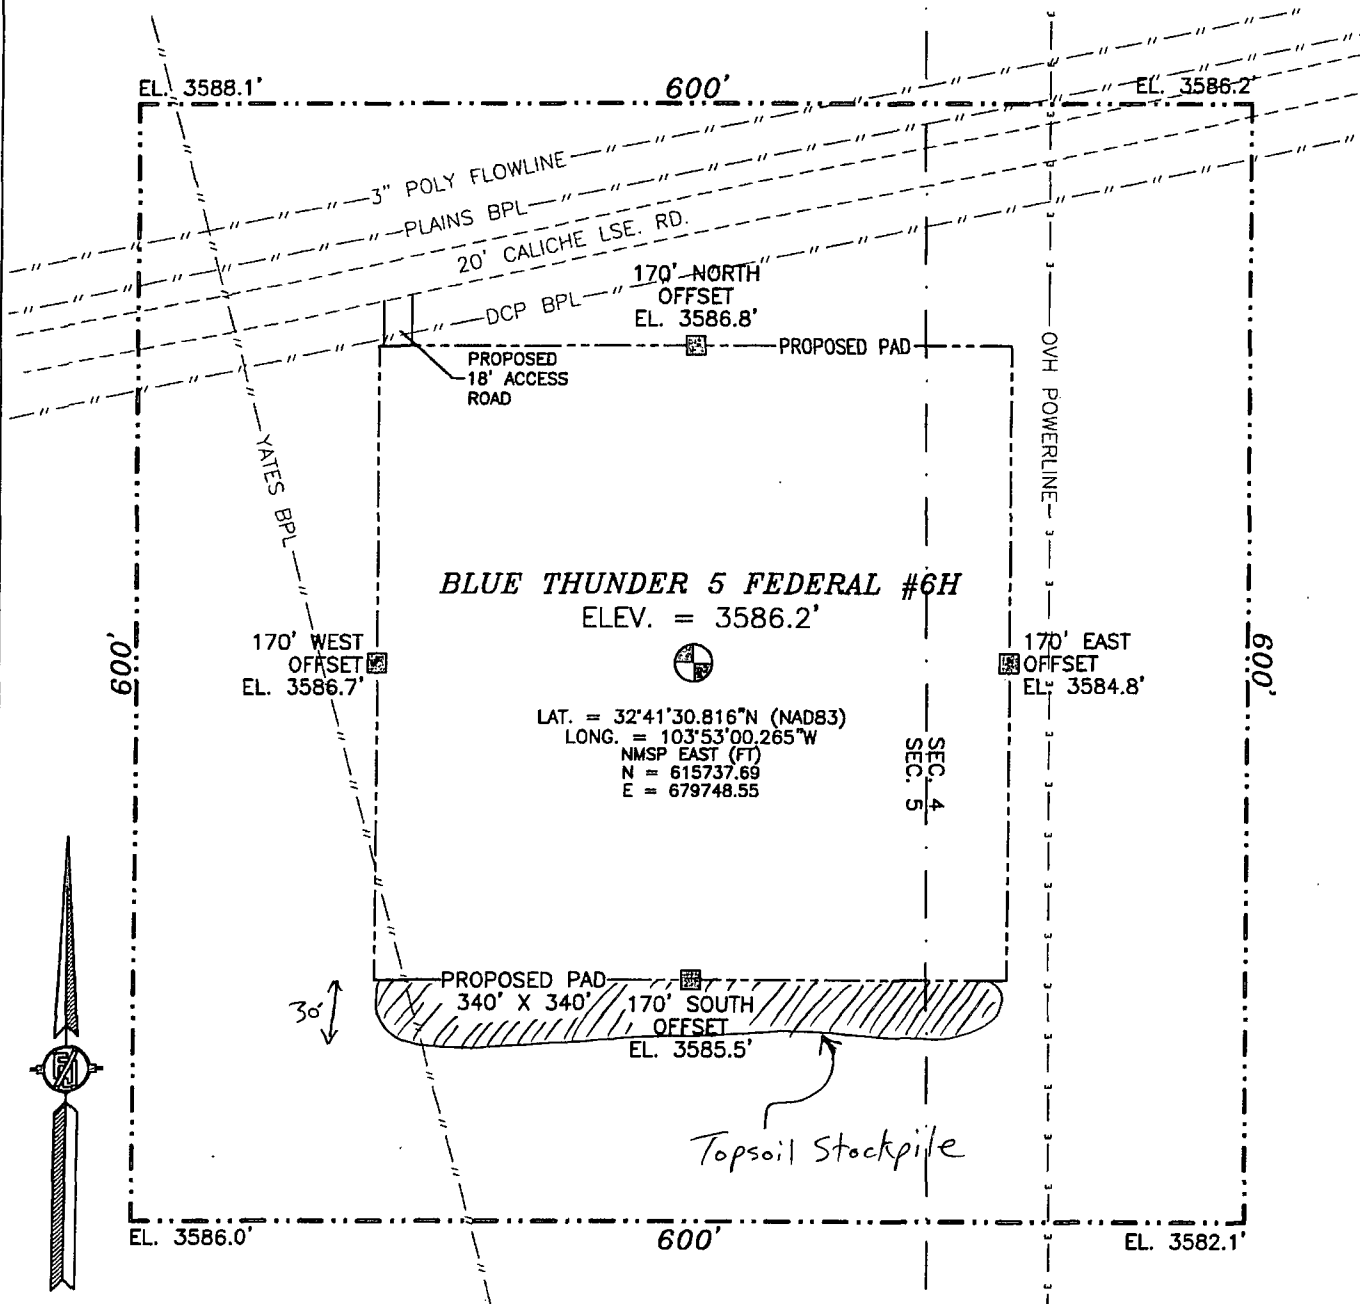

010 50 100 200

SCALE 1" = 100'

DIRECTIONS TO LOCATION

FROM THE INTERSECTION OF CO. RD. 222 (SHUGART) & CO. RD. 249
(WESTALL) GO NORTH ACROSS CATTLE GUARD. GO WEST APPROX. 0.4
OF A MILE. LOCATION IS APPROX 230' SOUTH.

COG OPERATING, LLC
BLUE THUNDER 5 FEDERAL #6H
LOCATED 1740 FT. FROM THE NORTH LINE
AND 125 FT. FROM THE EAST LINE OF
SECTION 5, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

OCTOBER 16, 2012

SURVEY NO. 993

MADRON SURVEYING, INC. 301 SOUTH CANAL (575) 234-3341

CARLSBAD, NEW MEXICO

301 SOUTH CANAL
(575) 234-3341

BLUE THUNDER
5 FEDERAL COM #6H


Powerline
 NORTH SHUGART OIL FIELD
 Hills
 Ridge
 Loco
 Pipaleno
 NIMEN
 ATCHISON
 LOPEZ AND SANTA FE
 Palo Alto
 Refinery
 Palo Alto

COG OPERATING, LLC
BLUE THUNDER 5 FEDERAL COM #6H
LOCATED 1740 FT. FROM THE NORTH LINE
AND 125 FT. FROM THE EAST LINE OF
SECTION 5, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

SURVEY NO. 993

MADRON SURVEYING, INC. 301 SOUTH CANAL
(575) 234-3341 **CARLSBAD, NEW MEXICO**

SECTION 5, TOWNSHIP 19 SOUTH, RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO
AERIAL PHOTO

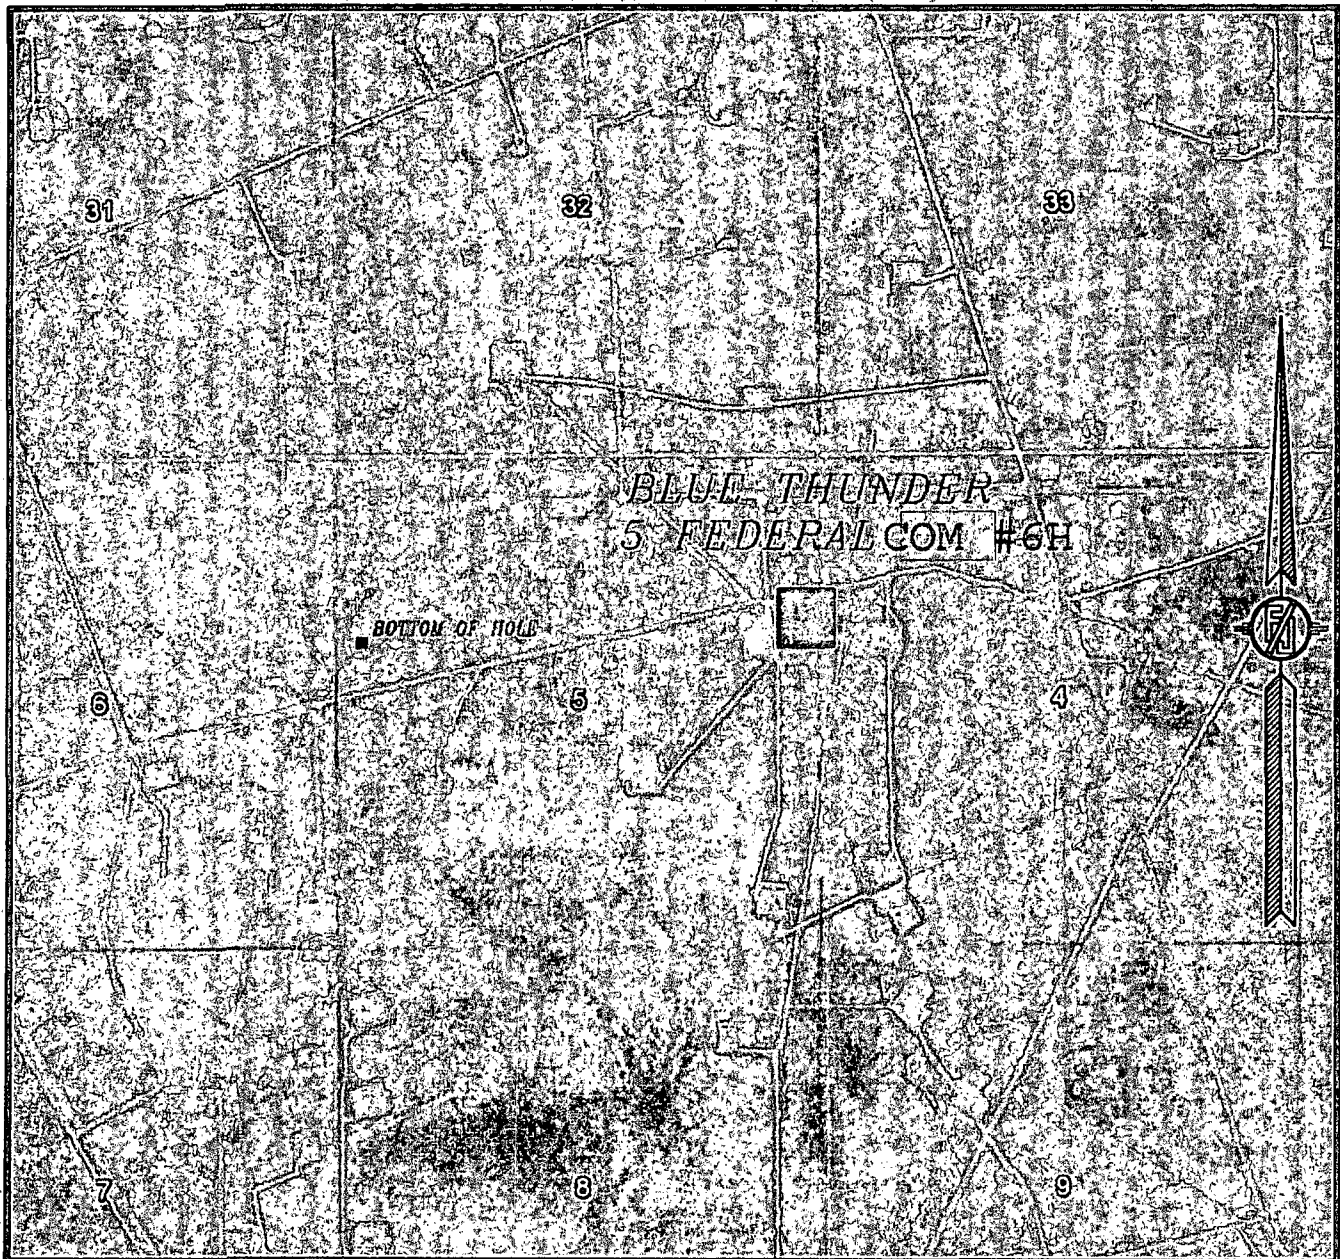

NOT TO SCALE
AERIAL PHOTO:
GOOGLE EARTH
MARCH 2012

COG OPERATING, LLC
BLUE THUNDER 5 FEDERAL COM #6H
LOCATED 1740 FT. FROM THE NORTH LINE
AND 125 FT. FROM THE EAST LINE OF
SECTION 5, TOWNSHIP 19 SOUTH,
RANGE 31 EAST, N.M.P.M.
EDDY COUNTY, STATE OF NEW MEXICO

OCTOBER 16, 2012

SURVEY NO. 993

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO
(575) 234-3341

COG Operating LLC
DRILLING AND OPERATIONS PROGRAM
Blue Thunder 5 Federal Com 6H
SHL: 1740' FNL & 125' FEL
BHL: 1980' FNL & 330' FWL
Section 5 T19S R31E
Eddy County, New Mexico

In conjunction with Form 3160-3, Application for Permit to Drill subject well, COG Operating LLC submits the following eleven items of pertinent information in accordance with BLM requirements.

1. Geological surface formation: Permian
2. The estimated tops of geologic markers & estimated depths at which anticipated water, oil or gas formations are expected to be encountered are as follows:

Fresh Water	240'	
Rustler	660'	
Top of Salt	743'	
Base of Salt	2225'	
Yates	2431'	— Green ??
Seven Rivers	2716'	
Grayburg	3804'	
Delaware	4320'	Oil
Bone Spring	6470'	Oil
TD TVD	8830'	
TD MD	13457'	

No other formations are expected to give up oil, gas or fresh water in measurable quantities. The surface fresh water sands will be protected by setting 13-3/8" casing at 745' - 685' and circulating cement back to surface. All intervals will be isolated by setting 5 1/2" casing to total depth and tying back cement to a minimum of 500' into the 9-5/8" casing.

3. Proposed Casing Program: All casing is new and API approved

See COA

Hole Size	Depths	Section	OD Casing	New/Used	Wt	Collar	Grade	Collapse Design Factor	Burst Design Factor	Tension Design Factor
17 1/2"	745' 0' - 685'	Surface	13 3/8"	New	54.5#	STC	J-55	1.125	1.125	1.6
12 1/4"	0' - 2600' 2700'	Intrmd	9 5/8"	New	36#	LTC	J-55	1.125	1.125	1.6
7 7/8"	0' - 13,457'	Production Curve & Lateral	5 1/2"	New	17#	LTC	P-110	1.125	1.125	1.6

- While running all casing strings, the pipe will be kept a minimum of 1/3 full at all times to avoid approaching the collapse pressure of casing.

4. Proposed Cement Program

- a. 13-3/8" Surface
- Lead: 225 sx Class C + 4% Gel + 2% CaCl₂
(13.5 ppg / 1.75 cuft/sx)
- Tail: 250 sx Class C + 2% CaCl₂
(14.8 ppg / 1.34 cuft/sx)
- **Calculated w/50% excess on OH volumes
- b. 9 5/8" Intermediate:
- Lead: 450 sx Class C + 4% Gel + 2% CaCl₂
(13.5 ppg / 1.75 cuft/sx)
- Tail: 250 sx Class C + 2% CaCl₂
(14.8 ppg / 1.34 cuft/sx)
- **Calculated w/35% excess on OH volumes
- c. 5 1/2" Production
- Lead: 825 sx 35:65:6 H + Salt+Gilsonite+CFR-3+ HR601
(12.7 ppg / 1.89 cuft/sx)
- Tail: 975 sx 50:50:2 H +Salt+GasStop +HR601 +CFR-3
(14.4 ppg / 1.25 cuft/sx)
- **Calculated w/35% excess on OH volumes

- The above cement volumes could be revised pending the caliper measurement.
- The 9-5/8" intermediate string is designed to circulate cement to surface.
- The production string will tie back a minimum of 500' into the 9-5/8" casing.

5. Control:

1 Nipple up on 13 3/8 with annular preventer tested to 50% of rated working pressure by independent tester and the rest of the 2M system tested to 2000 psi.

Nipple up on 9 5/8 with 3M system tested to 3000 psi by independent tester.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. A 2" kill line and a minimum 3" choke line will be included in the drilling spool located below the ram-type BOP. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold with 3000 psi WP rating. A remotely operated choke will be installed before drilling out intermediate shoe.

6. Estimated BHP & BHT:

Lateral TD = 4040 psi

Lateral TD= 145°F

7. Mud Program: The applicable depths and properties of this system are as follows:

See COA	Depth	Type System	Mud Weight	Viscosity (sec)	Waterloss (cc)
	0' - 745'	Fresh Water	8.4	29	N.C.
	745' - 2700'	Brine	10	29	N.C.
	2700' - 13,457' (Lateral)	Cut Brine	8.8 - 9.2	29	N.C.

- The necessary mud products for weight addition and fluid loss control will be on location at all times.

- A visual and electronic mud monitoring system will be rigged up prior to spud to detect changes in the volume of mud system. The electronic system consists of a pit volume total, stroke counter and flow sensor at flow line.
- If weight and/or viscosity are introduced to the mud system a daily mud check will be performed by mud contractor, along with tourly check by rig personnel.
- After setting intermediate casing, a third party gas unit detection system will be installed at the flow line.

8. Auxiliary Well Control and Monitoring Equipment:

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.

See
COA

9. Testing, Logging and Coring Program:

- a. Drill stem tests will be based on geological sample shows.
- b. If open hole electrical logging is performed, the program will be:
 - i. Total Depth to Intermediate Casing: Dual Laterolog-Micro Laterolog and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - ii. Total Depth to Surface: Compensated Neutron with Gamma Ray
 - iii. No coring program is planned
 - iv. Additional testing will be initiated subsequent to setting the 5 1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.

10. Potential Hazards:

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. No H₂S is anticipated to be encountered.

11. Anticipated starting date and Duration of Operations:

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon as possible after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 30 days.



PATHFINDER
A Schlumberger Company

COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13 Anti-Collision Summary Report

Analysis Date-24hr Time:

May 02, 2013 - 11:49

Client:

COG

Field:

NM Eddy County (NAD 83)

Structure:

COG Blue Thunder 5 Federal Com #6H

Slot:

COG Blue Thunder 5 Federal Com #6H

Well:

COG Blue Thunder 5 Federal Com #6H

Borehole:

Original Borehole

Analysis Method:

3D Least Distance

Reference Trajectory:

COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13 (Def Plan)

Depth Interval:

Every 10.00 Measured Depth (ft)

Rule Set:

D&M AntiCollision Standard S002 v5.1/5.2

Min Pts:

All local minima indicated.

Offset Selection Criteria

Wellhead distance scan:

Not performed!

Selection filters:

Definitive Surveys - Definitive Plans - Definitive surveys exclude definitive plans

- All Non-Def Surveys when no Def-Survey is set in a borehole - All Non-Def Plans when no Def-Plan is set in a borehole

Offset Trajectories Summary

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status	
	Cl-Cl (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major			
COG Blue Thunder 5 Federal #1 Inc Only Surveys (Def Survey)														Fail Major
	561.93	32.81	579.43	549.12	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
	567.13	172.17	451.51	394.95	4.99	OSF 1.50	2680.00	2680.00	OSF<5.00				Enter Alert	
	493.62	497.78	160.88	-4.17	1.49	OSF 1.50	8580.00	8571.49		OSF<1.50			Enter Minor	
	339.90	514.15	-3.86	-174.25	0.99	OSF 1.50	8820.00	8748.82			OSF<1.00		Enter Major	
	102.50	522.97	-247.03	-420.48	0.29	OSF 1.50	9160.00	8830.00					MinPts	
	345.97	522.17	-2.97	-176.20	0.99	OSF 1.50	9490.00	8830.00			OSF>1.00		Exit Major	
	520.63	522.10	171.73	-1.47	1.50	OSF 1.50	9670.00	8830.00		OSF>1.50			Exit Minor	
	1733.47	521.89	1384.71	1211.58	5.00	OSF 1.50	10890.00	8830.00	OSF>5.00				Exit Alert	
	4296.40	521.54	3949.87	3776.86	12.41	OSF 1.50	13456.74	8830.00					TD	



COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13 Proposal
Geodetic Report
(Def Plan)

PATHFINDER
A Schlumberger Company

Report Date: May 02, 2013 - 11:49 AM
Client: COG
Field: NM Eddy County (NAD 83)
Structure / Slot: COG Blue Thunder 5 Federal Com #6H / COG Blue Thunder 5 Federal Com #6H
Well: COG Blue Thunder 5 Federal Com #6H
Borehole: Original Borehole
UWI / API#: Unknown / Unknown
Survey Name: COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13
Survey Date: April 18, 2013
Tort / AHD / DDI / ERD Ratio: 90.000 ° / 4831.671 ft / 5.821 / 0.547
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 41' 30.83715", W 103° 53' 0.31000"
Location Grid N/E Y/X: N 615737.690 RUS, E 679748.550 RUS
CRS Grid Convergence Angle: 0.2430 °
Grid Scale Factor: 0.99993103

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 266.808 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3604.200 ft above
Seabed / Ground Elevation: 3586.200 ft above
Magnetic Declination: 7.648 °
Total Gravity Field Strength: 998.5083mgn (9.80665 Based)
Total Magnetic Field Strength: 48651.940 nT
Magnetic Dip Angle: 60.482 °
Declination Date: April 18, 2013
Magnetic Declination Model: BGGM 2012
North Reference: Grid North
Grid Convergence Used: 0.2430 °
Total Corr Mag North->Grid North: 7.4048 °
Local Coord Referenced To: Structure Reference Point

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (RUS)	Easting (RUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL	0.00	0.00	266.81	0.00	0.00	0.00	0.00	N/A	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
KOP Build @ 12"	8352.54	0.00	266.81	8352.54	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
DLS	9102.54	90.00	266.81	8830.00	477.46	-26.59	-476.72	12.00	615711.10	679271.86	N 32 41 30.59	W 103 53 5.89
Landing Point												
COG Blue Thunder												
5 Federal Com #6H	13456.74	90.00	266.81	8830.00	4831.67	-269.08	-4824.17	0.00	615468.63	674924.72	N 32 41 28.37	W 103 53 56.77
PBHL												

Survey Type: Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	0.000	18.000	1/100.000	30.000	30.000	SLB_MWD-STD-Depth Only	Original Borehole / COG Blue Thunder 5 Federal Com #6H
	18.000	13456.741	1/100.000	30.000	30.000	SLB_MWD-STD	Original Borehole / COG Blue Thunder 5 Federal Com #6H



COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13 Proposal
Geodetic Report
(Def Plan)

PATHFINDER
A Schlumberger Company

Report Date: May 02, 2013 - 11:48 AM
Client: COG
Field: NM Eddy County (NAD 83)
Structure / Slot: COG Blue Thunder 5 Federal Com #6H / COG Blue Thunder 5 Federal Com #6H
Well: COG Blue Thunder 5 Federal Com #6H
Borehole: Original Borehole
UWI / API#: Unknown / Unknown
Survey Name: COG Blue Thunder 5 Federal Com #6H Rev0 MDT 18Apr13
Survey Date: April 18, 2013
Tort / AHD / DDI / ERD Ratio: 90,000' / 4831.671 ft / 5.821 / 0.547
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 41' 30.83715", W 103° 53' 0.31000"
Location Grid N/E Y/X: N 615737.690 ftUS, E 679748.550 ftUS
CRS Grid Convergence Angle: 0.2430°
Grid Scale Factor: 0.99993103

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 266.808° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3604.200 ft above
Seabed / Ground Elevation: 3586.200 ft above
Magnetic Declination: 7.648°
Total Gravity Field Strength: 998.5083mgn (9.80665 Based)
Total Magnetic Field Strength: 48651.940 nT
Magnetic Dip Angle: 60.482°
Declination Date: April 18, 2013
Magnetic Declination Model: BGGM 2012
North Reference: Grid North
Grid Convergence Used: 0.2430°
Total Corr Mag North->Grid North: 7.4048°
Local Coord Referenced To: Structure Reference Point

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL	0.00	0.00	266.81	0.00	0.00	0.00	0.00	N/A	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	100.00	0.00	266.81	100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	200.00	0.00	266.81	200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	300.00	0.00	266.81	300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	400.00	0.00	266.81	400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	500.00	0.00	266.81	500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	600.00	0.00	266.81	600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	700.00	0.00	266.81	700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	800.00	0.00	266.81	800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	900.00	0.00	266.81	900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1000.00	0.00	266.81	1000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1100.00	0.00	266.81	1100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1200.00	0.00	266.81	1200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1300.00	0.00	266.81	1300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1400.00	0.00	266.81	1400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1500.00	0.00	266.81	1500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1600.00	0.00	266.81	1600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1700.00	0.00	266.81	1700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1800.00	0.00	266.81	1800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	1900.00	0.00	266.81	1900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2000.00	0.00	266.81	2000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2100.00	0.00	266.81	2100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2200.00	0.00	266.81	2200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2300.00	0.00	266.81	2300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2400.00	0.00	266.81	2400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2500.00	0.00	266.81	2500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2600.00	0.00	266.81	2600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2700.00	0.00	266.81	2700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2800.00	0.00	266.81	2800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	2900.00	0.00	266.81	2900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3000.00	0.00	266.81	3000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3100.00	0.00	266.81	3100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3200.00	0.00	266.81	3200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3300.00	0.00	266.81	3300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3400.00	0.00	266.81	3400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3500.00	0.00	266.81	3500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3600.00	0.00	266.81	3600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3700.00	0.00	266.81	3700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3800.00	0.00	266.81	3800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	3900.00	0.00	266.81	3900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4000.00	0.00	266.81	4000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4100.00	0.00	266.81	4100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4200.00	0.00	266.81	4200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4300.00	0.00	266.81	4300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4400.00	0.00	266.81	4400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4500.00	0.00	266.81	4500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4600.00	0.00	266.81	4600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4700.00	0.00	266.81	4700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4800.00	0.00	266.81	4800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	4900.00	0.00	266.81	4900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5000.00	0.00	266.81	5000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5100.00	0.00	266.81	5100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5200.00	0.00	266.81	5200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5300.00	0.00	266.81	5300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5400.00	0.00	266.81	5400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5500.00	0.00	266.81	5500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5600.00	0.00	266.81	5600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5700.00	0.00	266.81	5700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5800.00	0.00	266.81	5800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	5900.00	0.00	266.81	5900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6000.00	0.00	266.81	6000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6100.00	0.00	266.81	6100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6200.00	0.00	266.81	6200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6300.00	0.00	266.81	6300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (ft/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	6400.00	0.00	266.81	6400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6500.00	0.00	266.81	6500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6600.00	0.00	266.81	6600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6700.00	0.00	266.81	6700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6800.00	0.00	266.81	6800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	6900.00	0.00	266.81	6900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7000.00	0.00	266.81	7000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7100.00	0.00	266.81	7100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7200.00	0.00	266.81	7200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7300.00	0.00	266.81	7300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7400.00	0.00	266.81	7400.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7500.00	0.00	266.81	7500.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7600.00	0.00	266.81	7600.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7700.00	0.00	266.81	7700.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7800.00	0.00	266.81	7800.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	7900.00	0.00	266.81	7900.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	8000.00	0.00	266.81	8000.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	8100.00	0.00	266.81	8100.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	8200.00	0.00	266.81	8200.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	8300.00	0.00	266.81	8300.00	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
KOP Build @ 12" DLS	8352.54	0.00	266.81	8352.54	0.00	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.84	W 103 53 0.31
	8400.00	5.70	266.81	8399.92	2.36	-0.13	-2.35	12.00	615737.56	679748.20	N 32 41 30.84	W 103 53 0.34
	8500.00	17.70	266.81	8497.67	22.59	-1.26	-22.56	12.00	615736.43	679725.99	N 32 41 30.83	W 103 53 0.57
	8600.00	29.70	266.81	8589.07	62.71	-3.49	-62.61	12.00	615734.20	679685.95	N 32 41 30.81	W 103 53 1.04
	8700.00	41.70	266.81	8670.13	120.95	-6.74	-120.76	12.00	615730.95	679627.80	N 32 41 30.78	W 103 53 1.72
	8800.00	53.70	266.81	8737.32	194.77	-10.85	-194.47	12.00	615726.84	679554.10	N 32 41 30.74	W 103 53 2.59
	8900.00	65.70	266.81	8787.68	280.95	-15.65	-280.51	12.00	615722.04	679468.06	N 32 41 30.69	W 103 53 3.59
	9000.00	77.70	266.81	8819.03	375.72	-20.92	-375.13	12.00	615716.77	679373.44	N 32 41 30.65	W 103 53 4.70
	9100.00	89.70	266.81	8829.99	474.93	-26.45	-474.19	12.00	615711.24	679274.39	N 32 41 30.60	W 103 53 5.86
	9102.54	90.00	266.81	8830.00	477.46	-26.59	-476.72	12.00	615711.10	679271.86	N 32 41 30.59	W 103 53 5.89
Landing Point	9200.00	90.00	266.81	8830.00	574.93	-32.02	-574.04	0.00	615705.67	679174.55	N 32 41 30.54	W 103 53 7.03
	9300.00	90.00	266.81	8830.00	674.93	-37.59	-673.88	0.00	615700.11	679074.72	N 32 41 30.49	W 103 53 8.20
	9400.00	90.00	266.81	8830.00	774.93	-43.16	-773.73	0.00	615694.54	678974.88	N 32 41 30.44	W 103 53 9.37
	9500.00	90.00	266.81	8830.00	874.93	-48.73	-873.57	0.00	615688.97	678875.04	N 32 41 30.39	W 103 53 10.53
	9600.00	90.00	266.81	8830.00	974.93	-54.29	-973.42	0.00	615683.40	678775.20	N 32 41 30.34	W 103 53 11.70
	9700.00	90.00	266.81	8830.00	1074.93	-59.86	-1073.26	0.00	615677.83	678675.36	N 32 41 30.29	W 103 53 12.87
	9800.00	90.00	266.81	8830.00	1174.93	-65.43	-1173.11	0.00	615672.26	678575.53	N 32 41 30.24	W 103 53 14.04
	9900.00	90.00	266.81	8830.00	1274.93	-71.00	-1272.95	0.00	615666.69	678475.69	N 32 41 30.19	W 103 53 15.21
	10000.00	90.00	266.81	8830.00	1374.93	-76.57	-1372.80	0.00	615661.12	678375.85	N 32 41 30.14	W 103 53 16.38
	10100.00	90.00	266.81	8830.00	1474.93	-82.14	-1472.64	0.00	615655.56	678276.01	N 32 41 30.09	W 103 53 17.55
	10200.00	90.00	266.81	8830.00	1574.93	-87.71	-1572.49	0.00	615649.99	678176.18	N 32 41 30.03	W 103 53 18.71
	10300.00	90.00	266.81	8830.00	1674.93	-93.28	-1672.33	0.00	615644.42	678076.34	N 32 41 29.98	W 103 53 19.88
	10400.00	90.00	266.81	8830.00	1774.93	-98.85	-1772.18	0.00	615638.85	677976.50	N 32 41 29.93	W 103 53 21.05
	10500.00	90.00	266.81	8830.00	1874.93	-104.42	-1872.02	0.00	615633.28	677876.66	N 32 41 29.88	W 103 53 22.22
	10600.00	90.00	266.81	8830.00	1974.93	-109.99	-1971.86	0.00	615627.71	677776.83	N 32 41 29.83	W 103 53 23.39
	10700.00	90.00	266.81	8830.00	2074.93	-115.55	-2071.71	0.00	615622.14	677676.99	N 32 41 29.78	W 103 53 24.56
	10800.00	90.00	266.81	8830.00	2174.93	-121.12	-2171.55	0.00	615616.58	677577.15	N 32 41 29.73	W 103 53 25.73
	10900.00	90.00	266.81	8830.00	2274.93	-126.69	-2271.40	0.00	615611.01	677477.31	N 32 41 29.68	W 103 53 26.89
	11000.00	90.00	266.81	8830.00	2374.93	-132.26	-2371.24	0.00	615605.44	677377.47	N 32 41 29.63	W 103 53 28.06
	11100.00	90.00	266.81	8830.00	2474.93	-137.83	-2471.09	0.00	615599.87	677277.64	N 32 41 29.58	W 103 53 29.23
	11200.00	90.00	266.81	8830.00	2574.93	-143.40	-2570.93	0.00	615594.30	677177.80	N 32 41 29.53	W 103 53 30.40
	11300.00	90.00	266.81	8830.00	2674.93	-148.97	-2670.78	0.00	615588.73	677077.96	N 32 41 29.47	W 103 53 31.57
	11400.00	90.00	266.81	8830.00	2774.93	-154.54	-2770.62	0.00	615583.16	676978.12	N 32 41 29.42	W 103 53 32.74
	11500.00	90.00	266.81	8830.00	2874.93	-160.11	-2870.47	0.00	615577.59	676878.29	N 32 41 29.37	W 103 53 33.90
	11600.00	90.00	266.81	8830.00	2974.93	-165.68	-2970.31	0.00	615572.03	676778.45	N 32 41 29.32	W 103 53 35.07
	11700.00	90.00	266.81	8830.00	3074.93	-171.24	-3070.16	0.00	615566.46	676678.61	N 32 41 29.27	W 103 53 36.24
	11800.00	90.00	266.81	8830.00	3174.93	-176.81	-3170.00	0.00	615560.89	676578.77	N 32 41 29.22	W 103 53 37.41
	11900.00	90.00	266.81	8830.00	3274.93	-182.38	-3269.85	0.00	615555.32	676478.93	N 32 41 29.17	W 103 53 38.58
	12000.00	90.00	266.81	8830.00	3374.93	-187.95	-3369.69	0.00	615549.75	676379.10	N 32 41 29.12	W 103 53 39.75
	12100.00	90.00	266.81	8830.00	3474.93	-193.52	-3469.54	0.00	615544.18	676279.26	N 32 41 29.07	W 103 53 40.92
	12200.00	90.00	266.81	8830.00	3574.93	-199.09	-3569.38	0.00	615538.61	676179.42	N 32 41 29.02	W 103 53 42.08
	12300.00	90.00	266.81	8830.00	3674.93	-204.66	-3669.23	0.00	615533.05	676079.58	N 32 41 28.96	W 103 53 43.25
	12400.00	90.00	266.81	8830.00	3774.93	-210.23	-3769.07	0.00	615527.48	675979.75	N 32 41 28.91	W 103 53 44.42
	12500.00	90.00	266.81	8830.00	3874.93	-215.80	-3868.92	0.00	615521.91	675879.91	N 32 41 28.86	W 103 53 45.59
	12600.00	90.00	266.81	8830.00	3974.93	-221.37	-3968.76	0.00	615516.34	675780.07	N 32 41 28.81	W 103 53 46.76
	12700.00	90.00	266.81	8830.00	4074.93	-226.94	-4068.61	0.00	615510.77	675680.23	N 32 41 28.76	W 103 53 47.93
	12800.00	90.00	266.81	8830.00	4174.93	-232.50	-4168.45	0.00	615505.20	675580.40	N 32 41 28.71	W 103 53 49.10
	12900.00	90.00	266.81	8830.00	4274.93	-238.07	-4268.30	0.00	615499.63	675480.56	N 32 41 28.66	W 103 53 50.26
	13000.00	90.00	266.81	8830.00	4374.93	-243.64	-4368.14	0.00	615494.06	675380.72	N 32 41 28.61	W 103 53 51.43
	13100.00	90.00	266.81	8830.00	4474.93	-249.21	-4467.98	0.00	615488.50	675280.88	N 32 41 28.56	W 103 53 52.60
	13200.00	90.00	266.81	8830.00	4574.93	-254.78	-4567.83	0.00	615482.93	675181.04	N 32 41 28.51	W 103 53 53.77
	13300.00	90.00	266.81	8830.00	4674.93	-260.35	-4667.67	0.00	615477.36	675081.21	N 32 41 28.45	W 103 53 54.94
	13400.00	90.00	266.81	8830.00	4774.93	-265.92	-4767.52	0.00	615471.79	674981.37	N 32 41 28.40	W 103 53 56.11
COG Blue Thunder 5 Federal Com #5H PBHL	13456.74	90.00	266.81	8830.00	4831.67	-269.08	-4824.17	0.00	615466.63	674924.72	N 32 41 28.37	W 103 53 56.77

Survey Type: Def Plan


Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	0.000	13456.741	1/100.000	30.000	30.000	SLB_MWD-STD	Original Borehole / COG Blue Thunder 5 Federal Com #5H




Legend


COB Blue Thunder 5 Federal Com 467110 Hardline
COB Blue Thunder 5 Federal Com 467110 Team Line
COB Blue Thunder 5 Federal Com 467110 PA
COB Blue Thunder 5 Federal Com 467110 Bay 101 1 Bay 12
COB Blue Thunder 5 Federal Com 467110 Bay 102 1 Bay 13



Grid North
Tot Corr (M->G
7.4048°)
Mag Dec (7.648°)
Grid Conv (0.243°)

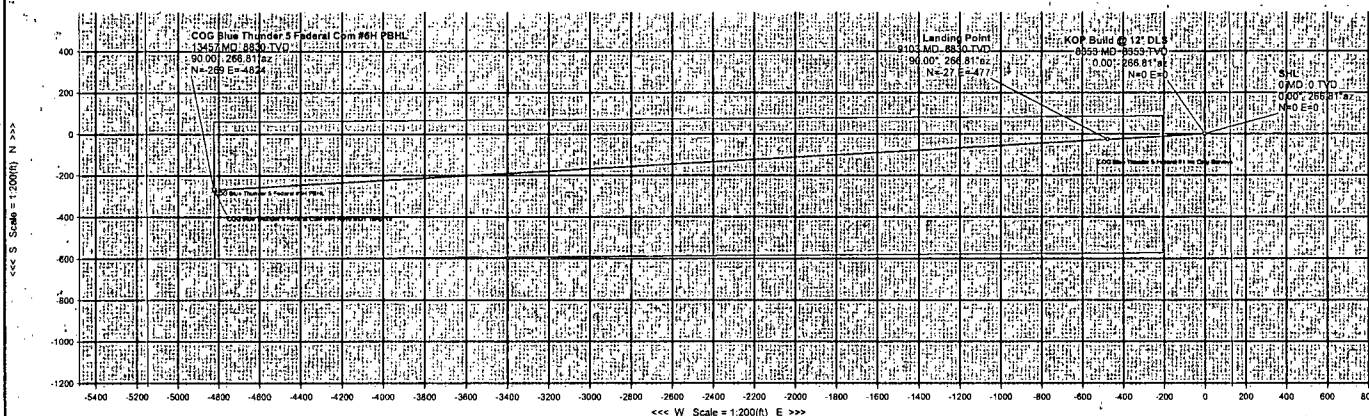

Comments	Survey ID#	Elevation (deg)	Azimuth(deg)	NVD#	Stops	VIS#	NS#	E-View	Northing(US)	Eastng(US)	Latitude(deg)	Longitude(deg)	DLS#(ft/m)	Mold Face
SHL	0.00	0.00	266.81	0.00	-3604.20	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.837	W 103 53 0.310		266.81
KOP Build @ 12" DLS	8352.54	0.00	266.81	8352.54	4748.34	0.00	0.00	0.00	615737.69	679748.55	N 32 41 30.837	W 103 53 0.310	0.00	266.81
Landing Point	9102.54	90.00	266.81	8830.00	5225.80	477.46	-26.59	-476.72	615711.10	679271.86	N 32 41 30.594	W 103 53 5.889	12.00	0.00
COG Blue Thunder 5 Federal Com #6H PBHL	13456.74	90.00	266.81	8830.00	5225.80	4831.67	-269.08	-4824.17	615468.63	674924.72	N 32 41 28.374	W 103 53 56.770	0.00	

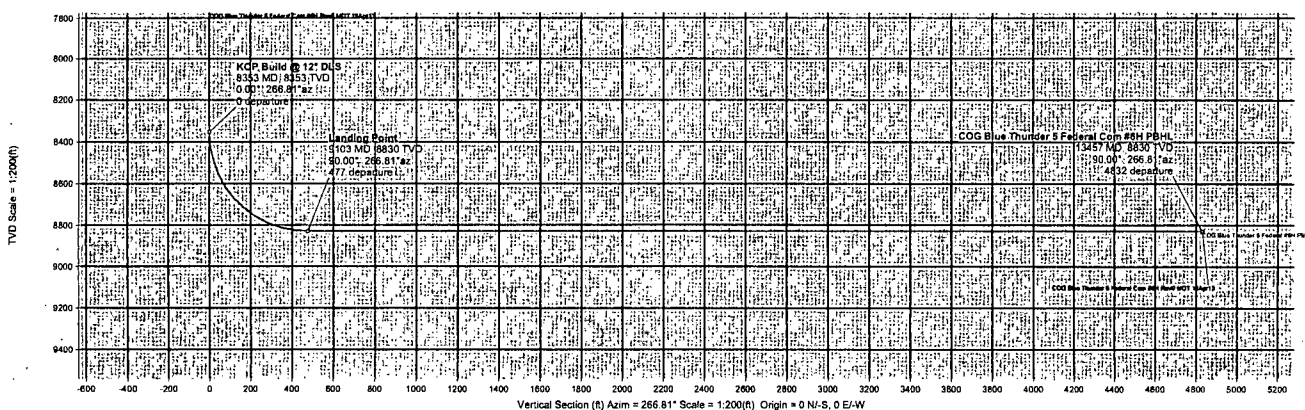

Drawn By: _____
Date Created: April 18, 2013 04:33:14 PM
Checked By: _____
Checked Date: _____
Approved By: _____



New Mexico Office of the State Engineer **Water Column/Average Depth to Water**

No records found.

PLSS Search:

Section(s): 5

Township: 19S

Range: 31E



New Mexico Office of the State Engineer Water Column/Average Depth to Water

(A CLW##### in the
POD suffix indicates the
POD has been replaced
& no longer serves a
water right file.)

(R=POD has
been replaced,
O=orphaned,
C=the file is
closed)

(quarters are 1=NW 2=NE 3=SW 4=SE)

(quarters are smallest to largest) (NAD83 UTM in meters)

(In feet)

POD Number	POD Sub-Code	basin	County	Q	Q	Q	Sec	Tws	Rng	X	Y	Depth Well	Depth Water	Water Column
CP 00641 EXPL			ED	4	1	36	19S	31E	610247	3609634*		300	130	170
CP 00642 EXPL			ED	2	2	25	19S	31E	611025	3611657*		250		
CP 00829			LE	2	4	16	19S	31E	606165	3614009*		120		

Average Depth to Water: 130 feet

Minimum Depth: 130 feet

Maximum Depth: 130 feet

Record Count: 3

PLSS Search:


Township: 19S

Range: 31E


*UTM location was derived from PLSS - see Help

The data is furnished by the NMOSE/ISC and is accepted by the recipient with the expressed understanding that the OSE/ISC make no warranties, expressed or implied, concerning the accuracy, completeness, reliability, usability, or suitability for any particular purpose of the data.


2,000 psi BOP Schematic

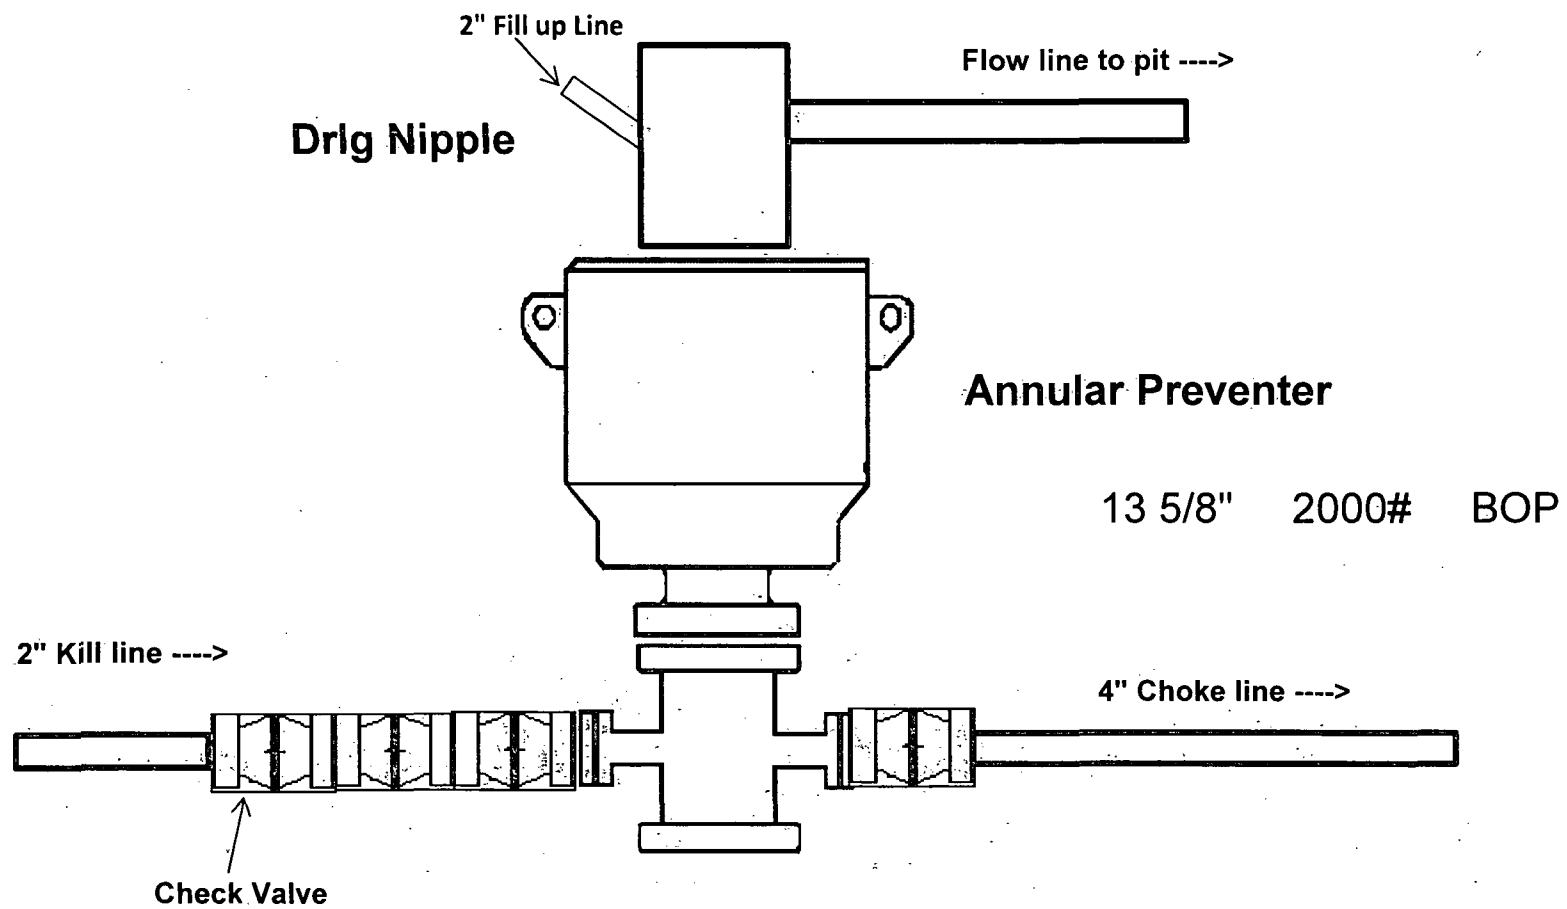


3,000 psi BOP Schematic

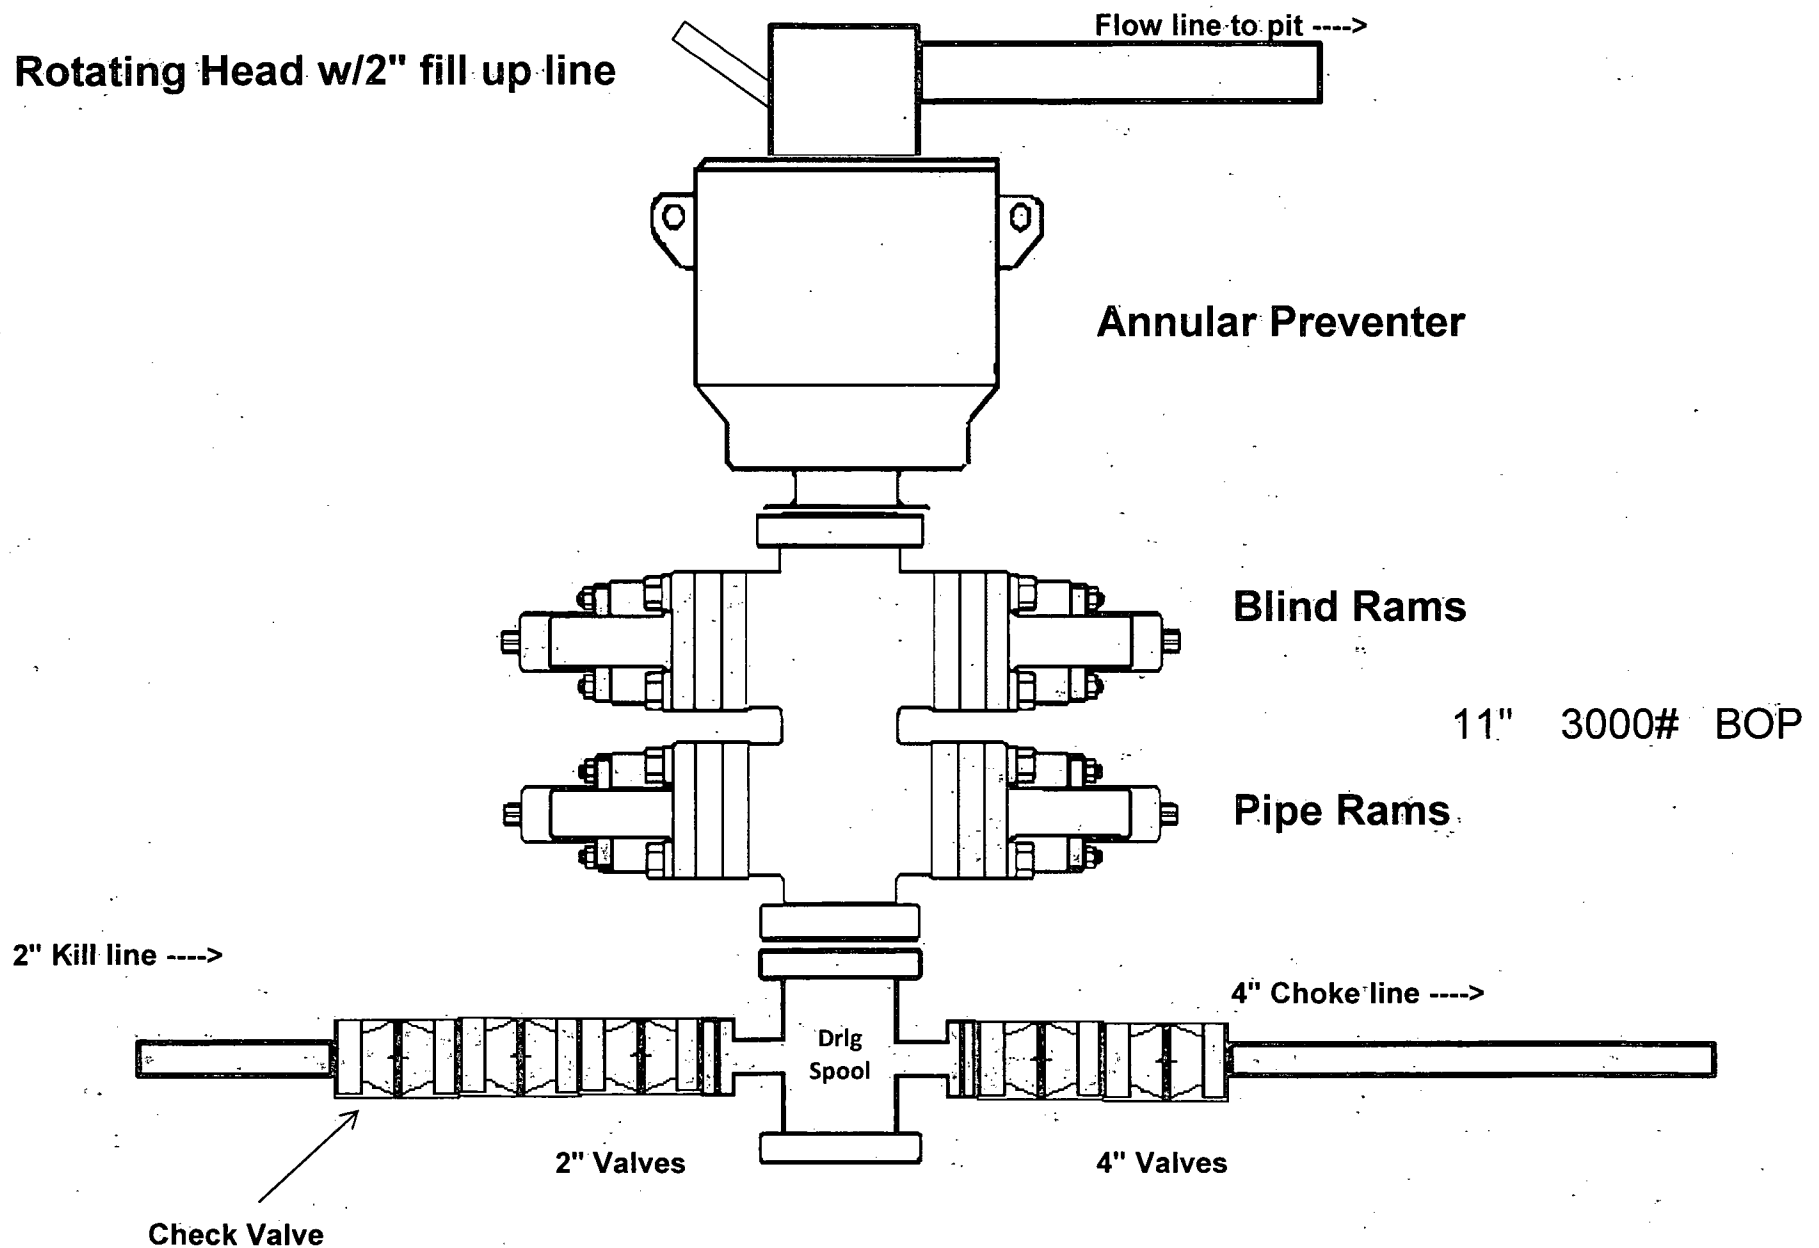

2M Choke Manifold Equipment

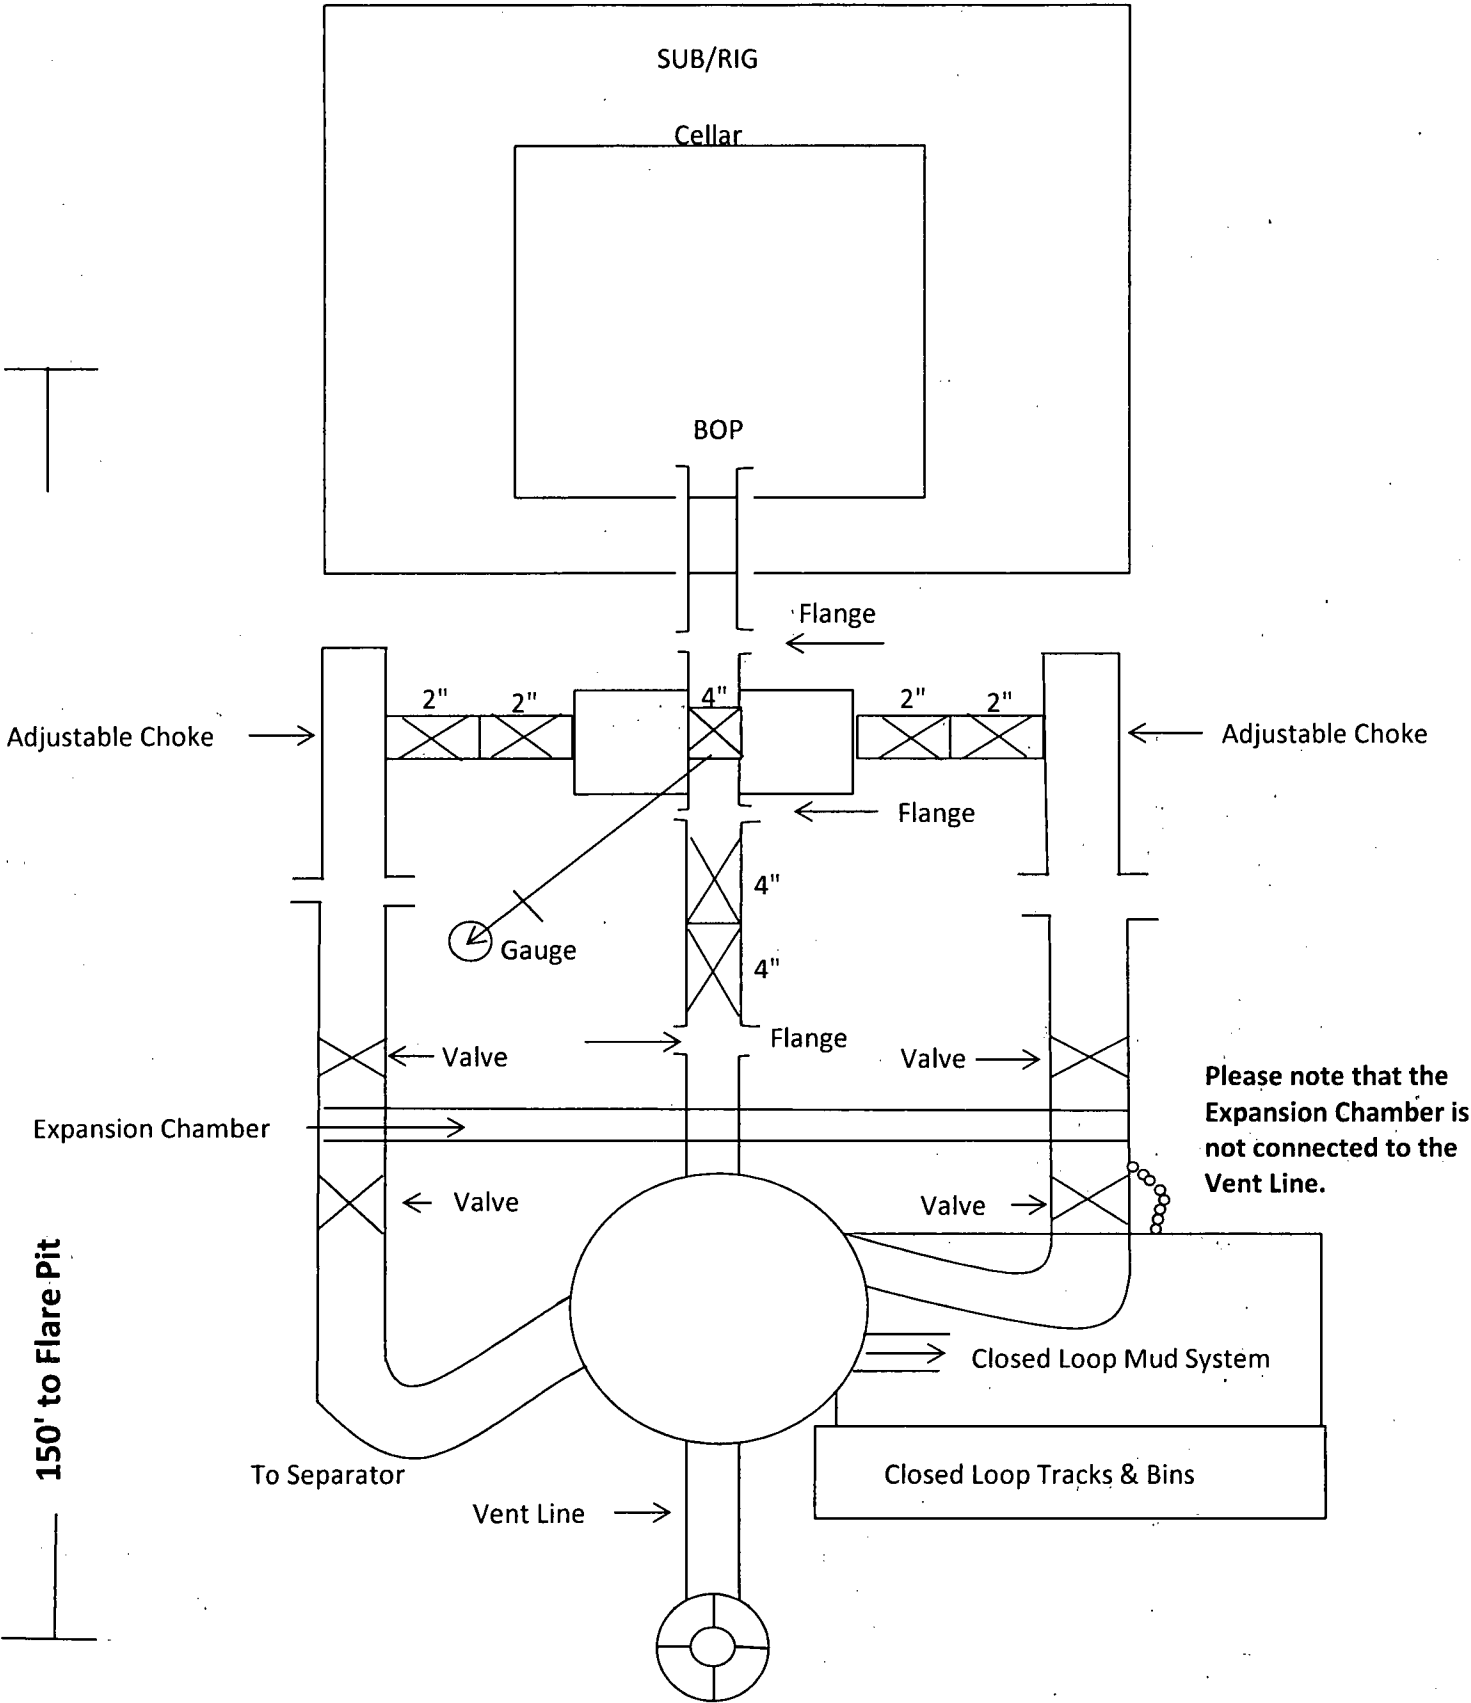

3M Choke Manifold Equipment

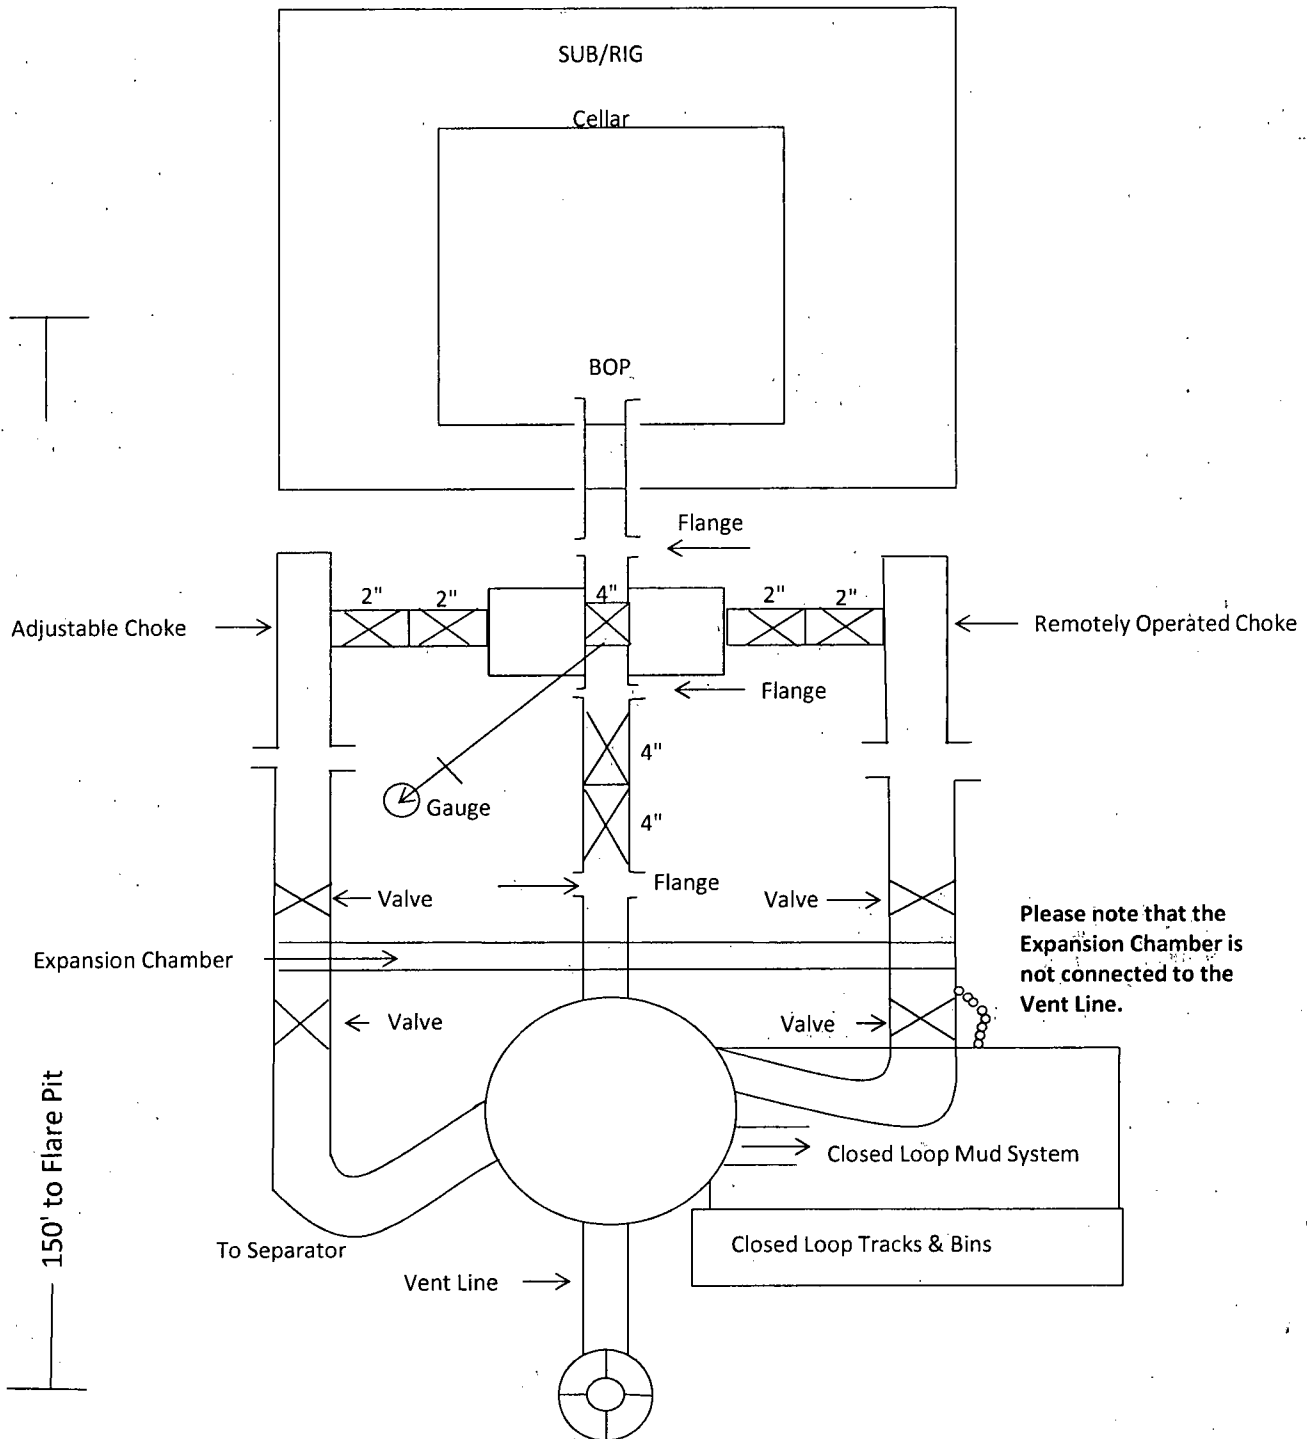

**Design Plan
Operating and Maintenance Plan
Closure Plan**

**Blue Thunder 5 Federal Com 6H
SHL: 1740' FNL & 125' FEL
BHL: 1980' FNL & 330' FWL
Section 5 T19S R31E
Eddy County, New Mexico**

COG Operating LLC will be using all above ground steel pits for fluid and cuttings while drilling. If any tank develops a leak we will have immediate visual discovery, we would then transfer the fluid to another tank then remove any contaminated soil and dispose of it in the cuttings bins for transportation. All leaks should be kept to less than 5 barrels. Rig crews will monitor the tanks at all times.

Equipment List:

2- Mongoose Shale Shakers
1- 414 Centrifuge
1- 518 Centrifuge
2- Roll Off Bins w/ Tracks
2- 500 BBL Frac Tanks

During drilling operations all liquids, drilling fluids and cuttings will be hauled off via CRI (Controlled Recovery Inc.) Permit R-9166 or any other approved facility.

COG Operating LLC
Rig Plat & Closed Loop Equipment Diagram

Well pad will be 340' X 340'
with cellar in center of pad
Flare Lines will be from both Choke
Manifold & Separator to edge of
location which is +/- 170'

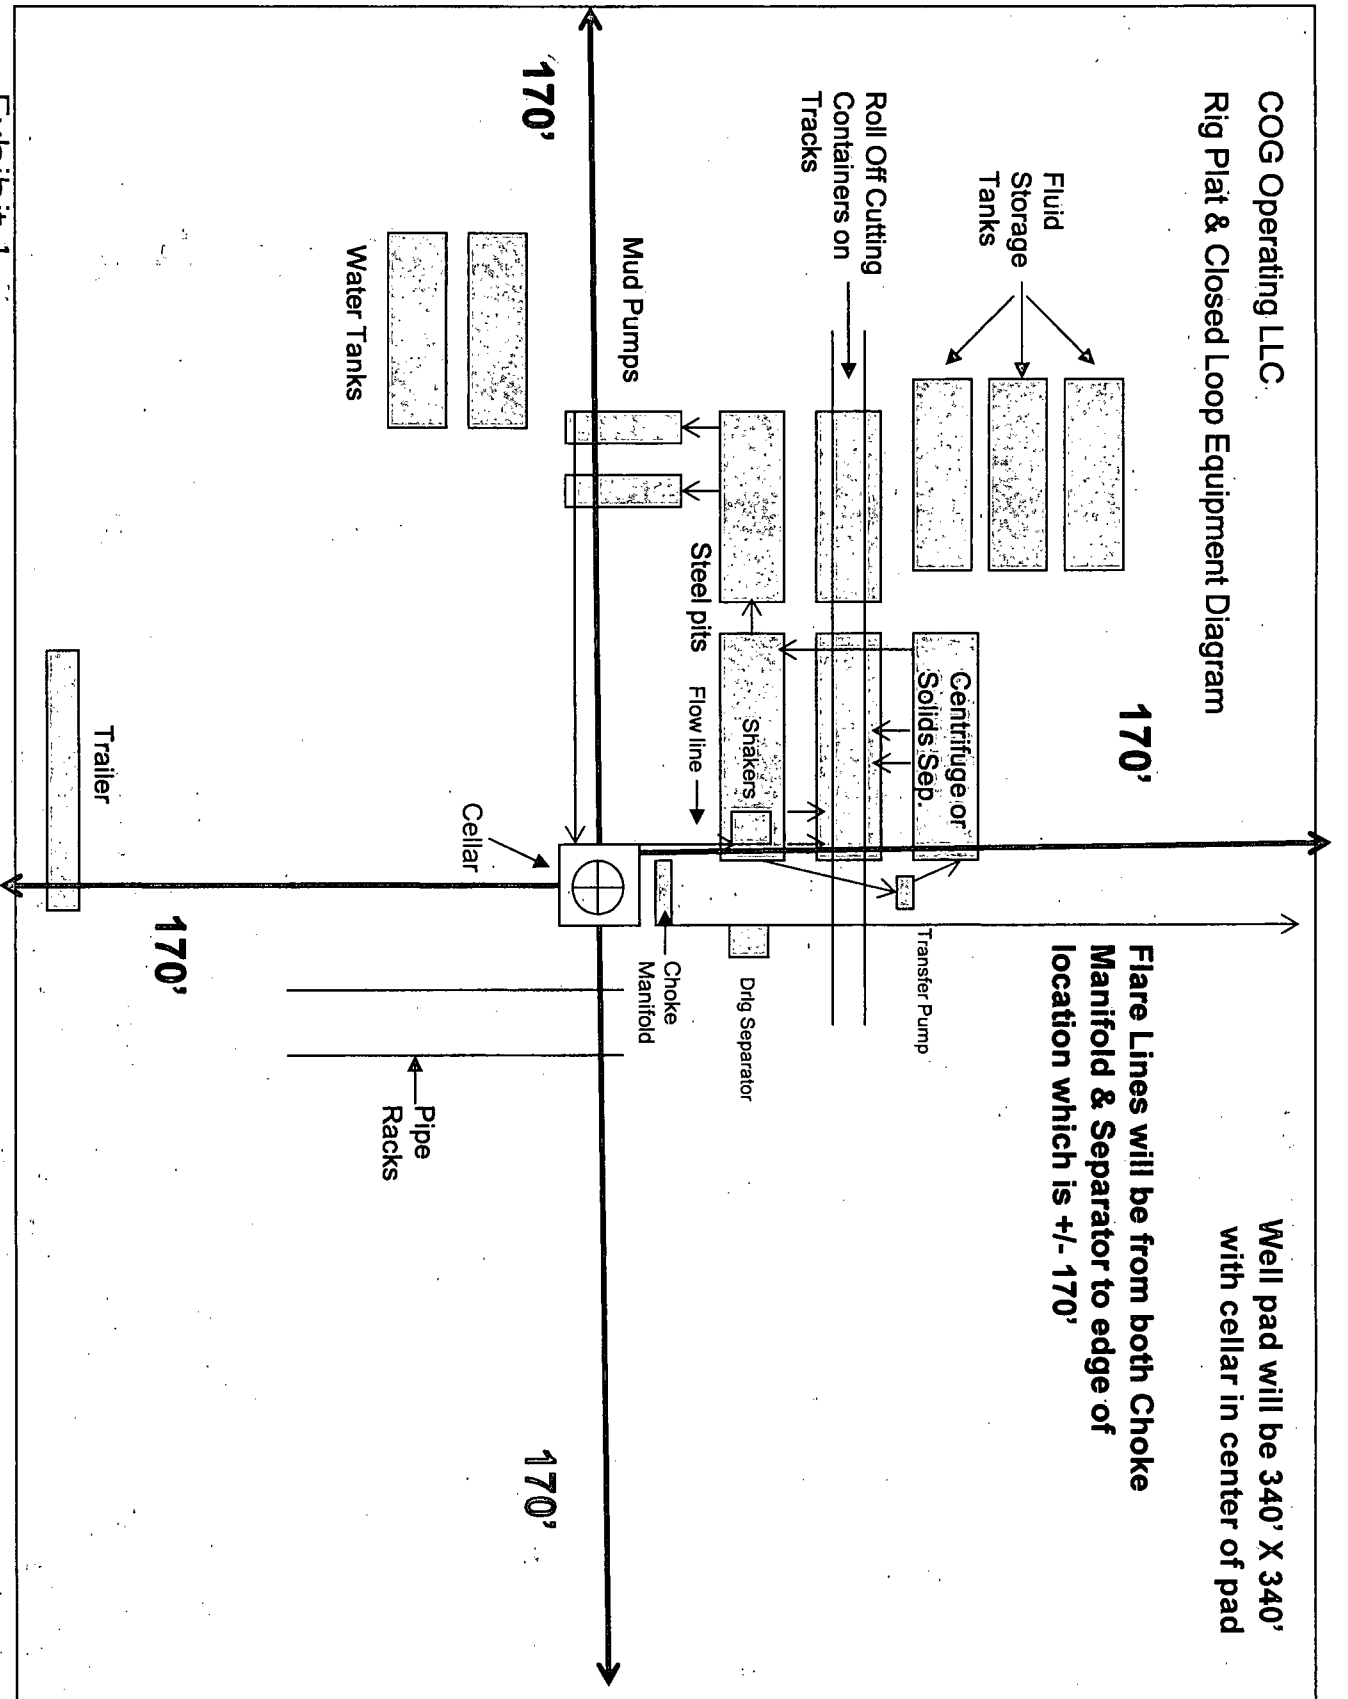


Exhibit 1



COG Operating LLC
2208 West Main
Artesia, NM 88210

EXHIBIT 3


Production Facility Layout Blue Thunder 5 Federal Com #6H Section 5-T19S-R31E

North



Scale
5' x 5'

- Legend
- = 500 BBL Steel Oil Tank
 - ⊗ = 500 BBL Steel Water Tank
 - ⊞ = 6' x 20' Heater

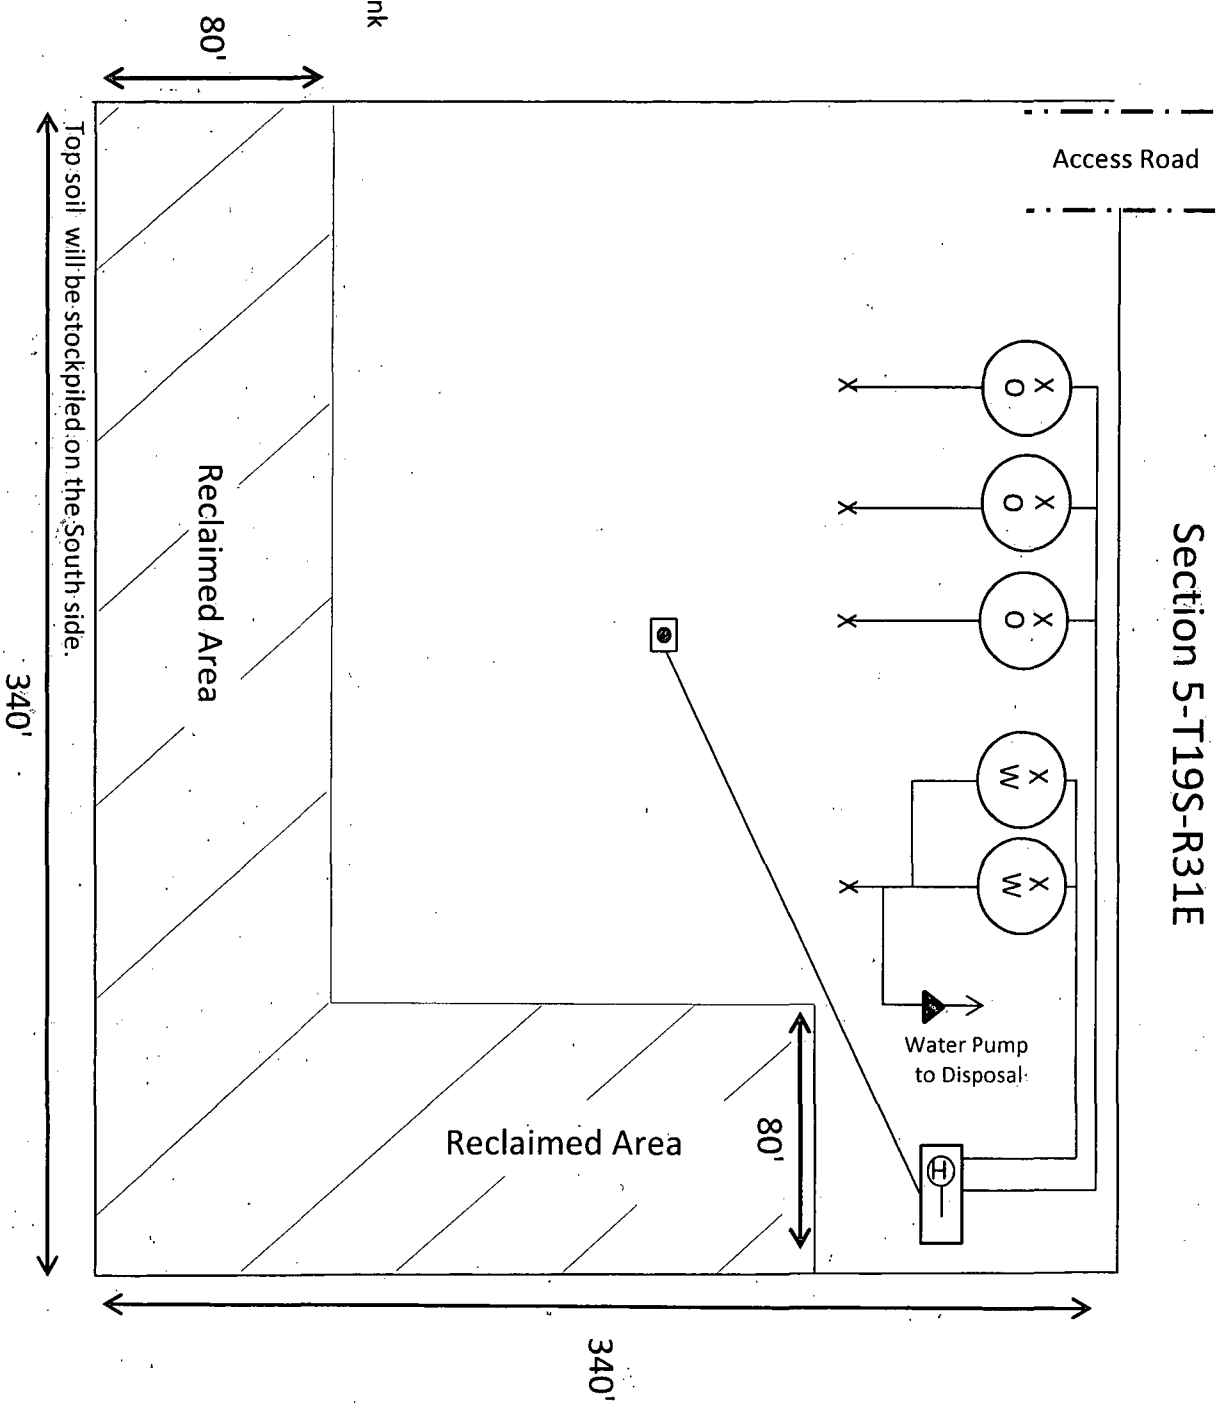

COG OPERATING LLC
HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. HYDROGEN SULFIDE TRAINING

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.

- b. Protective equipment for essential personnel:
Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H2S detection and monitoring equipment:
2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.

COG OPERATING LLC has conducted a review to determine if an H2S contingency plan is required for the above referenced well. We were able to conclude that any potential hazardous volume would be minimal. H2S concentrations of wells in this area from surface to TD are low enough; therefore, we do not believe that an H2S contingency plan is necessary.

W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CK WITH COG OPERATING LLC FOREMAN AT MAIN OFFICE**

COG OPERATING LLC

1-575-748-6940

EMERGENCY CALL LIST

	<u>OFFICE</u>	<u>MOBILE</u>
COG OPERATING LLC OFFICE	575-748-6940	
SHERYL BAKER	575-748-6940	432-934-1873
KENT GREENWAY	575-746-2010	432-557-1694
SETH WILD	575-748-6940	432-528-3633
WALTER ROYE	575-748-6940	432-934-1886

EMERGENCY RESPONSE NUMBERS


	<u>OFFICE</u>
STATE POLICE	575-748-9718
EDDY COUNTY SHERIFF	575-746-2701
EMERGENCY MEDICAL SERVICES (AMBULANCE)	911 or 575-746-2701
EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS)	575-887-9511
STATE EMERGENCY RESPONSE CENTER (SERC)	575-476-9620
CARLSBAD POLICE DEPARTMENT	575-885-2111
CARLSBAD FIRE DEPARTMENT	575-885-3125
NEW MEXICO OIL CONSERVATION DIVISION	575-748-1283
INDIAN FIRE & SAFETY	800-530-8693
HALLIBURTON SERVICES	800-844-8451

Location
Entry
Condition
Sign



Well pad will be 340' X 340'
with cellar in center of pad

COG Operating LLC
H₂S Equipment Schematic
Terrain: Shinnery sand hills.

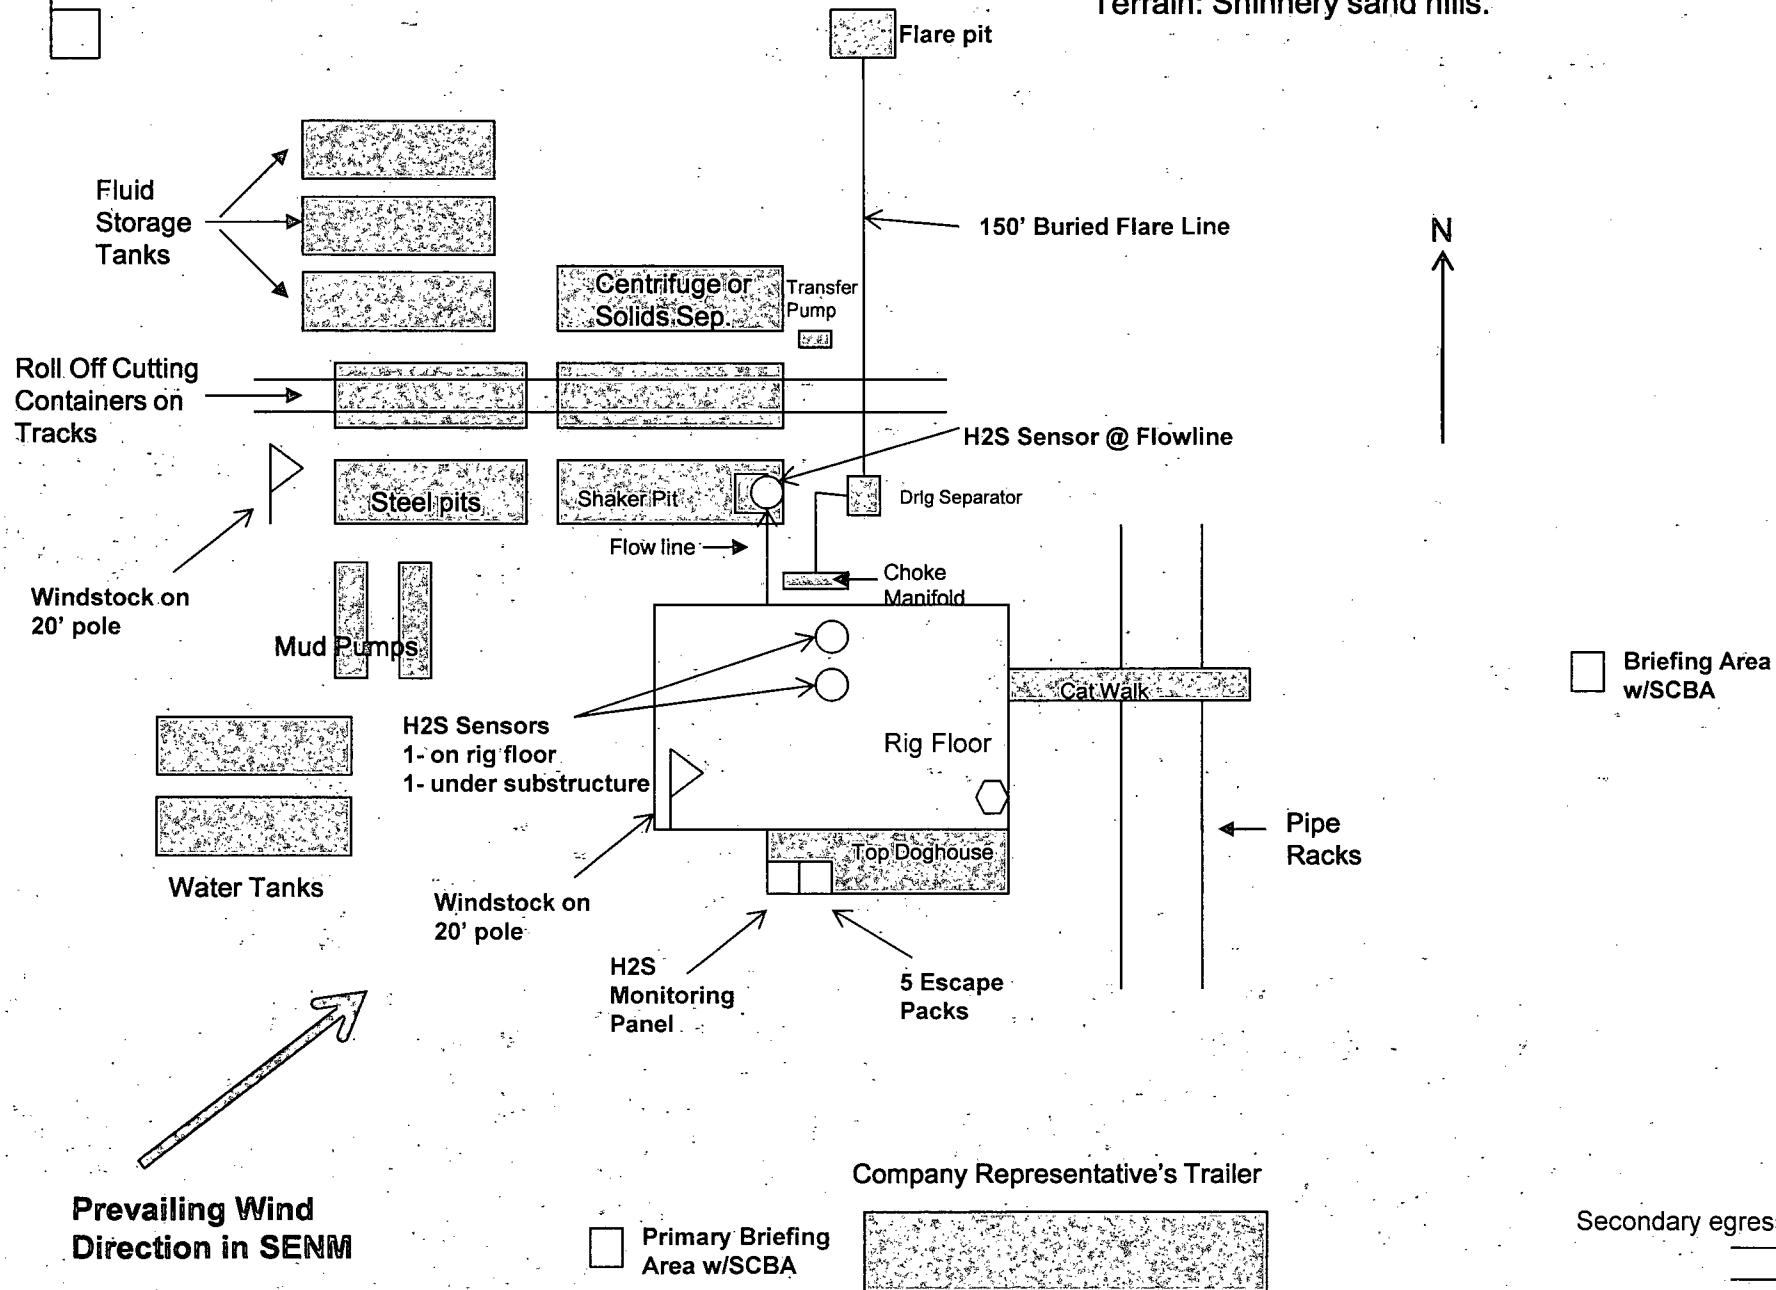

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

Surface Use & Operating Plan

Blue Thunder 5 Federal Com #5H

- Surface Tenant: G & L Cattle LLC, 23104 County Road 19, Springfield, CO 81073.
- New Road: approximately 18'
- Flow Line: on well pad
- Facilities: will be constructed on well pad – see Exhibit 3

Well Site Information

V Door: East

Topsoil: South

Interim Reclamation: South & East

Notes

Onsite: On-site was done by Tanner Nygren (BLM), Gerald Herrera & Rand French (COG) on May 23, 2013.

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

SURFACE USE AND OPERATING PLAN

1. Existing & Proposed Access Roads

- A. The well site survey and elevation plat for the proposed well is attached with this application. It was staked by Madron Surveying, Inc. Carlsbad, NM.
- B. All roads to the location are shown on the Location Verification Map Exhibit 2. The existing lease roads are illustrated and are adequate for travel during drilling and production operations. Upgrading existing roads prior to drilling the well will be done where necessary. The road route to the well site is depicted in Exhibit #2. The road highlighted in Exhibit #2 will be used to access the well.
- C. Directions to location: See 600 x 600 plat
- D. Routine grading and maintenance of existing roads will be conducted as necessary to maintain their condition as long as any operations continue on this lease. Roads will be maintained according to specifications in section 2A of this Surface Use and Operating Plan.

2. Proposed Access Road:

The Elevation Plat shows that 18' of new access road will be required for this location. If any road is required it will be constructed as follows:

- A. The maximum width of the running surface will be 14'. The road will be crowned, ditched and constructed of 6" rolled and compacted caliche. Ditches will be at 3:1 slope and 4 feet wide. Water will be diverted where necessary to avoid ponding, prevent erosion, maintain good drainage, and to be consistent with local drainage patterns.
- B. The average grade will be less than 1%.
- C. No turnouts are planned.
- D. No culverts, cattleguard, gates, low water crossings or fence cuts are necessary.
- E. Surfacing material will consist of native caliche. Caliche will be obtained from the actual well site if available. If not available onsite, caliche will be hauled from the nearest BLM approved caliche pit.

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

3. Location of Existing Well:

The One-Mile Radius Map shows existing wells within a one-mile radius of surface hole location and the bottom hole location.

4. Location of Existing and/or Proposed Facilities:

A. If the well is productive, contemplated facilities will be as follows:

- 1) A tank battery and facilities will be constructed as shown on Exhibit 3.
- 2) The tank battery and facilities including all flow lines and piping will be installed according to API specifications.
- 3) Any additional caliche will be obtained from the actual well site. If caliche does not exist or is not plentiful from the well site, the caliche will be hauled from a BLM approved caliche pit. Any additional construction materials will be purchased from contractors.
- 4) It will be necessary to run electric power if this well is productive. Power will be provided by Xcel Energy and they will submit a separate plan and ROW for service to the well location.
- 5) If the well is productive, rehabilitation plans will include the following:
 - The original topsoil from the well site will be returned to the location, and the site will be re-contoured as close as possible to the original site.

5. Location and Type of Water Supply:

The well will be drilled with combination brine and fresh water mud system as outlined in the drilling program. The water will be obtained from commercial water stations in the area and hauled to location by transport truck over the existing and proposed access roads shown in Exhibit #1. If a commercial fresh water source is nearby, fast line may be laid along existing road ROW's and fresh water pumped to the well. No water well will be drilled on the location.

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

6. Source of Construction Materials and Location "Turn-Over" Procedure:

Obtaining caliche: One primary way of obtaining caliche to build locations and roads will be by "turning over" the location. This means, caliche will be obtained from the actual well site. A caliche permit will be obtained from BLM prior to obtaining caliche. 2400 cubic yards is the maximum amount of caliche needed for pad and roads. Amount will vary for each pad. The procedure below has been approved by BLM personnel:

- A. The top 6 inches of topsoil is pushed off and stockpiled along the side of the location.**
- B. An approximate 160' X 160' area is used within the proposed well site to remove caliche.**
- C. Subsoil is removed and stockpiled within the surveyed well pad.**
- D. When caliche is found, material will be stock piled within the pad site to build the location and road.**
- E. Then subsoil is pushed back in the hole and caliche is spread accordingly across entire location and road.**
- F. Once well is drilled, the stock piled top soil will be used for interim reclamation and spread along areas where caliche is picked up and the location size is reduced.**
- G. Neither caliche nor subsoil will be stock piled outside of the well pad. Topsoil will be stockpiled along the edge of the pad as depicted in the Well Site Layout or survey plat.**

In the event that no caliche is found onsite, caliche will be hauled in from a BLM approved caliche pit or other established mineral pit. A BLM mineral material permit will be acquired prior to obtaining any mineral material from BLM pits or land.

7. Methods of Handling Water Disposal:

- A. The well will be drilled utilizing a closed loop mud system. Drill cuttings will be held in roll-off style mud boxes and taken to an NMOCD approved disposal site.**
- B. Drilling fluids will be contained in steel mud pits.**
- C. Water produced from the well during completion will be held temporarily in steel tanks and then taken to an NMOCD approved commercial disposal facility.**

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

- D. Garbage and trash produced during drilling or completion operations will be collected in a trash bin and hauled to an approved landfill. No toxic waste or hazardous chemicals will be produced by this operation.
- E. Human waste and grey water will need to be properly contained and disposed of. Proper disposal and elimination of waste and grey water may include but are not limited to portable septic systems and/or portable waste gathering systems (i.e. portable toilets).
- F. After the rig is moved out and the well is either completed or abandoned, all waste materials will be cleaned up within 30 days. In the event of a dry hole only a dry hole marker will remain.

8. Ancillary Facilities:

No airstrip, campsite or other facilities will be built as a result of the operation on this well.

9. Well Site Layout:

- A. The drill pad layout, with elevations staked by Madron Surveying, Inc., is shown in the Elevation Plat. Dimensions of the pad and pits are shown on the Rig Layout. V door direction is East. Topsoil, if available, will be stockpiled per BLM specifications. Because the pad is almost level no major cuts will be required.
- B. The Rig Layout Closed-Loop exhibit shows the proposed orientation of closed loop system and access road. No permanent living facilities are planned, but a temporary foreman/toolpusher's trailer will be on location during the drilling operations.

10. Plans for Restoration of the Surface:

- A. Interim Reclamation will take place after the well has been completed. The pad will be downsized by reclaiming the areas not needed for production operations. The portions of the pad that are not needed for production operations will be re-contoured to its original state as much as possible. The caliche that is removed will be reused to either build another pad site or for road repairs within the lease. The stockpiled topsoil will then be spread out reclaimed area and reseeded with a BLM approved seed mixture. In the event that the well must be worked over or maintained, it may be necessary to drive, park, and/or operate machinery on reclaimed land. This area will be repaired or reclaimed after work is complete.

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

- B. Final Reclamation: Upon plugging and abandoning the well all caliche for well pad and lease road will be removed and surface will be recontoured to reflect its surroundings as much as possible. Caliche will be recycled for road repair or reused for another well pad within the lease. If any topsoil remains, it will be spread out and the area will be re-seeded with a BLM approved mixture and re-vegetated as per BLM orders.

11. Surface Ownership:

- A. The surface is owned by the U.S. Government and is administered by the Bureau of Land Management. The surface is multiple uses with the primary uses of the region for grazing of livestock and the production of oil and gas.
- B. The surface tenant is G & L Cattle LLC, 23104 County Road 19, Springfield, CO 81073.
- C. The proposed road routes and surface location will be restored as directed by the BLM

12. Other Information:

- A. The area around the well site is grassland and the topsoil is sandy. The vegetation is moderately sparse with native prairie grasses, some mesquite and shinnery oak. No wildlife was observed but it is likely that mule deer, rabbits, coyotes and rodents traverse the area.
- B. There is no permanent or live water in the immediate area.
- C. There are no dwellings within 2 miles of this location.
- D. If needed, a Cultural Resources Examination is being prepared by Southern New Mexico Archaeological Services, Inc. P.O. Box 1, Bent New Mexico, 88314, phone # 505-671-4797 and the results will be forwarded to your office in the near future. Otherwise, COG will be participating in the Permian Basin MOA Program.

Surface Use Plan
COG Operating, LLC
Blue Thunder 5 Federal Com #6H
SL: 1740' FNL & 125' FEL UL H
Section 5, T19S, R31E
BHL: 1980' FNL & 330' FWL UL E
Section 5, T19S, R31E
Eddy County, New Mexico

13. Bond Coverage:

Bond Coverage is Statewide Bonds # NMB000215 and NMB000740

14. Lessee's and Operator's Representative:

The COG Operating LLC representative responsible for assuring compliance with the surface use plan is as follows:

Sheryl Baker
Drilling Superintendent
COG Operating LLC
2208 West Main Street
Artesia, NM 88210
Phone (575) 748-6940 (office)
(432) 934-1873 (cell)

Ray Peterson
Drilling Manager
COG Operating LLC
One Concho Center
600 W Illinois Ave
Midland, TX 79701
Phone (432) 685-4304 (office)
(432) 818-2254 (business)

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	COG Operating LLC
LEASE NO.:	NMNM-100858
WELL NAME & NO.:	Blue Thunder 5 Federal Com 6H
SURFACE HOLE FOOTAGE:	1740' FNL & 0125' FEL
BOTTOM HOLE FOOTAGE	1980' FNL & 0330' FWL
LOCATION:	Section 05, T. 19 S., R 31 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Recreation Area Requirements
 - Lesser Prairie-Chicken Timing Stipulations
 - Ground-level Abandoned Well Marker
 - Communitization Agreement
- ☒ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - Cement Requirements
 - Logging Requirements
 - Waste Material and Fluids
- ☐ **Production (Post Drilling)**
 - Well Structures & Facilities
- ☐ **Interim Reclamation**
- ☒ **Final Abandonment & Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

Recreation Area Requirements

Pipelines shall be buried a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. Power poles and associated ground structures (poles, guy wires) will not be placed within 20 feet of recreation trails. Guy wires must be equipped with a sleeve, tape or other industry approved apparatus that is highly visible during the day and reflective at night. Appropriate safety signage will be in place during all phases of the project. Upon completion of construction, the road shall be returned to pre-construction condition with no bumps or dips. All vehicle and equipment operators will observe speed limits and practice responsible defensive driving habits.

Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

Communitization Agreement

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. In addition, the well sign shall include the surface and bottom hole lease numbers. If the Communitization Agreement number is known, it shall also be on the sign. If not, it shall be placed on the sign when the sign is replaced.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5909 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil in a low profile manner in order to prevent wind/water erosion of the topsoil. The topsoil to be stripped is approximately 6 inches in depth. The topsoil will be used for interim and final reclamation.

C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. EXCLOSURE FENCING (CELLARS & PITS)

Exclosure Fencing

The operator will install and maintain exclosure fencing for all open well cellars to prevent access to public, livestock, and large forms of wildlife before and after drilling operations until the pit is free of fluids and the operator initiates backfilling. (For

examples of enclosure fencing design, refer to BLM's Oil and Gas Gold Book, Enclosure Fence Illustrations, Figure 1, Page 18.)

G. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty-five (25) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

Ditching

Ditching shall be required on both sides of the road.

Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

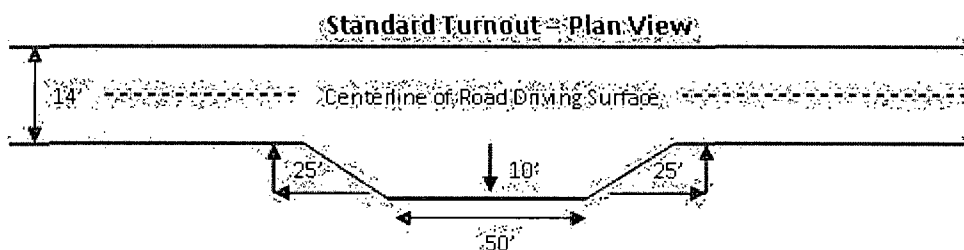


Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

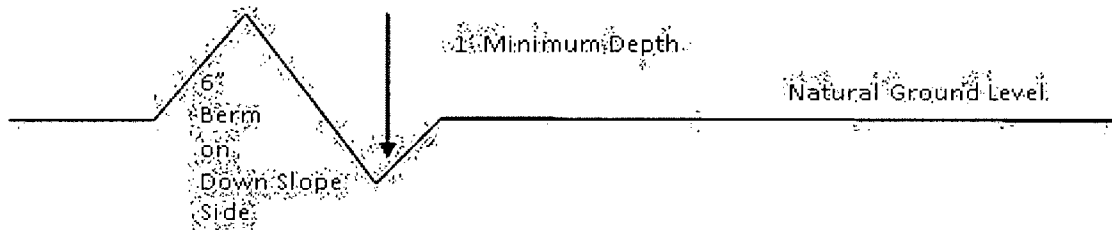

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Cattleguards


An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

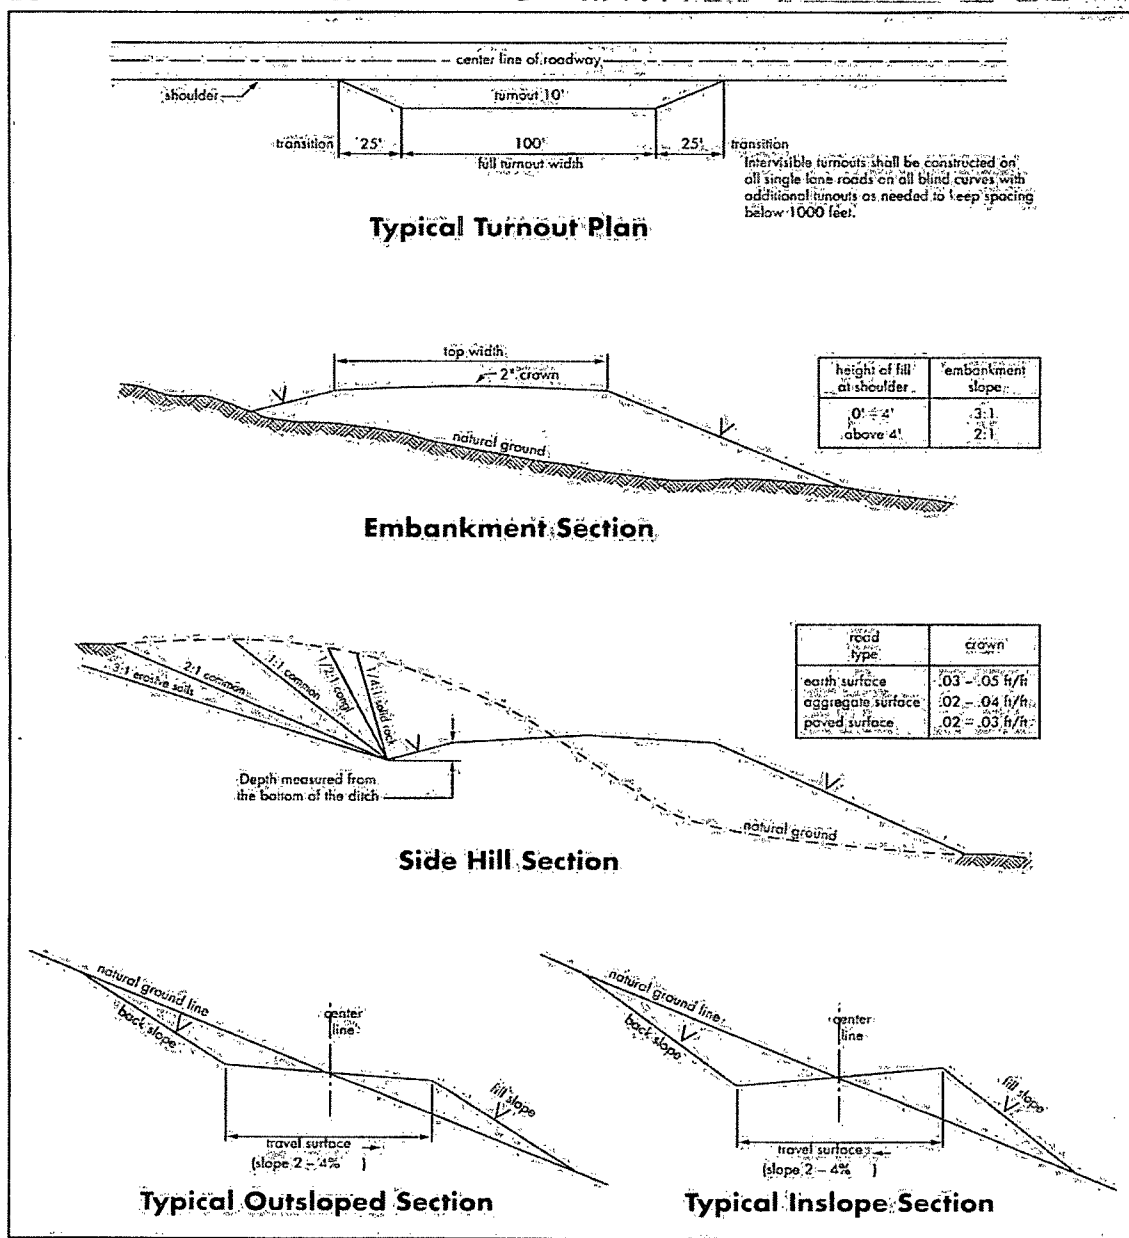

VII. DRILLING

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Although Hydrogen Sulfide has not been reported in the area, it is always a potential hazard. Operator has stated that they will have monitoring equipment in place prior to drilling out of the surface shoe. If Hydrogen Sulfide is encountered, please report measurements and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. **If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a “Major” violation.**
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
4. **The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.**

B. CASING

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. IF OPERATOR DOES NOT HAVE THE WELL SPECIFIC CEMENT DETAILS ONSITE PRIOR TO PUMPING THE CEMENT FOR EACH CASING STRING, THE WOC WILL BE 30 HOURS. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Capitan Reef – if encountered.

Possibility of water flows in the Salado, Artesia Group, Delaware, and Bone Spring. Possibility of lost circulation in the Rustler, Capitan Reef, Delaware, and Bone Spring.

1. The 13-3/8 inch surface casing shall be set at approximately 745 feet (in a competent bed below the Magenta Dolomite, which is a Member of the Rustler, and if salt is encountered, set casing at least 25 feet above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing, which shall be set at approximately 2700 feet, is:

☒ Cement to surface. If cement does not circulate see B.1.a, c-d above.

Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - ☒ Cement should tie-back a minimum of 500 feet into previous casing. Operator shall provide method of verification.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
 - a. **For surface casing only:** If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** intermediate casing shoe shall be **3000 (3M)** psi.
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. The tests shall be done by an independent service company utilizing a test plug **not a cup or J-packer**. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock.
- d. The results of the test shall be reported to the appropriate BLM office.
- e. All tests are required to be recorded on a calibrated test chart. **A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.**
- f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 081213

VIII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Exclosure Netting (Open-top Tanks)

Immediately following active drilling or completion operations, the operator will take actions necessary to prevent wildlife and livestock access, including avian wildlife, to all open-topped tanks that contain or have the potential to contain salinity sufficient to cause harm to wildlife or livestock, hydrocarbons, or Resource Conservation and Recovery Act of 1976-exempt hazardous substances. At a minimum, the operator will net, screen, or cover open-topped tanks to exclude wildlife and livestock and prevent mortality. If the operator uses netting, the operator will cover and secure the open portion of the tank to prevent wildlife entry. The operator will net, screen, or cover the tanks until the operator removes the tanks from the location or the tanks no longer contain substances that could be harmful to wildlife or livestock. Use a maximum netting mesh size of 1 ½ inches. The netting must not be in contact with fluids and must not have holes or gaps.

Chemical and Fuel Secondary Containment and Exclosure Screening

The operator will prevent all hazardous, poisonous, flammable, and toxic substances from coming into contact with soil and water. At a minimum, the operator will install and maintain an impervious secondary containment system for any tank or barrel containing hazardous, poisonous, flammable, or toxic substances sufficient to contain the contents of the tank or barrel and any drips, leaks, and anticipated precipitation. The operator will dispose of fluids within the containment system that do not meet applicable state or U. S. Environmental Protection Agency livestock water standards in accordance with state law; the operator must not drain the fluids to the soil or ground. The operator will design, construct, and maintain all secondary containment systems to prevent wildlife and livestock exposure to harmful substances. At a minimum, the operator will install effective wildlife and livestock exclosure systems such as fencing, netting, expanded metal mesh, lids, and grate covers. Use a maximum netting mesh size of 1 ½ inches.

Open-Vent Exhaust Stack Exclosures

The operator will construct, modify, equip, and maintain all open-vent exhaust stacks on production equipment to prevent birds and bats from entering, and to discourage perching, roosting, and nesting. (*Recommended exclosure structures on open-vent exhaust stacks are in the shape of a cone.*) Production equipment includes, but may not be limited to, tanks, heater-treaters, separators, dehydrators, flare stacks, in-line units, and compressor mufflers.

Containment Structures

Proposed production facilities such as storage tanks and other vessels will have a secondary containment structure that is constructed to hold the capacity of 1.5 times the

largest tank, plus freeboard to account for precipitation, unless more stringent protective requirements are deemed necessary.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color, **Shale Green** from the BLM Standard Environmental Color Chart (CC-001: June 2008).

IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

X. FINAL ABANDONMENT & RECLAMATION

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed