ATS-12-994

.

Form 3160-3 (April 2004)		OCD Artesi	3	OMB N	APPROVED o. 1004-0137 March 31, 2007		
UNITED STATI DEPARTMENT OF THE	<b>INTERIOR</b>		-	5. Lease Serial No. NMLC - 0294			_
BUREAU OF LAND MA				6. If Indian, Allotee			
				7. If Unit or CA Agr			
la. Type of work: ✓ DRILL	_	<b></b>		8. Lease Name and	Well No.		
Ib. Type of Well:     ✓ Oil Well     Gas Well     Other       2. Name of Operator	Sin Sin	ngle Zone Multi	ple Zone	NFE FEDER. 9. API Well No.	AL # 32H <30	18724>	
APACHE CORPORATION				30-015-	416	$\left[ \mathcal{L} \right]$	
3a. Address 303 VETERANS AIRPARK LN #3000 MIDLAND, TX 79705		. (include area code) <b>8-1167</b>		10. Field and Pool, or CEDAR LAK	1 2	<b>4468</b> A-YES	<b>617</b>
4. Location of Well (Report location clearly and in accordance with	•			11. Sec., T. R. M. or E	Blk. and Survey	or Area	
At surface1495' FSL & 432' FELUL:I SFAt proposed prod. zone1495' FSL & 330' FELUL:I SF				T175 R31E			
<ul> <li>14. Distance in miles and direction from nearest town or post office*</li> <li>APPROX 6.1 MILES EAST NORTHEAST OF LOCO</li> </ul>				12. County or Parish EDDY	13.	State NM	·
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No. of a 2.491 1,885 ACI	92	1	ig Unit dedicated to this 60 ACRES	well		
<ul> <li>18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. ~ 25'</li> </ul>		d Depth 2 5480' 2 10618'		BIA Bond No. on file	6		
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 3703'	22. Approxi	mate date work will sta		23. Estimated duration	n		_
	24. Attac	chments	•				
The following, completed in accordance with the requirements of Ons	hore Oil and Gas	Order No.1, shall be a	ttached to th	iis form:			
<ol> <li>Well plat certified by a registered surveyor.</li> <li>A Drilling Plan.</li> <li>A Surface Use Plan (if the location is on National Forest Syste SUPO shall be filed with the appropriate Forest Service Office).</li> </ol>	m Lands, the	Item 20 above). 5. Operator certific	cation specific inf	ns unless covered by an ormation and/or plans as	-	·	
25. Signature Spring Libres	4	(Printed/Typed) SORINA L. FLORI			Date <b>1/19</b>	112	
Title SUPV OF DRILLING SERVICES	1				<i>y</i>		
Approved by (Signature) /s/George MacDone!	Name	(Printed/Typed)			Date SEP	10	2013
Title FIELD MANAGER	Office		CADI				_
Application approval does not warrant or certify that the applicant he	olds legal or equi	table title to those righ		SBAD FIELD OFF		cant to	
conduct operations thereon. Conditions of approval, if any, are attached.				'Roval for			•
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a States any false, fictitious or fraudulent statements or representations	crime for any particular was to any matter w	erson knowingly and within its jurisdiction.					<b>)</b>
*(Instructions on page 2)							
	IRE	CEIVED		SEE ATT	ACHE	DF	OR
Roswell Controlled Water Basin	SE	EP <b>17</b> 2013		CONDIT	IONS (	OF A	PPROVA
	NMO	CD ARTES	A				÷.
Αυσιον	al Subject to	General Require	ements				

--

 $\gamma_{\rm c}$ 

i.

, Ì

& Special Stipulations Attached

# UNITED STATES DEPARTMENT OF THE INTERIOR **BUREAU OF LAND MANAGEMENT CARLSBAD FIELD OFFICE 620 E. GREENE STREET** CARLSBAD, NM 88220

# **OPERATOR CERTIFICATION**

I HEARBY CERTIFY THAT I, OR SOMEONE UNDER MY DIRECT SUPERVISION, HAVE INSPECTED THE DRILL SITE AND ACCESS ROUTE PROPOSED HEREIN; THAT I AM FAMILIAR WITH THE CONDITIONS WHICH CURRENTLY EXIST; THAT I HAVE FULL KNOWLEDGE OF STATE AND FEDERAL laws applicable to this operation; that the statements made in the APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

Executed this 1871 day of JULY, 2012	
Well:NFE_FEDERAL_32H	
Operator Name: APACHE CORPORATION	
Signature: Terry West Printed Name: TERRY WEST	
Title: Drilling Engineer Date:	
Email (optional): terry.west@apachecorp.com	
Street or Box: <u>303 Veterans Airpark Ln., Ste. 3000</u>	
City, State, Zip Code: <u>Midland, TX 79705</u>	
Telephone: <u>432-818-1114</u>	
Field Representative (if not above signatory <u>):</u> Address (if different from above): Felephone (if different from above <u>):</u>	
Email (optional):	

Agents not directly employed by the operator must submit a letter from the operator authorizing that the agent to act or file this application on their behalf.

STRICT 1 25 N. French Dr., Hobbs, NM 88240 one: (575) 393-6161 Fax: (575) 393-07 STRICT 11 I S. First St., Artesia, NM 88210 one: (575) 748-1283 Fax: (575) 748-97 STRICT 111 00 Rito Brazos Road, Aztec, NM 87410 one: (505) 334-6178 Fax: (305) 334-61 STRICT 1V 20 S. St. Francis Dr., Santa Fe, NM 875 one: (505) 476-3460 Fax: (505) 476-34	finerals IL CON 1220		Resources De ON DIVISION rancis Dr.		Submit or	Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office □AMENDED REPORT		
uno. (505) (1,0 2,00 ( no. (5,55) (10-5 (		L LOCAT	FION A	ND ACREA	AGE DEDICA	ATION PLA	T ·	
API Number 30-015- 4110	72	Pool Code Pool Name						
30-015- 410 Property Code		2 96831 (Ledar La Ke; Glori) Property Name					<u>7a - 1CSO</u> W	ell Number
308724		NFE FEDERAL						32H
ogrid no. 893			APAC	Operator Name			1	Blevation 3706'
8 /		<u></u>		Surface Locati				
UL or lot No. Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
I 7	17-S	31-E		1495	SOUTH	432	EAST	EDDY
·					erent From Surface			
UL or lot No. Section I 8	Township 17-S	Range 31-E	Lot Idù	Feet from the 1495	North/South line	Feet from the 330	East/West line EAST	County EDDY
Dedicated Acres Joint or		Consolidation Con	de Orde	r No.	boom			
160								
·	 	       				I hereby cert complete to that this orgu unleased min proposed bo	ATOR CERTIFI ify that the information h the best of my knowledge unization either owns a w seral interest in the land i ttom hole location or has ocation pursuant to a con	erein is true and e aud belief, and orking interest or including the a right to drill this
CORNER COORDINATE	S TABLE	432' S.L. DETAIL 55 C 55 C 55 C 55 C 55 C 55 C 55 C 55	H Q	N. 7.1' SURF Y=	5'55" B.I	I hereby cert complete to that this org unleased min proposed bo well at this la of such mine pooling agre heretofore en Signature Printed Na Sonn E-mail Adu SURV I hereby cert was plotted if me or undar	ify that the information h the best of my knowledge nization either owns a w neral interest in the land i trom hole location or has been on the division. The second second second me second second second me second second second from the location from field notes of actual my supervision, and that to the best of my belief. APRIL 23, 20	erein is true and e and belief, and orking interest or neluding the a right to drill this tract with an owner or to a voluntary wooling order <u>n/a/13</u> Date <u>res</u> <u>Date</u> <u>res</u> <u>CATION</u> shown on this plat surveys made by the same is true


Ť

ĩ

•


.

.

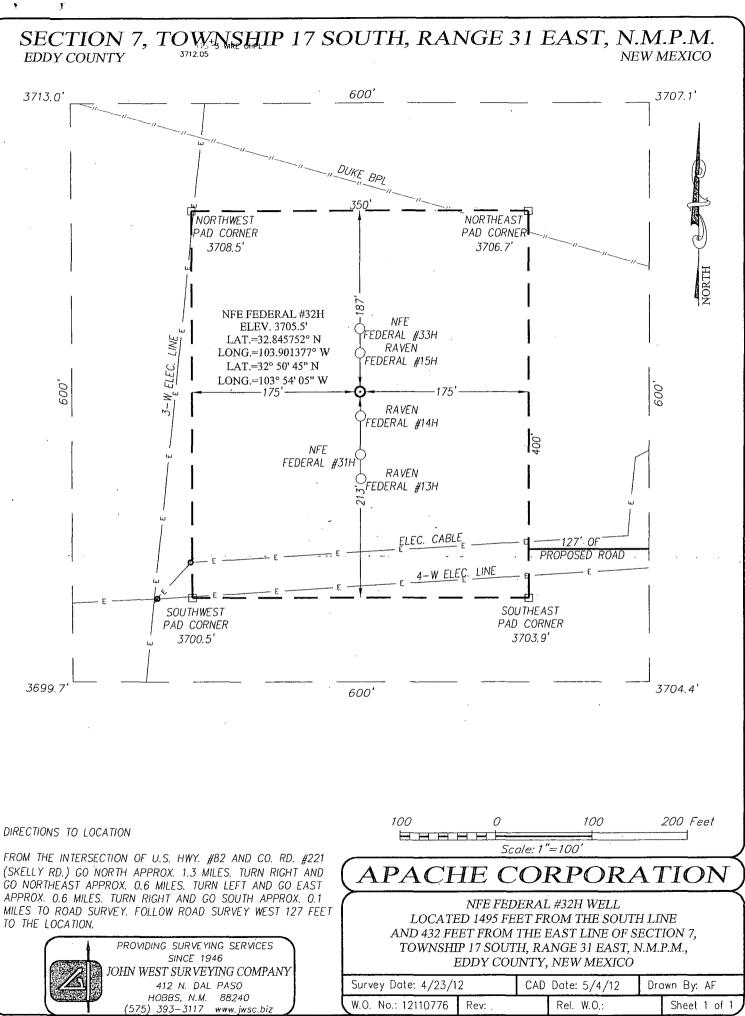

<sup>©</sup> ABEL\2012\APACHE CORPORATION\Wells

VICINITY MAP

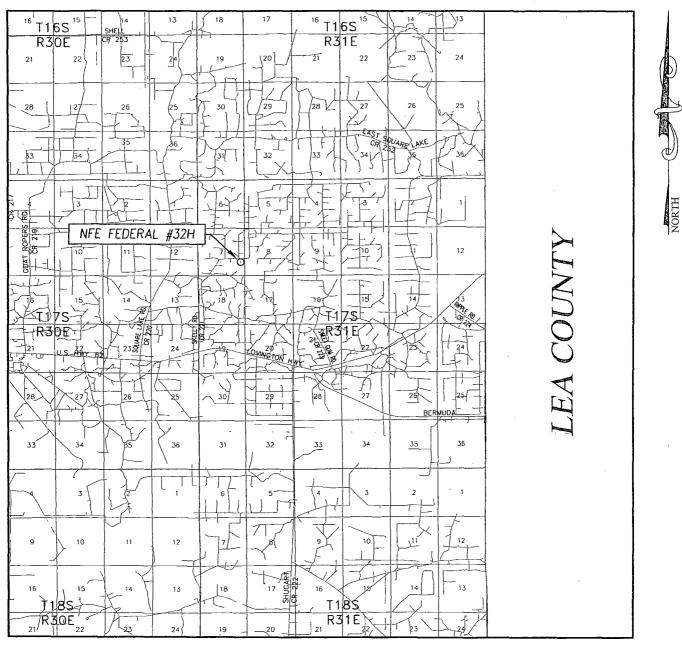


SCALE: 1" = 2 MILES


SEC7 TWP. <u>17-S</u> RGE. <u>_32-E</u>
SURVEYN.M.P.M.
COUNTYEDDYSTATE_NEW_MEXICO
DESCRIPTION 1495' FSL & 432' FEL
ELEVATION3706'
OPERATOR APACHE CORPORATION
LEASENFE_FEDERAL

Ý

3




# LOCATION VERIFICATION MAP

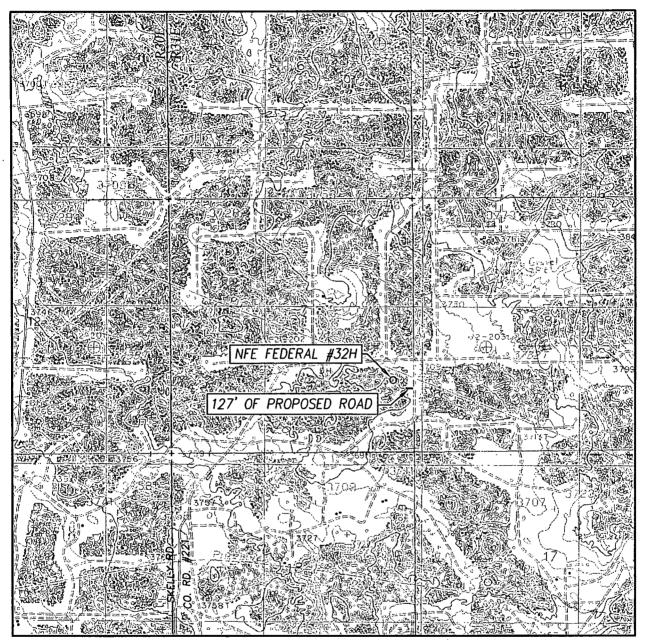


SCALE: 1'' = 2000'


SEC7TWP. <u>17-S</u> RGE. <u></u>
SURVEY N.M.P.M.
COUNTY EDDY STATE NEW MEXICO
DESCRIPTION 1495' FSL & 432' FEL
ELEVATION3706'
OPERATOR APACHE CORPORATION
LEASENFE_FEDERAL
U.S.G.S. TOPOGRAPHIC MAP LOCO HILLS, N.M.

CONTOUR INTERVAL: LOCO HILLS, N.M. - 10' NORTH



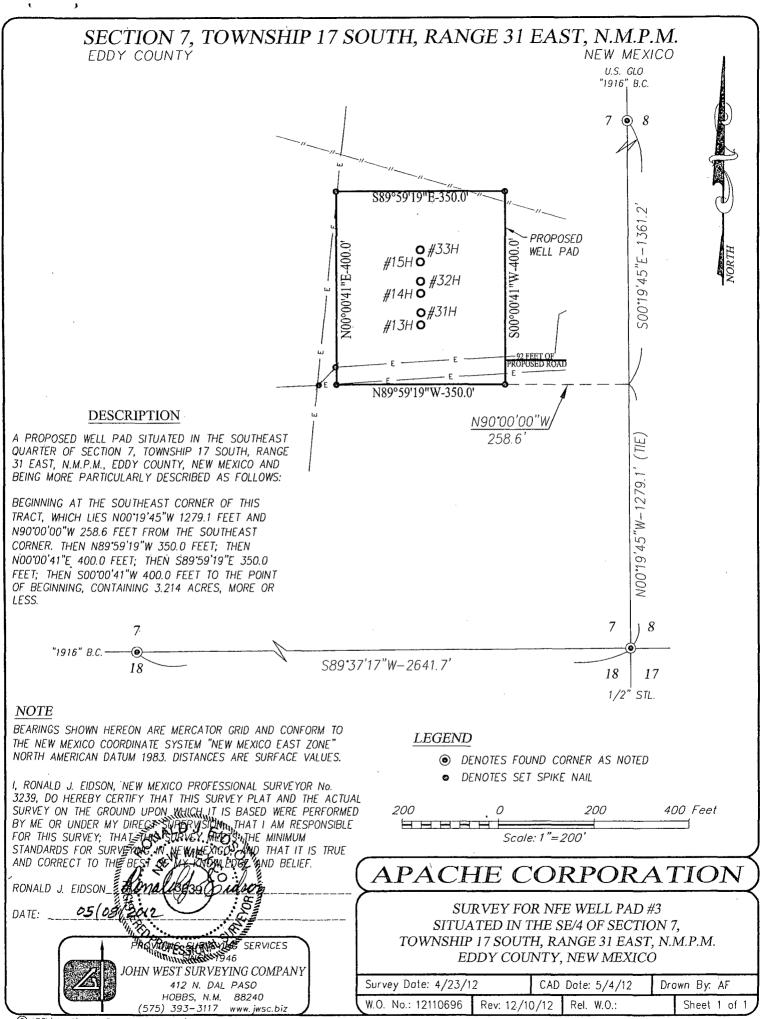

© ABEL\2012\Mack Energy Corporation\Frac Pond

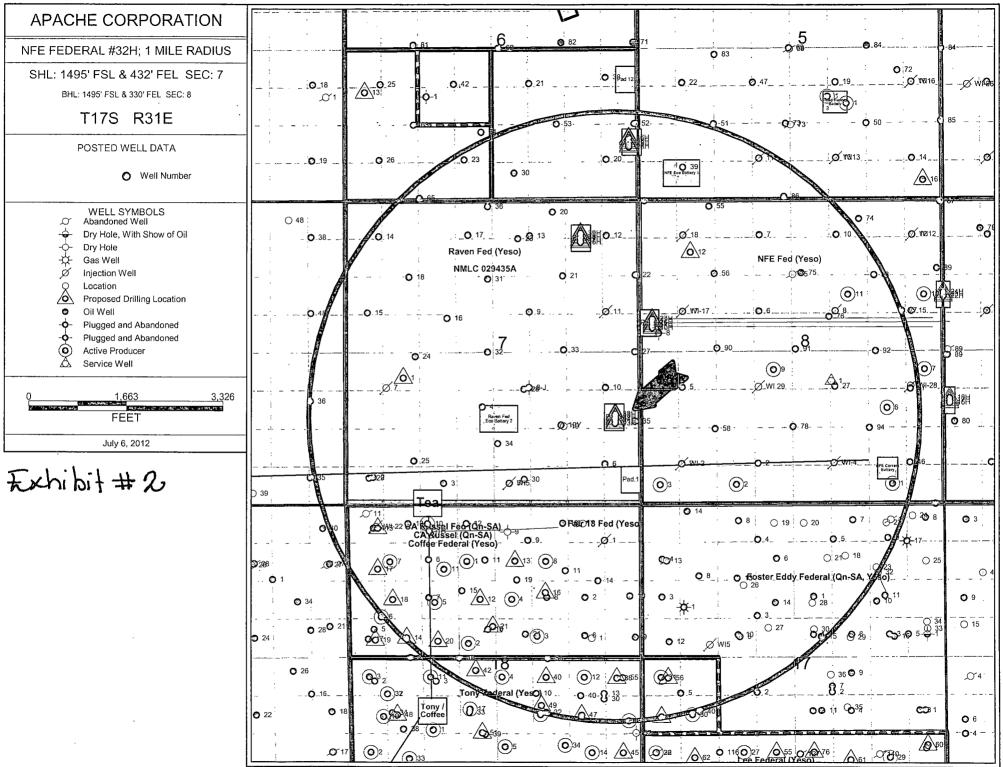



PETRA 7/6/2012 10-10-40 AM


# EXHIBIT #1

# ACCESS ROAD PLAT

# RAVEN FEDERAL #13H, 14H, 15H NFE FEDERAL #31H #32H #33H

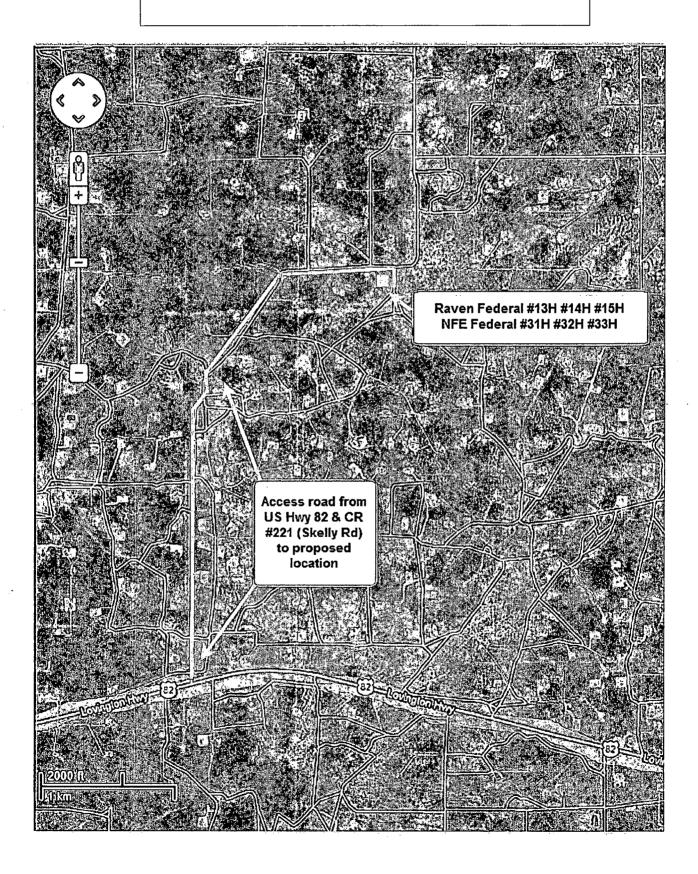

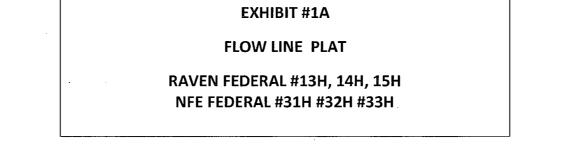

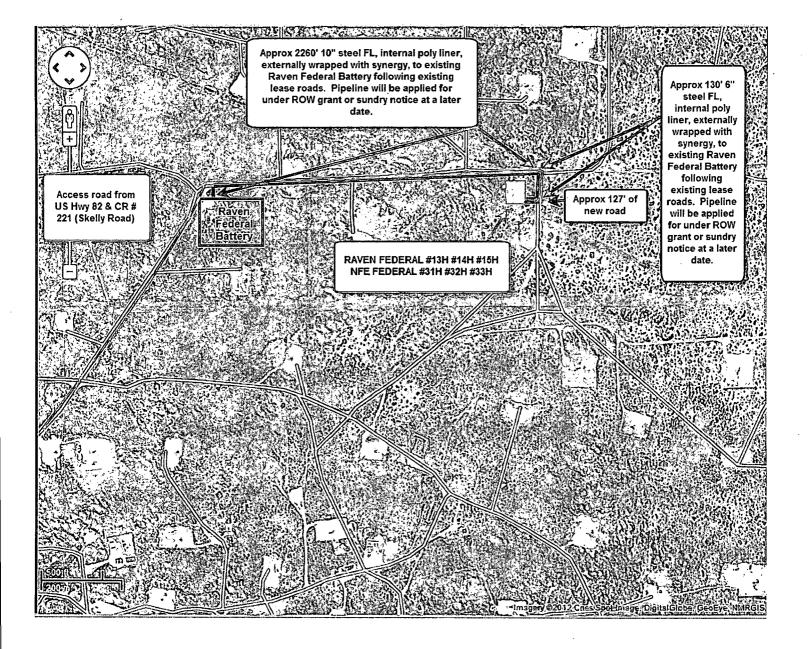

## DRILLING PLAN: BLM COMPLIANCE

(Supplement to BLM 3160-3)

### APACHE CORPORATION (OGRID: 873) NFE FEDERAL #32H

Lease #: NMLC-029435B Projected TVD: ~5480 ' MD: ~ 10618 ' GL: 3706' SHL: 1495' FSL & 432' FEL UL: | SEC: 7 BHL: 1495' FSL & 330' FEL UL: | SEC: 8 T17S R31E EDDY COUNTY, NM

### **1. GEOLOGIC NAME OF SURFACE FORMATION:** Eolian/Piedmond Alluvial Deposits

# 2. ESTIMATED TOPS OF GEOLOGICAL MARKERS & DEPTHS OF ANTICIPATED FRESH WATER, OIL OR GAS:

Quaternary Aeolian	Surf	Queen	2397'
Rustler	256'	Grayburg	2786′
Salt Top	496′	San Andres	3096' (Oil)
Salt Bottom	1316'	Glorieta	4589'
Yates	1501'	Yeso (Paddock)	4647' (Oil)
Seven Rivers	1799'	TVD / MD	~ 5480' / ~ 10618'

Avg Depth to Ground Water: ~91'

Fresh water & prospectively valuable minerals, as described by BLM, encountered during drilling, will be recorded by depth & adequately protected. All oil & gas shows within zones of correlative rights will be tested to determine commercial potential. Surface FW sands will be protected by setting 13-3/8" csg @ 450' & circ cmt back to surface. Hydrocarbon zones will be protected by setting 9-5/8".csg @ ~3500', if water flow is encountered, then 7" @ ~5010'; 4-1/2" liner f/7" csg though build @ ~5100' TVD/MD holding at ~5612' MD.

#### 3. CASING PROGRAM: All casing is new & API approved

STRING	HOLE SIZE	DEPTH	OD CSG	WEIGHT	COLLAR	GRADE	COLLAPSE	BURST	TENSION
Surface	17-1/2"	0′ – 450′	13-3/8"	48#	STC	H-40	1.0	1.21	1.8
Intermediate *	12-1/4"	0' - 3500'	9-5/8"	36#	STC	J-55	1.0	1.21	1.8
Production	8-3/4″	0' - 5010'	7″	26#	LTC	J-55	1.0	1.21	1.8
Production Liner	6-1/8"	4910' – 1061 <b>g</b> '	4.5″	11.6#	LTC	L-80	1.125	1.21	1.8

\*Contingency: 9-5/8" string will only be ran if water flows are encountered.

### 4. CEMENT PROGRAM:

### A. <u>Surface (TOC – Surface) \*\*100% excess cmt to surf\*\* Cmt with:</u>

Lead: 170 sx Class H 50/50 w/10% Gel + 0.5# Star Seal + 0.25% Defoamer + 3% Salt (11.9 wt, 2.31 yld) Compressive Strengths : 12 hr - 589 psi 24 hr - 947 psi

<u>Tail:</u> 250 sx Class C w/ 0.25% De-foamer (14.8 wt, 1.33 yld) Compressive Strengths: **12 hr** – 813 psi **24 hr** – 1205 psi

#### B. Intermediate (TOC – Surface) \*\*50% excess cmt to surf\*\*. Cmt with:

Lead: 550 sx Class H 50/50 w/10% Gel + 2# Star Seal + 0.25% De-foamer (11.9 wt, 2.24 yld) Compressive Strengths: 12 hr - 540 psi 24 hr - 866 psi

<u>Tail:</u> 380 sx Class C w/ 1% CACL + 0.25% De-foamer (14.8 wt, 1.34 yld) Compressive Strengths: **12 hr** – 813 psi **24 hr** – 1205 psi

(May use a DVT & modify cmt program for a 2 stage job, if a strong water flow is encountered)

### C. Production (TOC: Surface) \*\*35% excess cmt\*\* Cmt with:

Lead: 270 sx Class H 50/50 w/10% Gel + 2# Star Seal + 0.25% Defoamer (11.9 wt, 2.24 yld) Compressive Strengths: 12 hr – 540 psi 24 hr – 866 psi

<u>Tail:</u> 400 sx Class C w/1% CaCL + 0.25% De-foamer (14.8 wt, 1.34 yld) Compressive Strengths: **12 hr** – 813 psi **24 psi** – 1205 psi \*Contingency: If 9-5/8" string is not ran, the following cmt program will be used for the Production string & will bring cmt to surface using 35% excess:

<u>Lead</u>: 1167 sx Class H 50/50 w/10% Gel + 2# Star Seal + 0.25% Defoamer (11.9 wt, 2.24 yld) Compressive Strengths: **12 hr** – 540 psi **24 hr** – 866 psi

<u>Tail:</u> 277 sx Class C w/1% CaCL + 0.25% De-foamer (14.8 wt, 1.34 yld) Compressive Strengths: **12 hr** – 813 psi **24 psi** – 1205 psi

D. Apache proposes to run a multiple packer system on the 4-1/2" production liner which will tie back into the 7" string (No Cmt). 9-5/8" string will only be ran if water flows are encountered. May have to use DVT & modify cmt program for a 2-stage job, if a strong water flow is encountered. Contingency cmt for production string will be used if intermediate string is not ran. Intermediate string will only be ran if water flows are encountered. An isolation packer will be set at or a few feet inside the lease offset limit & no ports will be placed between this isolation packer & the liner top packer, if the adjoining leases are not going to be unitized.

\*\* The above cmt volumes could be revised pending caliper measurement from open hole logs. For Surface csg: If cmt does not circ to surface, the appropriate BLM office shall be notified. The TOC shall be determined as directed by the BLM for the specific set of circumstances. Cement will then be brought to surface via either 1" or ready mix operations, as specified by the BLM at that time.

# 5. PROPOSED CONTROL EQUIPMENT

*"EXHIBIT 3"* shows a 13-5/8" 3M psi WP BOP consisting of at least annular bag type preventer. This BOP will be nippled up on the 13-3/8" surface csg head & tested to 70% of casing burst. After the 9-5/8" intermediate csg is set & cemented (or after the 7" string, if the 9-5/8" casing isn't ran), either a 13-5/8" or an 11" 3M BOP consisting of an annular bag type preventer, middle blind rams and bottom pipe rams will be installed in place of the original BOP & utilized continuously until TD is reached. The BOP will be tested at 2000 psi, maximum surface pressure is not expected to exceed 2M psi, BHP is calculated to be approximately 2411 psi. \*All BOP's & associated equipment will be tested as per BLM *Drilling Operations Order #2.* The BOP will be operated & checked each 24 hr period & blind rams will be operated & checked when the drill pipe is out of the hole. Functional tests will be documented on the daily driller's log. *"EXHIBIT 3"* also shows a 3M psi choke manifold with a 3" blow down line. Full opening stabbing valve & Kelly cock will be on derrick floor in case of need. No abnormal pressures of temperatures are expected in this well. No nearby wells have encountered any problems.



\* Contingency: Apache respectfully requests a variance for using a flex hose contingent on type of rig used due to rig scheduling. If a flex hose is utilized, the company man will have all proper certified paperwork for that hose available on location. Possible flex hose specifications listed below:

#### **Flex Hose Variance Statement**

Apache request a variance if Basic 44 is used to drill this well to use a co-flex line between the BOP & choke manifold.

Manufacturer:NRP JonesSerial #:MJL001CKLength:26Size:3Ends - Flanges/ ClampsWP rating:10,000psiAnchors required by manufacturer - Yes / No

# 6. AUXILIARY WELL CONTROL EQUIPMENT / MONITORING EQUIPMENT:

13-3/8" & 11" x 3000 psi Double BOP/Blind & pipe ram (3M BOP/BOPE to be used as 2M system) 4-1/2" x 3000 psi Kelly valve 13-3/8" & 11" x 3000 psi mud cross – H2S detector on production hole Gate-type safety valve 3" choke line from BOP to manifold 2" adjustable chokes – 3" blow down line Fill up line as per Onshore Order 2

INTERVAL	MW (ppg)	VISC (sec/qt)	FLUID LOSS (cc)	MUD TYPE
0' -450'	8.6-8.8	28-30	NC	FW
450' to 3500' *	9.8 10.2	28-34	NC	Brine
3500' - 4460'	8.6-9.1	28-36	NC	FW/Brine
4460' - 10167'	8.6-9.1	28 - 40	15 - NC	FW/Brine

### 7. PROPOSED MUD CIRCULATION SYSTEM: (Closed Loop System)

\* Contingency: If 9-5/8" string is not run, these mud properties will be continued to the next casing seat instead of those Indicated on the next line.

\*\* The necessary mud products for weight addition and fluid loss control will be on location at all times. In order to run open hole logs & casing, the above mud properties may have to be altered to meet these needs.

## 8. LOGGING, CORING & TESTING PROGRAM:

- A. OH logs: Dual Laterolog, MSFL, CNL, Litho-Density, Gamma Ray, Caliper & Sonic from TD back to last csg shoe.
- B. Run CNL, Gamma Ray from last csg shoe back to surface.
- C. No cores, DST's or mud logger are planned at this time.
- **D.** Additional testing will be initiated subsequent to setting the 5-1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows & drill stem tests.

#### 9. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are anticipated. In the event abnormal pressures are encountered, however, the proposed mud program will be modified to increase the mud-weight. There is known presence of  $H_2S$  in this area. If  $H_2S$  is encountered the operator will comply with the provisions of *Onshore Oil & Gas Order No. 6*. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated <u>BHP: 2191 psi</u> and estimated <u>BHT: 115°</u>.

### **10. ANTICIPATED STARTING DATE AND DURATION OF OPERATIONS:**

Road and location construction will begin after BLM has approved APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig is available. Move in operations and drilling is expected to take ~ 25 <u>days</u>. If production casing is run then an additional 90 <u>days</u> will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.

#### **11. OTHER FACETS OF OPERATION:**

After running csg; cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Cedar Lake; Glorieta-Yeso formation will be perforated and stimulated in order to establish production. The well will be swab tested & potentialed as an oil well.



# **Apache Corporation**

Eddy County, NM (Nad27) Raven Federal NFE Federal #32H Wellbore #1

Plan: Plan#1 071112

# Apache

11 July, 2012





		Phoenix Technol Apach			PHOENIX TECHNOLOGY SERVICES
Company:Apache CorporationProject:Eddy County, NM (Nad27)Site:Raven FederalWell:NFE Federal #32HWellbore:Wellbore #1Design:Plan#1 071112			Local Co-ordinate R TVD Reference: MD Reference: North Reference: Survey/Calculation I Database:	WELL @ 3718.00usft (C WELL @ 3718.00usft (C Grid	riginal Well Elev)
Project: Eddy County, N Map System: US State Plane 1927 (E Geo Datum: NAD 1927 (NADCON CO Map Zone: New Mexico East 3001	xact solution)		System Datum:	Mean Sea Level	
Site Raven Federal	· · · · · · · · · · · · · · · · · · ·				
Site Position: From: Map Position Uncertainty: 0.00 us	ft	Northing: Easting: Slot Radius:	673,239.70 usft 633,303.50 usft 13-3/16 "	Latitude: Longitude: Grid Convergence:	32° 51' 0.2430 N 103° 53' 57.3509 W 0.24 °
Well NFE Federal #3	2Н	، ۲۰۰۰ ه. بر ۲۰۰۱ المحمد ال المحمد المحمد المحمد المحمد المحمد	· · · · · · · · · · · · · · · · · · ·		
	) usft ) usft	Northing: Easting:	671,667.10 usft 632,661.00 usft	Latitude: Longitude:	32° 50' 44.7080 N 103° 54' 4.9578 W
Position Uncertainty 0.0	) usft	Wellhead Elevation:	usft	Ground Level:	3,703.00 usft
Wellbore #1		ч 			
Magnetics Model Name	Sample Date	Declination (°)	Angle: (°) (nT)		
· IGRF2010_14	05/01/12	7.68	60.68	48,864	and the second
Design Plan#1 071112			- A in the print and the second	and and the second and a second and the second and	
Audit Notes: Version:	Phase: PL	AN Tie On Depth:	0.00		
Vertical Section De	pth <sup>*</sup> From (TVD) <sup>*</sup> (úsft) 0.00	+N/-S +E/-W (úsft) (usft) 0.00 0.00	Direction (°) 89.60		
Survey Tool Program Date 07/11/12 From To (usft) (usft) Survey (	Vellbore)		Description		
0:00 10,617.80 Plan#1 0	(1112 (Wellbore #1)	MWD	MWD - Standard		

.

.

٠

~

# Phoenix Technology Services

Apache



e.

.

Project: Eddy ( Site: Raven Well: NFE F Wellbore: Wellbo	e Corporation County, NM (Nad27) Federal ederal #32H ore #1 I 07.1112				۲ ۱ ۲	ocal Co-ordinate Refere VD Reference: MD Reference: Iorth Reference: Survey Calculation Meth Database:	WELL @ 3718.00usft (Original Well Elev) WELL @ 3718.00usft (Original Well Elev) Grid	
Planned Survey	<u> </u>							
MD (usft)	linc Azi (°)	i (azimuth)	TVD (usft)	N/S .(usft)	E/W	/. Sec (usft)		م و من میشند. میرونی مرکز میرونی مرکز میرونی
0.00	0.00	0.00	0.00	0.00	0.00	0.00	and a stand of the second s	and the second secon
100.00	0.00	0.00	100.00	0.00	0.00	0.00	·	
200.00	0.00	0.00	200.00	0.00	0.00	0.00		
256.00	0.00	0.00	256.00	0.00	0.00	0.00		
Rustler				i	:			
300.00	0.00	0.00	300.00	0.00	0.00	0.00		
400.00	0.00	0.00	400.00	0.00	0.00	0.00		
496.00	0.00	0.00	496.00	0.00	0.00	0.00		
T/Salt		2		•			• • •	•
500.00	0.00	0.00	500.00	0.00	0.00	0.00		
600.00	0.00	0.00	600.00	0.00.	0.00	0.00		
700.00	0.00	0.00	700.00	0.00	0.00	0.00		
800.00	0.00	0.00	800.00	0.00	0.00	0.00		-
900.00	0.00	0.00	900.00	0.00	0.00	0.00	·	
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00		
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00		
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00		
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00		
1,316.00	0.00	0.00	1,316.00	0.00	0.00	0.00		
B/Salt				×				
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00		
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00		
1,501.00	0.00	0.00	1,501.00	0.00	0.00	0.00		
Yates				•				
1,600.00	0.00	0.00	1,600.00	0.00,	0.00	0.00		
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00		
1,800.00	0.00	0.00	1,800.00	0.00'	0.00	0.00		
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00		

.

Apache



4

~

Project: E Site: F Well: N Wellbore: V	Apache Corporation Eddy County, NM (Nad27) Raven Federal IFE Federal #32H Vellbore #1 Plan#1 071112					Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference: Survey Calculation Method: Database:	Well NFE Federal #32H WELL @ 3718.00usft (Original Well Elev) WELL @ 3718.00usft (Original Well Elev) Grid Minimum Curvature GCR DB v5000
Planned Survey							
(usft)	inc Azi		TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (ûsft)	
2,000.00		0.00	2,000.00	0.00	0.00	0.00	ed - when here a perform and here and the second
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	
2,200.00		0.00	2,200.00	0.00	0.00	0.00	
2,300.00		0.00	2,300.00	0.00	0.00	0.00	
2,397.00		0.00	2,397.00	0.00	0.00	0.00	
Queen			·	į			
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	
2,700.00	0.00	0.00	2,700.00	0.00	0.00	· 0.00	
2,786.00	0.00	0.00	2,786.00	0.00	0.00	0.00	
Grayburg 2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	
3,096.00	0.00	0.00	3,096.00	0.00	0.00	0.00	
San Andres				•	•		
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	
3,400.00	0.00 ·	0.00	3,400.00	0.00	0.00	0.00	
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	
3,600.00	0.00	0.00	3,600.00	0.001	0.00 .	0.00	
3,700:00	0.00	0.00	3,700.00	0.00	0.00	0.00	
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	

PHOENIX TECHNOLOGY SERVICES

PHOENIX TECHNOLOGY SERV	וכזג			Phoenix 1	Fechnology Se Apache	rvices	PHOENIX TICHNOLOGY SILVIC
Company: Project: Site: Well: Wellbore: Design:	Apache Corporation Eddy County, NM (Nac Raven Federal NFE Federal #32H Weilbore #1 Plan#1 071112	12?)				Local Co-ordinate Reference TVD Reference: MD Reference: North Reference: Survey Calculation Method: Database:	Well NFE Federal #32H WELL @ 3718.00usft (Original Well Elev) WELL @ 3718.00usft (Original Well Elev) Grid Minimum Curvature. GCR DB v5000
Planned Survey				1		;	
MD (usft)	lnc (°)	Azi (azimuth)	TVD. (úsft)	N/S (usft)	E/W (usft)	V.Sec (usft)	
4,100	0.00 0.00	0.00	4,100.00	0.00	0.00	0.00	
. 4,200	0.00	0.00	4,200.00	0.00	0.00	0.00	
4,300	0.00 0.00	0.00	4,300.00	0.00	0.00	0.00	
4,400	0.00	0.00	4,400.00	0.00	0.00	0.00	
4,500	0.00	0.00	4,500.00	0.00	0.00	0.00	
4,589	0.00	0.00	4,589.00	0.00	0.00	0.00	
Glorieta 4,600		0.00	4,600.00	0.00	0.00	0.00	
4,647	0.00	0.00	4,647.00	0.00	0.00	0.00	
Yeso (P					0.00	0.00	
4,700		0.00 0.00	4,700.00 4,800.00	0.00 <sup>1</sup>	0.00 0.00	0.00 0.00	
4,800		0.00	4,800.00	0.00	0.00	0.00	
5,000		0.00	5,000.00	0.00	0.00	0.00	
5,018		0.00	5,018.57	0.00	0.00	0.00	
	ild 15.00	~~~~			0.05		
5,100		89.60 89.60	5,099.38	0.06 0.13	8.65 18.18	8.65 18.18	
		09.00	5,135.00	0.13	10.10	10.10	
Yeso (B 5,200		89.60	5,193.25	0.30	42.28	42.28	
5,300		89.60	5,275.22	0.69	99.07	. 99.07	
5,400	0.00 57.21	89.60	5;339.69	1.22	175.13	175.14	
5,500		89.60	5,382.29	1.85	265.29	265.30	
5,600		89.60	5,400.09	2.54	363.40	363.41	
5,612		89.60	5,400.49	2.63	375.90	375.91	
Start 50 5,700	06.16 hold at 5612.50 ME 0.00 89.09	<b>)</b> 89.60	5,401.88	3.24	463.38	463.39	
5,800		89.60	5,403.47	3.94	563.37	563.38	

•

•

Phoenix Technology Services

Apache

7		· · ·					¥
Company: Project: Site: Well: 1	Apache Corporation Eddy County, NM (Nac Raven Federal NFE Federal #32H	27)				Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference:	Well NFE Federal #32H WELL @ 3718.00usft (Original Well Elev) WELL @ 3718.00usft (Original Well Elev) Grid
Wellbore:	Wellbore #1	χ.				Survey Calculation Method:	Minimum Curvature
Design:	Plan#1 071112			· .		Database:	GCR DB v5000
Planned Survey							)·
MD (usft)	اnc (۴)	Azi (azimuth).	TVD (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	
5,900.0	and the second sec	89.60	5,405.06	4.63	663.35	663.37	· · · · · · · · · · · · · · · · · · ·
6,000.0	00 89.09	89.60	5,406.65	5.33	763.34	763.35	
6,100.0	00 89.09	89.60	5,408.24	6.03	863.32	863.34	
6,200.0	00 89.09	89.60	5,409.82	6.73	963.31	963.33	
6,300.0	00 89.09	89.60	5,411.41	7.43	1,063.29	1,063.32	
6,400.0	00 89.09	89.60	5,413.00	8.13	1,163.28	1,163.30	
6,500.0	00 89.09	89.60	5,414.59	- 8.83	1,263.26	1,263.29	
6,600.0	00 89.09	89.60	5,416.18	9.53	1,363.24	1,363.28	
6,700.0	00 89.09	89.60	5,417.76	10.22	1,463.23	1,463.27	- -
6,800.0	00 89.09	89.60	5,419.35	10.92	1,563.21	1,563.25	
6,900.0	00 89.09	89.60	5,420.94	11.62	1,663.20	1,663.24	X
7,000.0	00 89.09	89.60	5,422.53	12.32	1,763.18	1,763.23	
7,100.0	00 89.09	89.60	5,424.12	13.02	1,863.17	1,863.22	
7,200.0	00 89.09	89.60	5,425.71	13.72	1,963.15	1,963.20	
7,300.0	00 89.09	89.60	5,427.29	14.42	2,063.14	2,063.19	
7,400.0	00 89.09	89.60	5,428.88	15.11	2,163.12	2,163.18	
7,500.0	00 89.09	89.60	5,430.47	15.81	2,263.11	2,263.16	
7,600.0	00 89.09	89.60	5,432.06	16.51	2,363.09	2,363.15	
7,700.0	00 89.09	, 89.60	5,433.65	17.21	2,463.08	2,463.14	
7,800.0	00 89.09	89.60	5,435.23	17.91	2,563.06	2,563.13	
7,900.0	. 89.09	89.60	5,436.82	18.61	2,663.05	2,663.11	
8,000.0	00 89.09	89.60	5,438.41	19.31	2,763.03	2,763.10	
8,100.0	00 89.09	89.60	5,440.00	20.00	2,863.02	2,863.09	
8,200.0	00 89.09	89.60	5,441.59	20.70	2,963.00	2,963.08	v
8,300.0	00 89.09	89.60	5,443.18	21.40	3,062.99	3,063.06	
8,400.0	00 89.09	89.60	5,444.76	22.10	3,162.97	3,163.05	
. 8,500.0	. 89.09	89.60	5,446.35	22.80	3,262.96	3,263.04	

07/11/12 12:27:33PM

COMPASS 5000.1 Build 56

PHOENIX TECHNOLOGY SERVICES

PHOENIX TECHNOLOGY SERVICES

PHOENIX TECHNOLOGY SERVICES

# Phoenix Technology Services

Apache



•

•

٠


Project: Ec Site: R Well: N Wellbore: W	pache Corporation ddy County, NM (Nad aven Federal FE Federal #32H /ellbore #1 an#1 071112	27)				Local Co-ordinate Referen TVD Reference: MD Reference: North Reference: Survey Calculation Methor Database:	WELL @ 3718.00usft (Original Well Elev) WELL @ 3718.00usft (Original Well Elev) Grid
Planned Survey							
MD (ûŝft)	inc (°)	Azi (azimuth) (°)	TVD, (usft)	N/S (usft)	E/W (usft)	V. Sec (usft)	
8,600.00	89.09	89.60	5,447.94	23.50	3,362.94	3,363.03	
8,700.00	89.09	89.60	5,449.53	24.20	3,462.93	3,463.01	
8,800.00	89.09	89.60	5,451.12	24.89	3,562.91	3,563.00	
8,900.00	89.09	89.60	5,452.70	25.59	3,662.90	3,662.99	
9,000.00	89.09	89.60	5,454.29	26.29	3,762.88	3,762.98	
9,100.00	89.09	89.60	5,455.88	26.99	3,862.87	3,862.96	
9,200.00	89.09	89.60	5,457.47	27.69	3,962.85	3,962.95	
9,300.00	89.09	89.60	5,459.06	28.39	4,062.84	4,062.94	
9,400.00	89.09	89.60	· 5,460.65	29.09	4,162.82	4,162.93	
9,500.00	89.09	89.60	5,462.23	29.78	4,262.81	4,262.91	
9,600.00	89.09	89.60	5,463.82	30.48	4,362.79	4,362.90	
9,700.00	89.09	89.60	5,465.41	31.18	4,462.78	4,462.89	
9,800.00	89.09	89.60	5,467.00	31.88	4,562.76	4,562.87	
9,900.00	89.09	89.60	5,468.59	32.58	4,662.75	4,662.86	
10,000.00	89.09	89.60	5,470.17	33.28	4,762.73	4,762.85	
10,100.00	89.09	89.60	5,471.76	33:98	4,862.72	4,862.84	
10,200.00	89.09	89.60	5,473.35	34.68	4,962.70	4,962.82	
10,300.00	89.09	89.60	5,474.94	35.37	5,062.69	5,062.81	
10,400.00	89.09	89.60	5,476.53	36.07	5,162.67	5,162.80	
10,500.00	89.09	89.60	5,478.12	36.77	5,262.66	5,262.79	
10,600.00	89.09	89.60	5,479.70	37.47	5,362.64	5,362.77	
10,618.66	89.09	89.60	5,480.00	37.60	5,381.30	5,381.43	
TD at 10618.	66			-			


PHOENIX TECHNOLOGY SERVIC	283				Phoen	<b>ix Technolog</b> Apache	y Services				
Company: Project: Site: Well: Wellbore: (Design:	Apache Corpo Eddy County, Raven Federal # NFE Federal # Wellbore #1 Plan#1 071111	NM (Nad27) I 32H <sub>.</sub>					Local Co-ordiña TVD Reference: MD Reference: North Reference Survey Calculat Database:	81. (* 1997) 1917 - Marine Marine, 1917 1917 - Marine Marine, 1917	Well NFE Federal #3 WELL @ 3718.00usfi WELL @ 3718.00usfi Grid Minimum Curvature GCR DB v5000	t (Original Well Elev)	
Formations	Measured Depth (ust)	Verticai Depth , (usft)	N	ame		Lithôlogy	Dip Dip Directio	n			
A - Sidned and - do- after	4,589.00	4,589.00			ntanit shenation 1986 at Anny, 1981 ay	<u>Elinoio</u> gy	Minna Callender		<u>der hannen 12. der soldet die sone</u>	ineiten, taleinen Antolen in 1 main 2006 antolen inteli	entire and
	496.00	496.00	T/Salt								
	4,647.00	4,647.00	Yeso (Paddock)								
	1,501.00	1,501.00	Yates								
	5,136.88	5,135.00	Yeso (Blinebry)								
	1,316.00	1,316.00	B/Salt							-	
	2,786.00	2,786.00	Grayburg								
	2,397.00	2,397.00	Queen								
	256.00	256.00	Rustler								

Plan Annotations	- <del> </del>	÷		ter and the second second second in the second s 1
Measured. Depth	Vertical Depth	Local Coord	inatés +E/-W	
(usft)	(usft)	(usft)	(usft)	Comment
5,018.57	5,018.57	0.00	0.00	Start Build 15.00
5,612.50	5,400.49	2.63	375.90	Start 5006.16 hold at 5612.50 MD
10,618.66	5,480.00	37.60	5,381.30	TD at 10618.66


Checked By: Approved By: Date:

PHOENIX TECHNOLOGY SERVICES

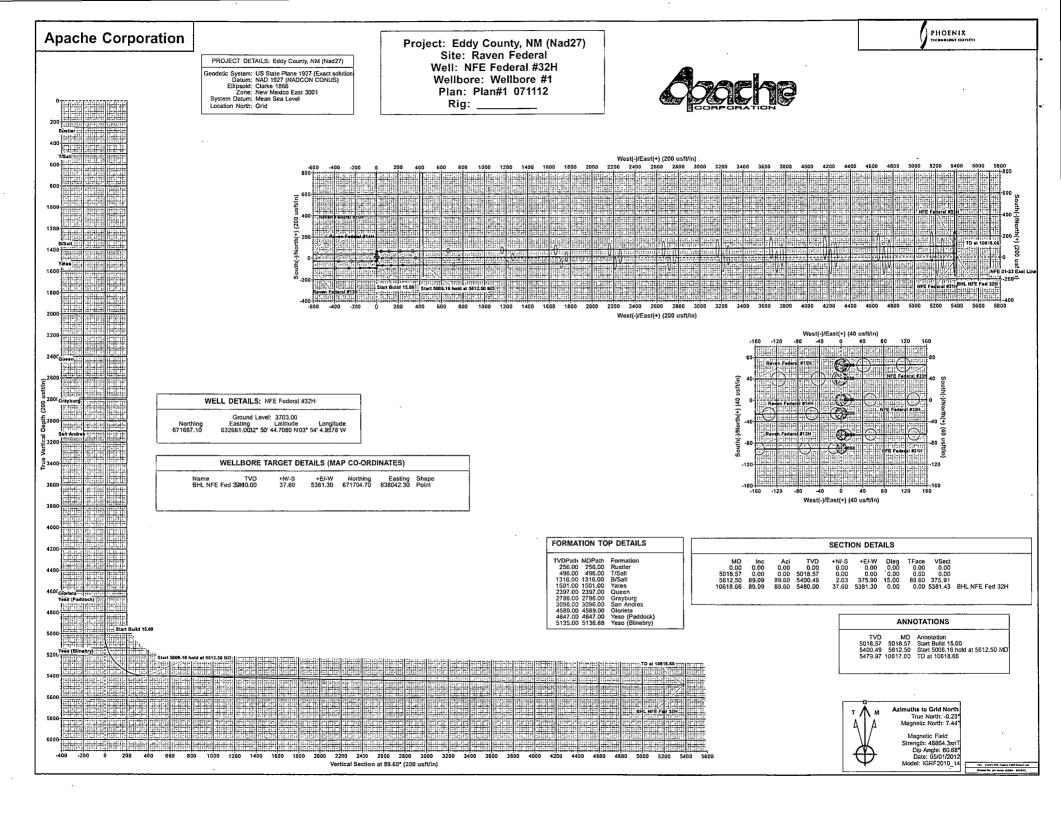


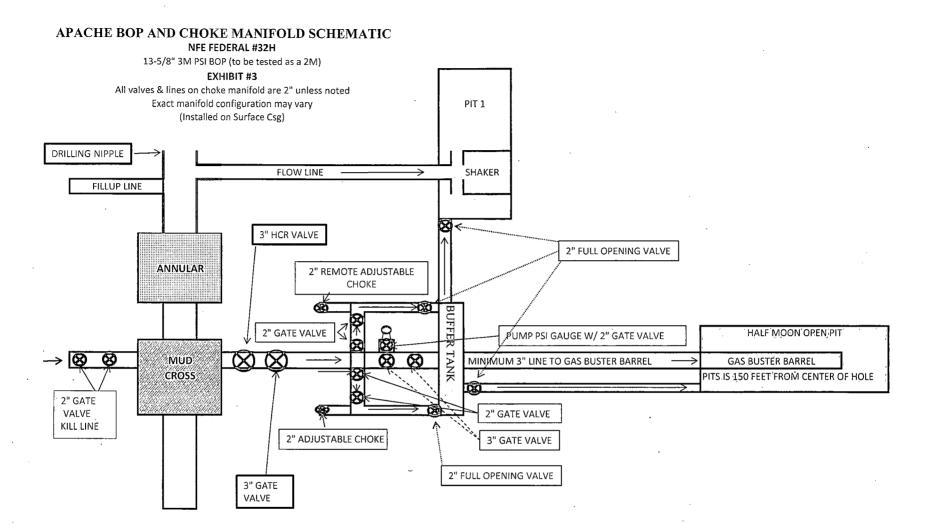


\*\*\* If H2S is encountered in quantities greater than 100ppm, Apache will shut in well & install a remote operated choke \*\*\*

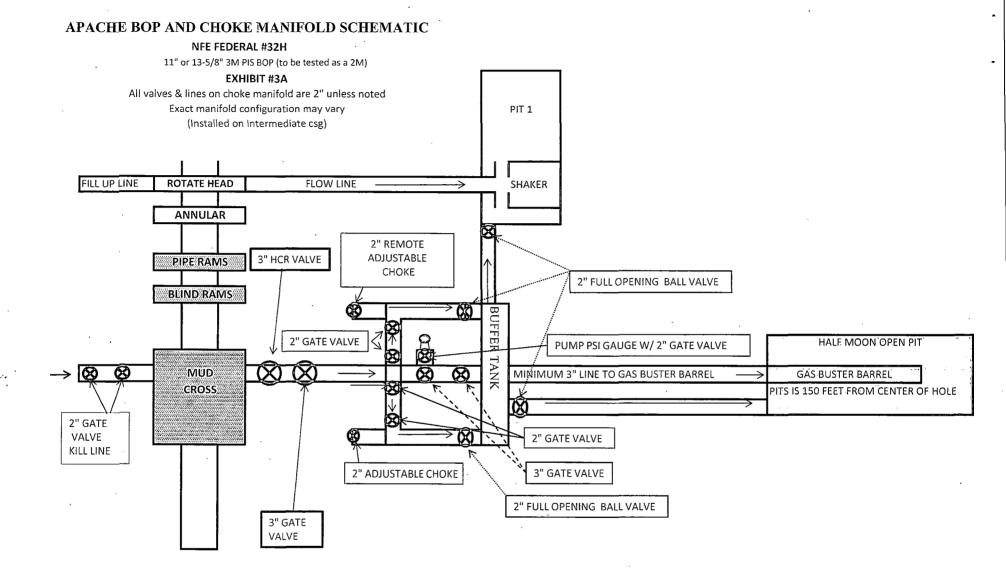


\*\*\* If H2S is encountered in quantities greater than 100ppm, Apache will shut in well & install a remote operated choke \*\*\*

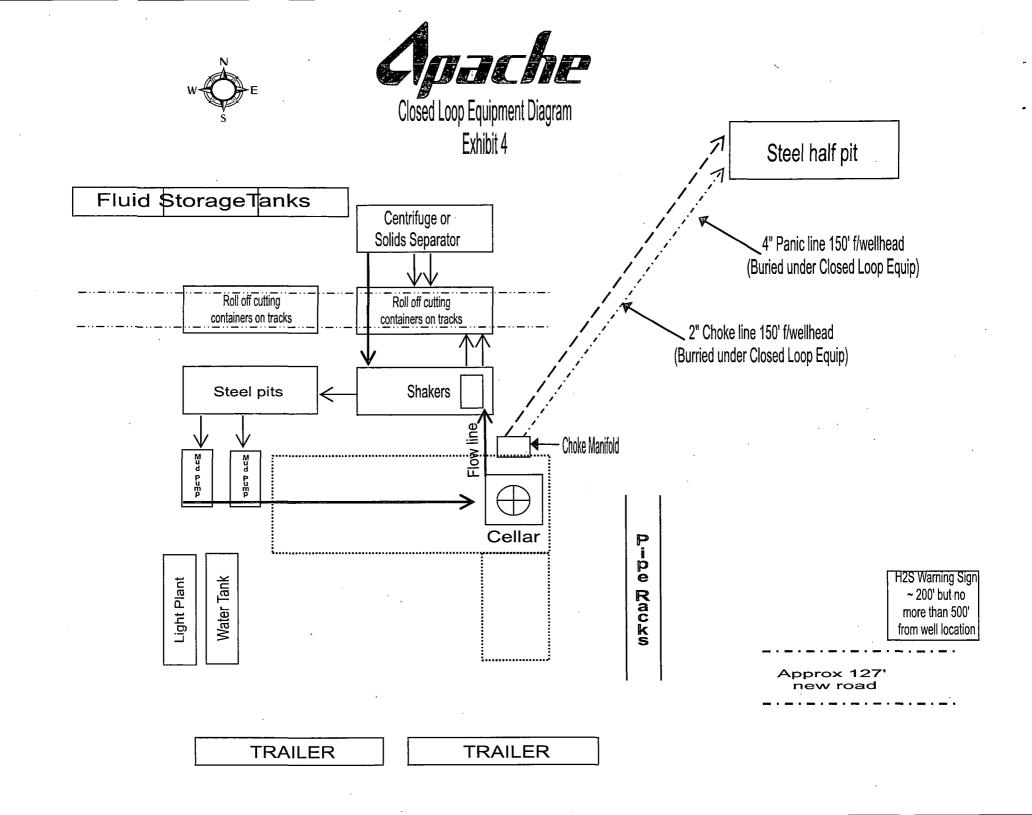



Certificate of Conformance

DATE 10-1-12		
SERIAL NO. MJKOO1CK	PART NO.	NA
SIZE	LENGTH	26
HYDROSTATICALLY TESTED AT	r <u>10,000 t</u>	¢
BY Cheft Sounders	Q.A.	
NEPHI RUBBER P	RODUCI	TS CORP.
Corporate Office: P.O. Box 310 • LaPorte, Indiana 46352 • ( Manufacturing: 255 West 11th North • Nephi, Utah 84648 •		· ·

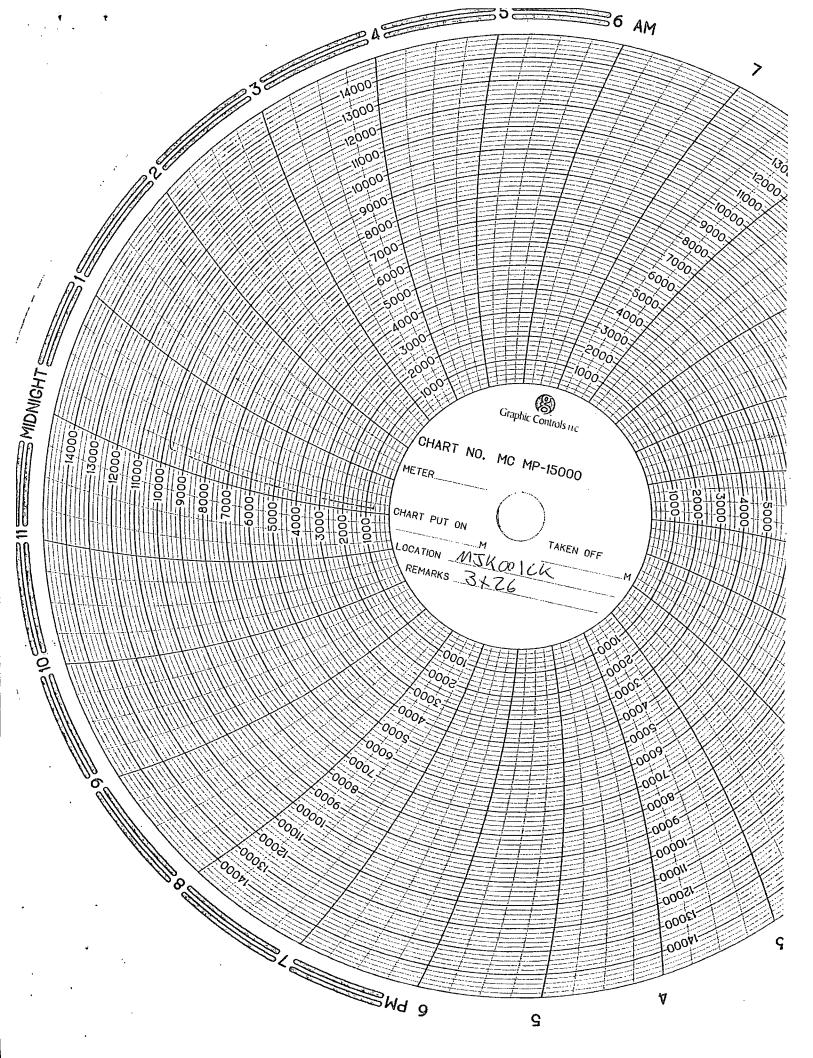

**HEN** 

# DESIGN PLAN, OPERATING & MAINTENANCE PLAN, & CLOSURE PLAN FOR OCD FOR C-144

# NFE FEDERAL #32H

#### DESIGN PLAN

Fluid & cuttings coming from drilling operations will pass over the Shale Shaker with the cuttings going to the Sundance Inc / CRI haul off bin and the cleaned fluid returning to the working steel pits.

Equipment includes:

2 – 500 bbl steel frac tanks (fresh water for drilling)

2 – 180 bbl steel working pits

3 – 75 bbl steel haul off bins

2 - Pumps (6-1/2" x 10" PZ 10 or equivalent )

1 – Shale shaker

1 – Mud cleaner – QMAX MudStripper


#### **OPERATING AND MAINTENANCE PLAN**


Inspection to occur every tour for proper operation of system and individual components. If any problems are found they will be repaired and/or corrected immediately.

#### **CLOSURE PLAN**

All haul bins containing cuttings will be removed from location and hauled to Sundance Incorporated (NM-01-0003) disposal site located 3 miles East of Eunice, NM on the Texas border / Controlled Recovery, Inc's (NM-01-0006) disposal site located near mile marker 66 on Highway 62/180.

Sorina L. Flores Supv. of Drilling Services

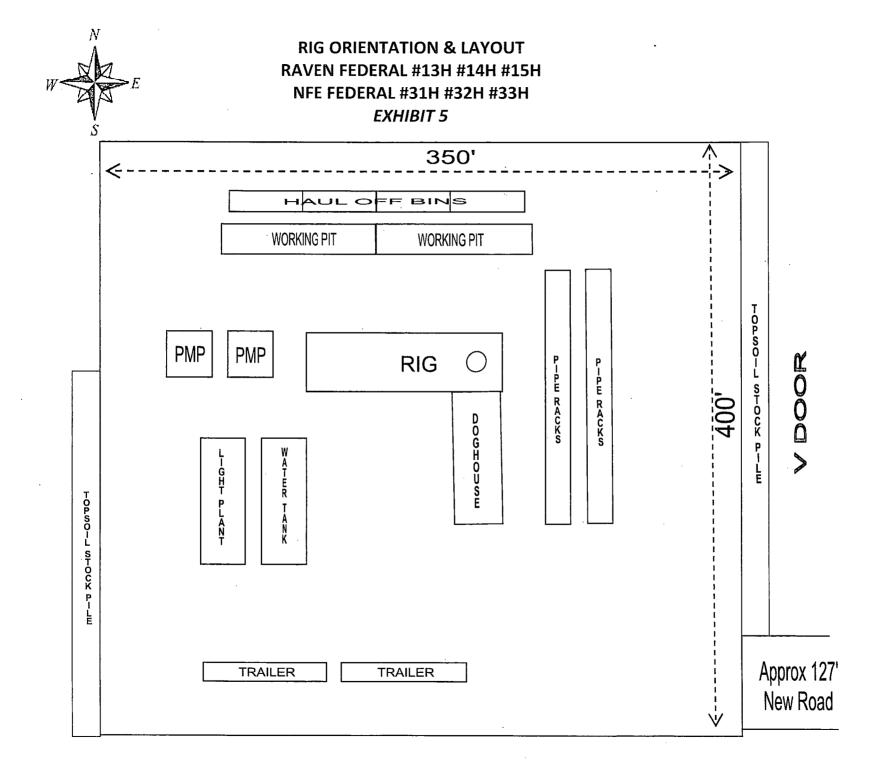

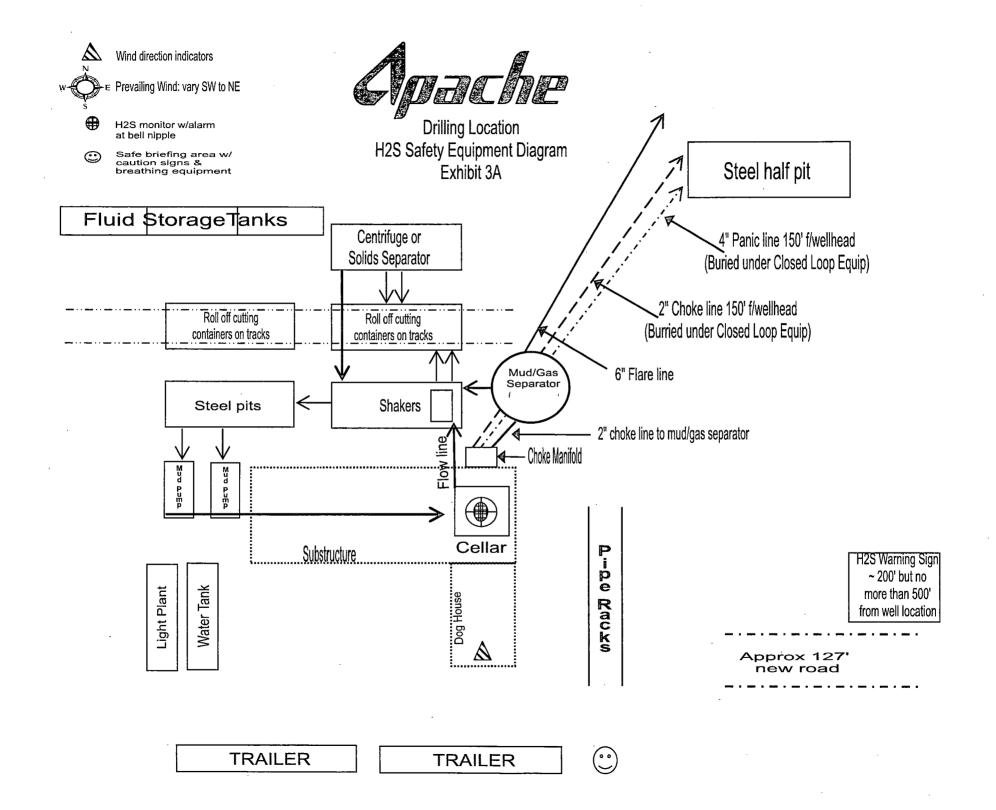

# HYDROGEN SULFIDE (H<sub>2</sub>S) DRILLING OPERATIONS PLAN

## Hydrogen Sulfide Training:

<u>All regularly assigned personnel, contracted or employed by Apache Corporation</u> will receive training from qualified instructor(s) in the following areas prior to commencing drilling possible hydrogen sulfide bearing formations in this well:

- The hazards and characteristics of hydrogen sulfide (H<sub>2</sub>S)
- The proper use and maintenance of personal protective equipment and life support systems.
- The proper use of H<sub>2</sub>S detectors, alarms, warning systems, briefing area, evacuation procedures & prevailing winds.
- The proper techniques for first aid and rescue procedures.

#### Supervisory personnel will be trained in the following areas:

- The effects of H<sub>2</sub>S on metal components. If high tensile tubulars are to be utilized, personnel will be trained in their special maintenance requirements.
- Corrective action & shut-in procedures when drilling or reworking a well & blowout prevention / well control procedures.
- The contents and requirements of the H<sub>2</sub>S Drilling Operations Plan

There will be an initial training session just prior to encountering a known or probable  $H_2S$  zone (within 3 days or 500') and weekly  $H_2S$  and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific  $H_2S$  Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received proper training.

# H<sub>2</sub>S SAFETY EQUIPMENT AND SYSTEMS:

#### Well Control Equipment that will be available & installed if H<sub>2</sub>S is encountered:

- Flare Line with electronic igniter or continuous pilot.
- Choke manifold with a minimum of one remote choke.
- Blind rams & pipe rams to accommodate all pipe sizes with properly sized closing unit.
- Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head & flare gun with flares

#### **Protective Equipment for Essential Personnel:**

• Mark II Survive-air 30 minute units located in dog house & at briefing areas, as indicated on wellsite diagram.

#### **H2S Dection and Monitoring Equipment:**

- Two portable H<sub>2</sub>S monitors positioned on location for best coverage & response. These units have warning lights & audible sirens when H<sub>2</sub>S levels of 20 ppm are reached.
- One portable H<sub>2</sub>S monitor positioned near flare line.

#### H2S Visual Warning Systems:

- Wind direction indicators are shown on wellsite diagram.
- Caution / Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used when appropriate. *"EXHIBIT 7"*

### Mud Program:

- The Mud Program has been designed to minimize the volume of H<sub>2</sub>S circulated to the surface. Proper mud weights, safe drilling practices & the use of H<sub>2</sub>S<sup>7</sup> scavengers will minimize hazards when penetrating H<sub>2</sub>S bearing zones.
- A mud-gas separator and H<sub>2</sub>S gas buster will be utilized as needed.

### Metallurgy:

- All drill strings, casing, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold & lines, & valves will be suitable for H<sub>2</sub>S service.
- $\bullet\,$  All elastomers used for packing & seals shall be  $H_2S$  trim.

### Communication:

• Cellular telephone and 2-way radio communications in company vehicles, rig floor and mud logging trailer.

# HYDROGEN SULFIDE (H<sub>2</sub>S) CONTINGENCY PLAN

# Assumed 100 ppm ROE = 3000'

100 ppm  $H_2S$  concentration shall trigger activation of this plan.

# **Emergency Procedures**

In the event of a release of gas containing H<sub>2</sub>S, the first responder(s) must

- Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- Evacuate any public places encompassed by the 100 ppm ROE.
- Be equipped with  $H_2S$  monitors and air packs in order to control the release.
- Use the "buddy system" to ensure no injuries occur during the response
- Take precautions to avoid personal injury during this operation.
- Contact operators and/or local officials to aid in operation. See list of phone numbers attached.
- Have received training in the :
  - $\circ$  Detection of H<sub>2</sub>S, and
  - Measures for protection against the gas,
  - Equipment used for protection and emergency response.

# Ignition of Gas source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO<sub>2</sub>). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever this is an ignition of the gas.

Ondracio					
Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H <sub>2</sub> S	1.189 Air = I	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO <sub>2</sub>	2.21 Air = I	2 ppm	N/A	1000 ppm

# Characteristics of H<sub>2</sub>S and SO<sub>2</sub>

# **Contacting Authorities**

Apache Corporation personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Apache's response must be in coordination with the State of New Mexico's *"Hazardous Materials Emergency Response Plan" (HMER).* 

# WELL CONTROL EMERGENCY RESPONSE PLAN

## I. <u>GENERAL PHILOSOPHY</u>

Our objective is to ensure that during an emergency, a predetermined procedure is followed so that prompt decisions can be made based on accurate information.

The best way to handle and emergency is with an experienced organization set up for the sole purpose of solving the problem. The *Well Control Emergency Response Team* was organized to handle dangerous & expensive well control problems. The *Team* is structured such that each individual can contribute the most from his area of expertise. Key decision-makers are determined prior to an emergency to avoid confusion about who is in charge.

If the well is flowing uncontrolled at the surface or subsurface, *The Emergency Response Team* will be mobilized. The *Team* is customized for the people currently on the Apache staff. Staff changes may require a change in the plan.

## II. EMERGENCY PROCEDURE ON DRILLING OR COMPLETION OPERATIONS

**A.** In the event of an emergency the *Drilling Foreman or Tool-Pusher* will immediately contact only one of the following starting with the first name listed:

Name	Office	Mobile	Home
Danny Laman – Drlg Superintendent	432-818-1022	432-634-0288	432-520-3528
Terry West – Drilling Engineer	432-818-1114	432-664-7254	
Bobby Smith – Drilling Manager	432-818-1020	432-556-7701	
Jeff Burt – EH&S Coordinator	4	432-631-9081	


\*\*This one phone call will free the Drilling Foreman to devote his full time to securing the safety of personnel & equipment. This call will initiate the process to mobilize the Well Control Emergency Response Team. Apache maintains an Emergency Telephone Conference Room in the Houston office. This room is available for us by the Permian Region. The room has 50 separate telephone lines.


- **B.** The Apache employee contacted by the Drilling Foreman will begin contacting the rest of the *Team*. If **Danny Laman** is out of contact, **Terry West** will be notified.
- **C.** If a member of the *Emergency Response Team* is away from the job, he must be available for call back. Telephone numbers should be left with secretaries or a key decision-maker.
- **D.** Apache's reporting procedure for spills or releases of oil or hazardous materials will be implemented when spills or releases have occurred or are probable.

· · · · · · · · · · · · · · · · · · ·
575-887-7551
575-396-3611
911
575-746-5050
575-885-2111
575-394-2111
575-397-9308
575-395-2221
575-396-2359
911
575-746-5050
575-885-2111
575-394-2112
575-397-9308
575-395-2221
575-396-2359
575-393-3612
575-393-6161

# **EMERGENCY RESPONSE NUMBERS:**

EXHIBIT #7

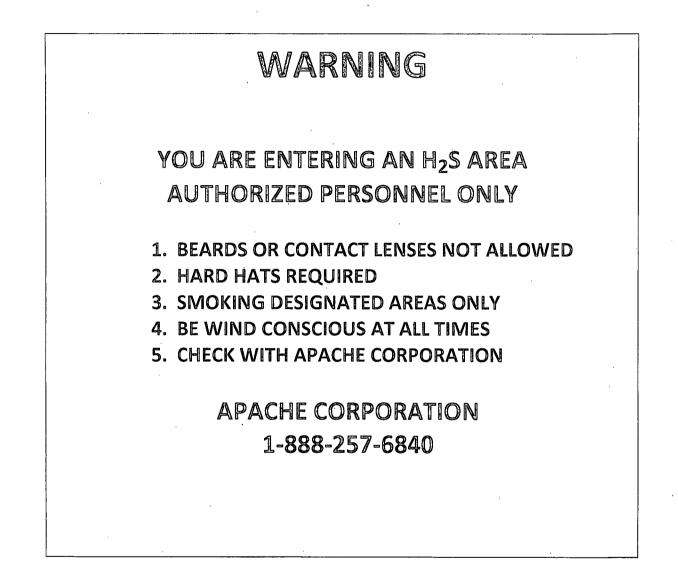

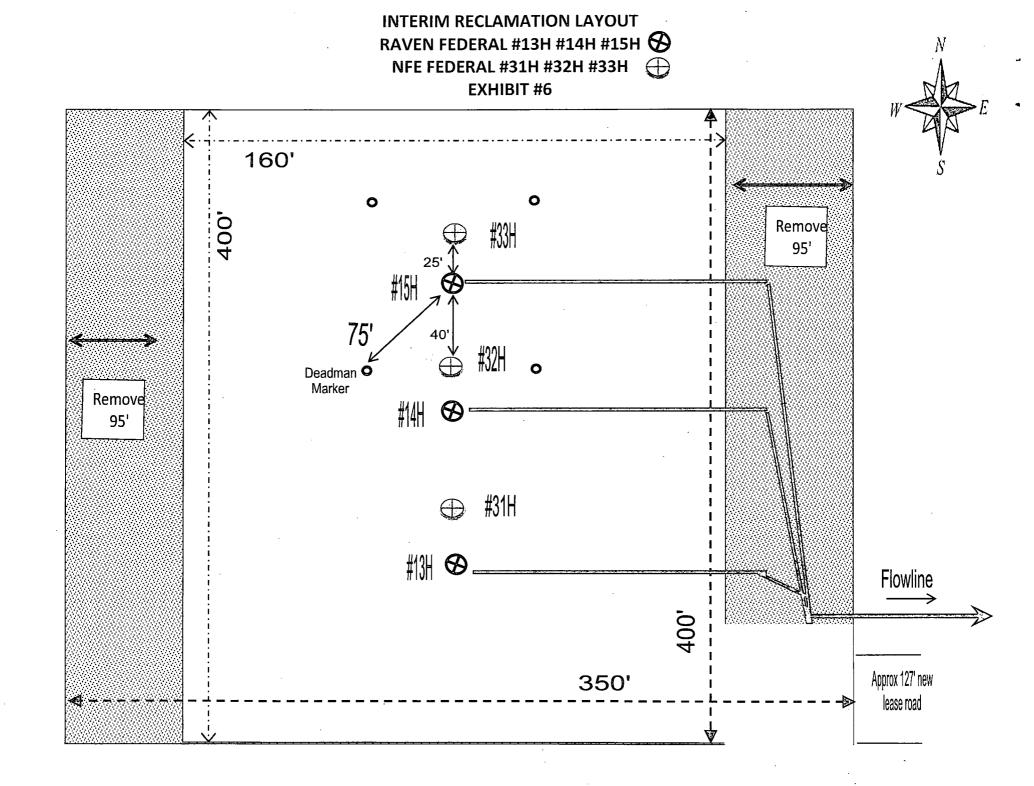



# SURFACE USE PLAN OF OPERATIONS

# NFE Federal #32H Lease #: SHL: NMLC – 029435A BHL: NMLC – 029435B SHL: 1495' FSL & 432' FEL UL: I SEC: 7 BHL: 1495' FSL & 330' FEL UL: I SEC: 8 T17S R31E Eddy County, NM

# **EXISTING ROADS**

- A. Proposed Well Site Location:
  - a. The well site & elevation plat for the proposed well are reflected on the well site layout (form C-102). Well staked by John West Surveying Company.
- B. Existing Roads
  - a. From the intersection of US Hwy #82 & CR #221 (Skelly), Go North approx 1.3 miles, turn Right, go Northeast approx 0.6 miles, turn Left, go East approx 0.6 miles, turn Right, go South approx 0.1 miles to road survey, follow road survey West approx 127' to location.
- C. Route Location
  - a. Approx 127' of new road is expected to be constructed. The existing lease road will be used to the extent possible. If a lease/access road needs to be constructed, all lease roads will be graded in compliance with BLM standards. See E (a).
- D. Existing Road Maintenance or Improvement Plan
  - a. *EXHIBIT 1* is a portion of a topo map showing the well & roads in the vicinity of the proposed location. The proposed well site & access route to the location are indicated in BLUE on *EXHIBIT 1*. Right of way using this proposed route will be requested if necessary.
  - b. Routing grading & maintenance of existing roads will be conducted as necessary to maintain their condition as long as any operations continue on this lease. Roads will be maintained according to specifications in "EXISTING ROADS Section E(a)" of this Surface Use Plan.
- E. Width, Max Grade, Turnout Ditches, Culverts, Cattle Guards, & Surface Equipment
  - a. All lease roads will be graded in compliance with BLM standards. All new & reconstructed roads will have a width & "crown design" (i.e. The max width of the driving surface will be 14'. The road will be crowned & ditched with a 2% slope from the tip of the crown to the edge of the driving surface. The ditches will be 1' deep with 3:1 slopes. The driving surface will be made of 6" rolled & compacted caliche.) If required, culverts and cattle guards will be set per BLM Specs.

#### LOCATION OF EXISTING WELLS

A. "EXHIBIT 2" indicates existing wells within a one mile radius of the proposed location.

#### LOCATION OF EXISTING AND/OR PROPOSED FACILITIES

- A. Existing production facilities are located at the Raven Federal Battery.
- B. New Facilities in the Event of Production

In the event well is productive, APACHE will install approx 130' of 6" & approx 2260' of 10" steel flow line, internal poly liner, externally wrapped with synergy, to the proposed Raven Federal Battery following existing lease roads. Pipeline will be applied for under ROW grant or sundry notice at a later date. (No pumping units will be used, fluid will be lifted with Electronic Submersible Pump.) If electricity is needed, power will be obtained from Central Valley Electric. Path & length will vary pending Central Valley Electric Coop evaluation. Central Valley Electric will apply for ROW for their power lines. *"SEE EXHIBIT 1"*.

C. Rehabilitation of Disturbed Areas Unnecessary for Production

Following the construction, those access areas required for continued production will be graded to provide drainage and minimize erosion. The areas unnecessary for use will be graded to blend in with the surrounding topography "SEE PLANS FOR RESTORATION OF THE SURFACE"

#### LOCATION AND TYPE OF WATER SUPPLY

- A. All water (fresh or otherwise) needed for the drilling and completion of this well will be purchased from a
- commercial source and trucked to the location via existing and/or proposed access roads. No water source wells will be drilled and no surface water will be utilized.

#### **CONSTRUCTION MATERIALS**

A. Materials

On-site caliche will be used for any required access road and/or well site pad. If necessary, caliche will be hauled from a BLM approved pit. No surface materials will be disturbed except those necessary for actual grading and construction of the drill site and access road.

#### METHODS FOR HANDLING WASTE DISPOSAL

A. Cuttings

Cuttings will be contained in roll off bins and disposed of hauled to a state approved disposal facility.

B. Drilling Fluids

Drilling fluids will be contained in steel pits, frac tanks and disposed at licensed disposal sites and/or will be cleaned and reused.

C. Produced Fluids

Water production will be contained in steel pits. Fluids may be cleaned and reused and/or disposed at a state approved facility. Hydrocarbon fluid or other fluids that may be produced during testing will be retained in test tanks until sold and hauled from site.

D. Salts

Salts remaining after completion will be picked up by supplier, including broken sacks.

E. Sewage

Current laws and regulations pertaining to the disposal of human waste will be complied with. A Port-a-John will be provided for the crews. This will be properly maintained during the drilling operations and removed upon completion of the well. Port-a-John will be cleaned out periodically.

· F. Garbage

Receptacles for garbage disposal during the drilling of this well will be provided and equipped to prevent scattering by wind, animals, etc. This waste will be hauled to an approved landfill site.

G. Cleanup of Well Site

Upon release of the drilling rig, the surface of the drilling pad will be graded to accommodate a completion rig if electric log analysis indicates potential productive zones. Reasonable cleanup will be performed prior to the final restoration of the site.

#### **ANCILLARY FACILITIES**

A. Upon completion, and/or testing of this well, rental tank facilities will be utilized until permanent storage is established. No camps, airstrips or staging are anticipated to be constructed.

#### WELLSITE LAYOUT

A. Rig Orientation and Layout

*"EXHIBIT 5 "* shows the dimensions of the well pad, closed loop system and the location of the major rig components. Only minor leveling of the well site will be required. No significant cuts or fills will be necessary.

B. Closed Loop System

A Closed Loop System will be used. Cuttings will be stored in steel roll off bins until they are hauled to a state approved disposal facility. A C-144 has been submitted to the appropriate OCD district office for approval. *"SEE EXHIBIT 4"* 

C. Location of Access Road

"SEE EXHIBIT 1 & John West Surveying well site pad location plat"

#### PLANS FOR SURFACE RECLAMATION

A. Reserve Pit Cleanup

Not applicable. Closed Loop System will be used.

B. Restoration Plans (Production Developed) "SEE EXHIBIT 6"

Those areas not required for production will be graded & recontoured to match surrounding topography and surfacing material will be removed. Topsoil from the soil pile will be loaded over the disturbed area to the extent possible and will be seeded. Subsurface soils from East side of the pad will be spread over the downsized areas for recontouring & then topsoil will be spread back over these areas. The portion of the site required for production will be graded to minimize erosion and provide access during inclement conditions. This may need to be modified in certain circumstances to prevent inundation of the locations' pad and surface facilities. Due to the topography of the area, no problems are anticipated and no erosion or other detrimental effects are expected as a result of this operation. Following depletion and abandonment of the site, restoration procedures will be those that follow under *"ITEM C"* of *"PLANS FOR SURFACE RECLAMATION"*.

#### C. Restoration Plans (No Production Developed)

With no production developed, the entire surface disturbed by construction of the well site will be restored as closely as possible to its pre-operation appearance, including re-vegetation. Surfacing material will be removed and the site will be recontoured to match surrounding topography with provisions made to minimize erosion. The topsoil, as available, shall be placed in a uniform layer and seeded according to the Bureau of Land Management's stipulations. Due to the topography of the area, no problems are anticipated and no erosion or other detrimental effects are expected as a result of this operation.

D. Rehabilitation's Timetable

Upon completion of drilling operations, the initial cleanup of the site will be performed as soon as weather and site conditions allow economic execution of the work.

#### SURFACE OWNERSHIP

A. Surface Ownership of drill site & access routes:

United Stated Department of the Interior c/o Bureau of Land Management 620 E. Greene St. Carlsbad, NM 88220

#### **OTHER INFORMATION**

A. Terrain, Soil, Vegetation, Wildlife, Surface Use

Slightly rolling hills; Topsoil is made up of caliche and sand; Plants are sparse, primarily grasses, some mesquite & shinnery oak; No wildlife observed but likely that deer, rabbits, coyotes & rodents traverse the area, which are all typical of the semi-arid desert land; Land primarily used for grazing.

B. Surface Water

There are no ponds, lakes, streams or rivers within several miles of the proposed location.

C. Water Wells

No known water wells within 1-1/2 miles of the proposed location.

D. Residences and Buildings

No dwellings within the immediate vicinity of the proposed location.

E. Historical Sites

None observed.

F. Archeological Resources

An Apache agrees to contribute funding to the Permian Basin Cultural Resource Fund in lieu of being required to conduct a Class III survey for cultural resources associated with this project. Any location or construction conflicts will be resolved before construction begins.

- G. Onsite: Onsite by John Fast, BLM Specialist.
- H. Well Signs: Well signs will be incompliance per State requirements and specifications.
- I. Drilling Contractor: Pending

#### **OPERATOR'S FIELD REPRESENTATIVE**

(Field personnel responsible for compliance with development plan for surface use)

#### DRILLING

Danny Laman Drilling Superintendent 303 Veterans Airpark Ln #3000 Midland, TX 79705 432-818-1022 - office 432-634-0288 - cell

#### PRODUCTION

Travis Carnes Sr. Production Foreman 2350 W. Marland Blvd Hobbs, NM 88240 575-393-2144 – w 432-425-2962 – c

# PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Apache Corporation
LEASE NO.:	NMLC-029435B
WELL NAME & NO.:	NFE Federal 32H
SURFACE HOLE FOOTAGE:	1495' FSL & 0432' FEL
<b>BOTTOM HOLE FOOTAGE</b>	1495' FSL & 0330' FEL Sec. 08, T. 17 S., R 31 E.
LOCATION:	Section 07, T. 17 S., R 31 E., NMPM
COUNTY:	Eddy County, New Mexico

# **TABLE OF CONTENTS**

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

General Provisions		
Permit Expiration		
Archaeology, Paleontology, and Historical Sites		
Noxious Weeds		
🔀 Special Requirements		
Berming		
Flowline not permitted/apply for with ROW		
Lesser Prairie-Chicken Timing Stipulations		
Ground-level Abandoned Well Marker		
Construction		
Notification		
Topsoil		
Closed Loop System		
Federal Mineral Material Pits		
Well Pads		
Roads		
Road Section Diagram		
🔀 Drilling		
Cement Requirements		
H2S Requirements		
Logging Requirements		
Waste Material and Fluids		
Production (Post Drilling)		
Well Structures & Facilities		
Pipelines		
Electric Lines		
Interim Reclamation		
Final Abandonment & Reclamation		

# I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

# **II. PERMIT EXPIRATION**

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

# **III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES**

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

# **IV. NOXIOUS WEEDS**

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

# V. SPECIAL REQUIREMENT(S)

# Berming

The east side of the well pad shall be bermed to prevent water from flowing across the well pad.

# **Buried Flowline not permitted** The buried flowline shall be applied for by ROW

#### Timing Limitation Stipulation / Condition of Approval for lesser prairie-chicken:

Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 feet from the source of the noise.

<u>**Ground-level Abandoned Well Marker to avoid raptor perching**</u>: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

# VI. CONSTRUCTION

# A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-6235 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

## B. TOPSOIL

The operator shall stockpile the topsoil in a low profile manner in order to prevent wind/water erosion of the topsoil. The topsoil to be stripped is approximately 4 inches in depth. The topsoil will be used for interim and final reclamation.

## C. CLOSED LOOP SYSTEM

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

## D. FEDERAL MINERAL MATERIALS PIT

Payment shall be made to the BLM prior to removal of any federal mineral materials. Call the Carlsbad Field Office at (575) 234-5972.

## E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

## F. ON LEASE ACCESS ROADS

## Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed twenty (20) feet.

#### Surfacing

Ē

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

#### Crowning


Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.

## Ditching

Ditching shall be required on both sides of the road.

#### Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

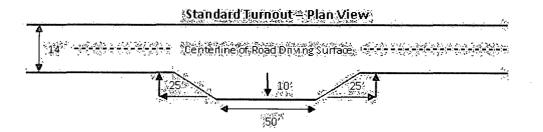


#### Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outsloping and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

#### **Cross Section of a Typical Lead-off Ditch**

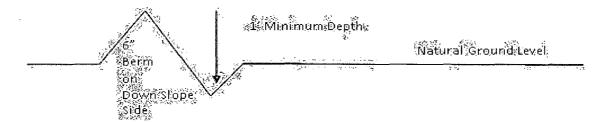

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

#### Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

400 foot road with 4% road slope: 400' + 100' = 200' lead-off ditch interval 4%

#### **Culvert Installations**

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

#### Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

#### **Fence Requirement**


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

#### **Public Access**

i,

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

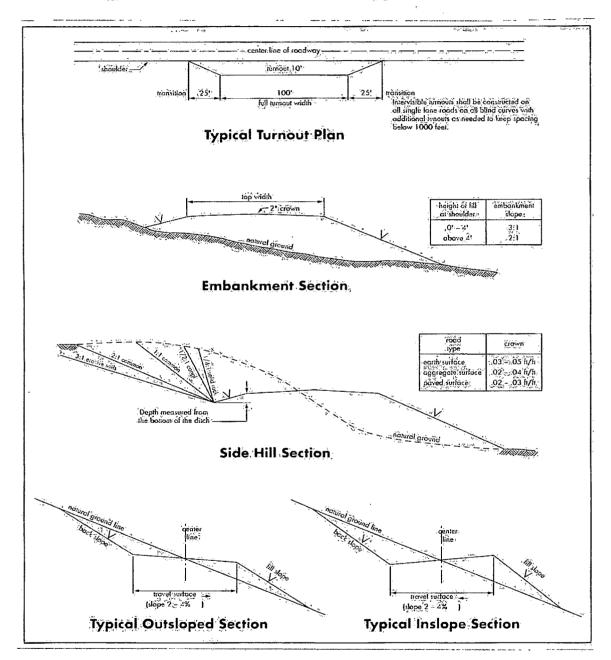



# VII. DRILLING

## A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

#### **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (575) 361-2822

- 1. A Hydrogen Sulfide (H2S) Drilling Plan shall be activated 500 feet prior to drilling into the Grayburg formation. As a result, the Hydrogen Sulfide area must meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.
- Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval. If the drilling rig is removed without approval – an Incident of Non-Compliance will be written and will be a "Major" violation.
- 3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works is located, this does not include the dog house or stairway area.
- 4. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

## B. CASING

.

Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.).

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time prior to drilling out for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. DURING THIS WOC TIME, NO DRILL PIPE, ETC. SHALL BE RUN IN THE HOLE. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. IF OPERATOR DOES NOT HAVE THE WELL SPECIFIC CEMENT DETAILS ONSITE PRIOR TO PUMPING THE CEMENT FOR EACH CASING STRING, THE WOC WILL BE 30 HOURS. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Possibility for water and brine flows in the Artesia and Salado Groups. Possible lost circulation in the Grayburg and San Andres formations.

- 1. The 13-3/8 inch surface casing shall be set at approximately 450 feet (in a competent bed below the Magenta Dolomite, which is a Member of the Rustler, and if salt is encountered, set casing at least 25 feet above the salt) and cemented to the surface.
  - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
  - b. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.
  - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.

d. If cement falls back, remedial cementing will be done prior to drilling out that string.

## Contingency 9-5/8 inch intermediate casing:

. . .

# Intermediate casing shall be kept fluid filled while running into hole to meet BLM minimum collapse requirements.

2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:

Cement to surface. If cement does not circulate see B.1.a, c-d above.

# Centralizers required on horizontal leg, must be type for horizontal service and a minimum of one every other joint.

3. The minimum required fill of cement behind the 7 inch production casing is:

Cement to surface. If cement does not circulate, contact the appropriate BLM office.

- 4. Cement not required on the 4-1/2" casing. Packer system being used.
- 5. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

## C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.

2. NOTE: FLEX HOSE SHALL BE COVERED WITH STAINLESS STEEL <u>ARMOUR COVER.</u> Variance approved to use flex line from BOP to choke manifold. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs). 3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 2000 (2M) psi (Operator installing a 3M testing to 2,000 psi).

15

- a. For surface casing only: If the BOP/BOPE is to be tested against casing, the wait on cement (WOC) time for that casing is to be met (see WOC statement at start of casing section). Independent service company required.
- 4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
  - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
  - b. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (18 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
  - c. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock.
  - d. The results of the test shall be reported to the appropriate BLM office.
  - e. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
  - f. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.

## D. DRILL STEM TEST

P3

.

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

## E. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

JAM 082113

# VIII. PRODUCTION (POST DRILLING)

## A. WELL STRUCTURES & FACILITIES

#### Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

#### **Containment Structures**

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

#### **Painting Requirement**

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color Shale Green, Munsell Soil Color Chart # 5Y 4/2

## B. PIPELINES (Apply by sundry or ROW)

## C. ELECTRIC LINES (not applied for in APD)

# IX. INTERIM RECLAMATION

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

Within six (6) months of well completion, operators should work with BLM surface management specialists (Jim Amos: 575-234-5909) to devise the best strategies to reduce the size of the location. Interim reclamation should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche that is free of contaminants may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

All disturbed areas after they have been satisfactorily prepared need to be reseeded with the seed mixture provided below.

Upon completion of interim reclamation, the operator shall submit a Sundry Notices and Reports on Wells, Subsequent Report of Reclamation (Form 3160-5).

## X. FINAL ABANDONMENT & RECLAMATION

12 A

At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land are restored.

Earthwork for final reclamation must be completed within six (6) months of well plugging. All pads, pits, facility locations and roads must be reclaimed to a satisfactory revegetated, safe, and stable condition, unless an agreement is made with the landowner or BLM to keep the road and/or pad intact.

After all disturbed areas have been satisfactorily prepared, these areas need to be revegetated with the seed mixture provided below. Seeding should be accomplished by drilling on the contour whenever practical or by other approved methods. Seeding may need to be repeated until revegetation is successful, as determined by the BLM.

Operators shall contact a BLM surface protection specialist prior to surface abandonment operations for site specific objectives (Jim Amos: 575-234-5909).

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well.

#### Seed Mixture for LPC Sand/Shinnery Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)\* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed\* per acre:

Species	<u>lb/acre</u>
Plains Bristlegrass	5lbs/A
Sand Bluestem	5lbs/A
Little Bluestem	3lbs/A
Big Bluestem	6lbs/A
Plains Coreopsis	2lbs/A
Sand Dropseed	1lbs/A

\*Pounds of pure live seed:

\$2

Pounds of seed  $\mathbf{x}$  percent purity  $\mathbf{x}$  percent germination = pounds pure live seed