
ř					
				FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010	
SUNDRY NOTICES AND REPORTS ON WELLS				5. Lease Serial No. NMLC029339A	
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.			6. If Indian, Allottee or Tribe Name		
SUBMIT IN TRIPLICATE - Other instructions on reverse side.				7. If Unit or CA/Agreement, Name and/or No.	
1. Type of Well 🔲 Gas Well 🔲 Other				8. Well Name and No. JACKSON A 28	
2. Name of Operator Contact: LESLIE M GARVIS BURNETT OIL CO., INC. E-Mail: Igarvis@burnettoil.com				9. API Well No. 30-015-34766	<u></u>
3a. Address BURNETT PLAZA - SUITE 1500 801 CHERRY STREE TPHUNITFORESWOOPELAT, 832676102 FORT WORTH, TX 76102				10. Field and Pool, or Exploratory CEDAR LAKE GLORIETA YESO	
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)				11. County or Parish, and State	
Sec 13 T17S R30E 990FNL 1650FEL				EDDY COUNTY COUNTY, NM	
12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION		······································	- <u> </u>		
Notice of Intent		Deepen .	-	on (Start/Resume)	UWater Shut-Off
Subsequent Report	Alter Casing Casing Repair	Fracture Treat New Construction	Reclama		Well Integrity
Final Abandonment Notice	Change Plans			rily Abandon Site Facility Dia m/Security Plan	Ste Facility Diagra
13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontaly, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleted. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.) Burnett Oil is requesting a change to the previously approved BOP/Choke Manifold Diagram for this deepening. Please see the attached revised diagram.					
Accepted for record NMOCD 197 101 FEB 2 5 2014 SEE ATTACHED FOR CONDITIONS OF APPROVAL					
14. I hereby certify that the foregoing is true and correct. Electronic Submission #235899 verified by the BLM Well Information System					
For BURNETT OIL CO., INC., sent to the Carlsbad Committed to AFMSS for processing by JERRY BLAKLEY on 02/19/2014 () Name(Printed/Typed) LESLIE M GARVIS Title REGULATORY COORDINATOR					
Name(Printed/Typed) LESLIE M GARVIS Title					
Signature (Electronic S	ubmission)	Date 02/19/20	A A	PPRUVEL	
THIS SPACE FOR FEDERAL OR STATE OFFICE USE					
Approved By Conditions of approval, if any, are attached certify that the applicant holds legal or equ which would entitle the applicant to condu		BUREAU OF LAVO MANAGEMENT CARLSBAD/FIELD OFFICE			
Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.					

1

** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED ** OPERATOR-SUBMITTED **

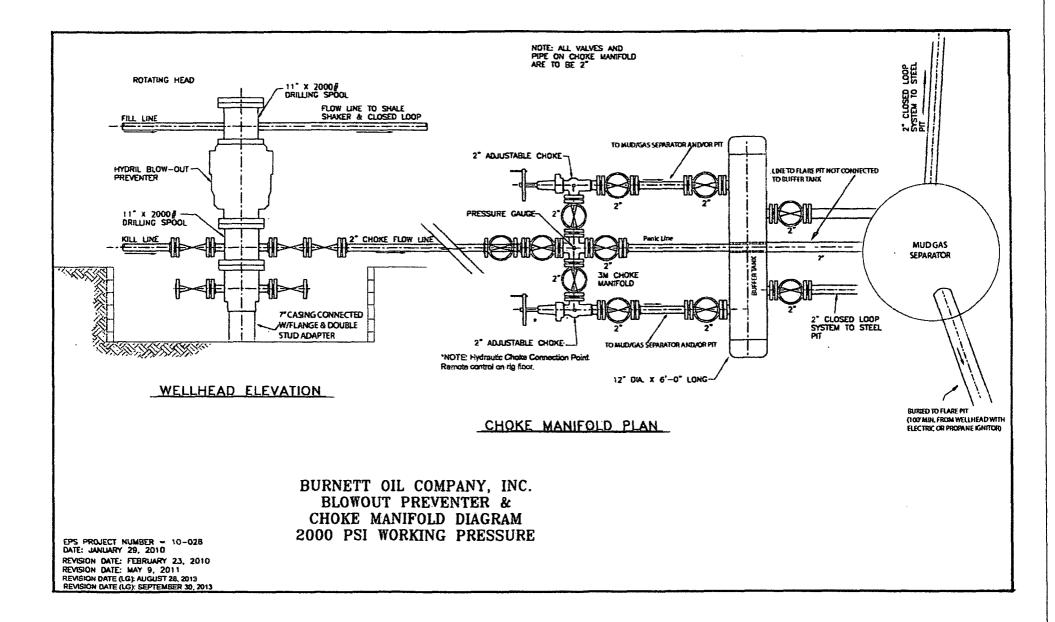

÷,

Jackson A 28 30-015-34766 Burnet Oil Co. February 19, 2014 Conditions of Approval

- 1. Work to be complete within 180 days.
- 2. Surface disturbance beyond the existing pad requires prior approval.
- 3. Closed loop system to be used.
- 4. H2S monitoring equipment should be onsite for personnel protection from surrounding oil operations. Operator should not encounter H2S while deepening.
- 5. BOP to be tested to 2000 psi based on BHP expected.
- 6. Variance for stand-off of less than 0.422" is approved due to NMOCD classifying the formations in this area as the Yeso group.
- 7. Cement on liner shall tie back to liner top, if this is not achieved contact appropriate BLM office. When plugged, cement plug will be required across this tie back and across squeezed perforations.
- 8. Test casing as per Onshore Order 2.III.B.1.h.
- 9. Subsequent sundry detailing work and current well test data are to be submitted when work is complete.

JAM 021914

14

Ŧ