

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONSERVATION
OCD Artesia
MAR 02 2015

FORM APPROVED
OMB No. 1004-0137
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
*Do not use this form for proposals to drill or to re-enter and
Abandoned well. Use Form 3160-3 (APD) for such proposals*

5. Lease Serial No.
NMLC-029395A
6. If Indian, Allottee or Tribe Name

SUBMIT IN TRIPLICATE – Other instructions on page 2.

7. If Unit of CA/Agreement, Name and/or No.

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

8. Well Name and No.
TONY FEDERAL 60 <308738>

2. Name of Operator
APACHE CORPORATION <873>

9. API Well No.
30-015-42626

3. Address
**303 VETERANS AIRPARK LN, #3000
MIDLAND, TX 79705**

3b. Phone No. (include area Code)
432-818-1000 / 432-818-1168

10. Field and Pool or Exploratory Area
CEDAR LAKE; GLORIETA-YESO <96831>

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

11. County or Parish, State

LOT NO. 2, SEC 19, T 17 S, R 31 E, 2310' FNL & 725' FWL

EDDY COUNTY, NM

12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input checked="" type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	DRILLING OPS: CASING
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	& CEMENT REPORT

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directional or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attached the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

Bond No: **BLM-CO-1463** 10/17/2014 **SPUD;**

10/17 DRLG SURFACE 91' – 330' TD; NOTIFIED BOBBY W/BLM OF CSG & CMT

SURFACE CSG 13,375 HOLE 17.5', H40, 48# SET 330'; FC @ 288'; RAN 5 CENTRALIZERS;

CMT: 200 SX; (14.4 PPG, 1.55 YLD)

252 SX; (14.8 PPG, 1.33 YLD)

CIRC 167 SX;

SURFACE CSG PRESSURE TEST 1200 PSI/30 MIN – OK

REPORT CONTINUED ON PAGE 2.

14. I hereby certify that the foregoing is true and correct.

Name (Printed/Typed)

MICHELLE COOPER

Title **DRILLING TECH**

Signature

Michelle Cooper

Date **2/5/2015**


THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

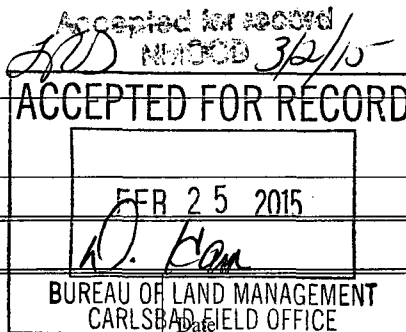

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

TONY FEDERAL 60 End of Well Sundry

10/18-10/22 DRILL OUT CMT & SHOE TRACK 270'-330'; START INTERMEDIATE HOLE; DRLG 330' – 3959' TD

10/22 INTERMEDIATE CSG 8.625" HOLE 11", J55, 32# CSG SET 3459'; FC @ 3413'; RAN 26 CENTRALIZERS;
LEAD: 1000 SX; (12.4 PPG, 2.02 YLD)
TAIL: 350 SX; (14.8 PPG, 1.32 YLD)
CIRC 343 SX

INTERMEDIATE CSG PRESSURE TEST 2000 PSI/ 30 MIN- OK

10/24-27 DRILL CEMENT & SHOE TRACK F/ 3411'- T/ 3459'; START PRODUCTION HOLE; DRLG F/3459'-6360' TD

10/28 SCHLUMBERGER LOGGERS

10/29 PRODUCTION CSG 5.5"; HOLE 7.875", J55, 17# CSG SET 6360'; FC @ 6314';
RAN 54 CENTRALIZERS;
LEAD: 460 SX; (12.5 PPG, 2.0 YLD)
TAIL: 540 SX; (14.9 PPG, 1.31 YLD)
CIRC 169 SX
PRODUCTION CSG PRESSURE TEST 2500 PSI/ 30 MIN- OK

10/29/2014 RIG RELEASED