

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Artesia

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.*5. Lease Serial No.
NMNM0467932

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.
WD MCINTYRE E 89. API Well No.
30-015-31787-00-S110. Field and Pool, or Exploratory
LOCO HILLS11. County or Parish, and State
EDDY COUNTY, NM**SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

COG OPERATING LLC

Contact: KANICIA CASTILLO

E-Mail: kcastillo@concho.com

3a. Address

ONE CONCHO CENTER 600 W ILLINOIS AVENUE
MIDLAND, TX 79701

3b. Phone No. (include area code)

Ph: 432-685-4332

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 20 T17S R30E NESW 1650FSL 2250FWL

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input checked="" type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleate horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleation in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

COG Operating LLC respectfully request to recompleate to the San Andres as follows.

**SEE ATTACHED FOR
CONDITIONS OF APPROVAL**

MCINTYRE, WD E #8

We are going to set a CIBP at 4302? (100? above the YESO perfs) w/ 40? of CMT on top of the plug to have our PBTD @ 4262?. We plan to have our bottom perfs from 3835?-4242?. Ideally, we like to have 200?-300? of rathole below our bottom perfs to give our bottom hole assembly room and prevent tubing from getting stuck with sand. In addition to having desired rathole space, this gives COG the option to re-enter the Glorietta/Yeso formation at later time.

Equipment Pull Procedure
? MIRU WSU, NU BOP
? Unset pump and POOH with rod

**NM OIL CONSERVATION
ARTESIA DISTRICT**

JUL 29 2015

Accepted for record
NM OCD 7/30/15
RECEIVED

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #309559 verified by the BLM Well Information System

For COG OPERATING LLC, sent to the Carlsbad

Committed to AFMSS for processing by JENNIFER SANCHEZ on 07/21/2015 (15JAS0426SE)

Name (Printed/Typed) KANICIA CASTILLO

Title PREPARER

Signature (Electronic Submission)

Date 07/17/2015

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

Title

JUL 21 2015

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

BUREAU OF LAND MANAGEMENT
CARLSBAD FIELD OFFICE

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

Additional data for EC transaction #309559 that would not fit on the form

32. Additional remarks, continued

- ? Tag for fill with tubing and POOH and bail if needed
- ? PU scraper and scrape down to 4400?
- ? POOH with tubing LD
- ? RU Wireline
- ? Set CIBP @ 4302?
- ? Wireline truck dump 40? Class C cement of top of CIBP
- ? Tag cement plug to verify depth of 4262?
- ? Pull up 4? to circulate hole clean with fresh water, and displace w/ 2% KCL and 1% packer corrosion inhibitor.
- ? Test Casing to 4,200 psi (max pressure for frac) and report back to engineering if the pressure holds.
- ? Secure wellbore
- ? RDMO WSU

Tentative Recompletion Procedure

- ? NU frac valve, and test casing to 4200 psi
- ? Rig up wireline.
- ? RIH w/ perforating guns and perforate San Andres Zone from 3835?-4242?, w/ 3 spf, 120? phasing, 66 holes.
- ? Acidize w/ 1500 gals of 15% HCl.
- ? Frac zone w/ 244,200 # of sand.
- ? Record ISIP and FG, Get 5, 10, 15 min SIP
- ? Rig up Wireline
- ? RIH w/ perforating guns and perforate San Andres Zone from 3207?-3742?, w/ 3 spf, 120? phasing, 66 holes.
- ? Acidize w/ 1500 gals of 15% HCl.
- ? Frac zone w/ 244,200 # of sand.
- ? Record ISIP and FG, Get 5, 10, 15 min SIP
- ? Clean out fill to new PBTD @ 4262?
- ? RIH with production tubing and locate intake at 4440?.
- ? Set TAC @ 3100?
- ? RIH w/ rods and pump.
- ? RDMO rig.

COG Operating LLC

Lease & Well # W D MCINTYRE E #008


30-015-31787

Eddy County, NM

Sec 20 T17S R30E NESW 1650 FSL 2250 FWL

Spud: 7/9/2001

Elevation - 3,634

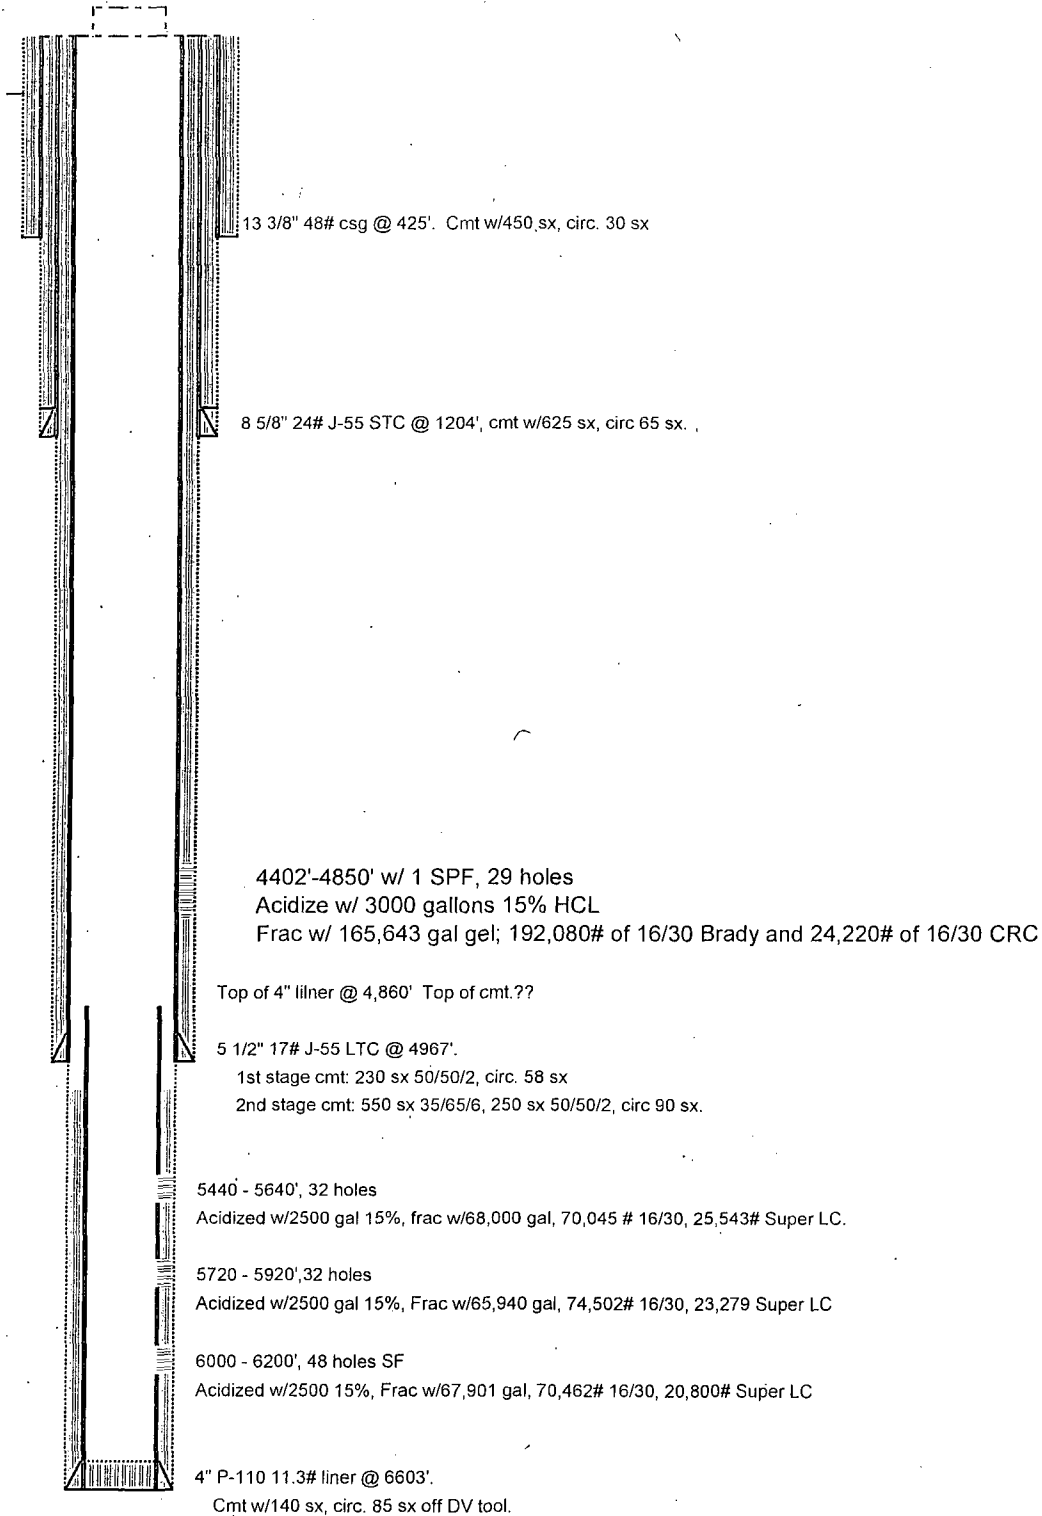

COG Operating LLC

Lease & Well # W D MCINTYRE E #008


30-015-31787

Eddy County, NM

Sec 20 T17S R30E NESW 1650 FSL 2250 FWL

Spud: 7/9/2001

Elevation - 3,634

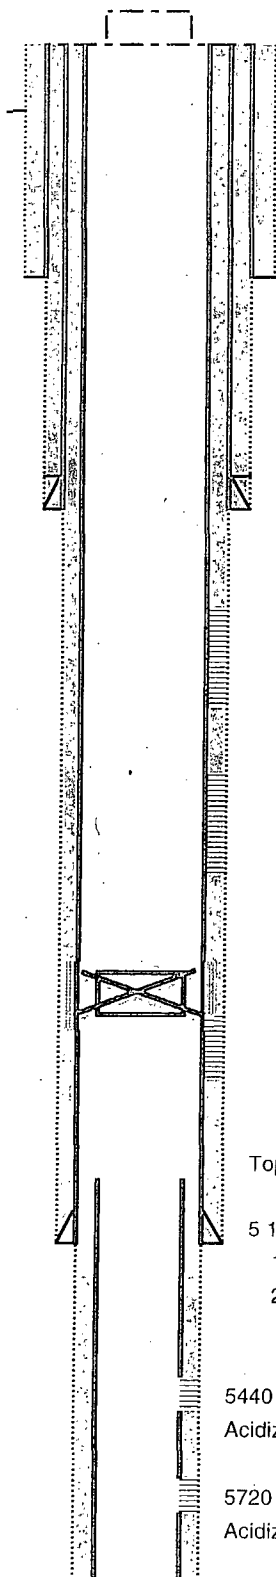

13 3/8" 48# csg @ 425'. Cmt w/450 sx, circ. 30 sx

8 5/8" 24# J-55 STC @ 1204', cmt w/625 sx, circ 65 sx.

3207'-3742'

Acidize w/ 3000 gallons 15% HCL
Frac zone w/ 244,200 # of sand.

3835'-4242'

Acidize w/ 3000 gallons 15% HCL
Frac zone w/ 244,200 # of sand.

PBTD" @ 4262'

CIBP @ 4302
w/ 40' of CMT

4402'-4850' w/ 1 SPF, 29 holes

Acidize w/ 3000 gallons 15% HCL

Frac w/ 165,643 gal gel; 192,080# of 16/30 Brady and 24,220# of 16/30

Top of 4" lilner @ 4,860' Top of cmt.??

5 1/2" 17# J-55 LTC @ 4967'.

1st stage cmt: 230 sx 50/50/2, circ. 58 sx


2nd stage cmt: 550 sx 35/65/6, 250 sx 50/50/2, circ 90 sx.

5440 - 5640', 32 holes

Acidized w/2500 gal 15%, frac w/68,000 gal, 70,045 # 16/30, 25,543# Super LC.

5720 - 5920', 32 holes

Acidized w/2500 gal 15%, Frac w/65,940 gal, 74,502# 16/30, 23,279 Super LC



6000 - 6200', 48 holes SF

Acidized w/2500 15%, Frac w/67,901 gal, 70,462# 16/30, 20,800# Super LC

4" P-110 11.3# liner @ 6603'

Cmt w/140 sx, circ. 85 sx off DV tool.

COG Operating LLC

Lease & Well #

McIntyre A West #8

Spud: 6/4/80

Elevation - 3630.5'

KB -

8 5/8" 24# @ 1598', 800 sx cmt, circ.

not correct

DV tool - 3504'

Blinebry Upper

5300'-5550', 54 holes

181,250# of 16/30 proppant

Blinebry Middle

5650'-5900', 54 holes

181,250# of 16/30 proppant

CIBP @ 6500'

CIBP w/ 40' of CMT 6460'

Abo

6632 -84, 6698 - 6710, 2 spf

Acidized w/200 gal 15% HCL

Fraced w/31,000 gal 3% gelled acid, 68,000 # sd

6824 - 6859, 2 spf

Acidized w/1,000 gal 15% HCL

Fraced w/35,000 gal 3% gelled HCL

PBTD - 6864'

1s stage: 1010 sx CL H, circ ?

2nd stage: 1407 sx 50/50 poz C, circ 305 sx

4 1/2" 10.5# csg @ 6899'

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-31787	² Pool Code 28509	³ Pool Name Grayburg Jackson; SR-Q-G-SA
⁴ Property Code 302576	⁵ Property Name W D McIntyre E	⁶ Well Number 8
⁷ OGRID No. 229137	⁸ Operator Name COG OPERATING LLC	⁹ Elevation 3634


¹⁰ Surface Location

UL or lot no. K	Section 20	Township 17S	Range 30E	Lot Idn	Feet from the 1650	North/South line South	Feet from the 2250	East/West line West	County Eddy
---------------------------	----------------------	------------------------	---------------------	---------	------------------------------	----------------------------------	------------------------------	-------------------------------	-----------------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A
NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

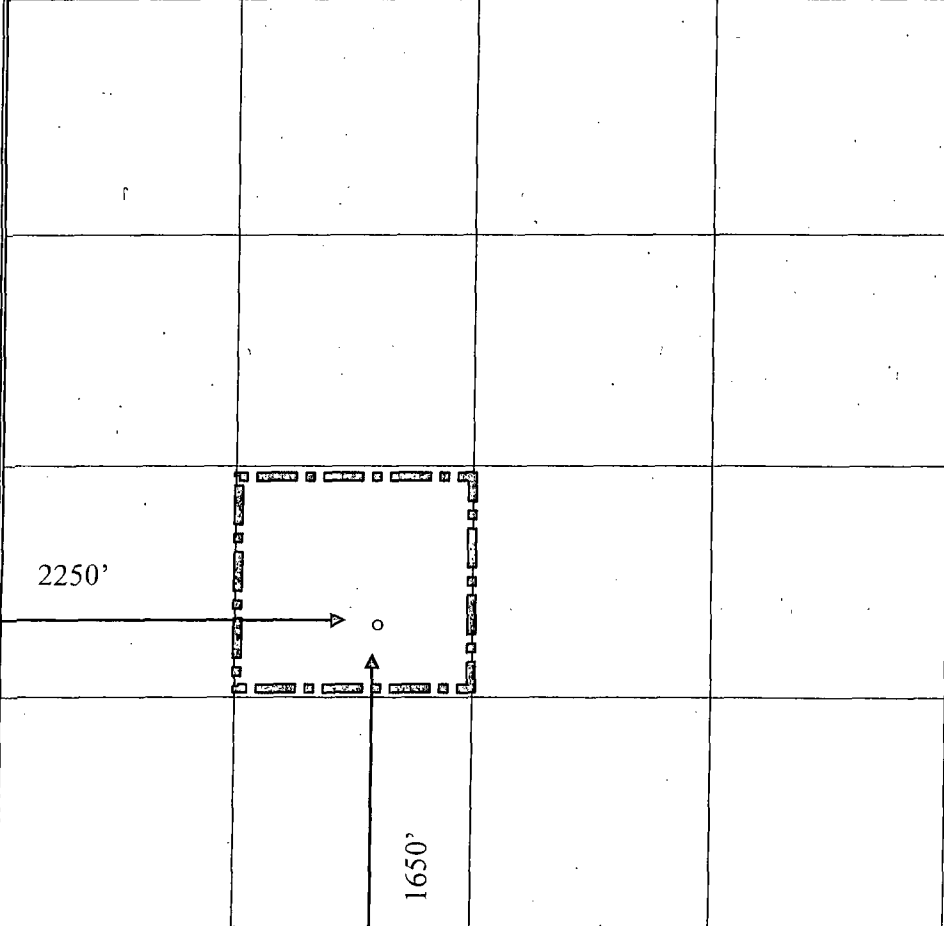	<p>¹⁷ OPERATOR CERTIFICATION <i>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</i></p> <p>Signature Kanicia Carrillo</p> <p>Printed Name Regulatory Analyst</p> <p>Title and E-mail Address 07/17/15</p> <p>Date</p>
	<p>¹⁸ SURVEYOR CERTIFICATION <i>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</i></p> <p>Referred Original Plat</p> <p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p>
	<p>Certificate Number</p>

District I
1625 N. French Dr., Hobbs, NM 88240

District II
1301 W. Grand Avenue, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised June 10, 2003
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-015-31787	² Pool Code 96718	³ Pool Name Loco Hills; Glorieta-Yeso
⁴ Property Code 302576	⁵ Property Name W D McIntyre E	
⁷ OGRID No. 229137	⁸ Operator Name COG OPERATING LLC	
		⁶ Well Number 8
		⁹ Elevation 3634

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	20	17S	30E		1650	South	2250	West	Eddy

¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
--	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	<p>¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>K. Carrillo</i></p> <p>Signature Kanicia Carrillo</p> <p>Printed Name Regulatory Analyst</p> <p>Title and E-mail Address 07/17/15</p> <p>Date</p>
	<p>¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Referred Original Plat</p> <p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p>
	<p>Certificate Number</p>

W D McIntyre E 8
30-015-31787
COG Operating, LLC.
July 21, 2015
Conditions of Approval

Notify BLM at 575-361-2822 a minimum of 24 hours prior to commencing work.

Work to be completed by October 21, 2015.

1. Operator shall set a CIBP at 4,302' and place 40' Class C cement on top. Tag required.

Note: At a later date, the CIBP at 4,302' and 40' of cement must be drilled out in order to place a plug across the 5-1/2" casing shoe and liner top. The Glorieta formation must also be abandoned properly at a later date.

2. Must conduct a casing integrity test before perforating and fracturing. Submit results to BLM. The CIT is to be performed on the production casing to max treating pressure. Notify BLM if test fails.
3. Before casing or a liner is added or replaced, prior BLM approval of the design is required. Use notice of intent Form 3160-5.
4. Surface disturbance beyond the originally approved pad must have prior approval.
5. Closed loop system required.
6. All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of work over operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area. Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.
7. Operator to have H2S monitoring equipment on location.
8. A minimum of a **2000 (2M)** BOP to be used. All blowout preventer (BOP) and related equipment (BOPE) shall comply with reasonable well control requirements. A two ram system with a blind ram and a pipe ram designed for the size of the work string shall be adequate. Tapered work strings will require an additional pipe ram. The manifold shall comply with Onshore Oil and Gas Order #2 Attachment I (2M Diagrams of Choke Manifold Equipment). The accumulator system shall have an immediately available power source to close the rams and retain 200 psi above pre-charge. The pre-charge test shall follow requirements in Onshore Order #2.

9. Subsequent sundry required detailing work done and completion report for the new formations. Operator to include well bore schematic of current well condition when work is complete.

10. See attached for general requirements.

JAM 072115

BUREAU OF LAND MANAGEMENT
Carlsbad Field Office
620 East Greene Street
Carlsbad, New Mexico 88220
575-234-5972

Permanent Abandonment of Production Zone Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within ninety (90) days from this approval.

If you are unable to plug back the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged back. Failure to do so will result in enforcement action.

2. **Notification:** Contact the appropriate BLM office at least 24 hours prior to the commencing of any plug back operations. For wells in Eddy County, call 575-361-2822. For wells in Lea County, call 575-393-3612

3. **Blowout Preventers:** A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. **Mud Requirement:** Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water. Minimum nine (9) pounds per gallon.

5. **Cement Requirement:** Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth.**

Unless otherwise specified in the approved procedure, the cement plug shall consist of either **Neat Class "C"**, for up to 7,500 feet of depth or **Neat Class "H"**, for deeper than 7,500 feet plugs.

6. **Subsequent Plug back Reporting:** Within 30 days after plug back work is completed, file one original and three copies of the Subsequent Report, Form 3160-5 to BLM. The report should give in detail the manner in which the plug back work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date work was completed.**

7. Trash: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.