
	DE	··· UNITED STATE PARTMENT OF THE I	NTERIOR ON CONSER	VATION	OMB N	APPROVED 10. 1004-0135 : July 31, 2010
(August 2007) DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT OIL CONSERVATION SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to re-entempting 4 2016				5. Lease Serial No. NMNM19423		
Do not use this form for proposals to drill or to re-enter and 4 2016 abandoned well. Use form 3160-3 (APD) for such proposals.					6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on reverse RECEIVED					7. If Unit or CA/Agreement, Name and/or N	
1. Type of Well □ Oil Well ⊠ Gas Well □ Other					8. Well Name and No. WHITE CITY 14 1	
2. Name of Operator Contact: DAVID A EYLER CIMAREX ENERGY COMPANY OF CO-Mail: DEYLER@MILAGRO-RES.COM					9. API Well No. 30-015-24865-00-S1	
3a. Address 202 S CHEYENNE A TULSA, OK 74103.4	E 1000	3b. Phone No. (include area code) Ph: 432-687-3033	e) 10. Field and Pool, or Exploratory WHITE CITY		Exploratory	
<u>, , , , , , , , , , , , , , , , , , , </u>	, R., M., or Survey Description	ו ו)			11. County or Parish, and State	
Sec 14 T25S R26E S	50FNL 1650FEL		EDDY COUN		Y, NM	
12. CHEC	CK APPR	ROPRIATE BOX(ES) TO	D INDICATE NATURE OF N	NOTICE, RI	EPORT, OR OTHE	R DATA
TYPE OF SUBMISSI	ION	TYPE OF ACTION				
Notice of Intent		C Acidize	🗋 Deepen	Product	ion (Start/Resume)	□ Water Shut-O
_		Alter Casing	Fracture Treat	🗖 Reclam	ation	Well Integrity
Subsequent Report		🗖 Casing Repair	New Construction	🛛 Recomp	olete	Other
Final Abandonment Notice	Change Plans Convert to Injection	🛛 Plug and Abandon	Temporarily Abandon Water Disposal			
determined that the site is t 1) SET 4-1/2" CIBP @ 2) PUMP 50 SXS.CM 3) PUMP 50 SXS.CM	d. Final Ab ready for fi @10 ,70 0'; <u>41. @ 9.3</u> 41. @ 8.6	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 100-8.957'(7"CSG SHOE 84'-8.504'(T/WC): WOC	sults in a multiple completion or rece ed only after all requirements, includ 0,72(0,790'-10,525'(T/STWN); CIR <u>4-1/2"I NR TOP): WOC X TA</u> X TAG CMT, PLUG,	mpletion in a r ing reclamation	new interval, a Form 316 n, have been completed,	and the operator has ,
determined that the site is t 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CI 7) PUMP 85 SXS CM 8) MIX X CIRC. TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC	d. Final Ab ready for fi ? 721 @10 ;700 '; <u>11. @ 9.3</u> 11. @ 8,6 11. @ 9.3 11. @ 450 SURF. 25 DFF WEL CEDURE SPOSAL,	andonment Notices shall be fil nal inspection.) (PUMP 25 SXS.CMT.@1 00'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1 ,859' , 1909' 210'-1,809'(T/DLWR.,B// D'- 270'(T/ANHY.,13-3/8 "C SXS.CMT.@ 63-37 LHEAD 3' B.G.L.; WELD	sults in a multiple completion or rece ed only after all requirements, includ 0,72(<u>0,790'-10,525'(T/STWN); CIR 4-1/2"I NR TOP): WOC X TA</u> X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG: ANHY.7"CSG.STUB,9-5/8"SH SG.SHOE); WOC X TAG CM Sur F ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. I7. SEE ATTACH	OE); TAG. IT. PLUG. S. X INSTAL IED FOI	iew interval, a Form 316 , have been completed, (for 9300' & Su Contract Plug S L DRY HOLE MARI ANK AND HAUL C	4 so - Surf 450 - Surf (High Karst)
determined that the site is t 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CM 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT C DURING THIS PROC THE REQUIRED DIS	d. Final Ab ready for fi ? 721 @10; 70 0'; <u>11.</u> @ 9.3 11. @ 8,6 11. @ 5,5 SG. @ +/- MT. @ 250 SURF. 25 DFF WEL CEDURE CEDURE SPOSAL, CEDURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 00'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1 ,859' .1909' 210'-1,809'(T/DLWR.,B// 2'-270'(T/ANHY.,13-3/8"C SXS.CMT.@62-3'- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission #	sults in a multiple completion or rece ed only after all requirements, includ 0,72(<u>0,70</u> 0'-10,525'(T/STWN); CIR <u>4-1/2"I NR TOP): WOC X TA</u> X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG: ANHY 7"CSG STUB,9-5/8"SH SG SHOE); WOC X TAG CM Sur F ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. I7. SEE ATTACH CONDITION! 308687 verified by the BLM Wel	C.WELL. G.CMT. G.CMT. OE): TAG. IT. PLUG. X. INSTAL A STEEL T IED FOF S.OF AF	iew interval, a Form 316 have been completed, (for 9300 + 50 Contract Plags L DRY HOLE MARI ANK AND HAUL C PROVAL	4 so - Surf 4 so - Surf (High Karst KER.
determined that the site is to 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CM 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the form	d. Final Ab ready for fi ? 721 @10; 70 0'; <u>11.</u> @ 9.3 11. @ 8,6 11. @ 5,5 SG. @ +/- MT. @ 250 SURF. 25 DFF WEL CEDURE CEDURE SPOSAL, CEDURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 600'-8.957'(7"CSG.SHOE 84'-8.504'(T/WC); WOC 17-5.387'(T/B.S.); WOC 1.959'.1909' 210'-1.809'(T/DLWR.B// 2'-270'(T/ANHY13-3/8"C SXS.CMT.@62-3'- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro-	sults in a multiple completion or rece ed only after all requirements, includ 0,72(0,700'-10,525'(T/STWN); CIR 4-1/2"I NR TOP): WOC X TA X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG: ANHY 7"CSG.STUB,9-5/8"SH SG.SHOE); WOC X TAG CM SEG SHOE); WOC X TAG CM ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W I SEE ATTACH CONDITION:	ompletion in a r ing reclamation G CMT G CMT OE); TAG IT. PLUG S. X INSTAL A STEEL T IED FOI SOF AP II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 have been completed, (for 9300 + 50 Contract Plags L DRY HOLE MARI ANK AND HAUL C PROVAL	4 SO - Surf 4 SO - Surf (High Karst
determined that the site is t 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CM 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the fo	d. Final Ab ready for fi ? 721 @10 ;70 0'; <u>11</u> @ 9.3 11. @ 8,6 11. @ 5,5 SG. @ +/- MT. @ 25, SURF. 25 DFF WEL CEDURE SPOSAL, EDURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 600'-8.957'(7"CSG.SHOE 84'-8.504'(T/WC); WOC 17-5.387'(T/B.S.); WOC 1.959'. 1909' 210'-1.809'(T/DLWR.B// 2'-270'(T/ANHY13-3/8"C SXS.CMT.@62-3'- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro-	sults in a multiple completion or rece ed only after all requirements, includ 0,72(0,700'-10,525'(T/STWN); CIR 4-1/2"LNR TOP): WOC X TA X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG. SG SHOE); WOC X TAG CM SG SHOE); WOC X TAG CM SM F ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. 7. SEE ATTACH CONDITION: 308687 verified by the BLM Well RGY COMPANY OF CO, sent to cessing by CATHY QUEEN on the sent sent sent sent sent sent sent sen	ompletion in a r ing reclamation G CMT G CMT OE); TAG IT. PLUG S. X INSTAL A STEEL T IED FOI SOF AP II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 h, have been completed, (For 9300' + So Contine Plug S L DRY HOLE MARI ANK AND HAUL C PROVAL System ad 5000549SE) Accepted	450 - Surf 450 - Surf (High Karst KER. ONTENTS TO
determined that the site is 1 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the formation in the second secon	d. Final Ab ready for fi ? 721 @10 ;70 0'; <u>11</u> @ 9.3 11. @ 8,6 11. @ 5,5 SG. @ +/- MT. @ 25, SURF. 25 DFF WEL CEDURE SPOSAL, EDURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 200'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1. 959' , 1909' 210'-1,809'(T/DLWRB// D'-279'(T/ANHY13-3/8"C SXS.CMT.@ 63-37- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro EYLER Submission)	sults in a multiple completion or rece ed only after all requirements, includ (0,72(0,700'-10,525'(T/STWN); CIR 4-1/2"L NR TOP): WOC X TA X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG. X TAG CMT. PLUG. ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. D. SEE ATTACH CONDITION: 308687 verified by the BLM Well RGY COMPANY OF CO, sent t cessing by CATHY QUEEN on t Title AGENT Date 07/09/21	C.WELL. G.CMT. G.CMT. G.CMT. C.WELL. G.CMT. OE); TAG. TAG. TAG. S. X INSTAL A STEEL T IED FOI SOF AP II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 h, have been completed, (For 9300' + So Combine Plug S L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCOPIED NMC	10-4 shall be filed once and the operator has 2 450 - Suff (High Karst KER. ONTENTS TO) 1/15/16 for record
determined that the site is 1 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the formation in the second secon	d. Final Ab ready for fi ? 721 @10; 70 0'; 11. @ 9.3 11. @ 8,6 11. @ 45,5 SG. @ +/- MT. @ 45,0 SURF. 25 DFF WEL CEDURE SPOSAL, CEDURE SPOSAL, CEDURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 200'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1. 959' , 1909' 210'-1,809'(T/DLWRB// D'-279'(T/ANHY13-3/8"C SXS.CMT.@ 63-37- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro EYLER Submission)	sults in a multiple completion or rece ed only after all requirements, includ (0,72(0,700'-10,525'(T/STWN); CIR 4-1/2"LINE TOP): WOC X TA X TAG CMT. PLUG: X TAG CMT. PLUG: X TAG CMT. PLUG: ANHY 7"CSG STUB,9-5/8"SH SG SHOE); WOC X TAG CM SG SHOE); WOC X TAG CM ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. 7. SEE ATTACH CONDITION! 308687 verified by the BLM Wel RGY COMPANY OF CO, sent to cessing by CATHY QUEEN on C Title AGENT	ompletion in a r ing reclamation G CMT_Pe OE); TAG IT. PLUG. S. X INSTAL A STEEL T HED FOF SOF AF SOF AF II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 h, have been completed, (F + 9300 + SC Combine Plags L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCEPTED NMO SE	450 - Surf 450 - Surf (High Karst KER. ONTENTS TO
determined that the site is in 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the for Name (<i>Printed/Typed</i>) D Signature (E	d. Final Ab ready for fi ? 701 20700'; 10,700'; 11, @ 9,3 17, @ 8,6 17, @ 4,6 SURF, 25 SG, @ +/- MT, @ 2,6 SURF, 25 OFF WEL CEDURE SPOSAL, CEDURE SPOSAL, COURE SPOSAL, COURE SPOSAL, COURE CEDURE COURE SPOSAL, COURE COURE COURE COURE COURE COURE COURE COURE COURE COURE COURE	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 00'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1 ,859' . 1909' 210'-1,809'(T/DLWR.,B// 210'-1,809'(T/DLWR.,B// 210'-1,809'(T/DLWR.,B// 2270'(T/ANHY.,13-3/8"C SXS.CMT.@62-3+ LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro EYLER Submission) THIS SPACE FC	sults in a multiple completion or rece ed only after all requirements, includ (0,72(9,700'-10,525'(T/STWN); CIR 4-1/2"I NR TOP): WOC X TA X TAG CMT. PLUG. X TAG CMT. PLUG. ANHY 7"CSG.STUB,9-5/8"SH SG.SHOE); WOC X TAG CM ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. 7. SEE ATTACI CONDITION! 308687 verified by the BLM Well RGY COMPANY OF CO, sent t is cessing by CATHY QUEEN on of Title AGENT Date 07/09/2 DR FEDERAL OR STATE	C.WELL. G.CMT. G.CMT. C.WELL. G.CMT. OE); TAG. IT. PLUG. S. X INSTAL A STEEL T IED FOR SOF AP II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 h, have been completed, (F + 9300 + SC Combine Plags L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCEPTED NMO SE	10-4 shall be filed once and the operator has 2 450 - Suff (High Karst KER. ONTENTS TO) 1/15/16 for record
determined that the site is in 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC. TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the for Name (<i>Printed/Typed</i>) D Signature (E	d. Final Ab ready for fi ? ? ? ? ? 1 0 ? 70 1 1 0 1 1 1 0 1 1 1 1 0 1 1 1 1 1 1 1 1 1 1	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 600'-8.957'(7"CSG.SHOE 84'-8.504'(T/WC); WOC 1.9591.1909'(T/DLWR.B// 210'-1.809'(T/DLWR.B// 210'-220'(T/ANHY.13-3/8'C 210'-220'	sults in a multiple completion or rece ed only after all requirements, includ (0,72(0.700'-10,525'(T/STWN); CIR 4-1/2"I NR TOP): WOC X TA X TAG CMT. PLUG: X TAG CMT. PLUG: ANHY 7"CSG STUB,9-5/8"SH SG SHOE); WOC X TAG CM ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. 7. SEE ATTACH CONDITION! 308687 verified by the BLM Wel RGY COMPANY OF CO, sent to cessing by CATHY QUEEN on Title AGENT Date 07/09/21 OR FEDERAL OR STATE	ompletion in a r ing reclamation G CMT_Pe OE); TAG IT. PLUG. S. X INSTAL A STEEL T HED FOF SOF AF SOF AF II Information o the Carlsba 07/16/2015 (1	iew interval, a Form 316 h, have been completed, (F + 9300 + SC Combine Plags L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCEPTED NMO SE	10-4 shall be filed once and the operator has 2 450 - Suff (High Karst KER. ONTENTS TO 0 1/15/16 for record
determined that the site is is 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC. TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the for <u>Name (Printed/Typed)</u> <u>Signature</u> (E <u>Signature</u>) Conditions of approval, if any, a certify that the applicant holds by which would entitle the applicant Title 18 U.S.C. Section 1001 an	d. Final Ab ready for fi [9, 721] @10,700'; AT. @ 9,3 AT. @ 8,6 AT. @ 9,3 AT. @ 450 SURF. 25 DFF WEL CEDURE SPOSAL, CEDURE SPOSAL, COURE SPOSAL, COURE COURE SPOSAL, COURE COU	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 600'-8.957'(7"CSG.SHOE 84'-8.504'(T/WC); WOC 1.9592.1909' 210'-1.809'(T/DLWR.,B// 0'-270'(T/ANHY.,13-3/8"C SXS.CMT.@63-37- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro EYLER Submission) THIS SPACE FC 4. Approval of this notice does itable title to those rights in the ct operations thereon. U.S.C. Section 1212, make it a	sults in a multiple completion or rece ed only after all requirements, includ (0,72(0.700'-10,525'(T/STWN); CIR 4-1/2"I NR TOP): WOC X TA X TAG CMT. PLUG: X TAG CMT. PLUG: ANHY 7"CSG STUB,9-5/8"SH SG SHOE); WOC X TAG CM ON STEEL PLATE TO CSGS CLOSED-LOOP SYSTEM W. 7. SEE ATTACH CONDITION! 308687 verified by the BLM Wel RGY COMPANY OF CO, sent to cessing by CATHY QUEEN on Title AGENT Date 07/09/21 OR FEDERAL OR STATE	C.WELL. G.CMT_Pe OE); TAG IT. PLUG. S. X INSTAL A STEEL T HED FOR SOF AP II Information o the Carlsba 07/16/2015 (1 015 OFFICE US	iew interval, a Form 316 h, have been completed, (for 9300' + Su Combine Plugs L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCOPTO NMO SE	12 450-Surf (High Karst KER. ONTENTS TO 1/15/16 for record CD Date 1/15
determined that the site is is 1) SET 4-1/2" CIBP (2) PUMP 50 SXS CM 3) PUMP 50 SXS CM 4) PUMP 45 SXS CM 5) CUT X PULL 7" CS 6) PUMP 130 SXS CT 7) PUMP 85 SXS CM 8) MIX X CIRC: TO S 9) DIG OUT X CUT O DURING THIS PROC THE REQUIRED DIS RECLAMATION PROC <u>ATTACHED</u> 14. I hereby certify that the for Name (<i>Printed/Typed</i>) D Signature (E Mathematical States of the applicant holds here the same factor of the same factor of the same factor of the applicant holds here the applicant holds here the applicant holds here the applicant holds here the same factor of the same	d. Final Ab ready for fi ?? 721 010;700'; 11. @ 9.3 11. @ 8,6 11. @ 5,5 SG. @ +/- MT. @ 2,6 SURF. 25 DFF WEL CEDURE POSAL, CEDURE POSAL, EDURE COURE POSAL, COURE POSAL, COURE COURE POSAL, COURE COURE POSAL, COURE COURE POSAL, COURE CO	andonment Notices shall be fil nal inspection.) PUMP 25 SXS.CMT.@1 100'-8.957'(7"CSG.SHOE 84'-8,504'(T/WC); WOC 37'-5,387'(T/B.S.); WOC -1, 859' . 1909' 210'-1,809'(T/DLWR.B// 210'-1,809'(T/DLWR.B// 2270'(T/ANHY13-3/8"C SXS.CMT.@62-3'- LHEAD 3' B.G.L.; WELD WE PLAN TO USE THE PER OCD RULE 19.15.1 true and correct. Electronic Submission # For CIMAREX ENE mmitted to AFMSS for pro EYLER Submission) THIS SPACE FC 1. Approval of this notice does itable title to those rights in the ct operations thereon. U.S.C. Section 1212, make it a tatements or representations as	sults in a multiple completion or rece ed only after all requirements, includ (0,72(C.WELL. G.CMT_Pe G.WELL. G.CMT_Pe OE); TAG IT. PLUG. S. X INSTAL A STEEL T HED FOR SOF AP II Information o the Carlson 07/16/2015 (1 015 OFFICE US E FG willfully to ma	iew interval, a Form 316 h, have been completed, (for 9300' + Su Combine Plug S L DRY HOLE MARI ANK AND HAUL C PROVAL System ad SCQ0549SE) ACCOPION NMC SE 19 ke to any department or	30-4 shall be filed once and the operator has 12 450 - Surf($14igh Karsf(Ker, Ker, Marsf(Ker, Marsf(Ker, Marsf(Ker, Marsf(Ker, Marsf(Marsf(Ker, Marsf(Ker, Marsf(Marsf(Ker, Marsf(Ker, Marsf(Ke$

· · ·

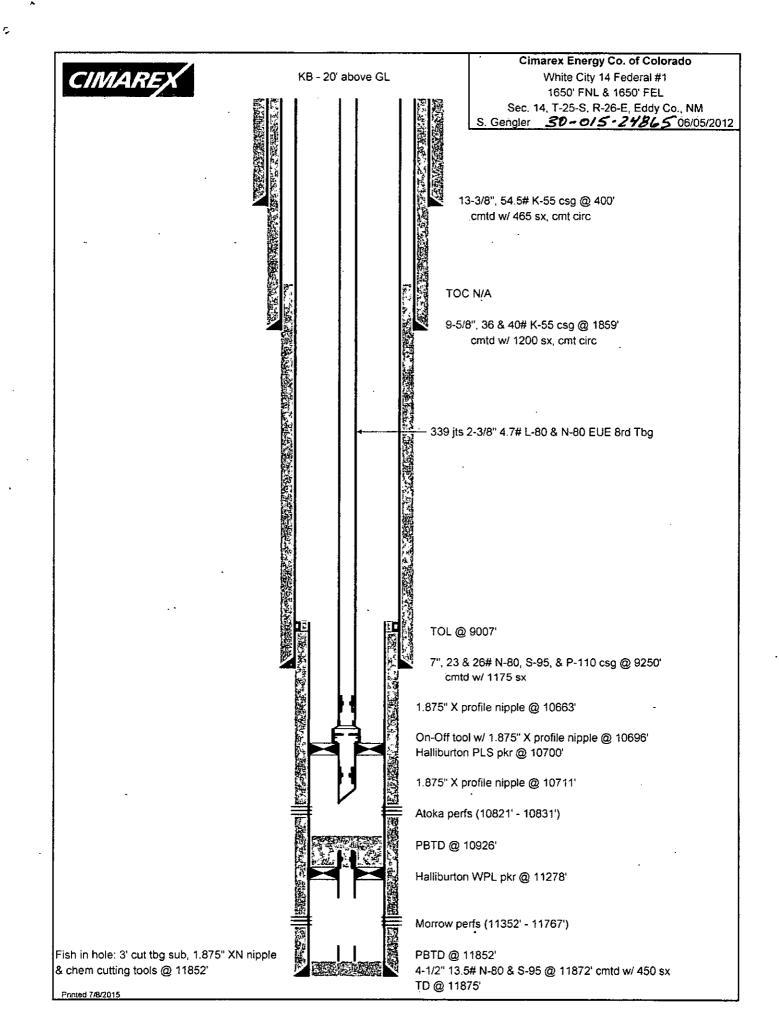

Cimarex Energy Co. of Colorado CIMAREX KB - 20' above GL White City 14 Federal #1 1650' FNL & 1650' FEL Sec. 14, T-25-S, R-26-E. Eddy Co., NM S. Gengler 30-015-14865 CIRC. 25 5×5.0 -105-5 Combine Phas 13-3/8", 54.5# K-55 csg @ 400' cmtd w/ 465 sx, cmt circ Aump 85 3×5.0. 450'- 270'- MC PXA High Cave/Karst NUD 1909 TOC N/A - OUT X PHILL 7"056-C 1959 9-5/8", 36 & 40# K-55 csg @ 1859' cmtd w/ 1200 sx, cmt circ Amp 130 5K5. @ 2210 -1809 - M6 2xA T/ ANHY ~ 320' NUD B/ANH + ~ 2160 T/DIWR.~1900' T/ B.S ~ 5462' Pump 45 5×50 5537 - 5387- MG t/wc. ~ 8594' PXR T/ STUN. ~10575 SD Pump 50 5x50 8684'- 8204-1746 Perfat 9300 + 592 (Toc-unknown) Pump 50 5×5. @ 9300'-8957 - MG pxxtmid TOL @ 9007 7", 23 & 26# N-80, S-95. & P-110 csg @ 9250" cmtd w/ 1175 sx TOC ? PXA NUD Pump. 25 5×50 10700'-10525' 10,721 -SET 412" CD8P@ 10700! Atoka perfs (10821' - 10831') PBTD @ 10926' Halliburton WPL pkr @ 11278' Morrow perfs (11352' - 11767') Fish in hole: 3' cut tbg sub, 1.875" XN nipple PBTD @ 11852' 4-1/2" 13.5# N-80 & S-95 @ 11872' cmtd w/ 450 sx & chem cutting tools @ 11852 TD @ 11875' DAE 07/09/15 Printed 7/8/2015

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>ninety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification</u>: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

z.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged.</u>

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.



United States Department of the Interior

BUREAU OF LAND MANAGEMENT Carlsbad Field Office .620 E. Greene St. Carlsbad, New Mexico 88220-6292 www.bim.gov/nm



In Reply Refer To: 1310

Reclamation Objectives and Procedures

Reclamation Objective: Oil and gas development is one of many uses of the public lands and resources. While development may have a short- or long-term effect on the land, successful reclamation can ensure the effect is not permanent. During the life of the development, all disturbed areas not needed for active support of production operations should undergo "interim" reclamation in order to minimize the environmental impacts of development on other resources and uses. At final abandonment, well locations, production facilities, and access roads must undergo "final" reclamation so that the character and productivity of the land and water are restored.

The long-term objective of final reclamation is to set the course for eventual ecosystem restoration, including the restoration of the natural vegetation community, hydrology, and wildlife habitats. In most cases this means returning the land to a condition approximating or equal to that which existed prior to the disturbance. The final goal of reclamation is to restore the character of the land and water to its predisturbance condition. The operator is generally not responsible for achieving full ecological restoration of the site. Instead, the operator must achieve the short-term stability, visual, hydrological, and productivity objectives of the surface management agency and take steps necessary to ensure that long-term objectives will be reached through natural processes.

To achieve these objectives, remove any and all contaminants, scrap/trash, equipment, pipelines and powerlines. Strip and remove caliche, contour the location to blend with the surrounding landscape, redistribute the native soils, provide erosion control as needed, rip and seed as specified in the original APD COA. This will apply to well pads, facilities, and access roads. Barricade access road at the starting point. If reserve pits have not reclaimed due to salts or other contaminants, submit a plan for approval, as to how you propose to provide adequate restoration of the pit area.

- The Application for Permit to Drill or Reenter (APD, Form 3160-3), Surface Use Plan of Operations must include adequate measures for stabilization and reclamation of disturbed lands. Oil and Gas operators must plan for reclamation, both interim and final, up front in the APD process as per Onshore Oil and Gas Order No. 1.
- 2. For wells and/or access roads not having an approved plan, or an inadequate plan for surface reclamation (either interim or final reclamation), the operator must submit a proposal describing the procedures for reclamation. For interim reclamation, the appropriate time for submittal would be when filing the Well Completion or Recompletion Report and Log (Form 3160-4). For final reclamation, the appropriate time for submittal would be when filing the Notice of Intent, or the Subsequent Report of Abandonment, Sundry Notices and Reports on Wells (Form 3160-5). Interim reclamation is to be completed within 6 months of well completion, and final reclamation is to be completed within 6 months.
- 3. The operator must file a Subsequent Report Plug and Abandonment (Form 3160-5) following the plugging of a well.

- 4. Previous instruction had you waiting for a BLM specialist to inspect the location and provide you with reclamation requirements. If you have an approved Surface Use Plan of Operation and/or an approved Sundry Notice, you are free to proceed with reclamation as per approved APD. If you have issues or concerns, contact a BLM specialist to assist you. It would be in your interest to have a BLM specialist look at the location and access road prior to the removal of reclamation equipment to ensure that it meets BLM objectives. Upon conclusion submit a Form 3160-5, Subsequent Report of Reclamation. This will prompt a specialist to inspect the location to verify work was completed as per approved plans.
- 5. The approved Subsequent Report of Reclamation will be your notice that the native soils, contour and seedbed have been reestablished. If the BLM objectives have not been met the operator will be notified and corrective actions may be required.
- 6. It is the responsibility of the operator to monitor these locations and/or access roads until such time as the operator feels that the BLM objective has been met. If after two growing seasons the location and/or access roads are not showing the potential for successful revegetation, additional actions may be needed. When you feel the BLM objectives have been met submit a Final Abandonment Notice (FAN), Form 3160-5, stating that all reclamation requirements have been achieved and the location and/or access road is ready for a final abandonment inspection.
- 7. At this time the BLM specialist will inspect the location and/or access road. If the native soils and contour have been restored, and the revegetation is successful, the FAN will be approved, releasing the operator of any further liability of the location and/or access road. If the location and/or access road have not achieved the objective, you will be notified as to additional work needed or additional time being needed to achieve the objective.

If there are any questions, please feel free to contact any of the following specialists:

Jim Amos

Э

Supervisory Petroleum Engineering Tech 575-234-5909, 575-361-2648 (Cell)

Arthur Arias Environmental Protection Specialist 575-234-6230

Linda Denniston Environmental Protection Specialist 575-234-5974

Henryetta Price Environmental Protection Specialist 575-234-5951

Dara Glass Environmental Protection Specialist 575-234-5924

Shelly Tucker Environmental Protection Specialist 575-234-5979