	ULD Artesia							
Form 3160-5 (August 2007)	UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT				* *		FORM APPROVED OMB NO. 1004-0135 Expires: July 31, 2010	
		NOTICES AND REPO	ELLS		5. Lease Scrial No. NMNM97120			
D ab	o not use the	is form for proposals to drill or to re-enter an II. Use form 3160-3 (APD) for such proposals.			6. If Indian, Allottee or Tribe Name			
SUBMIT IN TRIPLICATE - Other instructions on reverse side.						7. If Unit or CA/Agreement, Name and/or No.		
1. Type of Well  ☑ Oil Well ☐ Gas Well ☐ Other						8. Well Name and No. BO DUKE FED 3H		
Name of Operator     DEVON ENERG	Y PRODUCT	Contact; ION CONTRAIN: richard.we	RICHARD V edman@dvn.co	/EDMAN		9. API Well No.		
3a. Address 6488 SEVEN RIN ARTESIA, NM 8	3b. Phone No. (include area code) Ph: 575-748-1819			10. Field and Pool, or Exploratory WILDCAT; BONE SPRING				
4. Location of Well (Footage, Sec., T., R., M., or Survey Description)						.11. County or Pari	sh, and State	
Sec 5 T23S R26E Mer NMP SWSE 175FSL 1980FEL						EDDY COU	NTY, NM	
12. C	HECK APPI	ROPRIATE BOX(ES) T	O INDICATI	E NATURE OF	NOTICE, R	EPORT. OR OTI	HER DATA	
TYPE OF SUBM	IISSION	, TYPE OF ACTION						
Motice of Intent	ent Report .	☐ Acidize	<b>□</b> De	epen	□ Produc	tion (Start/Resume)	Water Shut-Off	
_		☐ Alter Casing	☐ Fracture Treat ☐ Recla		nation	■ Well Integrity		
■ Subsequent Rep		Casing Repair	□ Ne	☐ New Construction ☐ Recom ☐ Plug and Abandon ☐ Tempo		orarily Abandon		
☐ Final Abandon		Change Plans	_					
		Convert to Injection	Plu	g Back	☐ Water	☐ Water Disposal		
If the proposal is to a Attach the Bond und following completion	teepen directions or which the wor of the involved pleted. Final Al	cration (clearly state all pertine ally or recomplete horizontally it will be performed or provide operations. If the operation is andonment Notices shall be final inspection.)	, give subsurface e the Bond No. c esults in a multip	e locations and mea on file with BLM/B ole completion or re	asured and true v BIA. Required su ecompletion in a	ertical depths of all pubsequent reports shall new interval, a Form	crtinent markers and zones. I be filed within 30 days 3160-4 shall be filed once	
To lay one 4" but Devon Chinabert	ried steel suc ry 5 Fed 1H F	tion line from the Compre ipeline.	essor at the E	o Duke 5 Fed 3	3H to an exist	_		
The spacing's for said line will be 30 feet wide by 2,375.52 feet (143.97 rods), co acres.					aining 1.637		L CONSERVATION RTESIA DISTRICT	
The lines are expected to carry 0.75 MMCFD at 125 PSI.					· .	•	JUN 2 0 2016	
Expected start da	ate will be soo	on after the approval of the	nis sundry.		,			
Expected work til	me should be	1 week.		Accepts	ed for recor	d - NMOCD	RECEIVED	
14. I hereby certify that	the foregoing is	true and correct. Electronic Submission # For DEVON ENERG	/299171 verific Y PRODUCTIO	d by the BLM W	/ell Informatio	n System sbad		
Namc(Printed/Typed) RICHARD WEDMAN				Title FIELD	LANDMAN			

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By

(Electronic Submission)

Signature

FIELD MANAGER

CARLSBAD FIELD OFFICE

04/23/2015

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

<sup>\*\*</sup> OPERATOR-SUBMITTED \*\* OPERATOR-SUBMITTED \*\*

## . Additional data for EC transaction #299171 that would not fit on the form

32. Additional remarks, continued

Devon Energy bond #CO-1104; NMB000801

See attached plat #3897

FLOWLINE PLAT (400510X) BURIED STEEL SUCTION LINE FROM THE COMPRESSOR AT THE BO DUKE "5" FED SH TO AN EXISTING DEVON CHINABERRY "5" FED 1 PIPELINE DEVON ENERGY PRODUCTION COMPANY, L.P. CENTERLINE SURVEY OF A PIPELINE CROSSING SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M. EDDY COUNTY, STATE OF NEW MEXICO APRIL 16, 2015 N89'15'00"E 2649.40 FT N89\*36'44"E 2662.17 FT 1000 Scale: = 1000 LO1 4 LOT 3 LOT 2 101 1 SEC 5 T.23S., R.26EBC 1943 BLMSTA 23+75.4 E.O.L. AT ICHINABERRY "5" FED 1 PIRELINE 488.34.48<u>,</u>E STA 7+87.5 PI LEFT STA 7+48.3 PI LEFT STA 3+85.5 P! LEFT STA 1+05.9 P! RIGHT! STA 0+09.4 P! RIGHT! STA 0+00 B.O.L. (TIE) S27"50"57"E 2168.11 FT 8010UKE "5" FED 3H 589'43'09"W 2677.38 FT S89\*57'29"W 2682.69 FT \$61'12'38**"**W 590.97 FT SEE NEXT SHEET (2-4) FOR DESCRIPTION SURVEYOR CERTIFICATE I, FILIMON F. JARANILLO ATNEW MEXICO PROFESSIONAL SURVEYOR NO. 12797, HEREBY CERTIFY THAT I HAVE CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY, THAT THIS SURVEY AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF, AND THAT THIS SURVEY AND PLAT (400510X) MEET THE MINIMUM STANDARDS FOR LAND SURVEYING WITH STATE OF NEW MEXICO. GENERAL NOTES 1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT. IN WITHERS WHEREOFD THIS CERTIFICATE IS EXECUTED AT CARLSBAD. 2.) BASIS OF BEARING IS NMSP EAST NEW MEXICO, THISE DAY OF APRIL 2015 MODIFIED TO SURFACE COORDINATES. MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO 88220 Phone (575) 234-3341 SHEET: 1-4 SURVEY NO. 3897 INC. (575) 231-335 CARLSBAD. *MADRON SURVEYING* NEW MEXICO

FLOWLINE PLAT (400510X)

4" BURIED STEEL SUCTION LINE FROM THE COMPRESSOR AT THE BO DUKE "5" FED 3H TO AN EXISTING DEVON CHINABERRY "5" FED 1 PIPELINE

DEVON ENERGY PRODUCTION COMPANY, L.P. CENTERLINE SURVEY OF A PIPELINE CROSSING SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M. EDDY COUNTY, STATE OF NEW MEXICO APRIL 16, 2015

DESCRIPTION

A STRIP OF LAND 30 FEET WIDE CROSSING BUREAU OF LAND MANAGEMENT LAND IN SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M.. EDDY COUNTY, STATE OF NEW MEXICO AND BEING 15 FEET EACH SIDE OF THE FOLLOWING DESCRIBED CENTERLINE

BEGINNING AT A POINT WITHIN THE SW/4 SE/4 OF SAID SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M., WHENCE THE SOUTH QUARTER CORNER OF SAID SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M. BEARS S61'12'38'W, A DISTANCE OF

THENCE N88'30'17"W A DISTANCE OF 9.39 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED; THENCE N88'30 17'W A DISTANCE OF 9.39 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N88'42'29"E A DISTANCE OF 96.51 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N89'42'29"E A DISTANCE OF 279.61 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N84'05'11"E A DISTANCE OF 362.76 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N70'52'04"E A DISTANCE OF 39.26 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N48'34'48"E A DISTANCE OF 166.44 FEET TO AN ANGLE POINT OF THE LINE HEREIN DESCRIBED;
THENCE N14'34'06"E A DISTANCE OF 1421.55 FEET THE TERMINUS OF THIS CENTERLINE SURVEY, WHENCE THE SOUTHEAST CORNER OF SAID SECTION 5, TOWNSHIP 23 SOUTH, RANGE 26 EAST, N.M.P.M. BEARS \$27'50'57"E, A DISTANCE OF 2168.11 FEET;

SAID STRIP OF LAND BEING 2375.52 FEET OR 143.97 RODS IN LENGTH, CONTAINING 1.637 ACRES MORE OR LESS AND BEING ALLOCATED BY FORTIES AS FOLLOWS:

1168.72 L.F. 70.83 RODS 0.805 ACRES 616.55 L.F. 37.37 RODS 0.425 ACRES 590.25 L.F. 35.77 RODS 0.407 ACRES SE/4 SE/4 NE/4 SE/4

GENERAL NOTES 1.) THE INTENT OF THIS ROUTE SURVEY IS TO ACQUIRE AN EASEMENT

2.) BASIS OF BEARING IS NMSP EAST MODIFIED TO SURFACE COORDINATES.

SURVEYOR CERTIFICATE

I, FILIMON F. JARAMILLO, A NEW! MEXICO PROFESSIONAL SURVEYOR NO. 12797,
HEREBY CERTIFY D'AT 1, HAY: CONDUCTED AND AM RESPONSIBLE FOR THIS SURVEY.
THAT THIS SURVEY IS THUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND
BELIEF, AND THAT THIS SURVEY AND PLAT (400510X) MEET THE MINIMUM STANDARDS
FOR LAND SURVEYING IN THE STATE OF NEW MEXICO.

IN WITNESS WHEREOF, THIS CERTIFICATE IS EXECUTED AT CARLSBAD,

NEW MEXICO, THIS DAY OF ABRILL 2015

MADRON SURVEYING, INC. 301 SOUTH CANAL CARLSBAD, NEW MEXICO 88220 Prone (575) 234-3341


SURVEY NO. 3897


SBADNEW MEXICO

SHEET: 2-4

*MADRON SURVEYING* 

INC. 401 SOUTH CANAL GARL

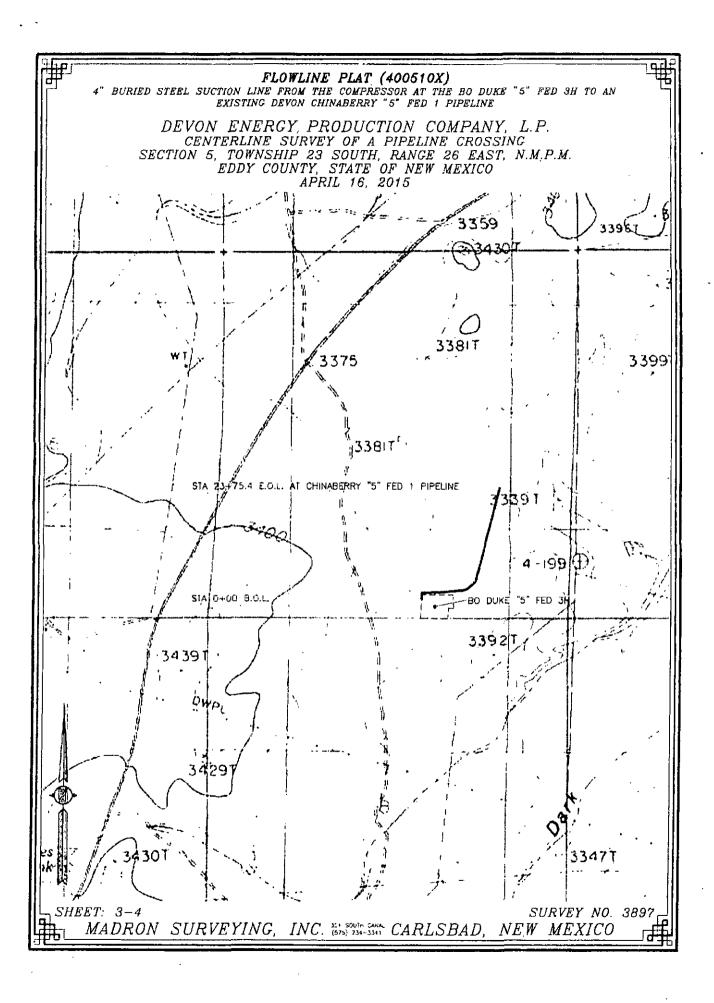

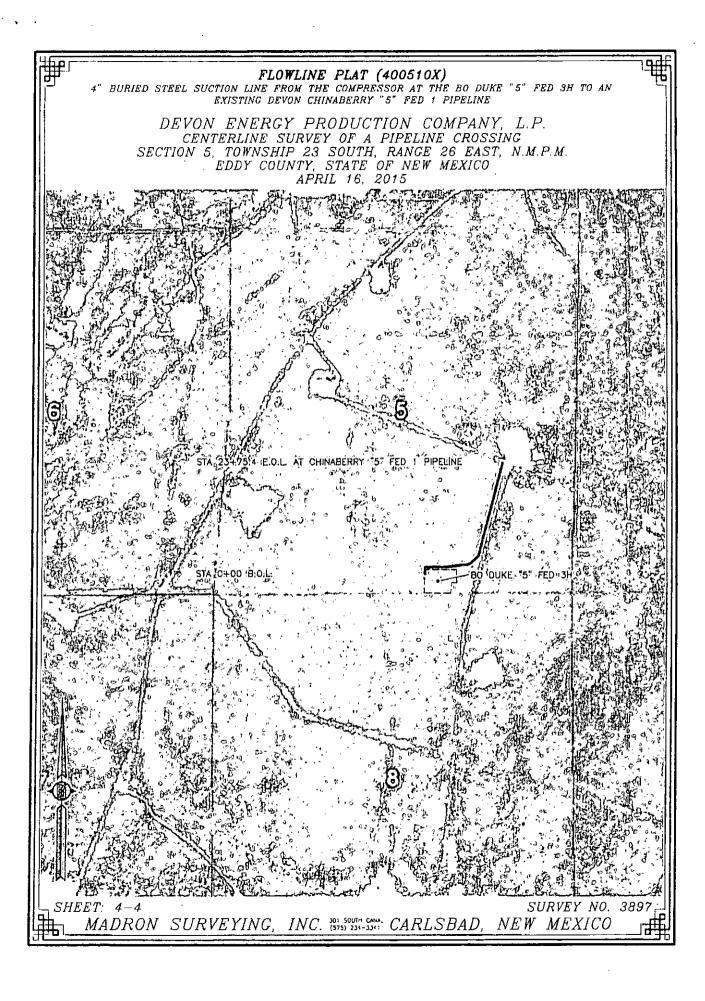

BLM LEASE NUMBER: NMNM97120 COMPANY NAME: Devon Energy

ASSOCIATED WELL NAME: Bo Duke Fed 3H

## BURIED PIPELINE STIPULATIONS

A copy of the application (Grant, APD, or Sundry Notice) and attachments, including conditions of approval, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

- 1. The Holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
- 2. The Holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.
- 3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C.6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.
- 4. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil or other pollutant, wherever found, shall be the responsibility of holder, regardless of fault. Upon failure of holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve holder of any responsibility as provided herein.

5. All construction and maintenance activity will be confined to the authorized right-of-way.							
6. The pipeline will be buried with a minimum cover of 36 inches between the top of the pipe and ground level.							
7. The maximum allowable disturbance for construction in this right-of-way will be $\underline{30}$ feet:							
Blading of vegetation within the right-of-way will be allowed: maximum width of blading operations will not exceed 20 feet. The trench is included in this area. (Blading is defined as the complete removal of brush and ground vegetation.)							
Clearing of brush species within the right-of-way will be allowed: maximum width of clearing operations will not exceed 30 feet. The trench and bladed area are included in this area. (Clearing is defined as the removal of brush while leaving ground vegetation (grasses, weeds, etc.) intact. Clearing is best accomplished by holding the blade 4 to 6 inches above the ground surface.)							
• The remaining area of the right-of-way (if any) shall only be disturbed by compressing the vegetation. (Compressing can be caused by vehicle tires, placement of equipment, etc.)							
8. The holder shall stockpile an adequate amount of topsoil where blading is allowed. The topsoil to be stripped is approximately6 inches in depth. The topsoil will be segregated from other spoil piles from trench construction. The topsoil will be evenly distributed over the bladed area for the preparation of seeding.							
9. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.							
10. Vegetation, soil, and rocks left as a result of construction or maintenance activity will be randomly scattered on this right-of-way and will not be left in rows, piles, or berms, unless otherwise approved by the Authorized Officer. The entire right-of-way shall be recontoured to match the surrounding landscape. The backfilled soil shall be compacted and a 6 inch berm will be left over the ditch line to allow for settling back to grade.							
11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.							
12. The holder will reseed all disturbed areas. Seeding will be done according to the attached seeding requirements, using the following seed mix.							
( x ) seed mixture 1 ( ) seed mixture 3 ( ) seed mixture 2 ( ) seed mixture 4 ( ) seed mixture 2/LPC ( ) Aplomado Falcon Mixture							

- 13. All above-ground structures not subject to safety requirements shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be color which simulates "Standard Environmental Colors" **Shale Green**, Munsell Soil Color No. 5Y 4/2.
- 14. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. All signs and information thereon will be posted in a permanent, conspicuous manner, and will be maintained in a legible condition for the life of the pipeline.
- 15. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder before maintenance begins. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway. As determined necessary during the life of the pipeline, the Authorized Officer may ask the holder to construct temporary deterrence structures.
- 16. Any cultural and/or paleontological resources (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the Authorized Officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery will be made by the Authorized Officer to determine appropriate actions to prevent the loss of significant cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the Authorized Officer after consulting with the holder.
- 17. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes associated roads, pipeline corridor and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.
- 18. <u>Escape Ramps</u> The operator will construct and maintain pipeline/utility trenches [that are not otherwise fenced, screened, or netted] to prevent livestock, wildlife, and humans from becoming entrapped. At a minimum, the operator will construct and maintain escape ramps, ladders, or other methods of avian and terrestrial wildlife escape in the trenches according to the following criteria:
  - a. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, the contractor/operator shall inspect the trench for wildlife, remove all trapped wildlife, and release them at least 100 yards from the trench.
  - b. For trenches left open for eight (8) hours or more, earthen escape ramps (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench.
- 19. Karst: The BLM, Carlsbad Field Office, will be informed immediately if any subsurface drainage channels, passages, or voids are intersected by trenching, and no pipe will be laid in the trench at that point until clearance has been issued by the Authorized Officer. If a void is encountered alignments may be rerouted to avoid the karst feature to avoid or lessen the potential of subsidence or collapse of karst features, toxic or combustible gas buildup, or other possible impacts to cave and karst resources from the

buried pipeline. Special restoration stipulations or realignment may be required at such intersections, if any. Leak detection systems, back flow eliminators, and differential pressure shut-off valves may be required to minimize the impacts of leaking or ruptured pipelines. To eliminate these extreme possibilities, regular monitoring is needed to quickly identify leaks for their immediate and proper treatment.