
		UNITED	STATES			FORM APPROVED
Form 3160-5 August 2007)		DDD (DDD (D) (D) (D) (D)	E EUE DUEEDIOD		1	OMB No. 1004-0137
August 2007)		DEPARTMENT O	F THE INTERIOR			Expires: July 31, 2010
		BUREAU OF LAN	D MANAGEMENT		5. Lease S	Serial No.
	SUNDR	Y NOTICES AND	OREPORTS ON V	VELLS		NMLC028731B
			osals to drill or to re		6. If India	an, Allottee or Tribe Name
	abandoned	well. Use Form 31	60-3 (APD) for such	proposals.		
	SUBMIT IN	TRIPLICATE - Of	ther instructions on	page 2	7. If Unit	or CA/Agreement, Name and/or No.
1. Type of Well						
		Other			8. Well N	ame and No.
2. Name of Operator	_ Gas Well	Other				Dodd Federal Unit #1
COG Operati					9. API W	
Ba. Address			3b. Phone No. (mchude area o	:ode)		30-015-25705
600 W. Illinoi	is Ave, Midlan	d TX 79701	432-686-3004		10. Field	and Pool, or Exploratory Area
		L, M., or Survey Description			Dodd	I-Glorieta-Upper Yeso G
Sec 10 T17S I	R29E NENW					ity or Parish, State
330FNL 1650						Eddy Co, NM
		PROPRIATE BOX	(ES) TO INDICATE N	ATURE OF NOTICE, RI	EPORT. O	
TYPE OF SI	UBMISSION		(	TYPE OF ACTION		
TTE OF 30	NI01221014		— — — — — — — — — — — — — — — — — — —			
			Deepen	Production (Start/Resu		Vater Shut-Off
Notice of Intent	ĩ	Alter Casing	Fracture Treat	Reclamantion	L v	Vell Integrity
Subsequent Rep	port	Casing Repair	New Construction	Recomplete		Diher
Final Abanda	mont Notice	Change Plans	🔀 Plug and Abandon	Temporarily Abandon	_	
Final Abandonment No	ment Nonce	Convert to Injection	Plug Back	Water Disposal		
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag.	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F $m_{1}^{2}$ $50 + 4$ $45$ -950 - 850	on file with BLM/BIA. Require completion or recompletion or recompletion II requirements, including rectain the ressure test-csg. Spot	in a new int imantion, ha	terval, a Form 3160-4 shall be file ve been consistent, and the operation $2500-375$
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag.	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F	on file with BLM/BIA. Require completion or recompletion or recompletion II requirements, including rectain the ressure test-csg. Spot	in a new int imantion, ha	terval, a Form 3160-4 shall be file ve been consistent, and the operation $2500-375$
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag. VOC & Tag. NOC & Tag.	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F $m_{1}^{2}$ $50 + 4$ $45$ -950 - 850	on file with BLM/BIA. Require completion or recompletion Il requirements, including recla Pressure test csg. Spot	in a new int mantion, ha 25 sx @ 2	terval, a Form 3160-4 shall be file to been constituted and the operat 2500 - 275 2525-2400'.
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile of ff a 4 950-850 Dry Hole Marker.	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2	terval, a Form 3160-4 shall be file to heen consisted, and the operat <b>2500-375</b> <b>2525-2400'.</b>
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m: 50 + f A5 - 950-850 Dry Hole Marker.	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2	terval, a Form 3160-4 shall be file to heen consisted, and the operat <b>2500-375</b> <b>2525-2400'.</b>
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile of ff a 4 950-850 Dry Hole Marker.	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F m/1 20 + f 4 4 950-850 Dry Hole Marker. Dry Hole Marker. B 0 6 2017	on file with BLM/BIA. Require completion or recompletion Il requirements, including recla Pressure test csg. Spot	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile of ff a 4 950-850 Dry Hole Marker.	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx (	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'</del> . @ 350-250'. W @ 60-Surface	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. In Below Ground	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F m/1 20 + f 4 4 950-850 Dry Hole Marker. Dry Hole Marker. B 0 6 2017	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <del>320-1220'.</del> @ 350-250'. W @ 60-Surface II head, weld o	work will be performed ved operations. If the op Abandonment Notices final inspection.) WOC & Tag. VOC & Tag. n Below Ground MARTE FE	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F m/1 20 + f 4 4 950-850 Dry Hole Marker. Dry Hole Marker. B 0 6 2017	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Thereby certify	nd under which the pletion of the invol en completed. Final the site is ready for a 1320-1220 <sup>4</sup> . a 350-250 <sup>4</sup> . W a 60-Surface II head, weld o COAS	work will be performed ved operations. If the op Abandonment Notices final inspection.) WOC & Tag. VOC & Tag. n Below Ground MARTE FE	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F m/1 20 + f 4 4 950-850 Dry Hole Marker. Dry Hole Marker. B 0 6 2017	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <u>320-1220'.</u> @ 350-250'. W @ 60-Surface II head, weld o Lhat the foregoing is Typed	work will be performed ved operations. If the op Abandonment Notices final inspection.) Gireulate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE ARTE FE	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m'. 50 ff A5 - 950-850 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVEED	on file with BLM/BIA. Requere completion or recompletion In requirements, including recta Pressure test csg. Spot STE ATTAC CONDITION	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Cut off wel 4. Thereby certify	nd under which the pletion of the invol en completed. Final the site is ready for a 1320-1220 <sup>4</sup> . a 350-250 <sup>4</sup> . W a 60-Surface II head, weld o COAS	work will be performed ved operations. If the op Abandonment Notices final inspection.) Gireulate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE ARTE FE	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m'. 50 ff A5 - 950-850 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVEED	on file with BLM/BIA. Require completion or recompletion Il requirements, including recta Pressure test csg. Spot Sue Parts.	in a new int mantion, ha 25 sx @ 2 11ED F	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Cut off wel 4. Thereby certify	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <u>320-1220'.</u> @ 350-250'. W @ 60-Surface II head, weld o Lhat the foregoing is Typed	work will be performed ved operations. If the op Abandonment Notices final inspection.) Gireulate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE ARTE FE	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile 20 ff 45 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	on file with BLM/BIA. Requere completion or recompletion In requirements, including recta Pressure test csg. Spot STE ATTAC CONDITION	in a new int mantion, ha 25 sx @ 2 11ED F	terval, a Form 3160-4 shall be file to heen consisted, and the operat <b>2500-375</b> <b>2525-2400'.</b>
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Thereby certify Name (Printed	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <u>320-1220'.</u> @ 350-250'. W @ 60-Surface II head, weld o Lhat the foregoing is Typed	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE AHAGAGA True and correct.)	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile 20 ff 45 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	the Age T	in a new int mantion, ha 25 sx @ 2 11ED F 12 OF	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Thereby certify Name (Printed	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <u>320-1220'.</u> @ 350-250'. W @ 60-Surface II head, weld o Lhat the foregoing is Typed	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE AHAGAGA True and correct.)	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile 20 ff 45 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	the $A_{3} = T$ the $I = I = 1$	in a new int mantion, ha 25 sx @ 2 11ED F 12 OF	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Thereby certify Name (Printed Signature	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'- @ 1 <u>320-1220'.</u> @ 350-250'. W @ 60-Surface II head, weld o Lhat the foregoing is Typed	work will be performed ved operations. If the op Abandonment Notices final inspection.) Girculate hole w/ WOC & Tag. VOC & Tag. n Below Ground MARTE FE AHAGAGA True and correct.)	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile 20 ff 45 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	the Arte I-18-72 the completion or recompletion Il requirements, including reck Pressure test csg. Spot STE ATTAC CONDITION the Arte I - 18 - 12 OR STATE OFFICE	in a new int mantion, ha 25 sx @ 2 11ED F 12 OF	TOR APPROVAL CCCEPted for teco ACCEPted for teco ALL
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off well 4. Thereby certify Name (Printed Signature	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'. @ 1320-1220'. @ 350-250'. W @ 60-Surface II head, weld o Construction that the foregoing is Typed March	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag. VOC & Tag. NOC & Tag. NOC & Tag. This SPAC	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m: 50 ff A5 - 950-850 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	In the with BLM/BIA. Requere completion or recompletion requirements, including recta Pressure test csg. Spot Due Parks. SEE ATTAC CONDITION Interpretation of the second s	in a new int mantion, ha 25 sx @ 2 11ED F 12 OF	OR
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off well 4. Thereby certify Name (Printed Signature	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'. @ 1320-1220'. @ 350-250'. W @ 60-Surface II head, weld o	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag. VOC & Tag. VOC & Tag. NOC & Tag. THIS SPAC	d or provide the Bond No peration results in a multip shall be filed only after a mud laden, fluid. F mile 20 ff 45 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED	In the with BLM/BIA. Requere completion or recompletion requirements, including recta Pressure test csg. Spot Due Parks. SEE ATTAC CONDITION Interpretation of the second s	in a new int mantion, ha 25 sx @ 2 11ED F 12 OF	TOR APPROVAL CCCEPted for teco ACCEPted for teco ALL
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off well 4. Thereby certify Name (Printed Signature	nd under which the pletion of the invol en completed. Final the site is ready for <b>IBP @ 2525'</b> . <b>@ 1320-1220'</b> . <b>@ 350-250'</b> . W <b>@ 60-Surface</b> <b>II head, weld o</b> <b>Warface</b> <b>II head, weld o</b> <b>II head, we</b>	work will be performed ved operations. If the op Abandonment Notices final inspection.) Circulate hole w/ WOC & Tag. VOC & Tag. NOC & Tag. NOC & Tag. THIS SPAC C C C C C C C C C C C C C C C C C C	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m'. 50 + f 45 - 950-850 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED E FOR FEDERAL does not warrant or certify the cet lease which would entitle	on file with BLM/BIA. Requere completion or recompletion I requirements, including recta Pressure test csg. Spot $D \in Par G$ . SEE ATTAO CONDITION the Area 7 Anter 1-18-17 OR STATE OFFICE Title Eng Title Eng Office (FO)	in a new int mantion, ha 25 sx @ 2 11ED F 1S OF 1S OF	TOR APPROVAL Ceepted tot reco Approval content of the operation content of the operation content of the operation content of the operation of the operation operation content of the operation of the operation operation content of the operation operation operation operation the operation operation operation the operation operation operation operation the operation o
Attach the Boi following comp testing has bee determined that 1. Set 5 1/2 C 2. Spot 25 sx ( 3. Spot 25 sx ( 4. Spot 25 sx ( 5. Cut off wel 4. Thereby certify Name (Printed Signature Sig	nd under which the pletion of the invol en completed. Final the site is ready for IBP @ 2525'. @ 1320-1220'. @ 350-250'. W @ 60-Surface II head, weld o	work will be performed ved operations. If the op Abandonment Notices final inspection.) Gireulate hole w/ WOC & Tag. NOC & Tag. n Below Ground MARTE FE AHAGAGA THIS SPAC	d or provide the Bond No beration results in a multip shall be filed only after a mud laden, fluid. F m'. 50 + f 45 - 950-850 Dry Hole Marker. Dry Hole Marker. B 0.6 2017 ECEVED E FOR FEDERAL does not warrant or certify the cet lease which would entitle	on file with BLM/BIA. Requere completion or recompletion I requirements, including recta Pressure test csg. Spot Due Parks. SEE ATTAC CONDITION the inclusion of the second seco	in a new int mantion, ha 25 sx @ 2 11ED F 1S OF 1S OF	TOR APPROVAL Ceepted tot reco Approval content of the operation content of the operation content of the operation content of the operation of the operation operation content of the operation of the operation operation content of the operation operation operation operation the operation operation operation the operation operation operation operation the operation o

•


٠

ļ



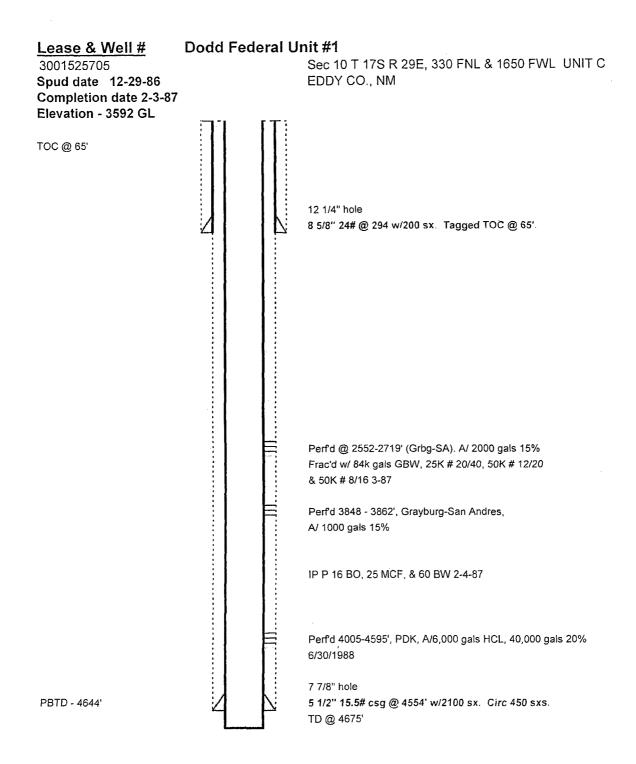

32.8555489 -104.065918

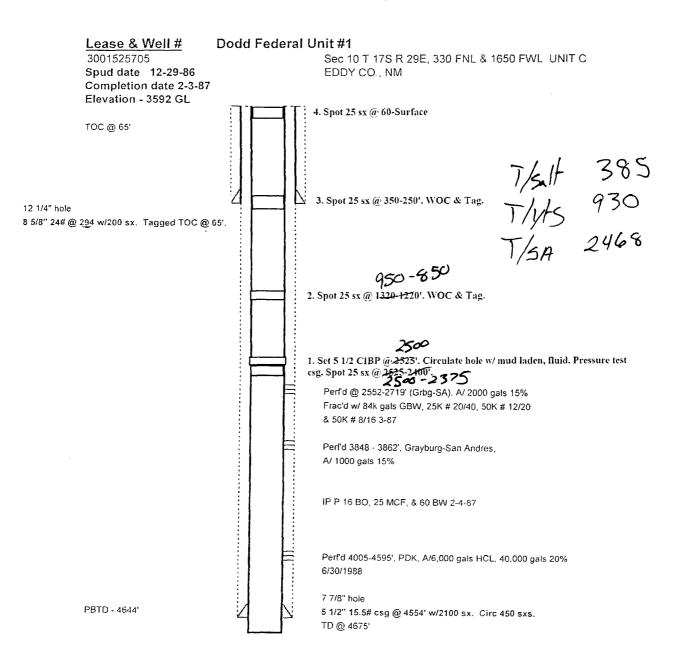

## COG Operating, LLC

CAUsers/BCMtAppData/Local/Microsoft/Windows/INetCache/Content/Outlook/L4LXTDNA/Dodd\_Unit\_LWBS (2)

1/11/2017

32.8555439 -104.065918

وم ا

## BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

1

## Permanent Abandonment of Federal Wells Conditions of Approval (LPC Habitat)

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within **<u>ninety (90)</u>** days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90<sup>th</sup> day provide this office, prior to the 90<sup>th</sup> day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification</u>: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3. <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement:</u> Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of **brine** water. Minimum nine (9) pounds per gallon.

5. <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In lieu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. **Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary.** 

Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

ŧ

6. <u>Below Ground Level Cap (Lesser Prairie-Chicken Habitat)</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). **The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses.** Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10<sup>th</sup> day, the BLM is to be contacted with justification to receive an extension for completing the cut off. Upon the plugging and subsequent abandonment of wells that are located in lesser prairie-chicken habitat, the casings shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The well bore shall then be covered with a metal plate at least <sup>1</sup>/<sub>4</sub> inch thick and welded in place. A weep hole shall be left in the plate and/or casing.

NMOCD also requires the operator to notify NMOCD when this type of dry hole marker is used. This can be done on the subsequent report of abandonment which is submitted to the BLM after the well is plugged. State that a below ground cap was installed as required in the COA's from the BLM.

7. <u>Subsequent Plugging Reporting:</u> Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. **Show date well was plugged.** 

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

## Timing Limitation Stipulation/ Condition of Approval for Lesser Prairie-Chicken:

From March 1<sup>st</sup> through June 15<sup>th</sup> annually, abandonment activities will be allowed except between the hours from 3:00 am and 9:00 am. Normal vehicle use on existing roads will not be restricted