

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

**NMOCD**  
**Artesia**

FORM APPROVED  
OMB NO. 1004-0137  
Expires: January 31, 2018

**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.**

5. Lease Serial No.  
NMNM121941

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.  
CHARLIE SWEENEY FED COM 224H

9. API Well No.

10. Field and Pool or Exploratory Area  
WILDCAT  
WOLFCAMP

11. County or Parish, State  
EDDY COUNTY, NM

**SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

MATADOR PRODUCTION COMPANY

Contact: TAMMY R LINK

Email: tlink@matadorresources.com

3a. Address

ONE LINCOLN CENTER 5400 LBJ FREEWAY SUITE 1500  
DALLAS, TX 75240

3b. Phone No. (include area code)

500 575-623-6601 Ext: 2465

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Sec 31 T23S R28E SESE 189FSL 665FEL  
32.254753 N Lat, 104.120392 W Lon

**12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has determined that the site is ready for final inspection.

BLM BOND NO. NMB001079

SURETY BOND NO. RLB0015172

SEE ATTACHMENTS FOR CHANGES IN CASING AND CEMENTING DESIGN.

**NM OIL CONSERVATION**  
**ARTESIA DISTRICT**

**MAR 13 2017**

**RECEIVED**

Original COAs still stand  
+ originally approved setting depths!

14. I hereby certify that the foregoing is true and correct.

Electronic Submission #366054 verified by the BLM Well Information System

For MATADOR PRODUCTION COMPANY, sent to the Carlsbad

Committed to AFMSS for processing by DEBORAH MCKINNEY on 02/07/2017 (17DLM0768SE)

Name (Printed/Typed) TAMMY R LINK

Title PRODUCTION ANALYST

Signature (Electronic Submission)

Date 02/06/2017

**THIS SPACE FOR FEDERAL OR STATE OFFICE USE FEB 22 2017**

Approved By

Title

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

**\*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\* BLM REVISED \*\***

Name	Hole Size	Casing Size	Wt/Grade	Thread Collar	Setting Depth
Surface	17-1/2"	13-3/8" (new)	54.5# J-55	BTC	<del>550</del> 2500
Intermediate	12-1/4"	9-5/8" (new)	40# J-55	BTC	<del>2500</del> 2450
Intermediate 2 Top	8-3/4"	7-5/8" (new)	29.7# P-110	BTC	2300
Intermediate 2 Middle	8-3/4"	7-5/8" (new)	29.7# P-110	VAM HTF-NR	9600
Intermediate 2 Bottom	8-3/4"	7" (new)	29# P-110	BTC	10470
Production Top	6-1/8"	5-1/2" (new)	20# P-110	BTC/TXP	9500
Production Bottom	6-1/8"	4-1/2" (new)	13.5# P-110	BTC/TXP	15070

Adam Lange has talked w/ Chris Walls  
+ Mustafa Haque on this design.

Name	Type	Sacks	Yield	Weight
Surface	Lead	240	1.82	12.8
	Tail	350	1.38	14.8
TOC = 0'		100% Excess		
Intermediate	Lead	550	2.13	12.6
	Tail	270	1.38	14.8
TOC = 0'		100% Excess		
Intermediate 2	Lead	500	2.13	12.6
	Tail	310	1.38	14.8
TOC = 2300'		60% Excess		
Production	Tail	510	1.17	15.8
TOC = 9970'		25% Excess		

<b>Blend</b>
Class C + Bentonite + 2% CaCL2 + 3% NaCl + LCM
Class C + 5% NaCl + LCM
Centralizers per Onshore Order 2.III.B.1f
Class C + Bentonite + 1% CaCL2 + 8% NaCl + LCM
Class C + 5% NaCl + LCM
2 on btm jt, 1 on 2nd jt, 1 every 4th jt to surface
TXI + Fluid Loss + Dispersant + Retarder + LCM
TXI + Fluid Loss + Dispersant + Retarder + LCM
2 on btm jt, 1 on 2nd jt, 1 every 4th jt to top of tail cement (500' above TOC)
Class H + Fluid Loss + Dispersant + Retarder + LCM
2 on btm jt, 1 on 2nd jt, 1 every other jt to top of curve


Top Cement
Surface
Surface
2300
2300
2300
9970
9970

# CONNECTION DATA SHEET ( Imperial Units)



Connection: VAM® HTF-NR 7,625" 29,70# P110EC  
 Alternate Drift: 6,750"

Drawing: PD-101836P PD-101836B Isolated connection

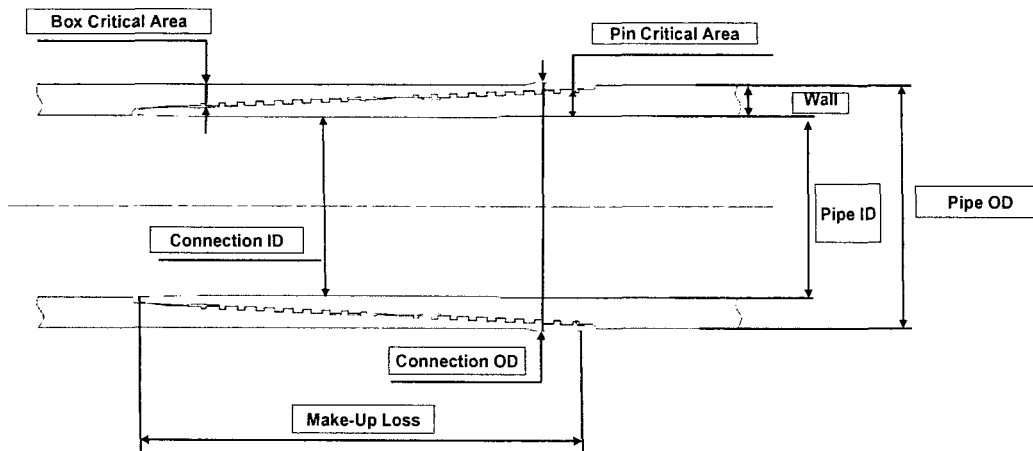

OD	WEIGHT	WALL	GRADE	API DRIFT
7,625"	29,70 lb/ft	0,375"	P110EC	6,750"

PIPE BODY PROPERTIES:			CONNECTION PROPERTIES:		
Outside Diameter	<i>inch</i>	7,625	Connection OD (nom)	<i>inch</i>	7,701
Internal Diameter	<i>inch</i>	6,875	Connection ID	<i>inch</i>	6,782
Nominal Area	<i>sqin.</i>	8,541	Coupling Length	<i>inch</i>	N/A
			Make-up Loss	<i>inch</i>	4,657
			Box critical area	<i>%PBYS</i>	58%
			Pin critical area	<i>%PBYS</i>	67%
Yield Strength	<i>klb</i>	1 068	Yield Strength	<i>klb</i>	619
Ultimate Strength	<i>klb</i>	1 153	Ultimate strength	<i>klb</i>	669
			Structural compression	<i>klb</i>	776
			Compression with sealability	<i>klb</i>	371
MIYP	<i>psi</i>	10 760	MIYP	<i>psi</i>	10 760
Collapse Pressure	<i>psi</i>	5 670	Ext Pressure Resistance	<i>psi</i>	5 670
			Regular Make-up Torque	<i>ft.lb</i>	
				<i>Min</i>	9 600
				<i>Opt</i>	11 300
				<i>Max</i>	13 000
			Maximum Torque with Sealability	<i>ft.lb</i>	58 500
			Maximum Torsional Value	<i>ft.lb</i>	73 000

No one knows VAM like VAM

uk@vamfieldservice.com  
 dubai@vamfieldservice.com  
 angola@vamfieldservice.com  
 singapore@vamfieldservice.com



usa@vamfieldservice.com  
 brazil@vamfieldservice.com  
 canada@vamfieldservice.com  
 mexico@vamfieldservice.com

50 VAM Specialists available worldwide 24/7 for Rig Site Assistance



Designed by :  
 X. MENCAGLIA

Reference: VRCC16-1177  
 Revision : 0  
 Date : July 19, 2016

For the latest performance data, always visit our website: [www.tenaris.com](http://www.tenaris.com)

February 02 2017



**Connection:** TenarisXP® BTC  
**Casing/Tubing:** CAS  
**Coupling Option:** REGULAR

**Size:** 5.500 in.  
**Wall:** 0.361 in.  
**Weight:** 20.00 lbs/ft  
**Grade:** P110-IC  
**Min. Wall Thickness:** 87.5 %

Nominal OD	<b>5.500 in.</b>	Nominal Weight	<b>20.00 lbs/ft</b>	Standard Drift Diameter	<b>4.653 in.</b>
Nominal ID	<b>4.778 in.</b>	Wall Thickness	<b>0.361 in.</b>	Special Drift Diameter	<b>N/A</b>
Plain End Weight	<b>19.83 lbs/ft</b>				
Body Yield Strength	<b>641 x 1000 lbs</b>	Internal Yield	<b>12630 psi</b>	SMYS	<b>110000 psi</b>
Collapse	<b>12100 psi</b>				
Connection OD	<b>6.100 in.</b>	Coupling Length	<b>9.450 in.</b>	Connection ID	<b>4.766 in.</b>
Critical Section Area	<b>5.828 sq. in.</b>	Threads per in.	<b>5.00</b>	Make-Up Loss	<b>4.204 in.</b>
Tension Efficiency	<b>100 %</b>	Joint Yield Strength	<b>641 x 1000 lbs</b>	Internal Pressure Capacity <sup>(1)</sup>	<b>12630 psi</b>
Structural Compression Efficiency	<b>100 %</b>	Structural Compression Strength	<b>641 x 1000 lbs</b>	Structural Bending <sup>(2)</sup>	<b>92 %/100 ft</b>
External Pressure Capacity	<b>12100 psi</b>				
Minimum	<b>11270 ft-lbs</b>	Optimum	<b>12520 ft-lbs</b>	Maximum	<b>13770 ft-lbs</b>
Operating Torque	<b>21500 ft-lbs</b>	Yield Torque	<b>23900 ft-lbs</b>		

**Blanking Dimensions**

**(1)** Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per

section 10.3 API 5C3 / ISO 10400 - 2007.

**(2)** Structural rating, pure bending to yield (i.e no other loads applied)

**(3)** Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at [licensees@oilfield.tenaris.com](mailto:licensees@oilfield.tenaris.com). Torque values may be further reviewed.

For additional information, please contact us at [contact-tenarishydril@tenaris.com](mailto:contact-tenarishydril@tenaris.com)



For the latest performance data, always visit our website: [www.tenaris.com](http://www.tenaris.com)

February 02 2017



**Connection:** TenarisXP® BTC  
**Casing/Tubing:** CAS  
**Coupling Option:** REGULAR

**Size:** 4.500 in.  
**Wall:** 0.290 in.  
**Weight:** 13.50 lbs/ft  
**Grade:** P110-ICY  
**Min. Wall Thickness:** 87.5 %

Nominal OD	<b>4.500 in.</b>	Nominal Weight	<b>13.50 lbs/ft</b>	Standard Drift Diameter	<b>3.795 in.</b>
Nominal ID	<b>3.920 in.</b>	Wall Thickness	<b>0.290 in.</b>	Special Drift Diameter	<b>N/A</b>
Plain End Weight	<b>13.05 lbs/ft</b>				
Body Yield Strength	<b>479 x 1000 lbs</b>	Internal Yield	<b>14100 psi</b>	SMYS	<b>125000 psi</b>
Collapse	<b>11620 psi</b>				
Connection OD	<b>5.000 in.</b>	Coupling Length	<b>9.075 in.</b>	Connection ID	<b>3.908 in.</b>
Critical Section Area	<b>3.836 sq. in.</b>	Threads per in.	<b>5.00</b>	Make-Up Loss	<b>4.016 in.</b>
Tension Efficiency	<b>100 %</b>	Joint Yield Strength	<b>479 x 1000 lbs</b>	Internal Pressure Capacity <sup>(1)</sup>	<b>14100 psi</b>
Structural Compression Efficiency	<b>100 %</b>	Structural Compression Strength	<b>479 x 1000 lbs</b>	Structural Bending <sup>(2)</sup>	<b>127 °/100 ft</b>
External Pressure Capacity	<b>11620 psi</b>				
Minimum	<b>6950 ft-lbs</b>	Optimum	<b>7720 ft-lbs</b>	Maximum	<b>8490 ft-lbs</b>
Operating Torque	<b>10500 ft-lbs</b>	Yield Torque	<b>12200 ft-lbs</b>		

**Blanking Dimensions**

**(1)** Internal Pressure Capacity related to structural resistance only. Internal pressure leak resistance as per

section 10.3 API 5C3 / ISO 10400 - 2007.

**(2)** Structural rating, pure bending to yield (i.e no other loads applied)

**(3)** Torque values calculated for API Modified thread compounds with Friction Factor=1. For other thread compounds please contact us at [licensees@oilfield.tenaris.com](mailto:licensees@oilfield.tenaris.com). Torque values may be further reviewed.

For additional information, please contact us at [contact-tenarishydril@tenaris.com](mailto:contact-tenarishydril@tenaris.com)