Susana Martinez Governor

David Martin Cabinet Secretary

Brett F. Woods, Ph.D. Deputy Cabinet Secretary David R. Catanach Division Director Oil Conservation Division



New Mexico Oil Conservation Division approval and conditions listed below are made in accordance with OCD Rule 19.15.7.11 and are in addition

to the actions approved by BLM on the following 3160-3 APD form.

Operator Signature Date: 1-20-15Well information; Operator <u>Enellest</u>, Well Name and Number <u>Jicarilla B # 5M</u>

API# <u>30-039-31305</u>, Section <u>21</u>, Township <u>26</u> (N/S, Range <u>5</u> E

Conditions of Approval:

(See, the below checked and handwritten conditions)

- Notify Aztec OCD 24hrs prior to casing & cement.
- Hold C-104 for directional survey & "As Drilled" Plat
- Hold C-104 for NSL, NSP, DHC
- Spacing rule violation. Operator must follow up with change of status notification on other well to be shut in or abandoned
- Regarding the use of a pit, closed loop system or below grade tank, the operator must comply with the following as applicable:
  - A pit requires a complete C-144 be submitted and approved prior to the construction or use of the pit, pursuant to 19.15.17.8.A
  - A closed loop system requires notification prior to use, pursuant to 19.15.17.9.A
  - A below grade tank requires a registration be filed prior to the construction or use of the below grade tank, pursuant to 19.15.17.8.C
- Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string

Regarding Hydraulic Fracturing, review EPA Underground Injection Control Guidance 84

Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system.

Well-bore communication is regulated under 19.15.29 NMAC. This requires well-bore Communication to be reported in accordance with 19.15.29.8.

NMOCD Approved by Signature

Date

1220 South St. Francis Drive • Santa Fe, New Mexico 87505 Phone (505) 476-3460 • Fax (505) 476-3462 • www.emnrd.state.nm.us/ocd

	L CONS. DIV DIST. 3							
*	SEP 0 3 2015		RECL	and have some	a hanne			
Form 3160-3 (March 2012)		7	JAN 22	2015	OMB N	APPROVED lo. 1004-0137 October 31, 2014		
	UNITED STATES DEPARTMENT OF THE	INTERIOF		eV e a	5. Lease Serial No. Jicarilla Aache Triba	al Contract	109	
	BUREAU OF LAND MAN	0	build have be had a harmon a line of	Steel .	6. If Indian, Allotee Jicarilla Apa	or Tribe Nan		
la. Type of work: 🗹 DRILL	. Type of work: DRILL REENTER					7. If Unit or CA Agreement, Name and No.		
lb. Type of Well: Oil Well					8. Lease Name and Well No. JIcarilla B #5M			
2. Name of Operator EnerVest	Operating, LLC				9. API Well No.	-313	5	
3a. Address 1001 Fannin St.,S Houston, Texas 7		3b. Phone 1 713-659-	10. (include area code) 3500		10. Field and Pool, or I Blanco MesaVerde		ota	
4. Location of Well (Report location		nv State reavin	ements *)		11. Sec., T. R. M. or B			
At surface 794' FNL, 2388'		iy blac require	листь. <i>)</i>		Sec.21 T26N R05		of fired	
At proposed prod. zone 14. Distance in miles and direction fr 30 miles NW of Lindrith, NM	rom nearest town or post office*				12. County or Parish Rio Arriba		. State	
15. Distance from proposed*		16. No. of	acres in lease	17. Spacir	g Unit dedicated to this v	well		
location to nearest property or lease line, ft. (Also to nearest drig. unit line, if	f any)	2,560 MV - W1/2 DK - W1/2						
<ol> <li>Distance from proposed location* to nearest well, drilling, complete applied for, on this lease, ft.</li> </ol>	ķ	19. Proposed Depth         20. BLM           7511'         RLB00			/BIA Bond No. on file 07886			
21. Elevations (Show whether DF, 6629 GL	22. Appro 04/01/20	ximate date work will star 015	rt*	<ul><li>23. Estimated duration</li><li>5 weeks</li></ul>				
		24. Att	achments					
The following, completed in accordan	ice with the requirements of Onsho	ore Oil and Ga	as Order No.1, must be a	ttached to th	is form:			
<ol> <li>Well plat certified by a registered</li> <li>A Drilling Plan.</li> <li>A Surface Use Plan (if the locat</li> </ol>		n Lands, the	<ol> <li>Bond to cover the Item 20 above).</li> <li>Operator certified</li> </ol>		ons unless covered by an	existing bon	d on file (see	
SUPO must be filed with the app	ropriate Forest Service Office).		6. Such other site BLM.	specific inf	ormation and/or plans as	s may be requ	iired by the	
25. Signature	asseher		he (Printed/Typed) helle Doescher				15	
Title Regulatory Consultant							/	
Approved by (Signature)	Monteeles (	Nar	ne (Printed/Typed)			Date 9/1	115	
Title	AFM	Off	ce FFO			/	/	
Application approval does not warra conduct operations thereon. Conditions of approval, if any, are a		lds legal or ea	quitable title to those right	nts in the su	bject lease which would o	entitle the app	olicant to	
Title 18 U.S.C. Section 1001 and Title States any false, fictitious or fraudule	43 U.S.C. Section 1212, make it a ent statements or representations as	crime for any is to any matte	person knowingly and r within its jurisdiction.	willfully to	make to any department of	or agency of	the United	
(Continued on page 2)	TATS	APPROV	AL OR ACCEPTA	NCE O	FTHIS *(Inst	tructions o	on page 2)	
This action is subject to 1 and procedural review p 43 CFR 3165.3 and app pursuant to 43 CFR 316	ursuant to PERA eal AUTHO	TOR FRO	NOT RELIEVE TH OM OBTAINING A ON REQUIRED FO ND INDIAN LAN	ANY OT	EE AND HER A RATIONS C	DRILLIN UTHORIZE OMPLIAN	IG OPERATIO ID ARE SUBJ CE WITH ATT L REQUIREM	
	UNILL		NHACDA					


• .\*

R

MAGULEV

OTLS: First St., Allesta, NM 86210         Phone: (575) 748-1283 Fax: (575) 748-9720 <u>District III</u> 1000 Rio Brazos Road, Aztec, NM 87410         Phone: (505) 334-6178 Fax: (505) 334-6170 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505         Phone: (505) 476-3460 Fax: (505) 476-3462					State of New Mexico Minerals & Natural Resources Department ONSERVATION DIVISION 220 South St. Francis Dr. Santa Fe, NM 87505 Revised Augu Submit one copy to ap Distr JAN 22 2015 AMENDED					District Office
1	API Numb	er	WE	<sup>2</sup> Pool Co		ACREAGE DED	Pool Nar			n
30-039-31305 72319/715					BLANCO MESAVERDE/BASIN DAKOTA					
*Property	*Property Code					<sup>5</sup> Property Name <sup>6</sup> Well Number				
3067	306753					JICARILLA B #5M				
<sup>7</sup> OGRID	No.				<sup>8</sup> Operator Name					levation
14319	143199					NERVEST OPERATING, LLC 6629				
<sup>10</sup> Surface Location										
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the			County
С	21	26N	5W		794'	NORTH	2388'	WES	ST	RIO ARRIBA
<sup>11</sup> Bottom Hole Location If Different From Surface									·	
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line County		County
<sup>12</sup> Dedicated Acre MV-W/2, 32		DK-1/2,	320± AC.		<sup>13</sup> Joint of Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.	I		<u> </u>

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

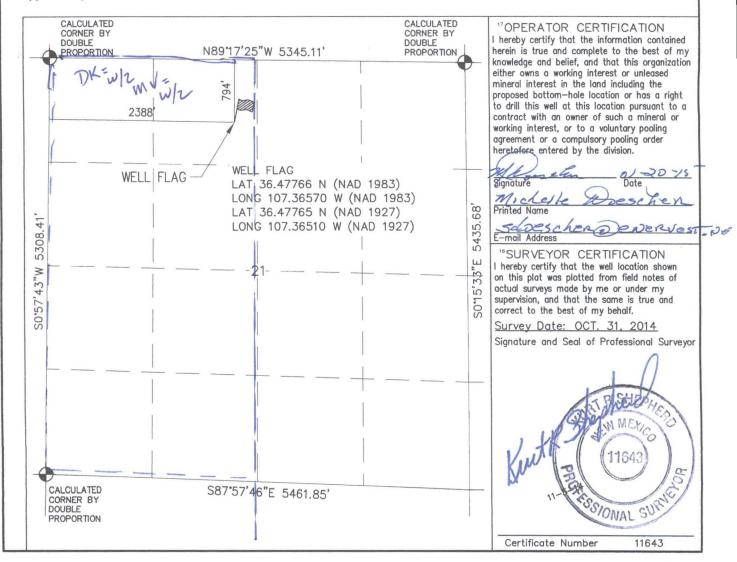

# Drilling Plan (11-24-2014)

All Lease and /or unit operations will be conducted in such a manner that full compliance is made with applicable laws, regulations, BLM Onshore orders and EnerVest's approved Further Development Project Plan. The operator is fully responsible for the actions of its subcontractors. A copy of the APD and Conditions of Approval will be available to the field representatives to ensure compliance.

## I. & II. ESTIMATED FORMATION TOPS (KB) and NOTABLE ZONES:

. .

The following formation depths and proposed casing depths are estimates only and may be modified as determined by well conditions while drilling.

Formation Name	Depth	Rock Type	Comments
San Jose	Surface	Sandstone	
Ojo Alamo	2259'	Sandstone	Possible Gas, Water
Kirtland	2657'	Shale	
Fruitland	2966'	Coal, Shale, Sandstone	Possible Lost Circ, Gas, Water
Pictured Cliffs	3012'	Sandstone	Possible Lost Circ, Gas, water
Lewis	3089'	Shale	Sloughing Shale
Mesa Verde (Cliffhouse)	4729'	Sandstone	Possible Lost Circ, Gas, Water
Mesa Verde (Menefee)	4776'	Coal, Sandstone, Shale	Possible Lost Circ, Gas, Water
Mesa Verde (Point Lookout)	5218'	Sandstone	Possible Lost Circ, Gas, Water
Mancos	5373'	Shale	Sloughing Shale
Gallup	6377'	Siltstone, Shale	Gas, Oil
Greenhorn	7131'	Limestone	Gas, Oil
Graneros	7184'	Shale	Gas, Oil, Water
Dakota	7211'	Sandstone	Gas, Oil, Water
Proposed Total Depth	7511'		

Fresh water zones will be adequately protected by setting and cementing the surface casing. All zones containing commercial quantities of oil or gas will be cased and cemented.

# III. <u>PRESSURE CONTROL</u>:

·,`

Maximum expected pressure is  $\sim 1652 (0.22 \text{ pressure gradient})$  psi. The drilling contract has not yet been awarded, thus the exact BOP and Choke Manifold model to be used is not yet known. A typical 11" 2000 psi model is pictured in Exhibits A & B.

A remote accumulator will be used, the pressures, capacities location of the remote and manual controls will be identified at the time of the BLM supervised BOP test.

BOP equipment, accumulator, choke manifold and all accessories will meet or exceed BLM requirements as listed in Onshore Order #2 for the 2M systems. The pressure control equipment considerations include but will not be limited to:

- 1. BOP will be a double gate ram preventer with a set of blind rams and a set of properlysized pipe rams.
- 2. Accumulator will have sufficient capacity to close the BOP rams and retain 200 psi above pre charge.
- 3. Accumulator fluid volume is to be maintained at manufacturer's recommendations.
- 4. BOP will also have manual closing handles available.
- 5. 2" minimum kill line and kill line valves (2).
- 6. Choke manifold (2" lines) with 2 adjustable chokes with valves and gauge.
- 7. Manually operated Kelly cocks available.
- 8. Safety valve and sub(s) with adequate opening for all drill strings used.
- 9. Fill line and flow line above the upper-most BOP rams.

BOPs will be pressure tested; after initial installation, before drilling out from under all set and cemented casing strings and any time a seal is broken. The BOPs will also be pressure tested a minimum of once every 21 days by a 3<sup>rd</sup> party. Additionally, the BOPs will be operationally checked every 24 hours.

All tests and pressure tests will be recorded on IADC log.

Ram type preventors, choke manifold and related pressure control equipment will be pressure tested to the rated working pressure of 2000 psi (high) and 250 psi (low).

The casing strings will be pressure tested per BLM Onshore Order #2 for 30 min as follows:

- a. Surface casing tested to 600 psi prior to drilling out the shoe.
- b. Production casing will be tested to 6000 psi at the commencement of completion operations.

#### IV. PROPOSED CASING PROGRAM :

Casing Design								
Hole/Casing Description	Hole Size	Casing OD	Weight lb/ft	Grade	Age	Connection	Top MD	Bottom MD
Surface	12 <sup>1</sup> / <sub>4</sub> "	8 <sup>5</sup> / <sub>8</sub> "	24	J-55	New	ST&C	0	500'
Prod Casing	7 <sup>7</sup> / <sub>8</sub> "	4 1/2"	11.6	N-80	New	LT&C	0	7511'

Surface casing is to be cemented to surface. The production casing is to be cemented in 3 stages covering all zones of production potential and the 3<sup>rd</sup> stage is intended to circulate cement to surface.

# V. <u>CASING CEMENT</u>:

A prototypical cementing program is listed as follows, site-specific cement designs will be produced for each well as the hole conditions warrant. The cement program will designed to meet the BLM Onshore Order #2 and NMOCD requirements.

Surface casing will be cemented to the surface.

Cement and properties; Mix and pump 310 sacks Type III cement (or equivalent) cement. Slurry density is to be 14.6 (yield = 1.39 cu ft/sx). Volume will include 100% excess. Cement is to be displaced using a top plug.

Two centralizers will be run on the shoe joint, one centralizer each on the next two joints and then one centralizer on every third joint thereafter. The surface casing will be pressure tested to 600 psi prior to drilling out the shoe.

**Production casing** will be cemented in 3 stages covering all zones of production potential and the  $3^{rd}$  stage is intended to circulate cement to surface. Volumes based on 45% - 50% excess over OH gauge volume.

**Stage 1 cement**; mix and pump 485 sacks premium lite slurry with CaCl2, cello flake and gilsonite. Estimated slurry density is to be 12.1 (yield = 2.13 cu ft/sx).

#### DV tool at +/- 4389 ft.

**Stage 2 Lead cement**; mix and pump 265 sacks premium lite slurry with CaCl2, cello flake and gilsonite. Estimated slurry density is to be 12.1 (yield = 2.13 cu ft/sx).

**Stage 2 Tail cement**; mix and pump 50 sacks Type III cement (or equivalent) cement. Slurry density is to be 14.6 (yield = 1.39 cu ft/sx). or equivalent cement.

## DV tool at +/- 2462 ft.

**Stage 3 Lead cement**; mix and pump 350 sacks premium lite slurry with CaCl2, cello flake and gilsonite. Estimated slurry density is to be 12.1 (yield = 2.13 cu ft/sx).

**Stage 3 Tail cement**; mix and pump 50 sacks Type III cement (or equivalent) cement. Slurry density is to be 14.6 (yield = 1.39 cu ft/sx). or equivalent cement.

Two centralizers will be run on the shoe joint, one centralizer on every third joint into the surface casing.

# The production casing will be pressure tested for 30 minutes at the commencement of completion operations as outlined above

Where cement has not been circulated to surface (or to planned depth) a CBL or temperature survey will be run to determine the TOC for that casing string. A CBL log will be run in the production casing prior to the commencement of completion operations.

Cement specifications may vary slightly due to cement type and cement contractor availability.

Depth	Туре У	Vt / pp	Visc	Fluid Loss
0-500'	FW gel/Lime Spud Mud	8.4-9.0	30-40	N/C
500'- 7511'	LSND/Gel sweeps, LCM a	as needed 8.7-9.0	20-32	4-6 cc

# VI. <u>MUD PROGRAM</u>

, C . .

 $\checkmark$  The well will be drilled utilizing a closed loop mud and solids control system. The closed loop system will comply with the NMOCD pit rules pertaining to the use of the system and disposal of the drill cuttings and waste. Drilling mud will be moved for re-use to drill subsequent wells whenever possible.

Viscosity, mud weight and other physical and chemical characteristics of the drilling mud will be varied as required to keep the hole clean, circulate drill cuttings, prevent caving, prevent lost circulation and maximize penetration rate.

Sufficient mud and materials will be kept on site to maintain mud properties and meet lost circulation or mud weight requirements at all times.

Mud design may change depending on well conditions, LCM, fluid loss and viscosity will be determined by the EnerVest representative and the mud engineer on site.

#### VII. CORING, TESTING, & LOGGING

·, (` . •

No cores or drill stem tests are planned. Well logs to be run are:

Surface to TD; GR/ Cement Bond Log, at the commencement of completion operations. 2500' to TD; GR/Cased hole Neutron.

Deviation surveys will be run at 500 ft intervals and at the base of each hole section prior to setting casing.

#### VIII. ANTICIPATED PRESSURES AND TEMPERATURES:

- Expected bottom hole pressure: <1652 psi a.
- Anticipated abnormal pressure: None b.

Anticipated abnormal temperatures: None c. None

Anticipated hazardous gas (H2S): d.

If any of the foregoing conditions are unexpectedly encountered, suitable steps will be taken to mitigate according to accepted industry best practices.

## IX. OTHER INFORMATION:


The anticipated spud date is spring 2015. The spud date will be dependent on the weather conditions, road conditions and the Conditions of Approval.

The dirt work for road and well pad construction will commence upon approval of the APD and will be dependent on weather conditions.

The well will be spud after well pad construction is complete and a suitable rig becomes available. The duration of drilling operations is expected to be from one to two weeks. The drilling rig and associated equipment will be removed and preparations will be made for the completion of the well.

Completion will start about one to four weeks after the finish of the drilling operations. A completion rig will be moved in for the completion phase. The completion phase of the well is expected to +/- two weeks. The completion phase will include; perforating, acidizing, fracture stimulation and well testing.

Some events/situations may arise that could potentially change the starting date or project duration that are out of EnerVest's control. If such events/situations arise, the proper officials will be promptly notified.

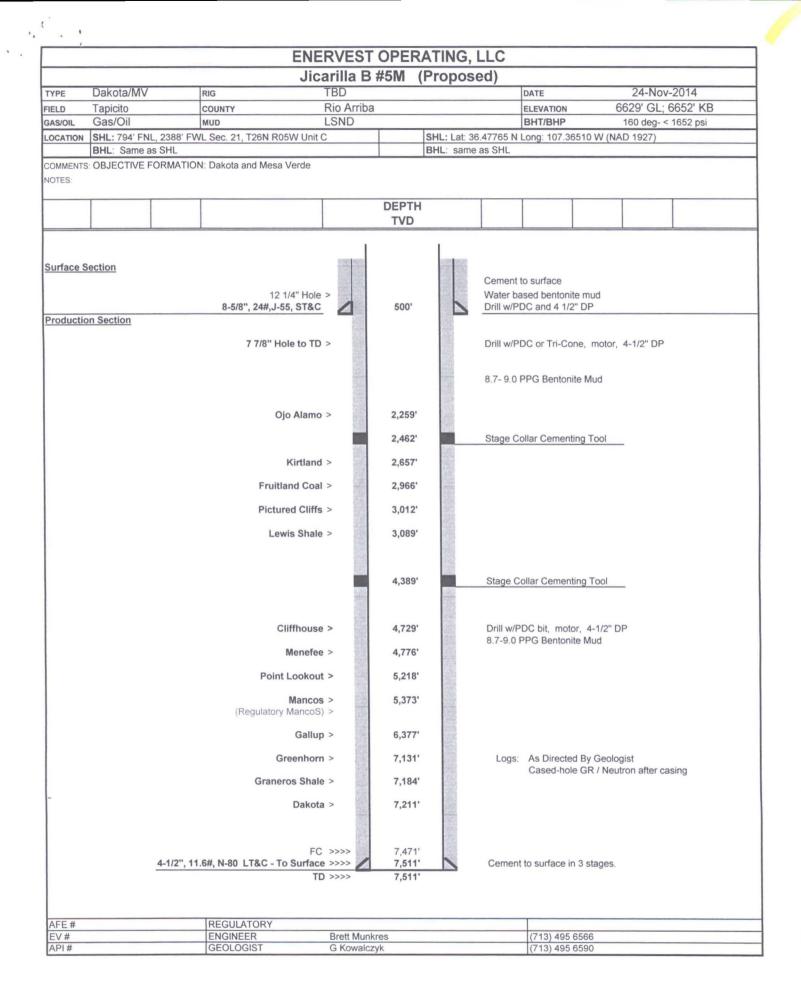

# EnerVest Operating, LLC Jicarilla B #5M SHL: 794' FNL, 2388' FWL, Unit C, Sec 21, T26N, R05W Rio Arriba, NM

#### 5. WELL SITE LAYOUT

· ·

The attached figure (Fig A) shows the proposed well location layout while drilling this well. The drilling contractor has not been chosen and the layout of the may vary with the particular drilling contractor's rig requirements. A construction zone will be built as needed around the perimeter of the location as shown on the attached survey plats. The area will be reclaimed as per item # 11 below upon the completion of the well.

## 6. <u>PROPOSED PRODUCTION FACILITIES</u>

The actual equipment used and the configuration will be determined after the well is completed. At a minimum, the facilities will include a meter run, a separator, a produced water storage tank and a condensate/oil storage tank. All surface equipment will be painted with a non-reflective paint color as per specifications as specified by the Conditions of Approval.

## 7. WATER SUPPLY

Drilling and completion water will come from sources as agreed with the Jicarilla Apache Tribe. Fresh water will be trucked from several sources; local ponds, or wells from the area. No water wells are to be drilled for this location.

# 8. <u>CONSTRUCTION MATERIALS & METHODS</u>

NM One Call (811), US Forest Service and BLM will be notified before construction starts. The top 6" of soil from the location will be saved and will be piled at near the location to be used for reclamation at a later date. Any road base, gravel or other fill material will be hauled from a source as agreed upon by the Jicarilla Apache Tribe or as specified in the Conditions of Approval.

# 9. WASTE DISPOSAL

- A. The drill cuttings will be handled with a closed loop system and stored in steel rig tanks. These will then be hauled to a properly-permitted site for disposal. The drilling fluid will be processed for reuse, any drilling fluid that cannot be re-used will be hauled to a properly-permitted facility for disposal. The closed loop system will be closed and removed as per NMOCD.
- B. Drilling mud that cannot be re-used will be disposed of at a properly permitted facility.
- C. Produced water will be collected and disposed of a properly permitted facility.
- D. Any sewage will be collected by the portable toilet provider for disposal.
- E. All garbage and general trash will be collected in a portable trash cage and will be removed from the site and disposed of in a properly permitted disposal facility. There will be no burning of trash.
- F. Drilling crews under the supervision of the contractor or operator will control and dispose of garbage and waste materials during the drilling operations.

