

submitted in lieu of Form 3160-5

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT DIS ALBUQUERQUE, N.M.

02 SEP 16 PM 1:48

		5.	Jicarilla Tribal Contract #7
1.	Type of Well Oil	6.	If Indian, All. or Tribe Name
		7.	Jicarilla Apache Unit Agreement Name
2.	Name of Operator	7.	Omt Agreement Name
	Golden Oil Company	8.	Well Name & Number
3.	Address & Phone No. of Operator	0.	Jicarilla Tribal Contract
	550 Post Oak Blvd, Suite 550, Houston, TX 77027	9.	API Well No. 30-039-22615 3 3545
Lo	ocation of Well, Footage, Sec., T, R, M	10.	Field and Pool
	1980' FSL and 1980' FWL, Sec. 9, T-23-N, R-4-W,	11.	S. Lindrith Gallup-Dakota County & State Rio Arriba County, NM
12	. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OT	HER D	ATA
	Type of Submission Type of Action Y Notice of Intent Y Abandonment Change of Blane		
	X Notice of Intent X Abandonment Change of Plans Recompletion New Construction		
	Subsequent Report Plugging Back Non-Routine Fractu	ring	
	Casing Repair Water Shut off		
	Final Abandonment Altering Casing Conversion to Inject Other -	tion	
13	. Describe Proposed or Completed Operations		
	Golden Oil Company plans to plug and abandon this well per the attached procedure.		
	attached procedure.		
14	. I hereby certify that the foregoing is true and correct.		
Sid	gned Thenk D Oldham Title Director of open	Lion	S Date9/10/02
;	Ted Oldham		
(T	his space for Federal or State Office use)		Date OCT 1 1 2002
	PROVED BY	* + + V * .	Date
(:(ONDITION OF APPROVAL if any		

PLUG AND ABANDONMENT PROCEDURE 9/9/02

Jicarilla Tribal Contract 71 #38 South Lindrith Gallup / Dakota 1980' FSL & 1980' FWL, Section 9, T23N, R4W Rio Arriba County, NM

Note: All cement volumes use 100% excess outside pipe and 50' excess inside pipe. The stabilizing wellbore fluid will be 8.3 ppg, sufficient to balance all exposed formation pressures.

All cement will be ASTM Type II, mixed at 15.6 ppg with a 1.18 cf/sx yield.


- Install and/or test rig anchors. Prepare blow pit. Comply with all NMOCD, BLM and Golden safety rules and regulations. MOL and RU daylight pulling unit. Blow well down; kill with water if necessary.
- Pick up on tubing and unseat pump. If necessary, hot oil tubing. Re-seat pump and pressure test tubing to 1000#. POH and LD rods. ND wellhead and NU BOP and stripping head; test BOP. TOH and tally 2-3/8" tubing, 7076'. If necessary LD tubing and PU workstring. Round-trip 4-1/2" gauge ring to 6826'. Note fluid level.
- 3. Plug #1 (Dakota perforations and top, 6826' 6726'): TIH and set a 4-1/2" cement retainer at 6826'. Pressure test tubing to 1000#. Pump 40 bbls water down the tubing. Mix 11 sxs cement and spot a balanced plug inside casing above retainer to isolate the Dakota perforations. TOH.
- 4. Plug #2 (Gallup perforations and top, 5482' 5382'): TIH and set a 4-1/2" cement retainer at 5482'. Load casing with water and circulate the well clean. Pressure test casing to 500#. If casing does not test, then spot or tag subsequent plugs as appropriate. Mix 11 sxs cement and spot a balanced plug inside casing above retainer to isolate Gallup perforations. PUH to 4266'.
- 5. Plug #3 (Cliffhouse top, 4266' 4166'): Mix 11 sxs cement and spot a balanced plug inside casing to cover the Cliffhouse top. If casing leaks increase cement. PUH to 2775'.
- 6. Plug #4 (Pictured Cliffs, Fruitland, Kirtland and Ojo Alamo tops, 2775' 2190): Mix 47 sxs cement and spot a balanced plug inside casing to cover through the Ojo Alamo top. PUH to 820'.
- 7. Plug #5 (Nacimiento top, 820' 720): Mix 11 sxs cement and spot a balanced plug inside casing to cover the Nacimiento top. PUH to 273'
- 8. Plug #6 (8-5/8" Surface casing, 273' surface): Mix and pump approximately 25 sxs cement from 273' to surface, circulate good cement out casing valve. Shut well in and WOC.
- 9. ND BOP and cut off casing below surface. Install P&A marker with cement to comply with regulations. RD, move off location, cut off anchors and restore location.

Jicarilla Tribal Contract 71 #38

Current

South Lindrith Gallup/Dakota

SW, Section 9, T-23-N, R-4-W, Rio Arriba County, NM

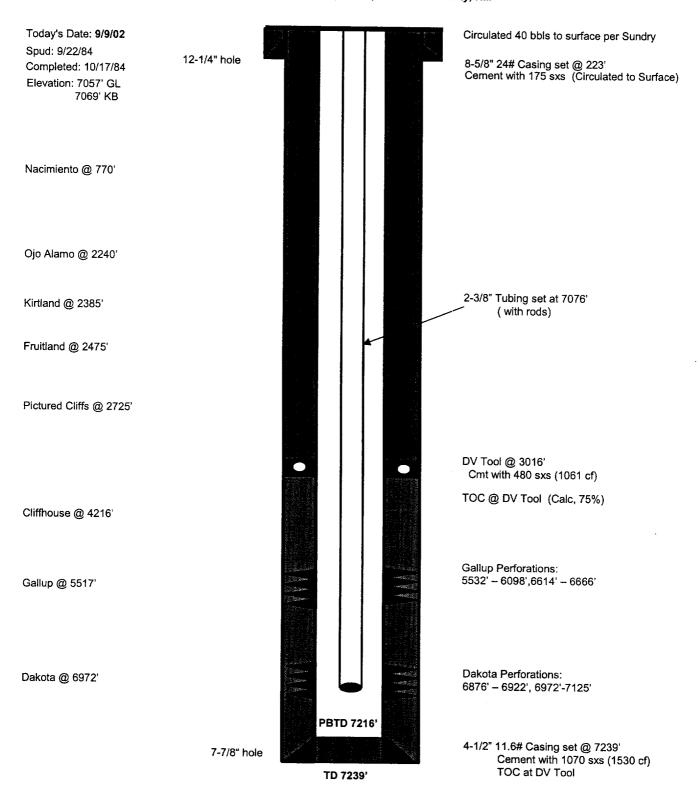

Jicarilla Tribal Contract 71 #38 Proposed P&A

South Lindrith Gallup/Dakota

SW, Section 9, T-23-N, R-4-W, Rio Arriba County, NM

Today's Date: 9/9/02 Spud: 9/22/84 Completed: 10/17/84 Elevation: 7057' GL 7069' KB

Nacimiento @ 770'

Ojo Alamo @ 2240'

Kirtland @ 2385'

Fruitland @ 2475'

Pictured Cliffs @ 2725'

Cliffhouse @ 4216' .

Gallup @ 5517'

Dakota @ 6972'

12-1/4" hole PBTD 7216'

Circulated 40 bbls to surface per Sundry

8-5/8" 24# Casing set @ 223'

Cement with 175 sxs (Circulated to Surface)

Plug #6: 273' - Surface

Cmt with 25 sxs

Plug #5: 820' - 720' Cmt with 11 sxs

Plug #4: 2775' - 2190'

Cmt with 47 sxs

DV Tool @ 3016' Cmt with 480 sxs (1061 cf) TOC @ DV Tool (Calc, 75%)

Plug #3: 4266' - 4166'

Cmt with 11 sxs

Set CR @ 5482'

Plug #2: 5482' - 5382'

Cmt with 11 sxs

Gallup Perforations: 5532' - 6098',6614' - 6666'

Plug #1: 6826' - 6726'

Cmt with 11 sxs

Set CR @ 6826'

Dakota Perforations: 6876' – 6922', 6972'-7125'

4-1/2" 11.6# Casing set @ 7239' Cement with 1070 sxs (1530 cf) TOC at DV Tool

7-7/8" hoie

TD 7239'

UNITED STATES DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT Albuquerque Field Office 435 Montano N.E. Albuquerque, New Mexico 87107

Company Golden Oil Company

Well No. Chase Apache 71 No. 38

Location 1980' FSL & 1980' FWL Sec. 9, T23N, R4W, NMPM

Lease No. Jicarilla Contract 71

Government Contacts:

Bureau of Land Management, Albuquerque Field Office Office 505.761.8700

Manager:

Steve Anderson, Assistant Field Manager 505.761.8982

Petroleum Engineer:

Brian W. Davis 505.761.8756, Home 505.323-8698,

Pager 505.969.0146, Cell 505.249.7922,

Petroleum Engineering Technician: Bryce Hammon, Office 505.759.1823, x-31, Cell 505.320.9741

BLM Geology / Environmental Contact: Patricia M. Hester 505.761.8786

GENERAL REQUIREMENTS FOR OIL AND GAS OPERATIONS FEDERAL & INDIAN LEASES

- 1. Plugging operations authorized are subject to the "General Requirements for Permanent Abandonment of Wells on Federal and Indian Leases."
- 2. For wells on Indian leases, Bryce Hammond with the Jicarilla Nation Tribal Oil and Gas Office is to be notified at least 24 hours (48 hours if possible) before the plugging operations commence. His phone number is (505) 759-1823, x-31 office, (505) 320-9741 cell. Office hours are 7:45 a.m. to 4:30 p.m.
- 3. Blowout prevention equipment is required.
- 4. The following modifications to your plugging program are to be made :

N/A

BLM CONDITIONS OF APPROVAL

The following surface rehabilitation Conditions of Approval must be complied with as applicable, before this well can be approved for final abandonment (see 43 CFR 3162.3-4). Surface rehabilitation work shall be completed within one year of the actual plugging date. Notification for completion of this work should be submitted with a Sundry Notice. Questions? Call Pat Hester at (505) 761-8786.

- 1. All fences, production equipment, purchaser's equipment, concrete slabs, deadman (anchors), flowlines, risers, debris and trash must be removed from the location. Non-retrieved flowlines and pipelines will be abandoned in accordance with State Rule 714. Information supporting the non-retrieval will be included in the subsequent report or final abandonment Sundry Notice.
- 2. Production pits will be closed according to the Unlined Surface Impoundment Closure Guidelines, as approved in the Environmental Assessment of December 1993. Any oil stained soils can be remediated on-site according to these guidelines or disposed of in a an approved facility.
- 3. The well pad will be shaped to the natural terrain and left as rough as possible. All compacted areas and areas devoid of vegetation shall be ripped/disked to a minimum of 12" in depth before reseeding.
- 4. Access roads will be shaped to conform to the natural terrain and left as rough as possible to deter vehicle travel. Access will be ripped to a minimum of 12" in depth, water barred and reseeded. All erosion problems created by the development must be corrected prior to acceptance of release. Water bars should be spaced as shown below along the fall line of the slope:

% Slope	Spacing Interval
Less than 20%	200'
2 to 5 %	150'
6 to 9 %	100,
10 to 15 %	50'
Greater than 15%	30'

- 5. All disturbed areas will be seeded with the prescribed certified seed mix (reseeding may be required). Seed mix must be certified weed free to avoid the introduction of noxious weeds. Refer to the original APD for seed mix.
 - 6. Notify Surface Managing Agency seven (7) days prior to seeding so that they may be present to witness.
- 7. The period of liability under the bond of record will not be terminated until the well is inspected and the surface rehabilitation approved.

Other Surface Managing Agencies (SMA's) may vary slightly in their restoration requirements. It is your responsibility, as the operator, to obtain surface restoration requirements from other SMA's. We need to be provided with a copy of these requirements. Any problems concerning stipulations received from other SMA's should be brought to us. On private land, a letter from the fee owner stating that the surface restoration is satisfactory will be provided to the office. Questions? Call Pat Hester at (505) 761-8786.