

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☒ Salt Water Disposal	5. LEASE DESIGNATION AND SERIAL NO. NM 043286
2. NAME OF OPERATOR Merrion Oil & Gas Corporation	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR P. O. Box 840, Farmington, NM 87499	7. UNIT AGREEMENT NAME Media
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 990' FSL & 1650' FWL	8. FARM OR LEASE NAME Media Entrada Unit
14. PERMIT NO.	9. WELL NO. 8
15. ELEVATIONS (Show whether SP, RT, GR, etc.) 6846' DF	10. FIELD AND POOL, OR WILDCAT Media Entrada
	11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec 14 T19N, R3W
	12. COUNTY OR PARISH 13. STATE Sandoval NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
(Other) ☐

PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
ABANDON* ☒
CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐
FRACTURE TREATMENT ☐
SHOOTING OR ACIDIZING ☐
(Other) ☐

REPAIRING WELL ☐
ALTERING CASING ☐
ABANDONMENT* ☒

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Attached for your approval is a procedure to P&A the subject well.
Please indicate your approval by signing and returning a copy to
this office.

RECEIVED
OCT 5 1990
OIL CON. DIV.
DIST. 3

18. I hereby certify that the foregoing is true and correct

SIGNED George F. Sharpe

TITLE Engineer

DATE 9/18/90

(This space for Federal or State office use)

APPROVED BY Shirley Mondy
CONDITIONS OF APPROVAL, IF ANY:

TITLE Acting AREA MANAGER
RIO PUERCO RESOURCE AREA

DATE 9/21/90

NMOCD

*See Instructions on Reverse Side

Copies: BLM - 6, Albuquerque
Well File - 1

Notify this office 24
hours prior to plugging
the well

MERRION OIL & GAS CORPORATION

MEDIA ENTRADA UNIT NO. 8

PLUG & ABANDON PROCEDURE

LOCATION: 990' FSL & 1650' FWL
Section 14, T19N, R3W
Sandoval County, New Mexico

ELEVATION: 6870' GL
6882' KB

PREPARED BY: George Sharpe

DATE: 9/14/90

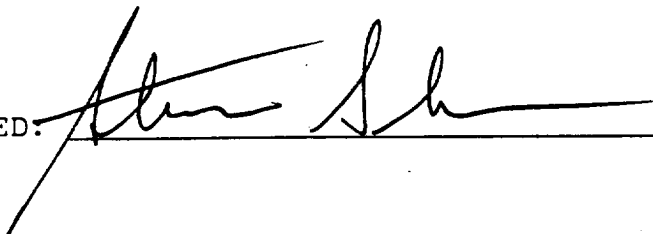
1. MIRU. ND WH. NU BOPs. Release Baker 4-1/2" tension packer and POOH with $\pm$ 5174' of 2-3/8" PL tubing.
2. RIH with workstring to PBTD @ 5311'. Roll hole with 9.0 ppg mud. Spot following cement plugs:

<u>Formation</u>	<u>Top</u>	<u>Perfs</u>	<u>Cement Sacks</u>	<u>Cmt Plug</u>	<u>Comments</u>
Entrada	5290'	5280'-5305'	25	5311'-4872'	WOC. Tag cmt.
Morrison	4514'		25	4564'-4125	
Dakota	4272'		--	See above	
Gallup	2798'		25	2850'-2411'	
Mesaverde	404'		27	454'-0'	If possible
Csg Shoe	213'		--	See above	
Surf Plug			--	See above	
Csg Annulus			10	60'-0'	

* All cement to be Class "G" with 50/50 Poz and 6% gel; yield = 1.57 ft³/sack.

3. RD MOL. Cut off casing. Install P&A marker. Restore location.

GFS/eg

APPROVED: 

DATE: 9-14-90

MEDIA ENTRADA UNIT #8 (SWD)
(FEDERAL MEDIA #4)

(FEDERAL MEDIA #4)

MEDIA ENTRADA FIELD

(DON. C. WILEY & FLUID POWER PUMP COMPANY)

LOCATION "N" 990' FSL & 1650' FWL SECTION 14 BLOCK

SURVEY T-19-N & R-3-W COUNTY SANDOVAL, NEW MEXICO

DATUM 6802' [KB] G.L. ELEV. 6870' TD 5344' PSTD 5311' KMT

[illegible]

OPT ENTRADA: 1680+968W+TSTM (7-7-69) 33°(?) API *Normal* DATA AVAILABLE DST ☐ PVT ☐
CORE ☒ 521-5 OTHER

REMARKS: Completed to SWD well on 8-24-75; commenced water injection 11-12-75.

DATE: 5-56 (1A)