

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 1004-1
Expires August 31, 1985

5. LEASE DESIGNATION AND SERIAL

NM 25816

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Silky Sullivan

9. WELL NO.

1

10. FIELD AND POOL OR WILDCAT

Pictured Cliffs

11. SEC. T., R., M., OR BLE. AND
SURVEY OR AREA

Sec. 15, T21N, R7W

12. COUNTY OR PARISH

Sandoval

13. STATE

New Mexico

1. OIL GAS WELL OTHER
WELL

2. NAME OF OPERATOR

Merrion Oil & Gas Corp.

3. ADDRESS OF OPERATOR

P. O. Box 840, Farmington, New Mexico 87499

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)

At surface

1670' FNL and 2290' FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6784' KB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Propose to plug and abandon the Silky Sullivan No. 1 as follows for lack of commercial quantities of natural gas (schematic attached):

1. MIRU pulling unit. Unset packer and POH w/ tubing. Remove packer.
2. RIH w/ tubing open ended to 1255 ft. Spot 95 sx plug (112 cu.ft.) to cover Chacra perms and above Chacra interval to surface. POH w/ tubing.
3. Top off @ surface to fill well w/ cement.
4. Remove wellhead & install dry hole marker.
5. Reclaim surface per BLM instructions.

RECEIVED
JUN 06 1988
OIL CON. DIV.
DIST. 3

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE Operations Manager

DATE May 20, 1988

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

NMOCC

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

PRIVACY ACT

The Privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et. seq., 351 et. seq., 25 U.S.C. et. seq.; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is to be used to evaluate, when appropriate, approve applications, and report completion of secondary well operations, on a Federal or Indian lease.

ROUTINE USES: (1) Evaluate the equipment and procedures used during the proposed or completed subsequent well operations. (2) Request and grant approval to perform those actions covered by 43 CFR 3162.3-2(2). (3) Analyze future applications to drill or modify operations in light of data obtained and methods used. (4)(5) Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions.

EFFECT OF NOT PROVIDING INFORMATION: Filing of this notice and report and disclosure of the information is mandatory once an oil or gas well is drilled.

The Paperwork Reduction Act of 1980 (44 U.S.C. 3501, et. seq.) requires us to inform you that:

This information is being collected in order to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

This information will be used to report subsequent operations once work is completed and when requested, to obtain approval for subsequent operations not previously authorized.

Response to this request is mandatory for the specific types of activities specified in 43 CFR Part 3160

JUN 06 1988

OIL CON. DIV
DIST. 3

08 MAY 23 AM 11:13


* MERRION OIL & GAS *

WELLBORE SCHEMATIC

Well: ~~Sinky~~ Sullivan No 1
Field: Wildcat

Location: 1670' FNL & 2290' FWL
Sec. 15, T21N, R7W
Sandoval Co, New Mexico

Elevation: 6,784' KB
6,776' GL

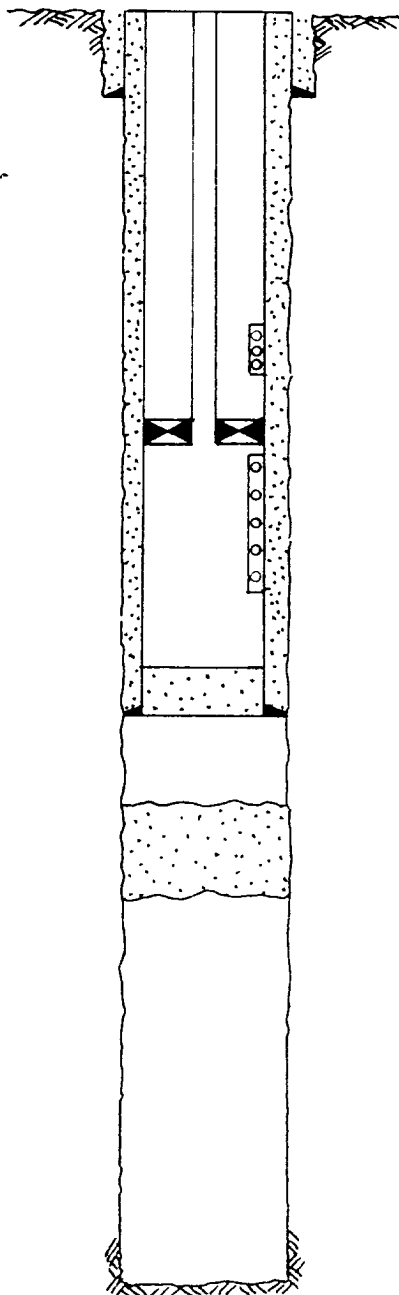

TOC @ Surface

Bit Size - 12 1/4"

8 5/8" 24# Surface @ 131' KB w/ 80 sx

Bit Size - 6 3/4"

Tubing - 2 3/8" 4.7# EUE w/ Packer @ 1150' KB

Pictured Cliffs Perfs - 759'-789' KB Gross

Chacra Perfs - 1166'-1254' Gross Interval

PBTD @ 1375' KB

4 1/2" 10.5# J-55 Casing @ 1430' KB w/ 380 sx 'H
Top of Cement @ Surface

Spot 20 sx open hole cement plug 1850'-1950' KB

Tops	Depth
Ojo Alamo	250
Fruitland	520
Pict Cliffs	758
Lewis	976
Chacra	1,153
Cliffhouse	1,952
Menefee	2,180
Pt Lookout	3,128
Mancos	3,212

TD @ 3287' KB