Form 3160-5 (June 1990)

## UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

FORM APPROVED Budget Bureau No. 1004-0135

Expires: March 31, 1993 5. Lease Designation and Serial No.

## CONTRACT #68

Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill or to deepen or reentry to a different/reservoir. 6. If Indian, Allottee or Tribe Name

Use "APPLICATION FOR PERMIT—" for such proposals		JICARILLA APACHE
SUBMIT IN TRIPLICATE  1. Type of Well  Oil  Well XX Well  Other  2. Name of Operator  Texaco Inc.  3. Address and Telephone No.  3300 N. Butler, Farmington N.M. 87401 (505)325-4397  4. Location of Well (Footage, Sec., T., R., M., or Survey Description)		7. If Unit or CA, Agreement Designation
		8. Well Name and No.  JICARILLA B No. 4  9. API Well No.  30-039-05706  10. Field and Pool, or Exploratory Area  BASIN DAKOTA  11. County or Parish, State
660' FSL & 660' FWL, SEC 3	2 T25N-R5W	RIO ARRIBA, NEW MEXICO
CHECK APPROPRIATE BOX	(s) TO INDICATE NATURE OF NOTICE,	REPORT, OR OTHER DATA
TYPE OF SUBMISSION	TYPE OF A	
XXNotice of Intent	Abandonment Recompletion	Change of Plans  New Construction
Subsequent Report	Plugging Back  XX asing Repair	Non-Routine Fracturing Water Shut-Off
Elizab Abandanment Notice	Altering Casing	Conversion to Injection

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TEXACO INC. PROPOSES TO PERFORM THE FOLLOWING ON THE SUBJECT WELL.

1. SPOT 2650 # SAND FROM TD TO 6900'.

2. SET RBP @ 6030', SQZ GALLUP PERFS USING THE HESITATION METHOD (IF REQUIRED). DRILL OUT CMT PLUG.

3. RIH W/ PKR, SET @ 1,500' PRESS TEST CSG TO 1000 PSI AND CLEAN OUT HOLE TO 6030'. TOOH W/ RBP.

4. RIH W/ 3 1/2" TBG TO 6060' AND CMT TO SURFACE USING 500 SX CMT.

5. RIH W/ 2 1/16" TBG AND FLUSH SAND TO TD USING 180,000 SCF  $\mathrm{N}_2$ 

6. INSTALL WELLHEAD, RDMOSU.



AUG 2 8 1990

OIL CON. DIV. DIST. 3


14. I hereby configurate the foregoing is the and correct Signed AM A Cluic	Tide Area Manager	Date 8/21/90
(This space for Federal or State office use)		APPROVED
Approved by	NMOCD	AUG 22 1990 Ken Towncond AREA MANAGER

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements

en de la companya de A

## JICARILLA "B" WELL NO. 4

## PROPOSED COMPLETION




2 1/16" TBG © 6950'

8-3/4" HOLE

3 1/2" CSG ● 6060' W/ 500 SX CMT TO SURFACE

5-1/2" CSG © 7140' w/ 600 SX 1ST STAGE & 500 SX 2ND STAGE

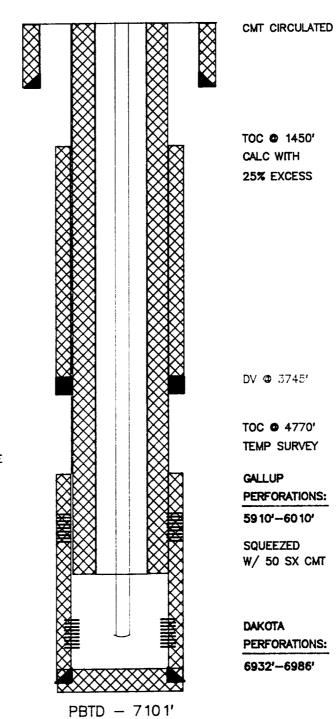

TD - 7150'