

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator
Texaco Inc.

3. Address and Telephone No.
3300 N. Butler, Farmington N.M. 87401 (505)325-4397

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)
SEC 31-T25-R5W 1590' FSL & 990' FEL

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
FA-3520 Cont 68

6. If Indian, Allottee or Tribe Name

JICARILLA APACHE

7. If Unit or CA, Agreement Designation

8. Well Name and No.

JICARILLA B #2

9. API Well No.

30-039-05725

10. Field and Pool, or Exploratory Area

OTERO GALLUP/BLANCO PC

11. County or Parish, State

RIO ARriba

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
- ☐ Subsequent Report
- ☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
- ☒ Recompletion
- ☐ Plugging Back
- ☐ Casing Repair
- ☐ Altering Casing
- ☐ Other

- ☐ Change of Plans
- ☐ New Construction
- ☐ Non-Routine Fracturing
- ☐ Water Shut-Off
- ☐ Conversion to Injection
- ☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

1. MIRUSU. NUBOP
2. PULL AND INSPECT TBG.
3. PRESS TEST CSG, REPAIR IF NECESSARY.
4. RIH W/ WIRELINE AND RUN GR-CCL-CNL FROM 5000' TO 2400'.
4. PERF PICTURED CLIFFS (2602'-2700') INTERVALS TO BE SELECTED.
5. ACIDIZE AND FRAC PC W/ 1500 GAL 15% HCL, 44,000 GAL SLICKWATER, AND 40,000 LB 20/40 MESH SAND.
6. ACIDIZE GALLUP W/ 2,000 GAL 15% HCL.
7. INSTALL PRODUCTION EQUIP, RDMOSU.

RECEIVED

SEP 20 1990

**OIL CON. DIV.
DIST. 3**

14. I hereby certify that the foregoing is true and correct

Signed Alan A. Hlavin Title Area Manager

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title NMOCD

Date 8/ /90

APPROVED

SEP 14 1990


AREA MANAGER

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side

JICARILLA B No. 2 PRESENT WELLBORE CONDITIONS

WELL:
JICARILLA B No. 2
LOCATION:
NE/4 SE/4
SEC 31 T25N R5W

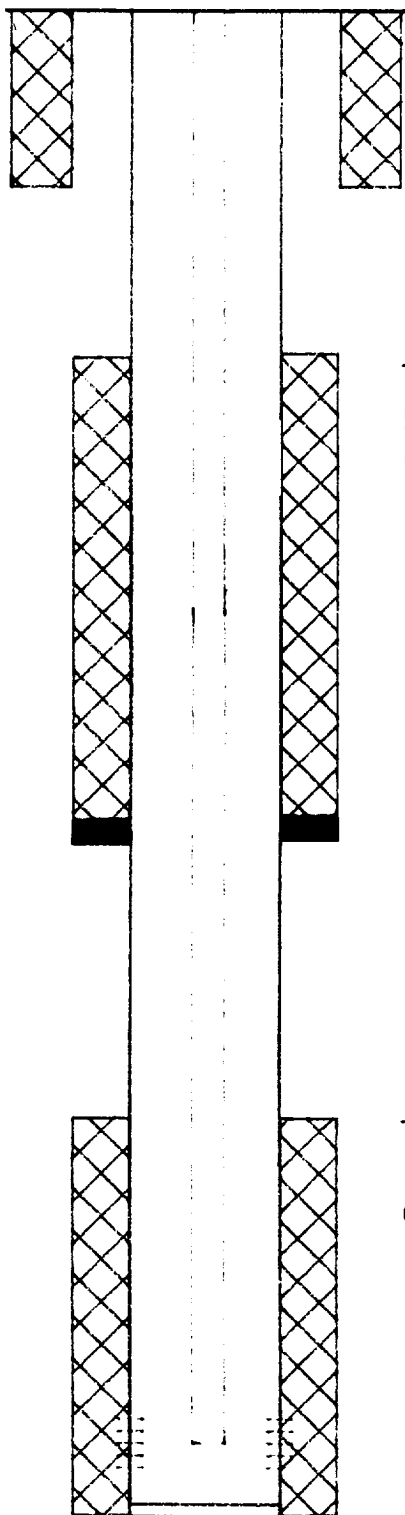

CIRC CMT
10 3/4" CSG
@ 330' W/ 300 SX CMT

TOC @ 2120'
BY TEMP SURVEY
CMT W/ 200 SX

DV @ 2750'

TOC @ 5235'
BY TEMP SURVEY
CMT W/ 350 SX


5 1/2" CSG @ 6365'
PBD-6221'
TD- 7252'

GALLUP
PERFORATIONS
5980'-6060'

JICARILLA B No. 2 PROPOSED WELLBORE

WELL:
JICARILLA B No. 2

LOCATION:
NE/4 SE/4
SEC 31 T25N R5W



CIRC CMT
10 3/4" CSG
● 330' W/ 300 SX CMT

1 1/2" TBG
● 2600'

TOC @ 2120'
BY TEMP SURVEY
CMT W/ 200 SX

2 3/8" TBG
● 5990'

PICTURED CLIFFS
PERFORATIONS
2602'-2697'

DV ● 2750'

PACKER ● 2720'

5 1/2" CSG ● 6365'
PBTD-6221'
TD- 7252'

TOC @ 5235'
BY TEMP SURVEY
CMT W/ 350 SX

GALLUP
PERFORATIONS
5980'-6060'

