

**UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT**

**Sundry Notices and Reports on Wells**

<p>1. Type of Well GAS</p> <hr/> <p>2. Name of Operator Meridian Oil Inc.</p> <hr/> <p>3. Address &amp; Phone No. of Operator Box 4289, Farmington, NM 87499 (505) 326-9700</p> <hr/> <p>4. Location of Well, Footage, Sec, T, R, M. SENW                      Sec. 6 , T-25-N, R-4-W, NMPM  1540/N 1670/W</p>	<p>5. Lease Number Jic. Contract 123 C</p> <p>6. If Indian, All. or Tribe Name Jic. Apache</p> <p>7. Unit Agreement Name</p> <hr/> <p>8. Well Name &amp; Number Jicarilla 123 C #27</p> <p>9. API Well No.</p> <hr/> <p>10. Field and Pool W. Lindrith Gallup Dakota</p> <p>11. County and State Rio Arriba County, NM</p>
--	--

12. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OTHER DATA

Type of Submission	Type of Action	
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Abandonment	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Water Shut Off
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Other - Add Gallup perforations	

**13. Describe Proposed or Completed Operations**

It is intended to add the Gallup interval in the subject well and commingle the production downhole. This well is in the West Lindrith Gallup Dakota commingled pool. The workover will consist of the following:

TOOH w/tbg. Set RBP @ 7100'.  
 Perf Gallup w/37 holes from 6585-6940'.  
 Stimulate Gallup w/100,000 gal. slick wtr & 106,000# 20/40 sand.  
 Flow back frac fluid and clean up well.  
 Pull RBP and land tbg @ 7600'.  
 Put well back on production.

RECEIVED  
SEP 3 1991  
OIL CON. DIV.  
DMS: S

14. I hereby certify that the foregoing is true and correct.  
 Signed Deputy Stateful (LS) Title Regulatory Affairs Date 9-3-91

(This space for Federal or State office use)


APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_  
 CONDITION OF APPROVAL, IF ANY:

SEP 10 1991  
DATE

Jicarilla 123 C #27  
Unit F Sect 6-T25N-R4W  
Rio Arriba County, New Mexico

Wellbore Schematic

CURRENT

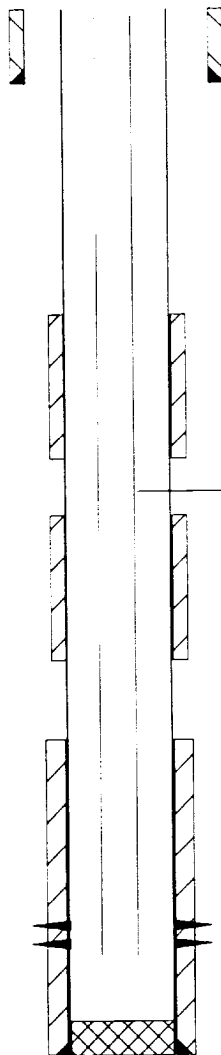

9 5/8" set @ 223'

DV Tool at 3447'  
TOC @ 2400'  
Third stage

2 3/8" Tubing set @ 7597'


DV Tool at 6034'  
TOC @ 5170'  
Second stage

4 1/2" set @ 7712'  
Top of cmt @ 6500' (calc.)  
First stage

Producing Dakota zone  
7422-7596' (10 holes)

PBTD @ 7695'  
TD @ 7712'

PROPOSED

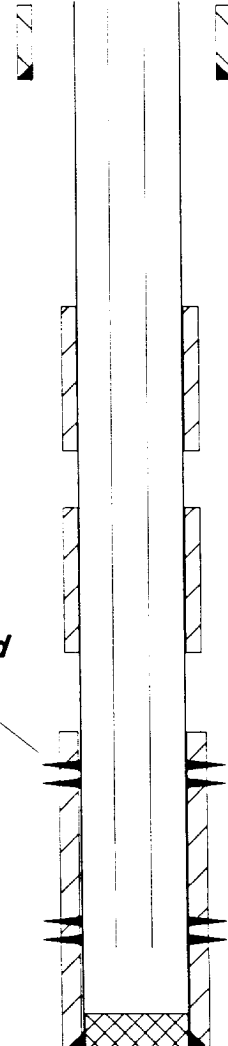

***Gallup Completed  
from 6585-6940'***