

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)



1. oil well <input checked="" type="checkbox"/> gas well <input type="checkbox"/> other <input type="checkbox"/>
2. NAME OF OPERATOR Cotton Petroleum Corporation
3. ADDRESS OF OPERATOR 717 17th St., Suite 2200, Denver, CO 80202
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) AT SURFACE: 1980' FWL & 1980' FSL AT TOP PROD. INTERVAL: AT TOTAL DEPTH:
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☒
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☒
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

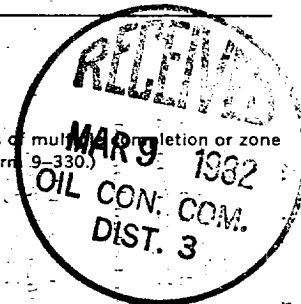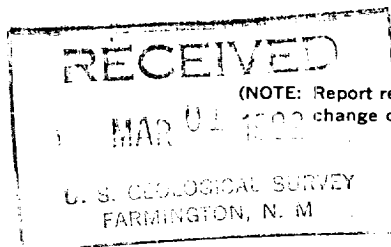

5. LEASE Contract #127
6. IF INDIAN, ALLOTTEE OR TRIBE NAME Jicarilla
7. UNIT AGREEMENT NAME NA
8. FARM OR LEASE NAME Apache
9. WELL NO. 132
10. FIELD OR WILDCAT NAME Lindrith Gallup Dakota West
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Section 4 T24N-R4W
12. COUNTY OR PARISH Rio Arriba
13. STATE New Mexico
14. API NO. 30-039-22216
15. ELEVATIONS (SHOW DF, KDB, AND WD) 6782' GR

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Cotton Petroleum has positively identified that a channel exists behind pipe to the Burrow Canyon from temperature surveys and water analysis. We request permission to perform the following work to shut off the Burrow Canyon:

Gallup making water.

1. Cement squeeze the Gallup perfs 6199'-6317' w/50 sacks cement in order to be able to circulate the hole during remaining work.
2. Perf the Burrow Canyon @ 7367'-7369' w/4 JSPF.
3. Set a cement retainer @ 7180'.
4. Squeeze both Burrow Canyon & Dakota D perfs w/150 sacks cement.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED D.E. Wood / DMJ TITLE Division Prod. Mgr. DATE February 24, 1982

APPROVED BY CONDITIONS OF APPROVAL IF ANY: MAR 05 1982 JAMES F. SIMS DISTRICT ENGINEER	DATE _____
--	------------

*See Instructions on Reverse Side

an 2
NMOCG