

Submit 1 Copy To Appropriate District  
Office  
District I - (575) 393-6161  
1625 N. French Dr., Hobbs, NM 88240  
District II - (575) 748-1283  
811 S. First St., Artesia, NM 88210  
District III - (505) 334-6178  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV - (505) 476-3460  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-103  
Revised July 18, 2013

<b>SUNDRY NOTICES AND REPORTS ON WELLS</b> (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-015-33465
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <u>Pressure Monitoring</u>		5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No. VA 2956
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name Pierce Crossing 36 State
4. Well Location Unit Letter <u>D</u> : <u>830</u> feet from the <u>North</u> line and <u>845</u> feet from the <u>West</u> line Section <u>36</u> Township <u>24S</u> Range <u>29E</u> NMPM County <u>Eddy</u>		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>3088</u>		9. OGRID Number 16696
		10. Pool name or Wildcat Owen Mesa Atoka (Gas)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐  
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐  
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐  
DOWNHOLE COMMINGLE ☐  
CLOSED-LOOP SYSTEM ☐  
OTHER: Workover - Pressure Monitoring ☒

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐  
COMMENCE DRILLING OPNS. ☐ P AND A ☐  
CASING/CEMENT JOB ☐  
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

RECEIVED

See Attached

MAY 21 2018

Approved For one (1) year  
GC

DISTRICT II-ARTESIA O.C.D.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 5/15/18

Type or print name David Stewart E-mail address: david\_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Staff Mgr TITLE Staff Mgr DATE 5-24-18  
Conditions of Approval (if any):


**C-103 Attachment****OXY USA Inc. - Pierce Crossing 36 State #1 - 30-015-33469**

OXY USA Inc. respectfully requests to convert this well to a pressure monitoring well. Plan to cleanout well to liner top, below lowest plan perforation in WCA (10,441'). Perforate in 3rd Bone Spring & 2nd Bone Spring. RIH & set 5 RBPs, 3 of which will have gauges for long term pressure monitoring within those respective zones. OXY will monitor pressure for approximately 90 days before coming back to remove plugs and gauges, at which point an Intent to P&A will be filed to plug the well.

**Step Description**

- 1 MIRU Workover rig
- 2 Clean out to liner top @ 10441'
- 3 POOH and lay down workstring
- 4 RIH RBP on wireline & set @ 9970'; first plug will not have a gauge.
- 5 Pull up hole to 9950' (3rd BS) & perforate a 1' gun @ 6spf (6 holes)
- 6 RIH RBP on wireline & set @ 9930'; this plug will not have a gauge.
- 7 Repeat steps 4 & 5 for the plug and perforation depths below:  
RBP w/gauge = 9090', Perf Top = 9070' (2nd BS)  
RBP w/gauge = 9050', Perf Top = 8900' (2nd BS)  
RIH w/ final RBP w/gauge on wireline & set @ 8880'
- 8 POOH with wireline and shut in well



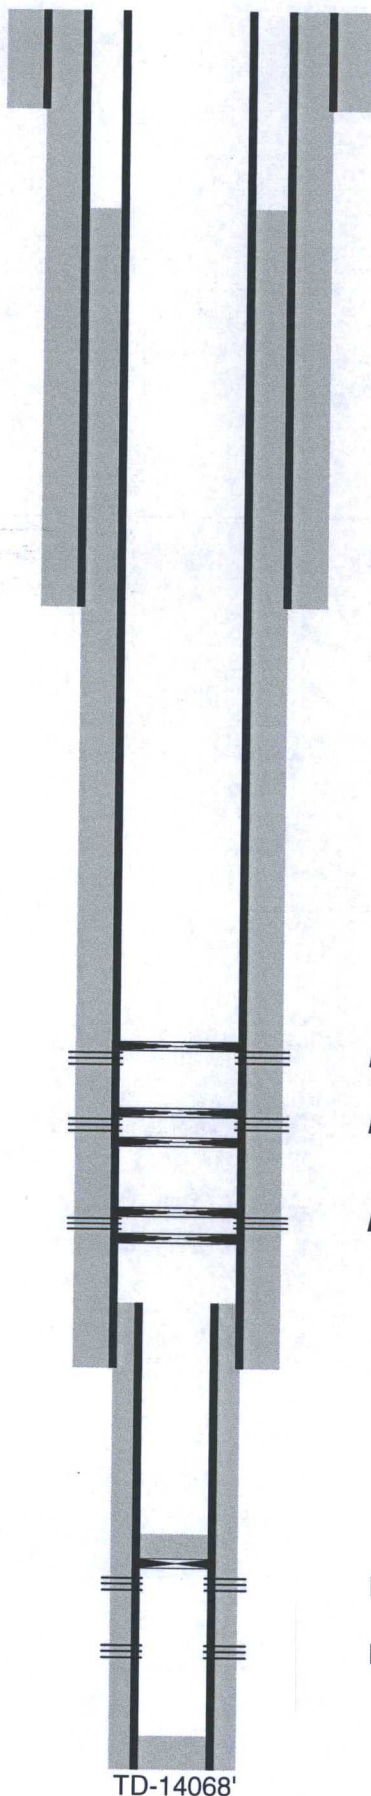

17-1/2" hole @ 776'  
13-3/8" csg @ 776'  
w/ 500sx-TOC-Surf-Circ

12-1/4" hole @ 4778'  
9-5/8" csg @ 4778'  
w/ 1775sx-TOC-Surf-Circ

RBP @ 8880' (w/gauge) 3

RBP @ 9050' (w/gauge) 2  
RBP @ 9090'

RBP @ 9930' (w/gauge) 1  
RBP @ 9970'

Perfs @ 8900-01' 2nd BS

Perfs @ 9070-71' 2nd BS

Perfs @ 9950-51' 3rd BS

8-3/4" hole @ 10938'  
7" csg @ 10938'  
w/ 1175sx-TOC-1900'-CBL

6-1/8" hole @ 10068'  
5" liner @ 10441'-14068'  
w/ 350sx-TOC-10441'-Circ/CBL

CIBP @ 12670' w/ 2sx cmt to 12640' Tagged

Perfs @ 12716-12724'

Perfs @ 13342-13420'

PB-14025'

TD-14068'

OXY USA Inc. - Current  
Pierce Crossing 36 State #1  
API No. 30-015-33469

17-1/2" hole @ 776'  
13-3/8" csg @ 776'  
w/ 500sx-TOC-Surf-Circ

12-1/4" hole @ 4778'  
9-5/8" csg @ 4778'  
w/ 1775sx-TOC-Surf-Circ

8-3/4" hole @ 10938'  
7" csg @ 10938'  
w/ 1175sx-TOC-1900'-CBL

6-1/8" hole @ 10068'  
5" liner @ 10441-14068'  
w/ 350sx-TOC-10441'-Circ/CBL

CIBP @ 12670' w/ 2sx cmt to 12640' Tagged

Perfs @ 12716-12724'

Perfs @ 13342-13420'

PB-14025'

TD-14068'