

Squeeze the pictured cliffs perforations
with cement.

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well GAS	5. Lease Number SF-078878		
2. Operator El Paso Natural Gas Company	6. If Indian, All.or Tribe Name		
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499	7. Unit Agreement Name Canyon Largo Unit		
4. Location of Well 910'S, 1675'W	8. Farm or Lease Name Canyon Largo Unit NP		
	9. Well No. 172		
	10. Field, Pool, Wildcat Ballard Pic. Cliffs		
	11. Sec. T. R. M. or Blk Sec. 27, T-25-N, R-7 -W NMMPM		
14. Permit No.	15. Elevations 6970' GR	12. County Rio Arriba	13. State NM
16. Intent to/Subsequent Report of :			
17. Describe proposed or completed operations:			

It is intended to plug back the Pictured Cliffs and recomplete in the Fruitland Coal formation in the following manner:

Set CIBP at 2630'. Pressure test to 3500 psi. Perforate at 2477-82', 2504-06', 2516-18', 2529-30', 2557-58', 2561-62', 2596-99', 2608-16' w/2 spf. Break down perms w/460 gal. of 7 1/2% HCl. Evaluate well. Fracture stimulate with 55,000# sand and 34,270 gal. fluid. Flow well back. Land 1 1/4" tbg at 2616'.

RECEIVED

OCT 11 1989

OIL CON. DIV.

DIST. 3

09-12-89

Date

18. Authorized by:

Regulatory Affairs

NOTE: This format is issued in lieu of US BLM Form 3160-5

(This space for Federal or State office use)

APPROVED BY

TITLE

CONDITION OF APPROVAL, IF ANY:

APPROVED
AS AMENDED


OCT 05 1989
DATE

AREA MANAGER

Canyon Largo Unit NP #172
SW/4 Section 27, T-25-N, R-7-W
Rio Arriba County, New Mexico

Wellbore Schematics

CURRENT

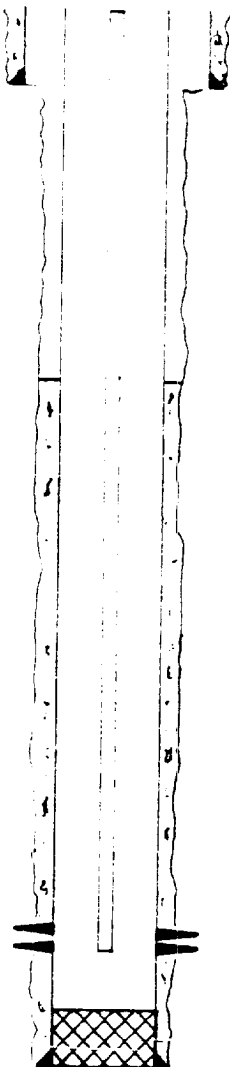

8 5/8" 24.0# K-55
set @ 142'

Top of cement @ 1610' (temp survey)


1 1/4" 2.3# 10rd NU set @ 2677'

PC perfs @ 2640'-46', 2654'-66',
2675'-81' and 2689'-95' (70 holes)

COTD @ 2747'

2 7/8" 6.4# J-55
set @ 2757'

PROPOSED

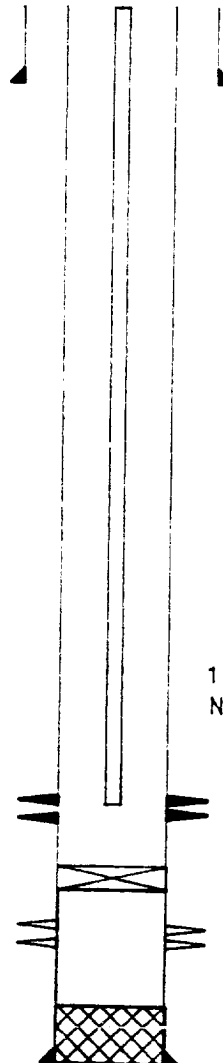

1 1/4" 2.3# J-55 10rd
NU tubing set @ 2616'

Fruitland Coal perfs
@ 2477'-2616'

Bridge plug
set @ 2630'