

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well GAS	5. Lease Number SF-079393		
2. Operator El Paso Natural Gas Company	6. If Indian, All.or Tribe Name		
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499	7. Unit Agreement Name San Juan 27-5 Unit		
4. Location of Well 940'N, 765'E	8. Farm or Lease Name San Juan 27-5 Unit		
	9. Well No. 62		
	10. Field, Pool, Wildcat Tapacitos Pic. Cliffs		
	11. Sec. T. R. M. or Blk Sec. 6, T-27-N, R-5 -W NMPM		
14. Permit No.	15. Elevations 6474' GR	12. County Rio Arriba	13. State NM
16. Intent to/Subsequent Report of :			
17. Describe proposed or completed operations:			

It is intended to plug back the Pictured Cliffs and recomplete in the Fruitland Coal formation in the following manner:

Set cmt. retainer @ 3290'. Pressure test to 3500 psi. Run CBL & CNL. Squeeze Pic. Cliffs perfs w/25 sx cmt. Spot 50 gal. 7 1/2% HCl @ 3290'. Perforate coal zones w/2 spf. Fracture stimulate well w/83,750# sand and 51,450 gal. fluid. Flow well back. Land 1 1/4" tbg @ bottom perforations.

18. Authorized by: [Signature]
Regulatory Affairs

09-12-89
Date

NOTE: This format is issued in lieu of US BLM Form 3160-5

=====
(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITION OF APPROVAL, IF ANY:


**APPROVED
AS AMENDED**

OCT 05 1989
DATE
AREA MANAGER

San Juan 27-5 Unit #62
NE/4 Section 6, T-27-N, R-5-W
Rio Arriba County, New Mexico

Wellbore Schematics

CURRENT

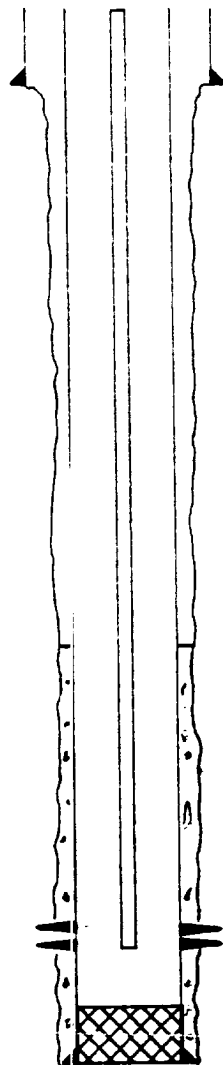

8 5/8" 24.0# K-55
set @ 133'

1" EUE tubing and 1" NU line pipe
set @ 3324'


Calculated cement top @ 2583'

PC perfs @ 3296'-3302', 3320'-
3326' and 3334'-3340' with 4 SPF

COTD @ 3359'

2 7/8" 6.4# J-55 set @ 3400'

PROPOSED

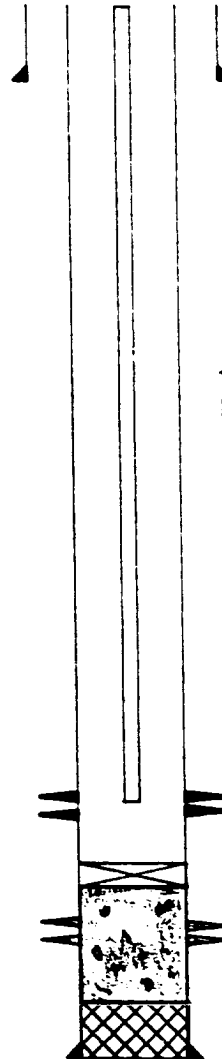

1 1/4" 2.4# J-55 10rd
EUE tubing set @ 3285'

Fruitland Coal perfs
@ 3205'-3285'

Cement retainer
set @ 3294'

PC perfs squeeze
cemented