
| (June 2015) UNITED STATES DEPARTMENT OF THE DIFISIONAL FIELD OIT BUREAU OF LAND MANAGEMENT SUNDRY NOTICES AND REPORTS OF WEDS A FLESS Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals. SUBMIT IN TRIPLICATE - Other instructions on page 2 | | | | January 31, 2018 |
|---|---|---|--|---|
| | | | 6. If Indian, Allottee | or Tribe Name |
| | | | 7. If Unit or CA/Agr | 7. If Unit or CA/Agreement, Name and/or N |
| 1. Type of Well | | | 8. Well Name and No GISSLER B 17 |). |
| Oil Well Gas Well Other Contact: LESLIE GARVIS | | | 9. API Well No. | |
| BURNETT OIL COMPANY INC E-Mail: lgarvis@burnettoil.com | | | 30-015-24963-00-S1 | |
| 801 CHERRY STREET UNIT FORT WORTH, TX 76102-68 | | 3b. Phone No. (include area code) Ph: 817.583.8730 | | |
| 4. Location of Well (Footage, Sec., T., R., M., or Survey Description) | | | 11. County or Parish, State | |
| Sec 11 T17S R30E NESW 19 | 80FSL 1980FWL | | EDDY COUNTY, NM | |
| :. 12. CHECK THE AF | PROPRIATE BOX(ES) | TO INDICATE NATURE O | F NOTICE, REPORT, OR OT | HER DATA |
| TYPE OF SUBMISSION | | TYPE OF | ACTION | |
| 🛛 Notice of Intent | C Acidize | Deepen | Production (Start/Resume) | U Water Shut-C |
| _ | Alter Casing | Hydraulic Fracturing | Reclamation | 🔲 Well Integrit |
| Subsequent Report | Casing Repair | New Construction | Recomplete | 🛛 Other |
| Final Abandonment Notice | Change Plans | Plug and Abandon | Temporarily Abandon | Right of Way |
| | Convert to Injection | Plug Back | Water Disposal | |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- andonment Notices must be fil | give subsurface locations and measure the Bond No. on file with BLM/BIA sults in a multiple completion or reco | impletion in a new interval a Form 31 | nent markers and zon e filed within 30 days 60-4 must be filed one |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to reroute located at T17S, R30E, Sec. 1 | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B | give subsurface locations and measu the Bond No. on file with BLM/BIA sulls in a multiple completion or reco ed only after all requirements, includi er B 17 from the Gissler B 3-1 3-3 battery-located at 17S. R | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Forn 31 ing reclamation, have been completed battery 30E. Sec. 11. | nent markers and zon e filed within 30 days 60-4 must be filed one |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to reroute | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- andorument Notices must be fil nal inspection. e the flowline of the Gissler 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of the | give subsurface locations and measu the Bond No. on file with BLM/BIA sults in a multiple completion or reco ed only after all requirements, includi er B 17 from the Gissler B 3-1 3-3 battery-located at 17S, R and tie into the existing flowli be Gissler B 91 and Gissler B | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well | nent markers and zon- e filed within 30 days 60-4 must be filed ond and the operator has |
| Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to reroute located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery located | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and we to the Gissler B 3-3 Batt | give subsurface locations and measu- the Bond No. on file with BLM/BIA sults in a multiple completion or reco- ed only after all requirements, includi- er B 17 from the Gissler B 3-1 3-3 battery-located at 17S, R and tie into the existing flowli- re Gissler B 91 and Gissler B will transport oil, gas and produ- | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well Joed water. | RECEIVED |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and we to the Gissler B 3-3 Batt | give subsurface locations and measu- the Bond No. on file with BLM/BIA sults in a multiple completion or reco- ed only after all requirements, includi- er B 17 from the Gissler B 3-1 3-3 battery-located at 17S, R: e and tie into the existing flowli- ne Gissler B 91 and Gissler B vill transport oil, gas and produ- ery dué to a change of operato | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well uced water. or of the DISTRIC | RECEIVED |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of th approximately 430' and v to the Gissler B 3-3 Batt Ily 1, 2018. | give subsurface locations and measu- the Bond No. on file with BLM/BIA sulls in a multiple completion or reco- ed only after all requirements, includi- er B 17 from the Gissler B 3-1 3-3 battery-located at 17S, R and tie into the existing flowli- he Gissler B 91 and Gissler B will transport oil, gas and produ- ery due to a change of operator G C 9 - / C | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Forn 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well uced water. or of the DISTRIC | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA C |
| Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of th approximately 430' and v to the Gissler B 3-3 Batt ily 1, 2018. | give subsurface locations and measu- the Bond No. on file with BLM/BIA sulls in a multiple completion or reco- ed only after all requirements, includi- er B 17 from the Gissler B 3-1 3-3 battery-located at 17S, R and tie into the existing flowli- he Gissler B 91 and Gissler B will transport oil, gas and produ- ery due to a change of operator G C 9 - / C | red and true vertical depths of all perti . Required subsequent reports must b impletion in a new interval, a Forn 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well uced water. or of the DISTRIC | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA O |
| Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and with to the Gissler B 3-3 Batter and the intersection of the approximately 430' and with to the Gissler B 3-3 Batter approximately 430' and with to the Gissler B 3-3 Batter approximately 430' and with the the intersection of the approximately 430' and with the the intersection of the the intersection of the approximately 430' and with the the intersection of the the intersection of the approximately 430' and with the the intersection of the the intersection of the the intersection of the approximately 430' and with the the intersection of the intersection of the the intersection of the the intersection of t | give subsurface locations and measur the Bond No. on file with BLM/BIA sulls in a multiple completion or reco ed only after all requirements, includi er B 17 from the Gissler B 3-1 3-3 battery located at 17S, R and tie into the existing flowlin he Gissler B 91 and Gissler B will transport oil, gas and produ- ery due to a change of operato CCC 9-/0 Accepted for record MM-P030-3018-0 425221 verified by the BLM Well OIL COMPANY INC, sent to the | red and true vertical depths of all perti Required subsequent reports must be impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well uced water. DISTRIP THE-EA Stipulation 216-EA Stipulation 216-EA Stipulation Carlsbad | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA O |
| Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and with to the Gissler B 3-3 Batter and the intersection of the approximately 430' and with to the Gissler B 3-3 Batter and the intersection of the approximately 430' and with to the Gissler B 3-3 Batter and correct. Electronic Submission # For BURNETT mitted to AFMSS for procession | give subsurface locations and measuring by the Bond No. on file with BLM/BIA sults in a multiple completion or record ed only after all requirements, including er B 17 from the Gissler B 3-1 3-3 battery located at 17S, Rise and tie into the existing flowling er Gissler B 91 and 91 | red and true vertical depths of all perti Required subsequent reports must be impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well uced water. DISTRIP THE-EA Stipulation 216-EA Stipulation 216-EA Stipulation Carlsbad | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA O |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map Approved M3W of 14. Thereby certify that the foregoing is Com | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and with to the Gissler B 3-3 Batter illy 1, 2018. $S_{1,20} = 0.018 \text{ pol} - 300000000000000000000000000000000000$ | give subsurface locations and measuring by the Bond No. on file with BLM/BIA sults in a multiple completion or record ed only after all requirements, including er B 17 from the Gissler B 3-1 3-3 battery located at 17S, Rise and tie into the existing flowling er Gissler B 91 and 91 | red and true vertical depths of all perti Required subsequent reports must be impletion in a new interval, a Form 31 ing reclamation, have been completed battery 30E, Sec. 11, ine to 82 well Joed water. DISTRIC TIG-EA Stipulation 216-EA Stipulation Carlsbad 06/25/2018 (18PP2051SE) ATORY MANAGER | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA C |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map Approved MSW of 14. Thereby certify that the foregoing is Name (Printed/Typed) LESLIE GA | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and v to the Gissler B 3-3 Batter illy 1, 2018. $S_{1,2} = 01S D \circ 1 - BU$ true and correct. Electronic Submission # For BURNETT mitted to AFMSS for proce ARVIS | give subsurface locations and measure the Bond No. on file with BLM/BIA sults in a multiple completion or reco ed only after all requirements, includi er B 17 from the Gissler B 3-1 3-3 battery located at 17S, R and tie into the existing flowling the Gissler B 91 and Gissler B will transport oil, gas and produ- ery due to a change of operato CCC 9-/C Accepted for record Accepted for record | red and true vertical depths of all perti Required subsequent reports must b ingreclamation, have been completed battery 30E, Sec. 11, ine to 82 well Joed water. DISTRIC TIGEEA Stipulation Carlsbad DESTRIC DISTRIC D | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA C |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will for the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map Appender Map 14. Thereby certify that the foregoing is Name (Printed/Typed) LESLIE GA | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and v to the Gissler B 3-3 Batter illy 1, 2018. $S_{1,2} = 01S D \circ 1 - BU$ true and correct. Electronic Submission # For BURNETT mitted to AFMSS for proce ARVIS | give subsurface locations and measurine Bond No. on file with BLM/BIA sults in a multiple completion or recorded only after all requirements, including er B 17 from the Gissler B 3-1 3-3 battery located at 17S, Rise and tie into the existing flowling er Gissler B 91 and 91 a | red and true vertical depths of all perti Required subsequent reports must b ingreclamation, have been completed battery 30E, Sec. 11, ine to 82 well Joed water. DISTRIC TIGEEA Stipulation Carlsbad DESTRIC DISTRIC D | nent markers and zon e filed within 30 days 60-4 must be filed on and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA C |
| If the proposal is to deepen directiona Attach the Bond under which the wor following completion of the involved testing has been completed. Final Ab determined that the site is ready for fin Burnett is requesting to rerouted located at T17S, R30E, Sec. 1 Unit M. This new flowline will fe the Gissler B 3-3 battery locate pads. The new flowline will be This well needs to be rerouted Gissler 3-1 battery effective Ju See attached Map Approved M3W of 14. Thereby certify that the foregoing is Com Name (Printed/Typed) LESLIE GA | Illy or recomplete horizontally, k will be performed or provide operations. If the operation re- handonment Notices must be fil- nal inspection. e the flowline of the Gissl 1, Unit B to the Gissler B ollow existing disturbance ed at the intersection of the approximately 430' and with to the Gissler B 3-3 Batter illy 1, 2018. | give subsurface locations and measurine Bond No. on file with BLM/BIA sults in a multiple completion or recorded only after all requirements, including er B 17 from the Gissler B 3-1 3-3 battery located at 17S, Rise and tie into the existing flowline Gissler B 91 and Gissler B | red and true vertical depths of all perti Required subsequent reports must b ingreclamation, have been completed battery 30E, Sec. 11, ine to 82 well Joed water. DISTRIC TIGEEA Stipulation Carlsbad DESTRIC DISTRIC D | nent markers and zone e filed within 30 days 60-4 must be filed onc and the operator has RECEIVED EP 0.7 2018 CT II-ARTESIA C |

2 M 4

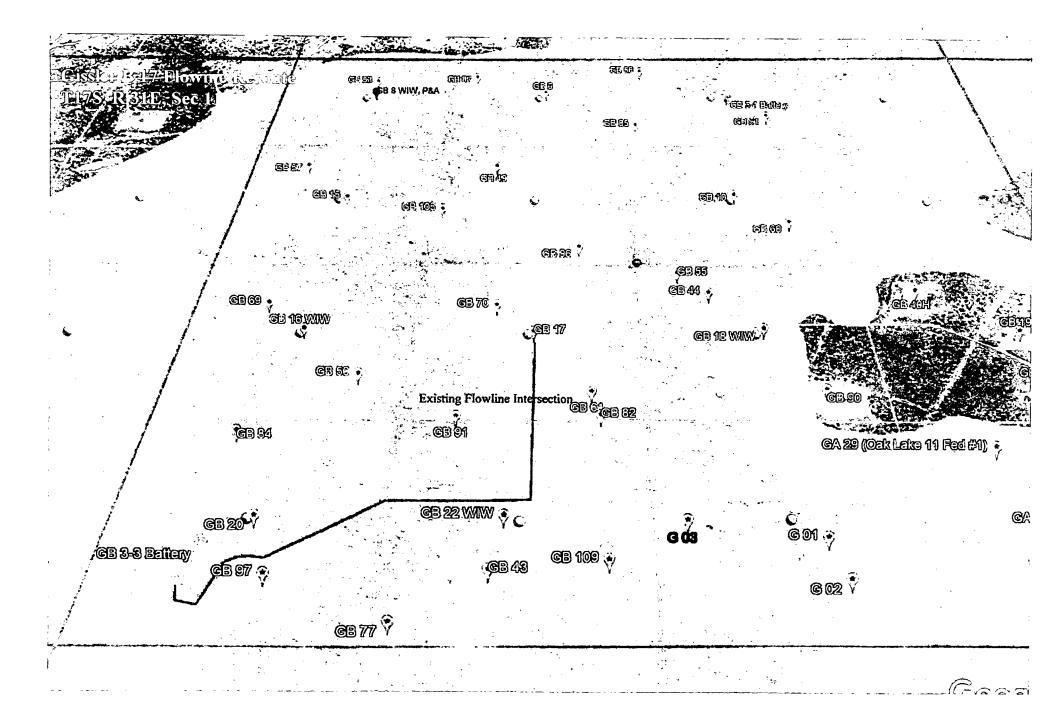

BLM LEASE NUMBER: NMNM2748 COMPANY NAME: Burnett Oil Company Inc ASSOCIATED WELL NAME: Gissler B 15, 17, and 105

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the application (Grant, Sundry Notice, APD) and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.

2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, <u>et seq</u>. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, <u>et seq</u>.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

a. Activities of the holder including, but not limited to construction, operation, maintenance,

and termination of the facility.

- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 20 feet. If the pipeline route follows an existing road or buried pipeline right-of-way, the surface pipeline must be installed no farther than 10 feet from the edge of the road or buried pipeline right-of-way. If existing surface pipelines prevent this distance, the proposed surface pipeline must be installed immediately adjacent to the outer surface pipeline. All construction and maintenance activity will be confined to existing roads or right-of-ways.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky of duney areas, the pipeline will be "snaked" around hummocks and dunes rather then suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-ofway and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

16. The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, powerline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

17. Surface pipelines must be less than or equal to 4 inches and a working pressure below 125 psi.

18. Special Stipulations:

- a. <u>Lesser Prairie-Chicken:</u> This authorization is subject to your Certificate of Participation and/or Certificate of Inclusion under the New Mexico Candidate Conservation Agreement. Because it involves surface disturbing activities covered under your Certificate, your Habitat Conservation Fund Account with the Center of Excellence for Hazardous Materials Management (CEHMM) will be debited according to Exhibit B Part 2 of the Certificate of Participation.
- b. Any trench left open for eight (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, an agency approved monitor shall walk the entire length of the open trench and remove all trapped vertebrates. Successful completion of the BLM Trench Workshop is required for a non-agency person to be approved as a monitor. The bottom surface of the trench will be disturbed a minimum of 2 inches in order to arouse any buried vertebrates. All vertebrates will be released a minimum of 100 yards from the trench.
- c. For trenches left open for eight (8) hours or more the following requirements apply:
 1) Earthen escape ramps and/or structures (built at no more than a 30- degree slope and spaced no more than 500 feet apart) shall be placed in the trench. Metal structures will not be authorized. Options will be discussed in detail at the required Trench Stipulation Workshop.

2) One approved monitor shall be required to survey up to three miles of trench between the hours of 11 AM-2 PM. A daily report (consolidated if there is more than one monitor) on the vertebrates found and removed from the trench shall be provided to the BLM (email/fax is acceptable) the following morning.

Dunes Sagebrush Lizard Trench Stipulation

- Pre-construction contact with a BLM wildlife biologist is required within 5 days before any ground disturbing activities associated with the project occurs.
- Successful completion of the BLM Trench Stipulation Workshop is required for a nonagency person to be approved as a monitor.
- Any trench left open for (8) hours or less is not required to have escape ramps; however, before the trench is backfilled, an agency approved monitor shall walk the entire length of the open trench and remove all trapped vertebrates. The bottom surface of the trench will be disturbed a minimum of 2 inches in order to arouse any buried vertebrates. All vertebrates will be released a minimum of 100 yards from the trench.
- For trenches left open for eight (8) hours or more the following requirements apply:
 - Earthen escape ramps and/or structures (built at no more than a 30 degree slope and spaced no more than 500 feet apart) shall be placed in the trench. Metal structures will <u>not</u> be authorized. Options will be discussed in detail at the required Trench Stipulation Workshop.
 - One approved monitor shall be required to survey up to three miles of trench between the hours of 11 AM-2 PM. A daily report (consolidate if there is more than one monitor) on the vertebrates found and removed from the trench shall be provided to the BLM (email/fax is acceptable) the following morning.
 - Prior to backfilling of the trench all structures used as escape ramps will be removed and the bottom surface of the trench will be disturbed a minimum of 2 inches in order to arouse any buried vertebrates. All vertebrates will be released a minimum of 100 yards from the trench.
- This stipulation shall apply to the entire length of the project in the DSL habitat polygon regardless of land ownership or CCA/CCAA enrollment status.
- A project closeout will be required within three business days of the completion of the project.

LPC: Conditions of Approval

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken: Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1 through June 15 annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Upon abandonment, a low profile abandoned well marker will be installed to prevent raptor perching.

The proponent of the proposed action is a Participating Cooperator in the Candidate Conservation Agreement (CCA) for the lesser prairie-chicken (*Tympanuchus pallidicinctus*) and dunes sagebrush lizard (*Sceloporus arenicolus*).

The goal of the Bureau of Land Management (BLM), U.S. Fish and Wildlife Service (USFWS), Center of Excellence for Hazardous Materials Management (CEHMM) and the Participating Cooperator is to reduce and/or eliminate threats to the LPC. By agreeing to conduct the conservation measures described by the CCA, and contribute funding or providing in-kind services for conservation.

The Certificate of Participation (CP) associated with the CCA is voluntary between CEHMM, BLM, USFWS and the Participating Cooperator. Through the CP, the Participating Cooperator voluntarily commits to implement or fund specific conservation actions that will reduce and/or eliminate threats to the LPC. Funds contributed as part of the CP will be used to implement conservation measures and associated activities. The funds will be directed to the highest priority projects to restore or reclaim habitat at the sole discretion of BLM and USFWS.

The following Conservation Measures are to be accomplished in addition to those described in the CCA and Pecos District Special Status Species Resource Management Plan Amendment (RMPA):

- 1. To the extent determined by the BLM representative at the Plan of Development stage, all infrastructures supporting the development of a well (including roads, power lines, and pipelines) will be constructed within the same corridor.
- 2. On enrolled parcels that contain inactive wells, roads and/or facilities that are not reclaimed to current standards, the Participating Cooperator shall remediate and reclaim their facilities within three years of executing this CP, unless the Cooperator can demonstrate they will put the facilities back to beneficial use for the enrolled

parcel(s). If an extension is requested by the Cooperator, they shall submit a detailed plan (including dates) and receive BLM approval prior to the three year deadline. All remediation and reclamation shall be performed in accordance with BLM requirements and be approved in advance by the Authorized Officer.

- 3. Utilize alternative techniques to minimize new surface disturbance when required and as determined by the BLM representative at the Plan of Development stage.
- 4. Install fence markings along fences owned, controlled, or constructed by the Participating Cooperator that cross through occupied habitat within two miles of an active LPC lek.
- 5. Bury new powerlines that are within two (2) miles of LPC lek sites active at least once within the past 5 years (measured from the lek). The avoidance distance is subject to change based on new information received from peer reviewed science.
- 6. Bury new powerlines that are within one (1) mile of historic LPC lek sites where at least one LPC has been observed within the past three years (measured from the historic lek). The avoidance distance is subject to change based on new information received from peer reviewed science.
- 7. Management recommendations may be developed based on new information received from peer reviewed science to mitigate impacts from H₂S and/or the accumulation of sulfates in the soil related to production of gas containing H₂S on the LPC. Such management recommendations will be applied by the Participating Cooperator as Conservation Measures under this CP in suitable and occupied LPC habitat where peer-reviewed science has shown that H₂S levels threaten the LPC.

Seed Mixture for LPC Sand/Shinnery Sites

.

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be <u>no</u> primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law(s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

| <u>lb/acre</u> |
|----------------|
| 5lbs/A |
| 5lbs/A |
| 3lbs/A |
| 6lbs/A |
| 2lbs/A |
| 1lbs/A |
| |

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed

Range Conditions of Approval

Cattle guards

. . •

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s). Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations. A gate shall be constructed on one side of the cattleguard and fastened securely to H-braces.

Fence Requirement

Where entry granted across a fence line, the fence must be braced and tied off on both sides of the passageway prior to cutting. Once the work is completed, the fence will be restored to its prior condition, or better. The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Livestock Watering Requirement

Structures that provide water to livestock, such as windmills, pipelines, drinking troughs, and earthen reservoirs, will be avoided by moving the proposed action.

Any damage to structures that provide water to livestock throughout the life of the well, caused by operations from the well site, must be immediately corrected by the operator. The operator must notify the BLM office (575-234-5972) and the private surface landowner or the grazing allotment holder if any damage occurs to structures that provide water to livestock.