

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

**SUNDRY NOTICES AND REPORTS ON WELLS**

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR  
J. Gregory Merrion & Robert L. Bayless

3. ADDRESS OF OPERATOR  
P.O. Box 507, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1800 FNL and 910 FWL  
AT TOP PROD. INTERVAL: same  
AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:	SUBSEQUENT REPORT OF:
TEST WATER SHUT-OFF <input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT <input type="checkbox"/>	<input checked="" type="checkbox"/>
SHOOT OR ACIDIZE <input type="checkbox"/>	<input checked="" type="checkbox"/>
REPAIR WELL <input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE <input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES <input type="checkbox"/>	<input type="checkbox"/>
ABANDON* <input type="checkbox"/>	<input type="checkbox"/>
(other) Squeeze, Test	

5. LEASE  
SF 080238-A

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME  
Chaco

9. WELL NO.  
9

10. FIELD OR WILDCAT NAME  
WAW Fruitland/Pic. Cliffs

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 6, T26N, R12W

12. COUNTY OR PARISH  
San Juan

13. STATE  
N.M.

14. API NO.  
30-045-22541

15. ELEVATIONS (SHOW DF, KDB, AND WD)  
5957 ft. GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

07-10-79 Set cement plug. Squeeze off perfs 1184-93', 1160-66', 1108-14', 1066-74'.

07-12-79 Drill out cement to 1150 ft. Preparing to test.

07-13-79 Rig up Birdwell. Perf Fruitland coal 1110-20' w/2 PF 1-11/16" glass jets. Slight blow indicated.

08-15-79 Rig up Dowell and fraced Fruitland 1110-20' w/2500 lbs. 20/40 sand and 83 bbls. water.

08-16-79 Flow back frac. Swab testing. Hung swab in hole @ 900 ft. Unable to pull free. Pulled wire line in half at surface.

08-23-79 Rig up C & C Swabbing unit. Fishing for wire line. Recovered 300 ft. Move off rig.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct


SIGNED Steven A. Merrion TITLE Engineer DATE Sept. 28, 1979

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_

CONDITIONS OF APPROVAL, IF ANY:

\*See Instructions on Reverse Side

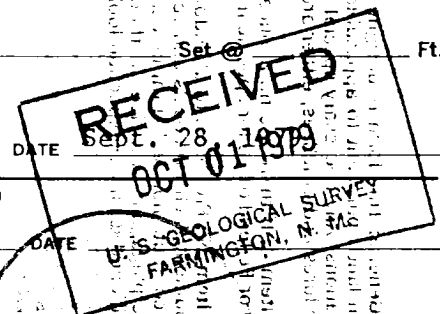

N.M.A.C.C.