

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
811 South First, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999

WELL API NO.
30-005-00236

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.
LG-4909

7. Lease Name or Unit Agreement Name:

Fawn AWN State Com

8. Well No.

9. Pool name or Wildcat
Foor Ranch Pre-Perm, NE

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☒ Other ☐

2. Name of Operator

Yates Petroleum Corporation

3. Address of Operator

105 S. 4th Street Artesia, NM 88210

4. Well Location

Unit Letter K : 1980 feet from the South line and 1980 feet from the West line

Section 17 Township 8S Range 27E NMPM Chaves County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3974' GR

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK ☐

PLUG AND ABANDON ☒

REMEDIAL WORK ☐

ALTERING CASING ☐

TEMPORARILY ABANDON ☐

CHANGE PLANS ☐

COMMENCE DRILLING OPNS. ☐

PLUG AND ABANDONMENT ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETION ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompilation.

**-25 sx plug @ 5470'*
**-Ref csg @ 305' - Place 100' of cmt. inside; outside of csg - 205' - 305'*
Recompletion to Abo unsuccessful. Plan to plug and abandon this well as follows:

1. Notify the NMOCD at least 24 hrs before starting the plugging work. Bleed the pressure off the well then load the tubing and the casing w/2% KCL water then ND the wellhead and NU the BOP then POOH with the tubing.
2. Set a 5-1/2" gauge ring at 4800' to make sure the casing is clear, then set a 5-1/2" CIBP at 4750'. Circulate hole with 10.0 ppg mud with 25#/bbl of gel in the mud. Spot 25 sx cement on top of the CIBP. *Leave 100' of cmt. in csg.*
3. Perforate 4 holes at 2500'. Squeeze with 50 sx cement behind the casing to cover the Glorieta. Perforate 4 holes at 1300'. Squeeze with 50 sx cement behind the casing to cover the base of the 8-5/8" casing. *Leave 100' of cmt. in csg. TAG*
Perforate 4 holes at 100' then screw in a casing swage and squeeze with 50 sx cement behind the casing to the surface. Spot 5 sx cement at the surface to fill up the casing if necessary. *-WOC-24 HRS TAG-*
4. ND the BOP and remove the wellhead and install a dry-hole marker and clean up the location.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE June 23, 2003

Type or print name Tina Huerta

Telephone No. 505-748-1471

(This space for State use)

APPROVED BY [Signature]

TITLE Field Rep

DATE 6-30-03

Conditions of approval, if any:

WELL NAME: Fawn AWN State Com #1

Field: Foor Ranch

LOCATION: Sec 17, 8S-27E 1980' FSL & 1980' FWL Chaves County


GL: 3974' ZERO: KB: 3984'

SPUD DATE: 4/12/57 COMPLETION DATE: 5/28/57

COMMENTS: Re-entered July 2001

CASING PROGRAM

9 5/8" 32.30#, H-40, ST&C	1253'
5 1/2" 15.50# j-55 st&c	6797'

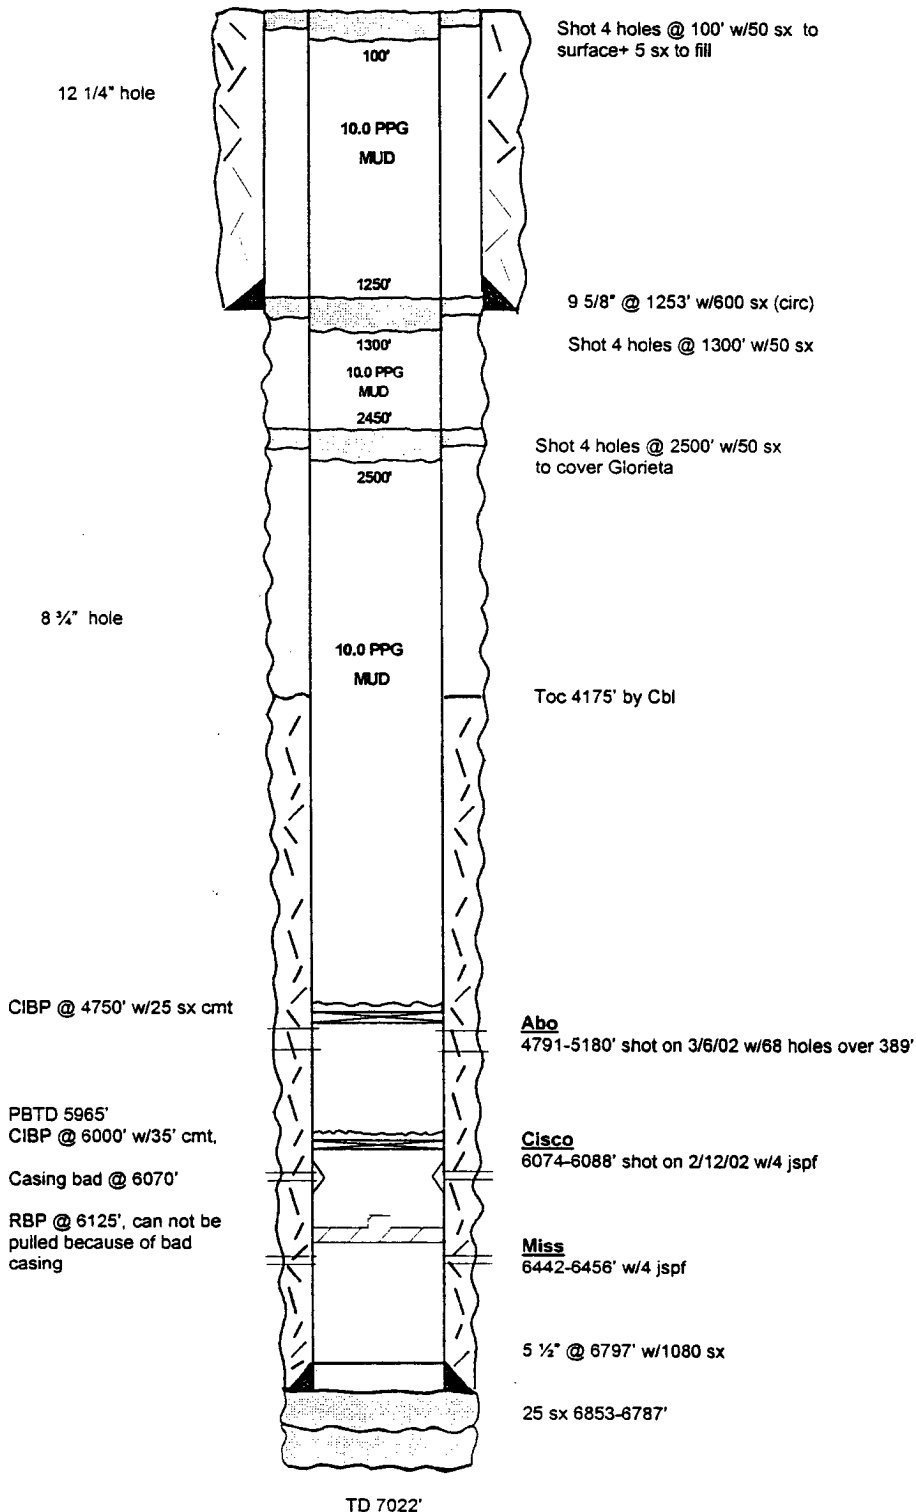

TOPS

Yates	305'
Queen	900'
San Andres	1376'
Glorieta	2595'
Tubbs	4017'
Abo	4738'
Wolfcamp	5470'
Penn	6087'
Miss	6430'
Devonian	6749'
Ellenburger	6829'
Granite Wash	6970'

AFTER

Not to Scale
Cam
8/10/00 Stormi D
8/18/00 JMP
7/19/01 JWP
6/23/03 Cam

OPERATOR: Yates Petroleum Corp. Inc.		API# 30-005-00236	
WELL: Fawn Awn State Cp, # 1		LOCATION: K-17-8-27	
SURFACE CSG-HOLE SIZE "	CSG. SIZE 9 5/8"	SET @ 1253'	SX. CMT. TOC. Circ
LONG STRING- HOLE SIZE "	CSG. SIZE 5 1/2"	SET @ 6797'	SX. CMT. TOC. 4175'
OTHER-			

