

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ gas ☒ other

2. NAME OF OPERATOR
El Paso Natural Gas Company

3. ADDRESS OF OPERATOR
P.O. Box 289, Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
1070'S, 1640'E

AT SURFACE:
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:


16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

☐
☐
☐
☐
☐
☐
☐
☐
☐
☐

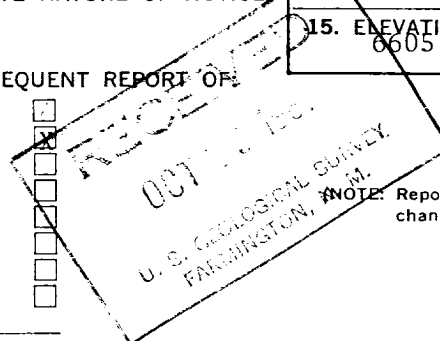

5. LEASE
SF 078425

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME
San Juan 29-7 Unit

8. FARM OR LEASE NAME
San Juan 29-7 Unit

9. WELL NO.
30A (MD)

10. FIELD OR WILDCAT NAME
Blanco MV & Basin Dakota

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 35, T-29-N, R-7-W
NMPM


12. COUNTY OR PARISH
Rio Arriba

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6605' GL

(NOTE: Report results of multiple completion or zone change on Form 9-330.)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

10-3-81: PBTD 7835'. Tested casing to 4500#, Held ok. Perfed Dakota: 7648,7655,7668,7746,7757,7780,7791,7805,7817,7823' W/1 SPZ. Fraced w/ 72,000# 20/40 sand, 73,000 gal. wtr. Flushed w/ 16,100 gal. wtr.

Perfed Point Lookout:

5593,5598,5605,5610,5622,5631,5635,5648,5652,5656,5660,5670,5698,5710,5724,5762,5777,5785,5861,5849,5889,5909,5917,5931,5977' W/1 SPZ. Fraced w/ 62,000# 20/40 sand, 124,000 gal. wtr. Flushed w/ 14,660 gal. wtr.

Perfed Cliff House & Menefee:

5044, 5050,5080,5125,5135,5148,5154,5160,5176,5190,5196,5202,5207,5304,5311,5334,5340,5246,5408' W/1 SPZ. Fraced w/ 57,000# 20/40

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

sand 114,000 gal. wtr. Flushed w/ 13,692 gal. wtr.

18. I hereby certify that the foregoing is true and correct

SIGNED N. P. Dices TITLE _____ DATE _____

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

OCT 15 1981