

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)


1. oil ☐ well gas ☒ well other ☐
- 2 NAME OF OPERATOR  
El Paso Natural Gas Company
- 3 ADDRESS OF OPERATOR  
P.O. Box 289, Farmington, NM 87401
- 4 LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
830'N, 830'E  
AT SURFACE:  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:
- 16 CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

- TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☐  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(or her) ☐

SUBSEQUENT REPORT OF:

- ☐  
☒  
☐  
☐  
☐  
☐  
☐  
☐  
☐  
☐

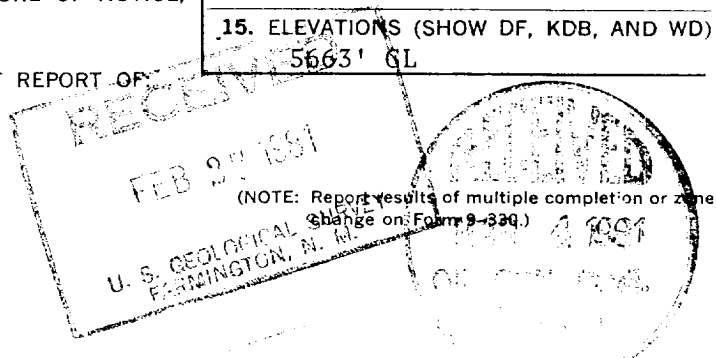

5. LEASE  
SF 077092
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Lackey A
9. WELL NO.  
1R (PM)
10. FIELD OR WILDCAT NAME  
Aztec PC & Blanco MV
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 12, T-29-N, R-10-W  
NMPM
12. COUNTY OR PARISH  
San Juan
13. STATE  
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
5663' GL

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

2-17-81: PBTD 4887'. Tested casing to 3500#, OK. Perfed Point Lookout: 4543, 4547, 4558, 4562, 4566, 4578, 4582, 4586, 4534, 4650, 4697, 4703, 4764, 4796, 4853, 4857' W/1 SPZ. Fraced w/ 37,000# 20/40 sand, 74,000 gal. wtr. Flushed w/ 5250 gal. wtr.

Perfed Cliff House & Menefee:

3814, 3831, 3840, 3855, 3895, 3960, 3974, 3995, 4007, 4063, 4146, 4160, 4191, 4198, 4364, 4374, 4384, 4410, 4421, 4427' W/1 SPZ. Fraced w/ 70,000# 20/40 sand, 138,000 gal. wtr. Flushed w/ 5000 gal. wtr.

Perfed Pic. Cliffs:

2177-84, 2192 -2207, 2221-40' W/12 SPZ. Fraced w/ 30,550# 10/20 sand, 37,950 gal. wtr. Flushed w/ 3400 gal. wtr.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED A. J. Susco TITLE Drilling Clerk DATE Feb. 25, 1981

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

NMOCC

\*See Instructions on Reverse Side