

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
720 S. Colo. Blvd., Denver, CO 80222


4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 790'FNL, 860'FEL, Unit B
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) Status Report: Completion

SUBSEQUENT REPORT OF:

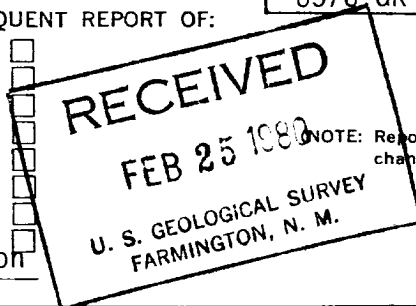

NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*
2/12-2/17/80

MIRUCU on 2/12/80. Tagged cmt @ 7413'. Filled hole w/1% KCL water. Set CIBP @ 7546 and tested csg to 3500 PSI. Spotted 750 gal of 7½% acid. Perf'd Dakota @ 7286-92, 7430-36, 7446-66, 7496-7528. Acidized w/1500 gal 15% HCL. Frac'd w/80000 gal of 30# crosslinked gel, 80000# 20/40 sand, 25000# 10/20 sand. Cleaned out to PBTD w/foam. Landed 2 3/8" tbg @ 7480'. NDBOP.

Subsurface Safety Valve: Manu. and Type _____

18. I hereby certify that the foregoing is true and correct

SIGNED _____

TITLE Admin. Supervisor

DATE

2/19/80

(This space for Federal or State office use)

APPROVED BY _____

TITLE _____

DATE _____

CONDITIONS OF APPROVAL, IF ANY:

NMOCC'

ACCEPTED FOR RECORD

FEB 28 1980

*See Instructions on Reverse Side

BY M. L. Kuchera