

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Sundry Notices and Reports on Wells

1. Type of Well GAS	5. Lease Number NM-019405		
2. Operator Meridian Oil Inc.	6. If Indian, All.or Tribe Name		
3. Address & Phone No. of Operator PO Box 4289, Farmington, NM 87499	7. Unit Agreement Name		
4. Location of Well 680'S, 2200'E	8. Farm or Lease Name Bloomfield		
	9. Well No. 3		
	10. Field, Pool, Wildcat Fulcher Kutz PC		
	11. Sec. T. R. M. or Blk Sec. 17, T-29-N, R-11-W NMPM		
14. Permit No.	15. Elevations 5718' GR	12. County San Juan	13. State NM

16. Intent to/Subsequent Report of :

17. Describe proposed or completed operations:

It is intended to plug back the Pictured Cliffs and recomplete in the Fruitland Coal formation in the following manner:

Set CIBP @ 1853'. Run CBL. Pressure test to 4000 psi. Perforate 1608-18', 1624-28', 1646-52', 1664-70', 1706-08', 1718-26', 1804-14', 1826-34' w/2 spf. Fracture stimulate well with 102,000# sand and 60,270 gal. fluid Flow well back. Land 1 1/4" tbg @ 1810'.

RECEIVED

OCT 11 1989

ON CON. DIV.
LON. 3

18. Authorized by: [Signature]
Regulatory Affairs

09-12-89

Date

NOTE: This format is issued in lieu of US BLM Form

APPROVED
AS AMENDED

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____
CONDITION OF APPROVAL, IF ANY:

OCT 04 1989
[Signature]
REA MANAGER
DATE

A Communitization Agreement is required
for the acreage dedicated to this well.


Squeeze the pictured cliffs perforations
with cement.

Bloomfield #3

WELLBORE DIAGRAM

CURRENT

PROPOSED

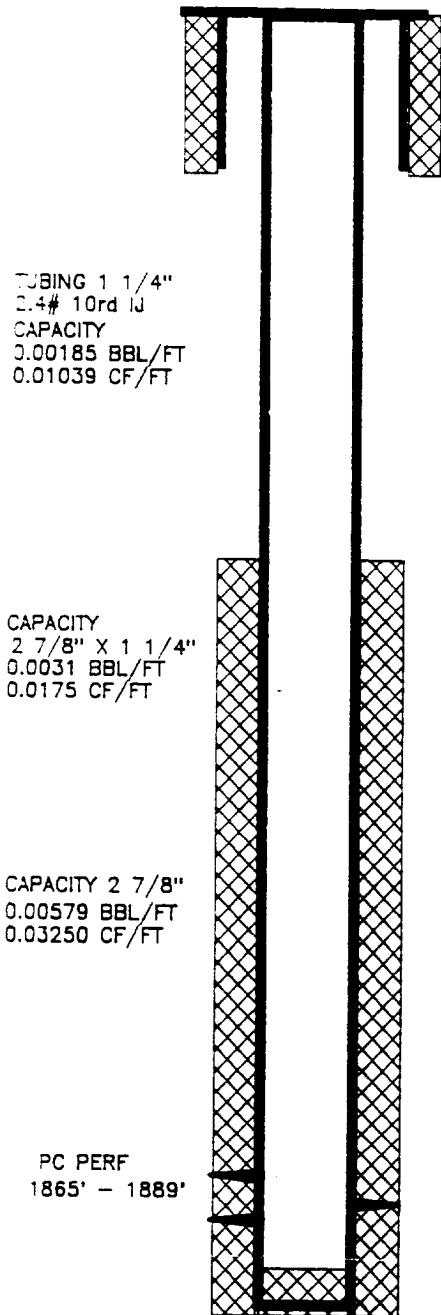

8 5/8" 24.0# K-55
SET AT 138'
CMT TO SURFACE

CMT TOP AT 600'
TEMP SURVEY

2 7/8" 6.4# J-55
SET AT 2067'
COTD AT 2056'
TD AT 2068'

