


**MERIDIAN OIL INC.**  
Completion Rig  
BOP Configuration

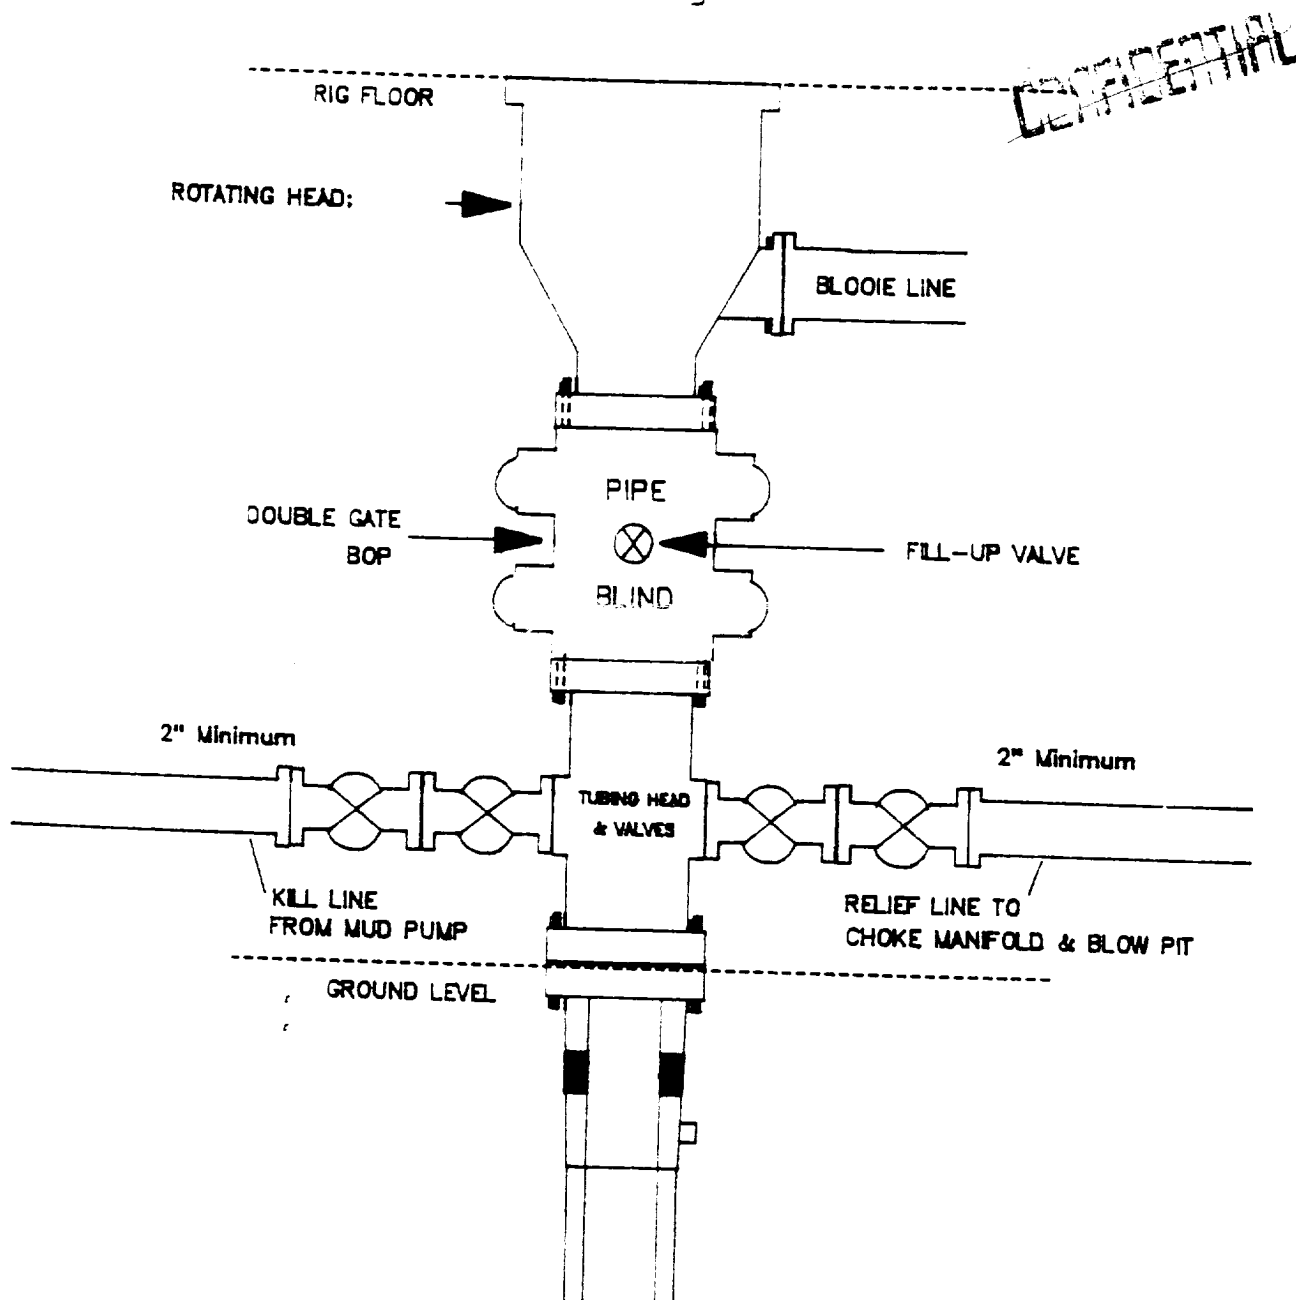

Minimum BOP installation for Completion Operations. 7 1/16" Bore (6" Nominal), 3000psi working pressure double gate BOP to be equipped with blind and pipe rams.