

## Devon Energy, Hefeweizen 26-35 3H

### 1. Geologic Formations

TVD of target	8,833'	Pilot hole depth	N/A
MD at TD:	15,991'	Deepest expected fresh water:	

### Basin

Formation	Depth (TVD) from KB	Water/Mineral Bearing/ Target Zone?	Hazards*
Rustler	1,981		
Salt	2,018		
Base of Salt	3,179		
Yates	3,260		
Seven Rivers	3,567		
Queen	4,193		
San Andres	4,903		
1st Bone Spring	6,153		
2nd Bone Spring Sand	8,484		

\*H2S, water flows, loss of circulation, abnormal pressures, etc.

## Devon Energy, Hefeweizen 26-35 3H

### 2. Casing Program

Hole Size	Casing Interval		Csg. Size	Weight (lbs)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
	From	To							
17.5"	0	2,006'	13.375"	54.5	J55	BTC	1.16	2.81	8.21
12.25"	0	3,300'	9.625"	36	J55	LTC	1.18	2.05	3.81
Option #1									
8.75"	0	15,991'	5.5"	17	HCP110	BTC	2.03	2.52	2.09
Option # 2									
8.75"	0	8,210'	7"	29	HCP110	BTC	2.34	2.86	4.01
8.75"	8,210'	15,991'	5.5"	17	HCP110	BTC	2.03	2.52	4.29
BLM Minimum Safety Factor							1.125	1	1.6 Dry 1.8 Wet

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Must have table for contingency casing

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	N
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	
Is well within the designated 4 string boundary.	
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3 <sup>rd</sup> string cement tied back 500' into previous casing?	
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	
Is 2 <sup>nd</sup> string set 100' to 600' below the base of salt?	
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	

## Devon Energy, Hefeweizen 26-35 3H

### 3. Cementing Program

Casing	# Sks	Wt. lb/ gal	H <sub>2</sub> O gal/sk	Yld ft <sup>3</sup> / sack	500# Comp. Strength (hours)	Slurry Description
Surf.	1150	12.9	9.81	1.85	15	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 3% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	560	14.8	6.34	1.34	6	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake + 1% BWOC Calcium Chloride
Inter.	500	12.9	9.81	1.85	15	Lead: (65:35) Class C Cement: Poz (Fly Ash): 6% BWOC Bentonite + 5% BWOW Sodium Chloride + 0.125 lbs/sack Poly-E-Flake
	430	14.8	1.33	6.32	7	Tail: Class C Cement + 0.125 lbs/sack Poly-E-Flake
5.5" Prod	460	11.9	12.89	2.26	n/a	1 <sup>st</sup> Lead: (50:50) Class H Cement: Poz (Fly Ash) + 10% BWOC Bentonite + 1 lb/sk of Kol-Seal + 0.3% BWOC HR-601 + 0.5lb/sk D-Air 5000
	330	12.5	10.86	1.96	30	2 <sup>nd</sup> Lead: (65:35) Class H Cement: Poz (Fly Ash) + 6% BWOC Bentonite + 0.25% BWOC HR-601 + 0.125 lbs/sack Poly-E-Flake
	2050	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite
7 x 5.5" Combo Prod	320	10.4	16.8	3.17	25	Lead: Tuned Light® Cement + 0.125 lb/sk Pol-E-Flake
	2050	14.5	5.31	1.2	25	Tail: (50:50) Class H Cement: Poz (Fly Ash) + 0.5% bwoc HALAD-344 + 0.4% bwoc CFR-3 + 0.2% BWOC HR-601 + 2% bwoc Bentonite

Casing String	TOC	% Excess
Surface	0'	100%
Intermediate	0'	75%
5.5" Production	2800'	25%
7 x 5.5" Combo Prod.	2800'	25%

#### 4. Pressure Control Equipment

N	A variance is requested for the use of a diverter on the surface casing. See attached for schematic.
---	--

BOP installed and tested before drilling which hole?	Size?	Min. Required WP	Type	✓	Tested to:
12-1/4"	13-5/8"	3M	Annular	x	50% of working pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	x	
			Other*		
8-3/4"	13-5/8"	3M	Annular	x	50% testing pressure
			Blind Ram		3M
			Pipe Ram		
			Double Ram	x	
			Other*		
			Annular		
			Blind Ram		
			Pipe Ram		
			Double Ram		
			Other*		

\*Specify if additional ram is utilized.

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

Y	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
---	---

## Devon Energy, Hefeweizen 26-35 3H

Y	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
Y	Are anchors required by manufacturer?
Y	<p>A multibowl wellhead is being used. The BOP will be tested per Onshore Order #2 after installation on the surface casing which will cover testing requirements for a maximum of 30 days. If any seal subject to test pressure is broken the system must be tested.</p> <p>Devon proposes using a multi-bowl wellhead assembly (FMC Uni-head). This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be 3000 (3M) psi.</p> <ul style="list-style-type: none"> <li>Wellhead will be installed by FMC's representatives.</li> <li>If the welding is performed by a third party, the FMC's representative will monitor the temperature to verify that it does not exceed the maximum temperature of the seal.</li> <li>FMC representative will install the test plug for the initial BOP test.</li> <li>FMC will install a solid steel body pack-off to completely isolate the lower head after cementing intermediate casing. After installation of the pack-off, the pack-off and the lower flange will be tested to 3M, as shown on the attached schematic. Everything above the pack-off will not have been altered whatsoever from the initial nipple up. Therefore the BOP components will not be retested at that time.</li> <li>If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head will be cut and top out operations will be conducted.</li> <li>Devon will pressure test all seals above and below the mandrel (but still above the casing) to full working pressure rating.</li> <li>Devon will test the casing to 0.22 psi/ft or 1500 psi, whichever is greater, as per Onshore Order #2.</li> </ul> <p>After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum rating of 3M will be installed on the FMC Uni-head wellhead system and will undergo a 250 psi low pressure test followed by a 3,000 psi high pressure test. The 3,000 psi high and 250 psi low test will cover testing requirements a maximum of 30 days, as per Onshore Order #2. If the well is not complete within 30 days of this BOP test, another full BOP test will be conducted, as per Onshore Order #2.</p> <p>After running the 9-5/8' intermediate casing with a mandrel hanger, the 13-5/8" BOP/BOPE system with a minimum rating of 3M will already be installed on the FMC Uni-head.</p> <p>The pipe rams will be operated and checked each 24 hour period and each time the drill pipe is out of the hole. These tests will be logged in the daily driller's log. A 2" kill line and 3" choke line will be incorporated into the drilling spool below the ram BOP. In addition to the rams and annular preventer, additional BOP accessories include a kelly cock, floor safety valve, choke lines, and choke manifold rated at 3,000 psi WP.</p>

## Devon Energy, Hefeweizen 26-35 3H

	Devon requests a variance to use a flexible line with flanged ends between the BOP and the choke manifold (choke line). The line will be kept as straight as possible with minimal turns
	See attached schematic.

### 5. Mud Program

Depth		Type	Weight (ppg)	Viscosity	Water Loss
From	To				
0	2,006'	FW Gel	8.6-8.8	28-34	N/C
2,006'	3,300'	Saturated Brine	10.0-10.2	28-34	N/C
3,300'	15,991'	Cut Brine	8.5-9.3	28-34	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

### 6. Logging and Testing Procedures

Logging, Coring and Testing.	
x	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
	No Logs are planned based on well control or offset log information.
	Drill stem test? If yes, explain
	Coring? If yes, explain

Additional logs planned		Interval
	Resistivity	Int. shoe to KOP
	Density	Int. shoe to KOP
X	CBL	Production casing
X	Mud log	Intermediate shoe to TD
	PEX	

## Devon Energy, Hefeweizen 26-35 3H

### 7. Drilling Conditions

Condition	Specify what type and where?
BH Pressure at deepest TVD	3975 psi
Abnormal Temperature	No

Mitigation measure for abnormal conditions. Describe. Lost circulation material/sweeps/mud scavengers.

Hydrogen Sulfide (H<sub>2</sub>S) monitors will be installed prior to drilling out the surface shoe. If H<sub>2</sub>S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

N H<sub>2</sub>S is present

Y H<sub>2</sub>S Plan attached

### 8. Other facets of operation

Is this a walking operation? No.

Will be pre-setting casing? No.

Attachments

☒ Directional Plan

☐ Other, describe

# DEVON ENERGY



Project: Lea County, NM (NAD-83)  
Site: Hefeweizen 26-35 State Com  
Well: 3H  
Wellbore: OH  
Design: Plan #1



**Azimuths to Grid North**  
True North: -0.54°  
Magnetic North: 6.71°  
  
**Magnetic Field**  
Strength: 48603.4 nT  
Dip Angle: 60.68°  
Date: 11/24/2014  
Model: BGGM2014

PROJECT DETAILS: Lea County, NM (NAD-83)  
Geodetic System: US State Plane 1983  
Datum: North American Datum 1983  
Ellipsoid: GRS 1980  
Zone: New Mexico Eastern Zone


**devon**

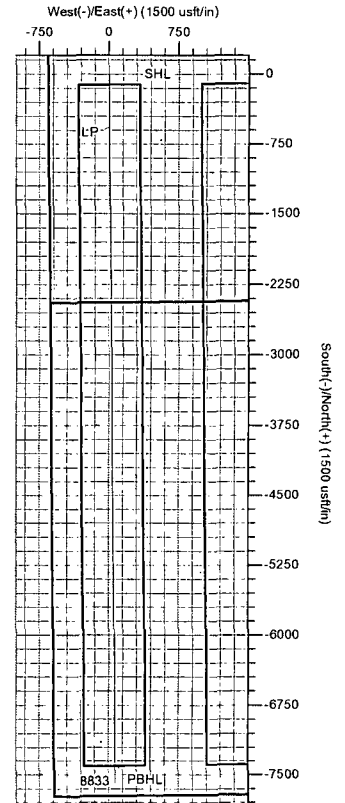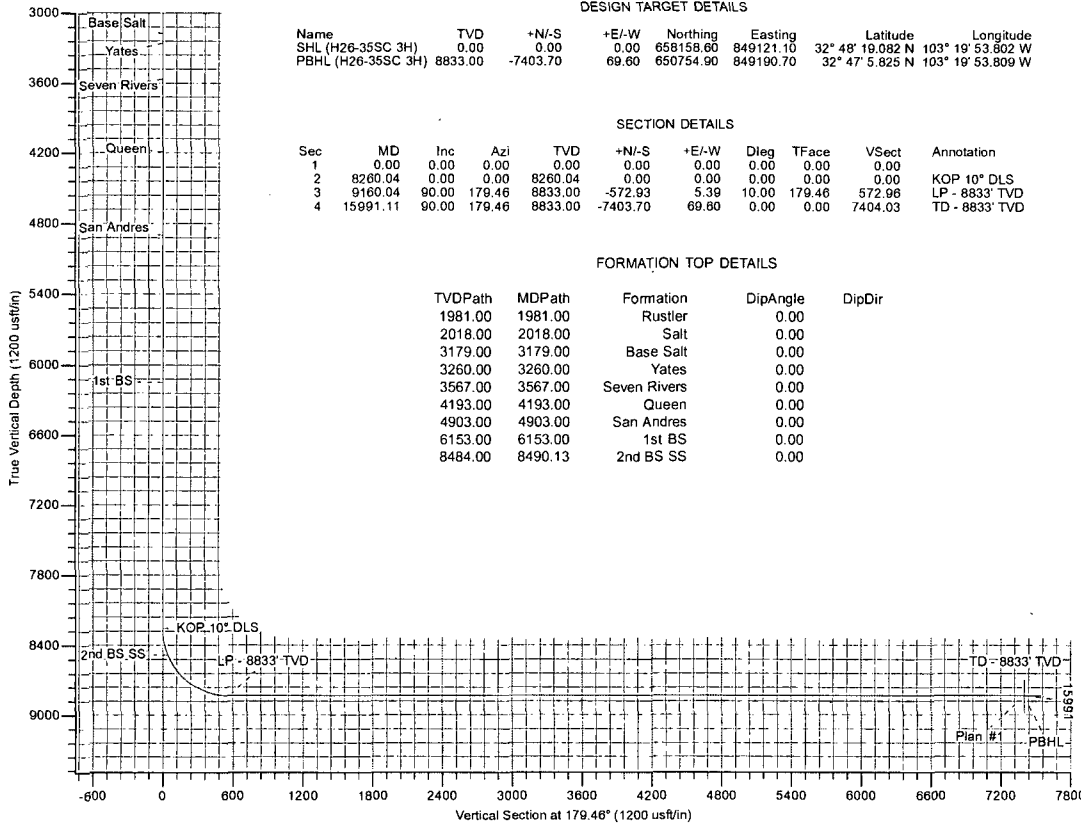

LEAM DRILLING SYSTEMS LLC  
2010 East Davis, Conroe, Texas 77301  
Phone: 936/756-7577, Fax 936/756-7595

Plan: Plan #1 (3H/OH)  
Hefeweizen 26-35 State Com  
Created By: Brady Deaver  
Date: 12/4, November 24 2014  
Approved: \_\_\_\_\_  
Date: \_\_\_\_\_





**LEAM**  
*Drilling Systems, Inc.*

# DEVON ENERGY

**Lea County, NM (NAD-83)**  
**Hefeweizen 26-35 State Com**  
**3H**

OH

### Plan: Plan #1

# Standard Planning Report

**24 November, 2014**

14-00000  
 14-00000  
 14-00000

devon

Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 3H
Company:	DEVON ENERGY	TVD Reference:	3863' GL + 25' RKB @ 3888.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3863' GL + 25' RKB @ 3888.00usft
Site:	Hefeweizen 26-35 State Com	North Reference:	Grid
Well:	3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

Project	Lea County, NM (NAD-83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	Hefeweizen 26-35 State Com		
Site Position:		Northing:	658,173.80 usft
From:	Map	Easting:	850,441.00 usft
Position Uncertainty:	0.00 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 48' 19.108 N
		Longitude:	103° 19' 38.338 W
		Grid Convergence:	0.55 °

Well	3H, 2nd BS SS		
Well Position	+N/-S	-15.20 usft	Northing:
	+E/-W	-1,319.90 usft	Easting:
Position Uncertainty	0.00 usft	Wellhead Elevation:	0.00 usft
		Latitude:	32° 48' 19.082 N
		Longitude:	103° 19' 53.802 W
		Ground Level:	3,863.00 usft

Wellbore	OH				
Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	BGGM2014	11/24/2014	7.26	60.68	48,603

Design	Plan #1			
Audit Notes:				
Version:	Phase:	PLAN	Tie On Depth:	0.00
Vertical Section:	Depth From (TVD) (usft)	+N/-S (usft)	+E/-W (usft)	Direction (°)
	0.00	0.00	0.00	179.46

Plan Sections										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	TFO (°)	Target
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
8,260.04	0.00	0.00	8,260.04	0.00	0.00	0.00	0.00	0.00	0.00	
9,160.04	90.00	179.46	8,833.00	-572.93	5.39	10.00	10.00	0.00	179.46	
15,991.11	90.00	179.46	8,833.00	-7,403.70	69.60	0.00	0.00	0.00	0.00	PBHL (H26-35SC 3H)

<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 3H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Site:</b>	Hefeweizen 26-35 State Com	<b>North Reference:</b>	Grid
<b>Well:</b>	3H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

**Planned Survey**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>SHL (H26-35SC 3H)</b>									
100.00	0.00	0.00	100.00	0.00	0.00	0.00	0.00	0.00	0.00
200.00	0.00	0.00	200.00	0.00	0.00	0.00	0.00	0.00	0.00
300.00	0.00	0.00	300.00	0.00	0.00	0.00	0.00	0.00	0.00
400.00	0.00	0.00	400.00	0.00	0.00	0.00	0.00	0.00	0.00
500.00	0.00	0.00	500.00	0.00	0.00	0.00	0.00	0.00	0.00
600.00	0.00	0.00	600.00	0.00	0.00	0.00	0.00	0.00	0.00
700.00	0.00	0.00	700.00	0.00	0.00	0.00	0.00	0.00	0.00
800.00	0.00	0.00	800.00	0.00	0.00	0.00	0.00	0.00	0.00
900.00	0.00	0.00	900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,000.00	0.00	0.00	1,000.00	0.00	0.00	0.00	0.00	0.00	0.00
1,100.00	0.00	0.00	1,100.00	0.00	0.00	0.00	0.00	0.00	0.00
1,200.00	0.00	0.00	1,200.00	0.00	0.00	0.00	0.00	0.00	0.00
1,300.00	0.00	0.00	1,300.00	0.00	0.00	0.00	0.00	0.00	0.00
1,400.00	0.00	0.00	1,400.00	0.00	0.00	0.00	0.00	0.00	0.00
1,500.00	0.00	0.00	1,500.00	0.00	0.00	0.00	0.00	0.00	0.00
1,600.00	0.00	0.00	1,600.00	0.00	0.00	0.00	0.00	0.00	0.00
1,700.00	0.00	0.00	1,700.00	0.00	0.00	0.00	0.00	0.00	0.00
1,800.00	0.00	0.00	1,800.00	0.00	0.00	0.00	0.00	0.00	0.00
1,900.00	0.00	0.00	1,900.00	0.00	0.00	0.00	0.00	0.00	0.00
1,981.00	0.00	0.00	1,981.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Rustler</b>									
2,000.00	0.00	0.00	2,000.00	0.00	0.00	0.00	0.00	0.00	0.00
2,018.00	0.00	0.00	2,018.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Salt</b>									
2,100.00	0.00	0.00	2,100.00	0.00	0.00	0.00	0.00	0.00	0.00
2,200.00	0.00	0.00	2,200.00	0.00	0.00	0.00	0.00	0.00	0.00
2,300.00	0.00	0.00	2,300.00	0.00	0.00	0.00	0.00	0.00	0.00
2,400.00	0.00	0.00	2,400.00	0.00	0.00	0.00	0.00	0.00	0.00
2,500.00	0.00	0.00	2,500.00	0.00	0.00	0.00	0.00	0.00	0.00
2,600.00	0.00	0.00	2,600.00	0.00	0.00	0.00	0.00	0.00	0.00
2,700.00	0.00	0.00	2,700.00	0.00	0.00	0.00	0.00	0.00	0.00
2,800.00	0.00	0.00	2,800.00	0.00	0.00	0.00	0.00	0.00	0.00
2,900.00	0.00	0.00	2,900.00	0.00	0.00	0.00	0.00	0.00	0.00
3,000.00	0.00	0.00	3,000.00	0.00	0.00	0.00	0.00	0.00	0.00
3,100.00	0.00	0.00	3,100.00	0.00	0.00	0.00	0.00	0.00	0.00
3,179.00	0.00	0.00	3,179.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Base Salt</b>									
3,200.00	0.00	0.00	3,200.00	0.00	0.00	0.00	0.00	0.00	0.00
3,260.00	0.00	0.00	3,260.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Yates</b>									
3,300.00	0.00	0.00	3,300.00	0.00	0.00	0.00	0.00	0.00	0.00
3,400.00	0.00	0.00	3,400.00	0.00	0.00	0.00	0.00	0.00	0.00
3,500.00	0.00	0.00	3,500.00	0.00	0.00	0.00	0.00	0.00	0.00
3,567.00	0.00	0.00	3,567.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Seven Rivers</b>									
3,600.00	0.00	0.00	3,600.00	0.00	0.00	0.00	0.00	0.00	0.00
3,700.00	0.00	0.00	3,700.00	0.00	0.00	0.00	0.00	0.00	0.00
3,800.00	0.00	0.00	3,800.00	0.00	0.00	0.00	0.00	0.00	0.00
3,900.00	0.00	0.00	3,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,000.00	0.00	0.00	4,000.00	0.00	0.00	0.00	0.00	0.00	0.00
4,100.00	0.00	0.00	4,100.00	0.00	0.00	0.00	0.00	0.00	0.00

<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 3H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Site:</b>	Hefeweizen 26-35 State Com	<b>North Reference:</b>	Grid
<b>Well:</b>	3H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

**Planned Survey**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
4,193.00	0.00	0.00	4,193.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>Queen</b>									
4,200.00	0.00	0.00	4,200.00	0.00	0.00	0.00	0.00	0.00	0.00
4,300.00	0.00	0.00	4,300.00	0.00	0.00	0.00	0.00	0.00	0.00
4,400.00	0.00	0.00	4,400.00	0.00	0.00	0.00	0.00	0.00	0.00
4,500.00	0.00	0.00	4,500.00	0.00	0.00	0.00	0.00	0.00	0.00
4,600.00	0.00	0.00	4,600.00	0.00	0.00	0.00	0.00	0.00	0.00
4,700.00	0.00	0.00	4,700.00	0.00	0.00	0.00	0.00	0.00	0.00
4,800.00	0.00	0.00	4,800.00	0.00	0.00	0.00	0.00	0.00	0.00
4,900.00	0.00	0.00	4,900.00	0.00	0.00	0.00	0.00	0.00	0.00
4,903.00	0.00	0.00	4,903.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>San Andres</b>									
5,000.00	0.00	0.00	5,000.00	0.00	0.00	0.00	0.00	0.00	0.00
5,100.00	0.00	0.00	5,100.00	0.00	0.00	0.00	0.00	0.00	0.00
5,200.00	0.00	0.00	5,200.00	0.00	0.00	0.00	0.00	0.00	0.00
5,300.00	0.00	0.00	5,300.00	0.00	0.00	0.00	0.00	0.00	0.00
5,400.00	0.00	0.00	5,400.00	0.00	0.00	0.00	0.00	0.00	0.00
5,500.00	0.00	0.00	5,500.00	0.00	0.00	0.00	0.00	0.00	0.00
5,600.00	0.00	0.00	5,600.00	0.00	0.00	0.00	0.00	0.00	0.00
5,700.00	0.00	0.00	5,700.00	0.00	0.00	0.00	0.00	0.00	0.00
5,800.00	0.00	0.00	5,800.00	0.00	0.00	0.00	0.00	0.00	0.00
5,900.00	0.00	0.00	5,900.00	0.00	0.00	0.00	0.00	0.00	0.00
6,000.00	0.00	0.00	6,000.00	0.00	0.00	0.00	0.00	0.00	0.00
6,100.00	0.00	0.00	6,100.00	0.00	0.00	0.00	0.00	0.00	0.00
6,153.00	0.00	0.00	6,153.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>1st BS</b>									
6,200.00	0.00	0.00	6,200.00	0.00	0.00	0.00	0.00	0.00	0.00
6,300.00	0.00	0.00	6,300.00	0.00	0.00	0.00	0.00	0.00	0.00
6,400.00	0.00	0.00	6,400.00	0.00	0.00	0.00	0.00	0.00	0.00
6,500.00	0.00	0.00	6,500.00	0.00	0.00	0.00	0.00	0.00	0.00
6,600.00	0.00	0.00	6,600.00	0.00	0.00	0.00	0.00	0.00	0.00
6,700.00	0.00	0.00	6,700.00	0.00	0.00	0.00	0.00	0.00	0.00
6,800.00	0.00	0.00	6,800.00	0.00	0.00	0.00	0.00	0.00	0.00
6,900.00	0.00	0.00	6,900.00	0.00	0.00	0.00	0.00	0.00	0.00
7,000.00	0.00	0.00	7,000.00	0.00	0.00	0.00	0.00	0.00	0.00
7,100.00	0.00	0.00	7,100.00	0.00	0.00	0.00	0.00	0.00	0.00
7,200.00	0.00	0.00	7,200.00	0.00	0.00	0.00	0.00	0.00	0.00
7,300.00	0.00	0.00	7,300.00	0.00	0.00	0.00	0.00	0.00	0.00
7,400.00	0.00	0.00	7,400.00	0.00	0.00	0.00	0.00	0.00	0.00
7,500.00	0.00	0.00	7,500.00	0.00	0.00	0.00	0.00	0.00	0.00
7,600.00	0.00	0.00	7,600.00	0.00	0.00	0.00	0.00	0.00	0.00
7,700.00	0.00	0.00	7,700.00	0.00	0.00	0.00	0.00	0.00	0.00
7,800.00	0.00	0.00	7,800.00	0.00	0.00	0.00	0.00	0.00	0.00
7,900.00	0.00	0.00	7,900.00	0.00	0.00	0.00	0.00	0.00	0.00
8,000.00	0.00	0.00	8,000.00	0.00	0.00	0.00	0.00	0.00	0.00
8,100.00	0.00	0.00	8,100.00	0.00	0.00	0.00	0.00	0.00	0.00
8,200.00	0.00	0.00	8,200.00	0.00	0.00	0.00	0.00	0.00	0.00
8,260.04	0.00	0.00	8,260.04	0.00	0.00	0.00	0.00	0.00	0.00
<b>KOP 10° DLS</b>									
8,300.00	4.00	179.46	8,299.97	-1.39	0.01	1.39	10.00	10.00	0.00
8,350.00	9.00	179.46	8,349.63	-7.05	0.07	7.05	10.00	10.00	0.00
8,400.00	14.00	179.46	8,398.61	-17.01	0.16	17.01	10.00	10.00	0.00
8,450.00	19.00	179.46	8,446.54	-31.20	0.29	31.20	10.00	10.00	0.00

<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 3H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Site:</b>	Hefeweizen 26-35 State Com	<b>North Reference:</b>	Grid
<b>Well:</b>	3H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

**Planned Survey**

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
8,490.14	23.01	179.46	8,484.00	-45.58	0.43	45.58	10.00	10.00	0.00
<b>2nd BS SS</b>									
8,500.00	24.00	179.46	8,493.05	-49.52	0.47	49.52	10.00	10.00	0.00
8,550.00	29.00	179.46	8,537.78	-71.81	0.68	71.82	10.00	10.00	0.00
8,600.00	34.00	179.46	8,580.40	-97.93	0.92	97.93	10.00	10.00	0.00
8,650.00	39.00	179.46	8,620.58	-127.65	1.20	127.66	10.00	10.00	0.00
8,700.00	44.00	179.46	8,658.02	-160.77	1.51	160.78	10.00	10.00	0.00
8,750.00	49.00	179.46	8,692.43	-197.02	1.85	197.03	10.00	10.00	0.00
8,800.00	54.00	179.46	8,723.55	-236.14	2.22	236.15	10.00	10.00	0.00
8,850.00	59.00	179.46	8,751.14	-277.81	2.61	277.83	10.00	10.00	0.00
8,900.00	64.00	179.46	8,774.99	-321.74	3.02	321.75	10.00	10.00	0.00
8,950.00	69.00	179.46	8,794.93	-367.57	3.46	367.59	10.00	10.00	0.00
9,000.00	74.00	179.46	8,810.79	-414.97	3.90	414.99	10.00	10.00	0.00
9,050.00	79.00	179.46	8,822.47	-463.57	4.36	463.59	10.00	10.00	0.00
9,100.00	84.00	179.46	8,829.86	-513.00	4.82	513.03	10.00	10.00	0.00
9,150.00	89.00	179.46	8,832.91	-562.89	5.29	562.92	10.00	10.00	0.00
9,160.04	90.00	179.46	8,833.00	-572.93	5.39	572.96	10.00	10.00	0.00
<b>LP - 8833' TVD</b>									
9,200.00	90.00	179.46	8,833.00	-612.89	5.76	612.92	0.00	0.00	0.00
9,300.00	90.00	179.46	8,833.00	-712.88	6.70	712.92	0.00	0.00	0.00
9,400.00	90.00	179.46	8,833.00	-812.88	7.64	812.92	0.00	0.00	0.00
9,500.00	90.00	179.46	8,833.00	-912.88	8.58	912.92	0.00	0.00	0.00
9,600.00	90.00	179.46	8,833.00	-1,012.87	9.52	1,012.92	0.00	0.00	0.00
9,700.00	90.00	179.46	8,833.00	-1,112.87	10.46	1,112.92	0.00	0.00	0.00
9,800.00	90.00	179.46	8,833.00	-1,212.86	11.40	1,212.92	0.00	0.00	0.00
9,900.00	90.00	179.46	8,833.00	-1,312.86	12.34	1,312.92	0.00	0.00	0.00
10,000.00	90.00	179.46	8,833.00	-1,412.85	13.28	1,412.92	0.00	0.00	0.00
10,100.00	90.00	179.46	8,833.00	-1,512.85	14.22	1,512.92	0.00	0.00	0.00
10,200.00	90.00	179.46	8,833.00	-1,612.84	15.16	1,612.92	0.00	0.00	0.00
10,300.00	90.00	179.46	8,833.00	-1,712.84	16.10	1,712.92	0.00	0.00	0.00
10,400.00	90.00	179.46	8,833.00	-1,812.84	17.04	1,812.92	0.00	0.00	0.00
10,500.00	90.00	179.46	8,833.00	-1,912.83	17.98	1,912.92	0.00	0.00	0.00
10,600.00	90.00	179.46	8,833.00	-2,012.83	18.92	2,012.92	0.00	0.00	0.00
10,700.00	90.00	179.46	8,833.00	-2,112.82	19.86	2,112.92	0.00	0.00	0.00
10,800.00	90.00	179.46	8,833.00	-2,212.82	20.80	2,212.92	0.00	0.00	0.00
10,900.00	90.00	179.46	8,833.00	-2,312.81	21.74	2,312.92	0.00	0.00	0.00
11,000.00	90.00	179.46	8,833.00	-2,412.81	22.68	2,412.92	0.00	0.00	0.00
11,100.00	90.00	179.46	8,833.00	-2,512.80	23.62	2,512.92	0.00	0.00	0.00
11,200.00	90.00	179.46	8,833.00	-2,612.80	24.56	2,612.92	0.00	0.00	0.00
11,300.00	90.00	179.46	8,833.00	-2,712.80	25.50	2,712.92	0.00	0.00	0.00
11,400.00	90.00	179.46	8,833.00	-2,812.79	26.44	2,812.92	0.00	0.00	0.00
11,500.00	90.00	179.46	8,833.00	-2,912.79	27.38	2,912.92	0.00	0.00	0.00
11,600.00	90.00	179.46	8,833.00	-3,012.78	28.32	3,012.92	0.00	0.00	0.00
11,700.00	90.00	179.46	8,833.00	-3,112.78	29.26	3,112.92	0.00	0.00	0.00
11,800.00	90.00	179.46	8,833.00	-3,212.77	30.20	3,212.92	0.00	0.00	0.00
11,900.00	90.00	179.46	8,833.00	-3,312.77	31.14	3,312.92	0.00	0.00	0.00
12,000.00	90.00	179.46	8,833.00	-3,412.76	32.08	3,412.92	0.00	0.00	0.00
12,100.00	90.00	179.46	8,833.00	-3,512.76	33.02	3,512.92	0.00	0.00	0.00
12,200.00	90.00	179.46	8,833.00	-3,612.76	33.96	3,612.92	0.00	0.00	0.00
12,300.00	90.00	179.46	8,833.00	-3,712.75	34.90	3,712.92	0.00	0.00	0.00
12,400.00	90.00	179.46	8,833.00	-3,812.75	35.84	3,812.92	0.00	0.00	0.00
12,500.00	90.00	179.46	8,833.00	-3,912.74	36.78	3,912.92	0.00	0.00	0.00
12,600.00	90.00	179.46	8,833.00	-4,012.74	37.72	4,012.92	0.00	0.00	0.00
12,700.00	90.00	179.46	8,833.00	-4,112.73	38.66	4,112.92	0.00	0.00	0.00



# LEAM Drilling Systems LLC

Planning Report



Database:	EDM 5000.1 Single User Db	Local Co-ordinate Reference:	Well 3H
Company:	DEVON ENERGY	TVD Reference:	3863' GL + 25' RKB @ 3888.00usft
Project:	Lea County, NM (NAD-83)	MD Reference:	3863' GL + 25' RKB @ 3888.00usft
Site:	Hefeweizen 26-35 State Com	North Reference:	Grid
Well:	3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	OH		
Design:	Plan #1		

## Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
12,800.00	90.00	179.46	8,833.00	-4,212.73	39.60	4,212.92	0.00	0.00	0.00
12,900.00	90.00	179.46	8,833.00	-4,312.73	40.54	4,312.92	0.00	0.00	0.00
13,000.00	90.00	179.46	8,833.00	-4,412.72	41.48	4,412.92	0.00	0.00	0.00
13,100.00	90.00	179.46	8,833.00	-4,512.72	42.42	4,512.92	0.00	0.00	0.00
13,200.00	90.00	179.46	8,833.00	-4,612.71	43.36	4,612.92	0.00	0.00	0.00
13,300.00	90.00	179.46	8,833.00	-4,712.71	44.30	4,712.92	0.00	0.00	0.00
13,400.00	90.00	179.46	8,833.00	-4,812.70	45.24	4,812.92	0.00	0.00	0.00
13,500.00	90.00	179.46	8,833.00	-4,912.70	46.18	4,912.92	0.00	0.00	0.00
13,600.00	90.00	179.46	8,833.00	-5,012.69	47.12	5,012.92	0.00	0.00	0.00
13,700.00	90.00	179.46	8,833.00	-5,112.69	48.06	5,112.92	0.00	0.00	0.00
13,800.00	90.00	179.46	8,833.00	-5,212.69	49.00	5,212.92	0.00	0.00	0.00
13,900.00	90.00	179.46	8,833.00	-5,312.68	49.94	5,312.92	0.00	0.00	0.00
14,000.00	90.00	179.46	8,833.00	-5,412.68	50.88	5,412.92	0.00	0.00	0.00
14,100.00	90.00	179.46	8,833.00	-5,512.67	51.82	5,512.92	0.00	0.00	0.00
14,200.00	90.00	179.46	8,833.00	-5,612.67	52.76	5,612.92	0.00	0.00	0.00
14,300.00	90.00	179.46	8,833.00	-5,712.66	53.70	5,712.92	0.00	0.00	0.00
14,400.00	90.00	179.46	8,833.00	-5,812.66	54.64	5,812.92	0.00	0.00	0.00
14,500.00	90.00	179.46	8,833.00	-5,912.65	55.58	5,912.92	0.00	0.00	0.00
14,600.00	90.00	179.46	8,833.00	-6,012.65	56.52	6,012.92	0.00	0.00	0.00
14,700.00	90.00	179.46	8,833.00	-6,112.65	57.46	6,112.92	0.00	0.00	0.00
14,800.00	90.00	179.46	8,833.00	-6,212.64	58.40	6,212.92	0.00	0.00	0.00
14,900.00	90.00	179.46	8,833.00	-6,312.64	59.34	6,312.92	0.00	0.00	0.00
15,000.00	90.00	179.46	8,833.00	-6,412.63	60.28	6,412.92	0.00	0.00	0.00
15,100.00	90.00	179.46	8,833.00	-6,512.63	61.22	6,512.92	0.00	0.00	0.00
15,200.00	90.00	179.46	8,833.00	-6,612.62	62.16	6,612.92	0.00	0.00	0.00
15,300.00	90.00	179.46	8,833.00	-6,712.62	63.10	6,712.92	0.00	0.00	0.00
15,400.00	90.00	179.46	8,833.00	-6,812.61	64.04	6,812.92	0.00	0.00	0.00
15,500.00	90.00	179.46	8,833.00	-6,912.61	64.98	6,912.92	0.00	0.00	0.00
15,600.00	90.00	179.46	8,833.00	-7,012.61	65.92	7,012.92	0.00	0.00	0.00
15,700.00	90.00	179.46	8,833.00	-7,112.60	66.86	7,112.92	0.00	0.00	0.00
15,800.00	90.00	179.46	8,833.00	-7,212.60	67.80	7,212.92	0.00	0.00	0.00
15,900.00	90.00	179.46	8,833.00	-7,312.59	68.74	7,312.92	0.00	0.00	0.00
15,991.11	90.00	179.46	8,833.00	-7,403.70	69.60	7,404.03	0.00	0.00	0.00
TD - 8833' TVD - PBHL (H26-35SC 3H)									

## Design Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude
SHL (H26-35SC 3H) - plan hits target center - Point	0.00	0.00	0.00	0.00	0.00	658,158.60	849,121.10	32° 48' 19.082 N	103° 19' 53.802 W
PBHL (H26-35SC 3H) - plan hits target center - Point	0.00	0.00	8,833.00	-7,403.70	69.60	650,754.90	849,190.70	32° 47' 5.825 N	103° 19' 53.808 W


<b>Database:</b>	EDM 5000.1 Single User Db	<b>Local Co-ordinate Reference:</b>	Well 3H
<b>Company:</b>	DEVON ENERGY	<b>TVD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Project:</b>	Lea County, NM (NAD-83)	<b>MD Reference:</b>	3863' GL + 25' RKB @ 3888.00usft
<b>Site:</b>	Hefeweizen 26-35 State Com	<b>North Reference:</b>	Grid
<b>Well:</b>	3H	<b>Survey Calculation Method:</b>	Minimum Curvature
<b>Wellbore:</b>	OH		
<b>Design:</b>	Plan #1		

#### Formations

Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
1,981.00	1,981.00	Rustler		0.00	
2,018.00	2,018.00	Salt		0.00	
3,179.00	3,179.00	Base Salt		0.00	
3,260.00	3,260.00	Yates		0.00	
3,567.00	3,567.00	Seven Rivers		0.00	
4,193.00	4,193.00	Queen		0.00	
4,903.00	4,903.00	San Andres		0.00	
6,153.00	6,153.00	1st BS		0.00	
8,490.14	8,484.00	2nd BS SS		0.00	

#### Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
8,260.04	8,260.04	0.00	0.00	KOP 10° DLS
9,160.04	8,833.00	-572.93	5.39	LP - 8833' TVD
15,991.11	8,833.00	-7,403.70	69.60	TD - 8833' TVD

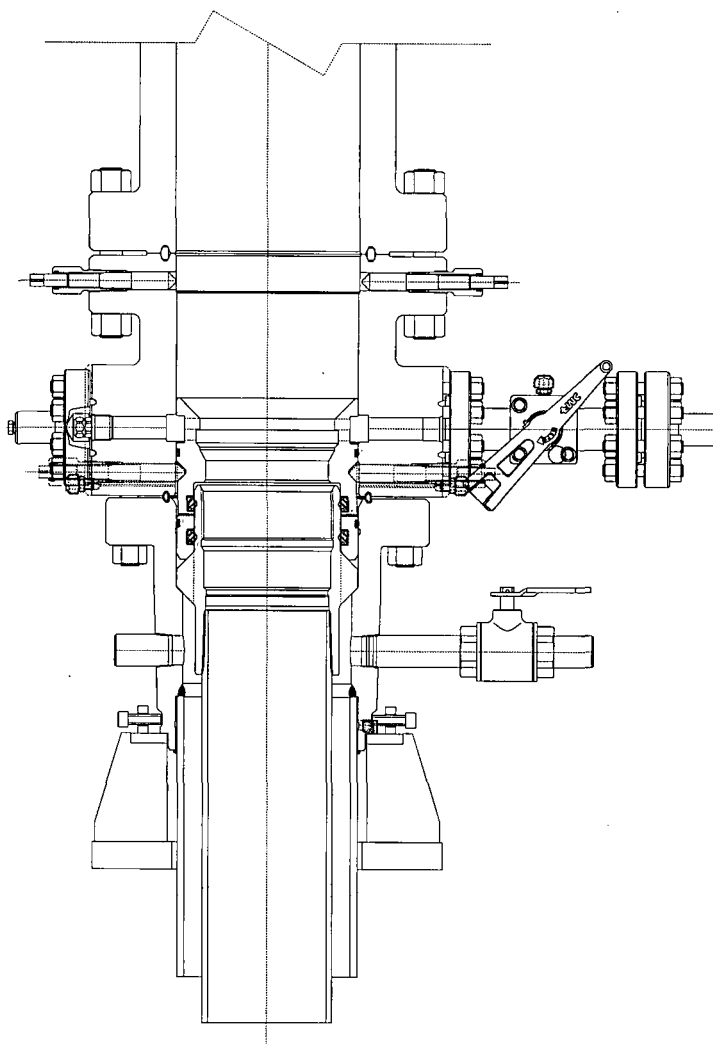


PRIMARY MODE

DEVON ENERGY  
ARTESIA  
S.E.N.M  
13 3/8 X 9 5/8

QUOTE LAYOUT  
F18648  
REF: DM100161737  
DM100151315

<b>PRIVATE AND CONFIDENTIAL</b> THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.  MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES	<b>REVISIONS</b>	<b>DESCRIPTION</b>	<b>DRAWN BY</b>		<b>FMC Technologies</b>  <b>DRAWING NUMBER</b> DM100161771-2A
	A 05-08-13	SURFACE WELLHEAD LAYOUT UNIHEAD, UH-1, SOW, DEVON ENERGY, ODESSA	K. VU	05-08-13	
	B 1-22-14		<b>DRAFTING REVIEW</b> Z. MARQUEZ	05-08-13	
	C 5-13-14		<b>DESIGN REVIEW</b> K. TAHA	05-08-13	
			<b>APPROVED BY</b> R. HAMILTON	05-08-13	



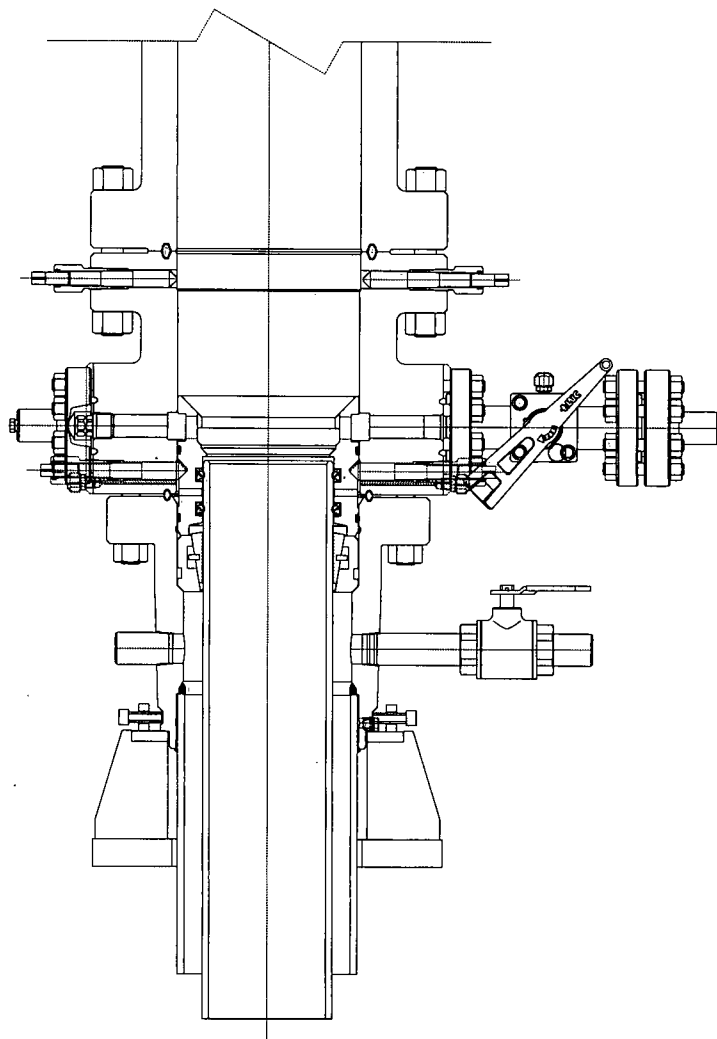

CONTINGENCY MODE


DEVON ENERGY

ARTESIA

S.E.N.M


13 3/8 X 9 5/8

QUOTE LAYOUT  
F18648  
REF: DM100161737  
DM100151315

PRIVATE AND CONFIDENTIAL		REVISIONS		DESCRIPTION				
THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND.		A	05-08-13			DRAWN BY		
		B	1-22-14			K. VU	05-08-13	
		C	5-13-14			DRAFTING REVIEW	Z. MARQUEZ	05-08-13
						DESIGN REVIEW	K. TAHA	05-08-13
MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES.				SURFACE WELLHEAD LAYOUT UNIHEAD, UH-1, SOW, DEVON ENERGY, ODESSA	APPROVED BY	R. HAMILTON	05-08-13	
<div></div> <div>DRAWING NUMBER DM100161771-2B</div>								



Commitment Runs Deep

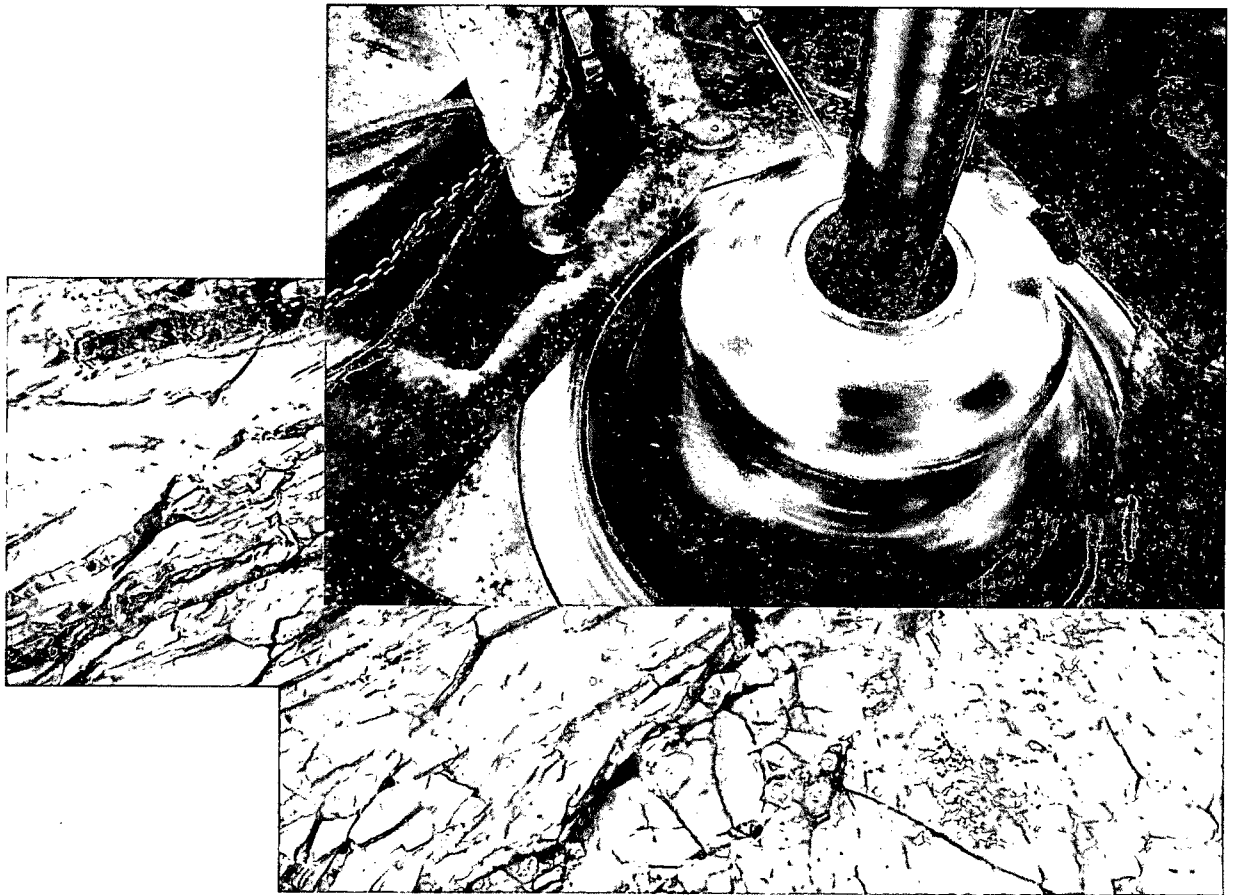

Design Plan  
Operation and Maintenance Plan  
Closure Plan

SENM - Closed Loop Systems  
June 2010

## **I. Design Plan**

Devon uses MI SWACO closed loop system (CLS). The MI SWACO CLS is designed to maintain drill solids at or below 5%. The equipment is arranged to progressively remove solids from the largest to the smallest size. Drilling fluids can thus be reused and savings is realized on mud and disposal costs. Dewatering may be required with the centrifuges to insure removal of ultra fine solids.

The drilling location is constructed to allow storm water to flow to a central sump normally the cellar. This insures no contamination leaves the drilling pad in the event of a spill. Storm water is reused in the mud system or stored in a reserve fluid tank farm until it can be reused. All lubricants, oils, or chemicals are removed immediately from the ground to prevent the contamination of storm water. An oil trap is normally installed on the sump if an oil spill occurs during a storm.

A tank farm is utilized to store drilling fluids including fresh water and brine fluids. The tank farm is constructed on a 20 ml plastic lined, bermed pad to prevent the contamination of the drilling site during a spill. Fluids from other sites may be stored in these tanks for processing by the solids control equipment and reused in the mud system. At the end of the well the fluids are transported from the tank farm to an adjoining well or to the next well for the rig.

Prior to installing a closed-loop system on site, the topsoil, if present, will be stripped and stockpiled for use as the final cover or fill at the time of closure.

Signs will be posted on the fence surrounding the closed-loop system unless the closed-loop system is located on a site where there is an existing well, that is operated by Devon.


## **II. Operations and Maintenance Plan**

*Primary Shakers:* The primary shakers make the first removal of drill solids from the drilling mud as it leaves the well bore. The shakers are sized to handle maximum drilling rate at optimal screen size. The shakers normally remove solids down to 74 microns.

**Mud Cleaner:** The Mud Cleaner cleans the fluid after it leaves the shakers. A set of hydrocyclones are sized to handle 1.25 to 1.5 times the maximum circulating rate. This ensures all the fluid is being processed to an average cut point of 25 microns. The wet discharged is dewatered on a shaker equipped with ultra fine mesh screens and generally cut at 40 microns.

  
devon

## Closed Loop Schematic

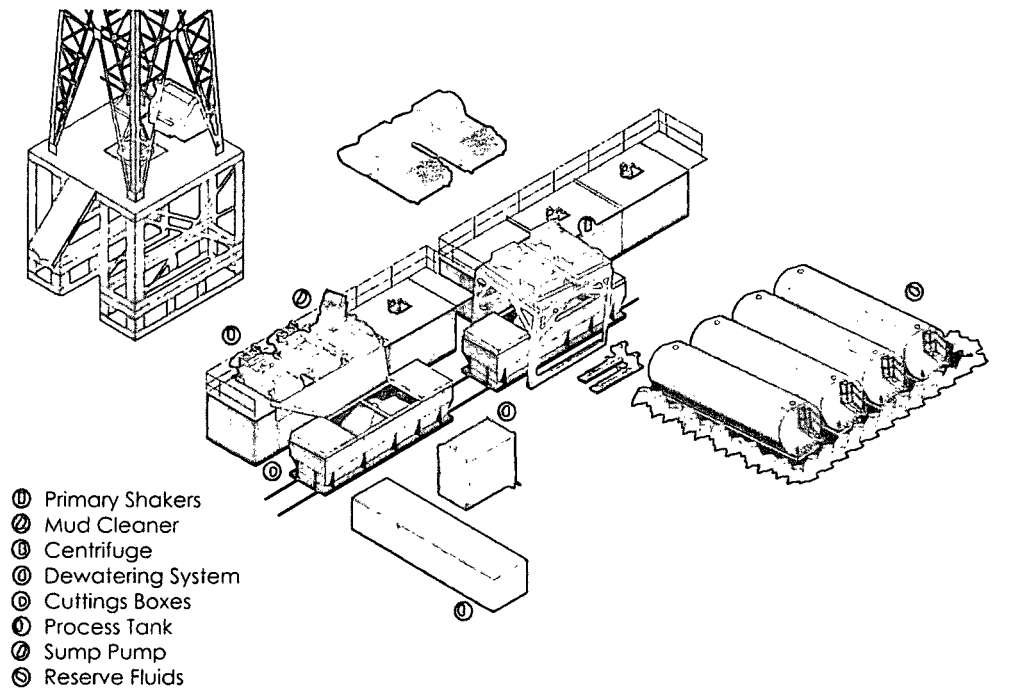

**Mi SWACO**

**Centrifuges:** The centrifuges can be one or two in number depending on the well geometry or depth of well. The centrifuges are sized to maintain low gravity solids at 5% or below. They may or may not need a dewatering system to enhance the removal rates. The centrifuges can make a cut point of 8-10 microns depending on bowl speed, feed rate, solids loading and other factors.

The centrifuge system is designed to work on the active system and be flexible to process incoming fluids from other locations. This set-up is also dependant on well factors.

**Dewatering System:** The dewatering system is a chemical mixing and dosing system designed to enhance the solids removal of the centrifuge. Not commonly used in shallow wells. It may contain pH adjustment, coagulant mixing and dosing, and polymer mixing and dosing. Chemical flocculation binds ultra fine solids into a mass that is within the centrifuge operating design. The

dewatering system improves the centrifuge cut point to infinity or allows for the return of clear water or brine fluid. This ability allows for the ultimate control of low gravity solids.

*Cuttings Boxes:* Cuttings boxes are utilized to capture drill solids that are discarded from the solids control equipment. These boxes are set upon a rail system that allows for the removal and replacement of a full box of cuttings with an empty one. They are equipped with a cover that insures no product is spilled into the environment during the transportation phase.

*Process Tank:* (Optional) The process tank allows for the holding and process of fluids that are being transferred into the mud system. Additionally, during times of lost circulation the process tank may hold active fluids that are removed for additional treatment. It can further be used as a mixing tank during well control conditions.

*Sump and Sump Pump:* The sump is used to collect storm water and the pump is used to transfer this fluid to the active system or to the tank for to hold in reserve. It can also be used to collect fluids that may escape during spills. The location contains drainage ditches that allow the location fluids to drain to the sump.

*Reserve Fluids (Tank Farm):* A series of frac tanks are used to replace the reserve pit. These are steel tanks that are equipped with a manifold system and a transfer pump. These tanks can contain any number of fluids used during the drilling process. These can include fresh water, cut brine, and saturated salt fluid. The fluid can be from the active well or reclaimed fluid from other locations. A 20 ml liner and berm system is employed to ensure the fluids do not migrate to the environment during a spill.

If a leak develops, the appropriate division district office will be notified within 48 hours of the discovery and the leak will be addressed. Spill prevention is accomplished by maintaining pump packing, hoses, and pipe fittings to insure no leaks are occurring. During an upset condition the source of the spill is isolated and repaired as soon as it is discovered. Free liquid is removed by a diaphragm pump and returned to the mud system. Loose topsoil may be used to stabilize the spill and the contaminated soil is excavated and placed in the cuttings boxes. After the well is finished and the rig has moved, the entire location is scrapped and testing will be performed to determine if a release has occurred.

All trash is kept in a wire mesh enclosure and removed to an approved landfill when full. All spent motor oils are kept in separate containers and they are removed and sent to an approved recycling center. Any spilled lubricants, pipe

dope, or regulated chemicals are removed from soil and sent to landfills approved for these products.

These operations are monitored by Mi Swaco service technicians. Daily logs are maintained to ensure optimal equipment operation and maintenance. Screen and chemical use is logged to maintain inventory control. Fluid properties are monitored and recorded and drilling mud volumes are accounted for in the mud storage farm. This data is kept for end of well review to insure performance goals are met. Lessons learned are logged and used to help with continuous improvement.

A MI SWACO field supervisor manages from 3-5 wells. They are responsible for training personnel, supervising installations, and inspecting sites for compliance of MI SWACO safety and operational policy.

### **III. Closure Plan**

A maximum 340' X 340' caliche pad is built per well. All of the trucks and steel tanks fit on this pad. All fluid cuttings go to the steel tanks to be hauled by various trucking companies to an agency approved disposal.