

		RECEIVED	*		
	DEPARTMENT OF THE INTERIOR OCD Artesia			FORM APPROVED OMB NO. 1004-0137 Expires: January 31, 2018	
SUNDRY	NOTICES AND REPOR	RTS ON WELLS	5. Lease Serial No. NMNM58511	,	
Do not use this form for proposals to drill or to the approximation appression of the second			6. If Indian, Allottee c	6. If Indian, Allottee or Tribe Name	
SUBMIT IN TRIPLICATE - Other instructions on page 2 1. Type of Well Oil Well Gas Well Other			7. If Unit or CA/Agree NMNM84605	 If Unit or CA/Agreement, Name and/or No NMNM84605 Well Name and No. PRONGHORN FED C 1 	
2. Name of Operator Contact: DAVID STEWART OXY USA WTP LIMITED PTNRSHIP E-Mail: david_stewart@oxy.com			9. API Well No. 30-015-26107-0	9. API Well No. 30-015-26107-00-S1	
3a. Address 3b. Phone No. (include area code) Ph: 432-685-5717				10. Field and Pool or Exploratory Area INDIAN BASIN-STRAWN	
HOUSTON, TX 77210 4. Location of Well (Footage, Sec., T., R., M., or Survey Description)			11. County or Parish.	11. County or Parish, State	
Sec 8 T21S R23E SESE 660FSL 660FEL			EDDY COUNT		
12. CHECK THE A	PPROPRIATE BOX(ES)	TO INDICATE NATURE OF 1	NOTICE, REPORT, OR OTH	ER DATA	
TYPE OF SUBMISSION		TYPE OF A			
Notice of Intent	🗋 Acidize	Deepen (Production (Start/Resume)	UWater Shut-O	
□ Subsequent Report	Alter Casing			U Well Integrity	
☐ Final Abandonment Notice	 Casing Repair Change Plans 	-	Recomplete Temporarily Abandon	Other	
-	Convert to Injection	-	U Water Disposal		
13-3/8" 48# csg @ 227' w/ 23 9-5/8" 36# csg @ 1675' w/ 59 5-1/2" 15.5-17# csg @ 7650'	l0sx, 12-1/4" hole, TOC-S∟ w/ 500sx, 8-3/4" hole, TOC M&P 40sx cmt to 6870' 60 ' WOC-Tag √3≲ 0		ROITIONS OF AF		
 All & Set CIBP @ 7170 , M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 	nt to 1625' WOC-Tag t to Surface	be utilized	Accepted for the		
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process	490871 verified by the BLM Well In P LIMITED PTNRSHIP, sent to th ing by DEBORAH MCKINNEY on	nformation System e Carlsbad 11/04/2019 (20DLM0123SE)		
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i 	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process	490871 verified by the BLM Well In P LIMITED PTNRSHIP, sent to th ing by DEBORAH MCKINNEY on	nformation System e Carlsbad		
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm Name (Printed/Typed) DAVID S 	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission)	490871 verified by the BLM Well In P LIMITED P NRSHIP, sent to th sing by DEBORAH MCKINNEY on Title SR. REGU	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9		
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm Name (Printed/Typed) DAVID S 	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission)	490871 verified by the BLM Well In P LIMITED PTNRSHIP, sent to th ing by DEBORAH MCKINNEY on Title SR. REGU	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9		
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm Name (Printed/Typed) DAVID S 	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission) THIS SPACE FO	490871 verified by the BLM Well In P LIMITED PTNRSHIP, sent to the sing by DEBORAH MCKINNEY on Title SR. REGU Date 11/01/201 DR FEDERAL OR STATE OF Title SA	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9	//- //-/ Date	
2. M&P 25sx cmt @ 5920-57 3. Perf @ 3300' sqz 55sx cm 4. Perf @ 1955' sqz 130sx ci 5. Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. Thereby certify that the foregoing i Comm Name(Printed/Typed) DAVID S' Signature (Electronic Approved By conditions of approval, if any, are attacher end of the applicant holds legal or extended	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission) THIS SPACE FO Compared of this notice does uitable title to those rights in the uct operations thereon.	490871 verified by the BLM Well In P LIMITED P NRSHIP, sent to the sing by DEBORAH MCKINNEY on Title SR. REGU Date 11/01/201 DR FEDERAL OR STATE OF 	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9 FFICE USE	//- //-/ Date	
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm Name (<i>Printed/Typed</i>) DAVID S Signature (Electronic Approved By Conditions of approval, if any, are attacher tify that the applicant holds legal or exhick would entitle the applicant to conditie 18 ULS. Section 1001 and Title 43 States any false, fictitious or fraudulent instructions on page 2)	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission) THIS SPACE FO Compared of this notice does uitable title to those rights in the uct operations thereon.	490871 verified by the BLM Well In P LIMITED PTNRSHIP, sent to the sing by DEBORAH MCKINNEY on Title SR. REGU Date 11/01/201 DR FEDERAL OR STATE OF 	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9 FFICE USE	Date agency of the United	
 M&P 25sx cmt @ 5920-57 Perf @ 3300' sqz 55sx cm Perf @ 1955' sqz 130sx ci Perf @ 492' sqz 175sx cm 10# MLF between plugs-Abov 14. I hereby certify that the foregoing i Comm Name (<i>Printed/Typed</i>) DAVID S Signature (Electronic Approved By Conditions of approval, if any, are attacher tify that the applicant holds legal or exhick would entitle the applicant to conditie 18 ULS. Section 1001 and Title 43 States any false, fictitious or fraudulent instructions on page 2)	nt to 1625' WOC-Tag t to Surface ve ground steel tanks will b s true and correct. Electronic Submission #4 For OXY USA WT hitted to AFMSS for process TEWART Submission) THIS SPACE FO Compared of this notice does uitable title to those rights in the uct operations thereon.	490871 verified by the BLM Well In P LIMITED P NRSHIP, sent to the sing by DEBORAH MCKINNEY on Title SR. REGU Date 11/01/201 DR FEDERAL OR STATE OF 	nformation System e Carlsbad 11/04/2019 (20DLM0123SE) JLATORY ADVISOR 9 FFICE USE	Date agency of the United	

OXY USA WTP LP - Current Pronghorn Federal #1 API No. 30-015-26107

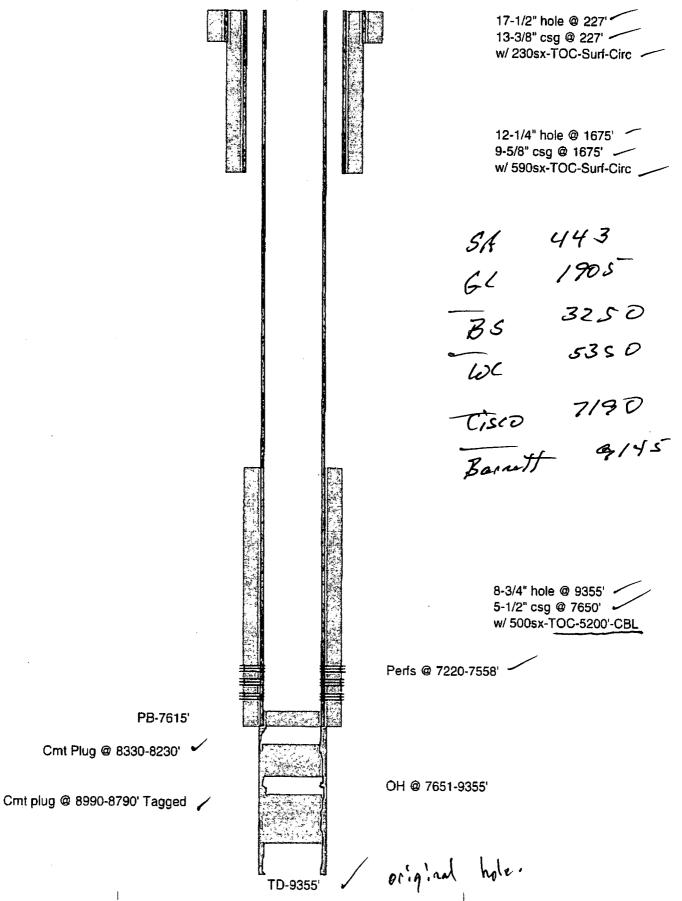

OXY UŠA WTP LP - Proposed Pronghorn Federal #1 API No. 30-015-26107

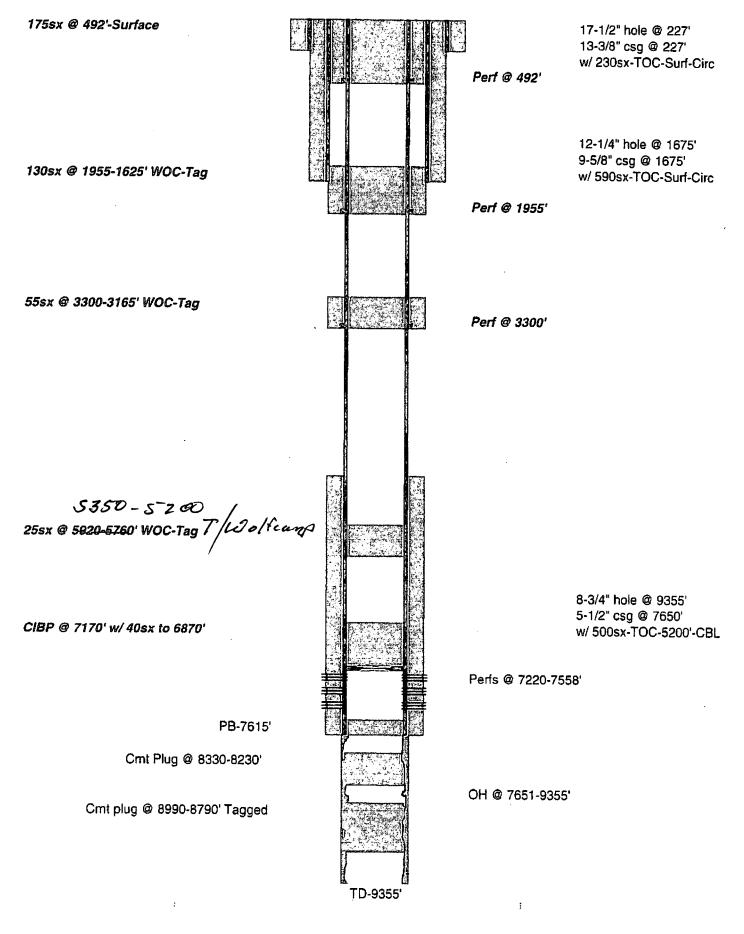

BUREAU OF LAND MANAGEMENT Carlsbad Field Office 620 East Greene Street Carlsbad, New Mexico 88220 575-234-5972

Permanent Abandonment of Federal Wells Conditions of Approval

Failure to comply with the following Conditions of Approval may result in a Notice of Incidents of Noncompliance (INC) in accordance with 43 CFR 3163.1.

1. Plugging operations shall commence within <u>minety (90)</u> days from the approval date of this Notice of Intent to Abandon.

If you are unable to plug the well by the 90th day provide this office, prior to the 90th day, with the reason for not meeting the deadline and a date when we can expect the well to be plugged. Failure to do so will result in enforcement action.

The rig used for the plugging procedure cannot be released and moved off without the prior approval of the authorized officer. Failure to do so may result in enforcement action.

2. <u>Notification</u>: Contact the appropriate BLM office at least 24 hours prior to the commencing of any plugging operations. For wells in Chaves and Roosevelt County, call 575-627-0272; Eddy County, call 575-361-2822; Lea County, call 575-393-3612.

3 <u>Blowout Preventers</u>: A blowout preventer (BOP), as appropriate, shall be installed before commencing any plugging operation. The BOP must be installed and maintained as per API and manufacturer recommendations. The minimum BOP requirement is a 2M system for a well not deeper than 9,090 feet; a 3M system for a well not deeper than 13,636 feet; and a 5M system for a well not deeper than 22,727 feet.

4. <u>Mud Requirement</u>: Mud shall be placed between all plugs. Minimum consistency of plugging mud shall be obtained by mixing at the rate of 25 sacks (50 pounds each) of gel per 100 barrels of brine water Minimum nine (9) pounds per gallon.

5 <u>Cement Requirement</u>: Sufficient cement shall be used to bring any required plug to the specified depth and length. Any given cement volumes on the proposed plugging procedure are merely estimates and are not final. Unless specific approval is received, no plug except the surface plug shall be less than 25 sacks of cement. Any plug that requires a tag will have a minimum WOC time of 4 hours.

In heu of a cement plug across perforations in a cased hole (not for any other plugs), a bridge plug set within 50 feet to 100 feet above the perforations shall be capped with 25 sacks of cement. If a bailer is used to cap this plug, 35 feet of cement shall be sufficient. Before pumping or bailing cement on top of CIBP, tag will be required to verify depth. Based on depth, a tag of the cement may be deemed necessary. Unless otherwise specified in the approved procedure, the cement plug shall consist of either Neat Class "C", for up to 7,500 feet of depth or Neat Class "H", for deeper than 7,500 feet plugs.

6. <u>Dry Hole Marker</u>: All casing shall be cut-off at the base of the cellar or 3 feet below final restored ground level (whichever is deeper). The BLM is to be notified a minimum of 4 hours prior to the wellhead being cut off to verify that cement is to surface in the casing and all annuluses. Wellhead cut off shall commence within ten (10) calendar days of the well being plugged. If the cut off cannot be done by the 10th day, the BLM is to be contacted with justification to receive an extension for completing the cut off.

The well bore shall then be capped with a 4-inch pipe, 10-feet in length, 4 feet above ground and embedded in cement, unless otherwise noted in COA (requirements will be attached). The following information shall be permanently inscribed on the dry hole marker: well name and number, name of the operator, lease serial number, surveyed location (quarter-quarter section, section, township and range or other authorized survey designation acceptable to the authorized officer such as metes and bounds).

7. <u>Subsequent Plugging Reporting</u>: Within 30 days after plugging work is completed, file one original and three copies of the Subsequent Report of Abandonment, Form 3160-5 to BLM. The report should give in detail the manner in which the plugging work was carried out, the extent (by depths) of cement plugs placed, and the size and location (by depths) of casing left in the well. <u>Show date well was plugged</u>.

8. <u>Trash</u>: All trash, junk and other waste material shall be contained in trash cages or bins to prevent scattering and will be removed and deposited in an approved sanitary landfill. Burial on site is not permitted.

Following the submission and approval of the Subsequent Report of Abandonment, surface restoration will be required. See attached reclamation objectives.

e