

District I
PO Box 1980, Hobbs, NM 88241-1980

District II
811 South First, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

Form C-101
Revised October 18, 1994

Instructions on back
Submit to Appropriate District Office
State Lease - 6 Copies
Fee Lease - 5 Copies

☐ AMENDED REPORT

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

¹ Operator Name and Address John H. Hendrix Corporation P. O. Box 3040 Midland, Texas 79702-3040		² GRID Number 012024
		³ API Number 30 - 025-34079
⁴ Property Code 005211	⁵ Property Name Parks	⁶ Well No. 13

⁷Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West Line	County
J	14	22 S	37 E		2310	South	1980	East	Lea

⁸Proposed Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West Line	County
⁹ Proposed Pool 1 Blinebry Oil & Gas (06660)					¹⁰ Proposed Pool 2				

¹¹ Work Type Code N	¹² Well Type Code O	¹³ Cable/Rotary R	¹⁴ Lease Type Code P	¹⁵ Ground Level Elevation 3330
¹⁶ Multiple No	¹⁷ Proposed Depth 7600	¹⁸ Formation Blinebry	¹⁹ Contractor McGee	²⁰ Spud Date 02-01-98

²¹Proposed Casing and Cement Program

Hole Size	Casing Size	Casing weight/foot	Setting Depth	Sacks of Cement	Estimated TOC
11	8 5/8	24#	1250	450	Surface
7 7/8	5 1/2	17# & 15.5#	7600	2000	Circ.

²²Describe the proposed program. If this application is to DEEPEN or PLUG BACK give the data on the present productive zone and proposed new productive zone. Describe the blowout prevention program, if any. Use additional sheets if necessary.

1. Drill 11" hole and set 8-5/8" casing at 1250' and cement surface string.
2. Continue drilling 7-7/8" hole to approximately 7600', log and set casing at 7600' and cement.
3. Perforate selected interval from log in the Blinebry and stimulate.

²³I hereby certify that the information given above is true and complete to the best of my knowledge and belief.

Signature: *Ronnie H. Westbrook*

Printed name: Ronnie H. Westbrook

Title: Vice President

OIL CONSERVATION DIVISION

Approved By: *Charles F. Lewis*

Title: OIL & GAS INSPECTOR

Approval Date: 8-4-97

Expiration Date:

24

DISTRICT I

P.O. Box 1980, Hobbs, NM 88241-1980

State of New Mexico

Energy, Minerals and Natural Resources Department

Form C-102

Revised February 10, 1994
Submit to Appropriate District Office

State Lease - 4 Copies

Fee Lease - 3 Copies

DISTRICT II

P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III

1000 Rio Brazos Rd., Aztec, NM 87410

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe, New Mexico 87504-2088

DISTRICT IV

P.O. Box 2088, Santa Fe, NM 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number 30-025-34079	Pool Code 06660	Pool Name Blinebry Oil & Gas
Property Code 005211	Property Name PARKS #13	Well Number 13
OGRID No. 012024	Operator Name JOHN H. HENDRIX CORPORATION	Elevation 3330

Surface Location

UL or lot No. J	Section 14	Township 22 S	Range 37 E	Lot Idn	Feet from the 2310	North/South line SOUTH	Feet from the 1980	East/West line EAST	County LEA
---------------------------	----------------------	-------------------------	----------------------	---------	------------------------------	----------------------------------	------------------------------	-------------------------------	----------------------

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

				OPERATOR CERTIFICATION	
				I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief. <i>Ronnie H. Westbrook</i> Signature Ronnie H. Westbrook Printed Name Vice President Title 7/31/97 Date	
				SURVEYOR CERTIFICATION	
				I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. JUNE 25, 1997 Date Surveyed <i>Ronald J. Eidson</i> Signature & Seal of Professional Surveyor 6-27-97 P.O. Num. 97-14-1046 Certificate No. JOHN H. WEST, 676 RONALD J. EIDSON, 3239 GARY G. EIDSON, 12641	

[illegible]

(505) 393-3117

LOCATION VERIFICATION MAP

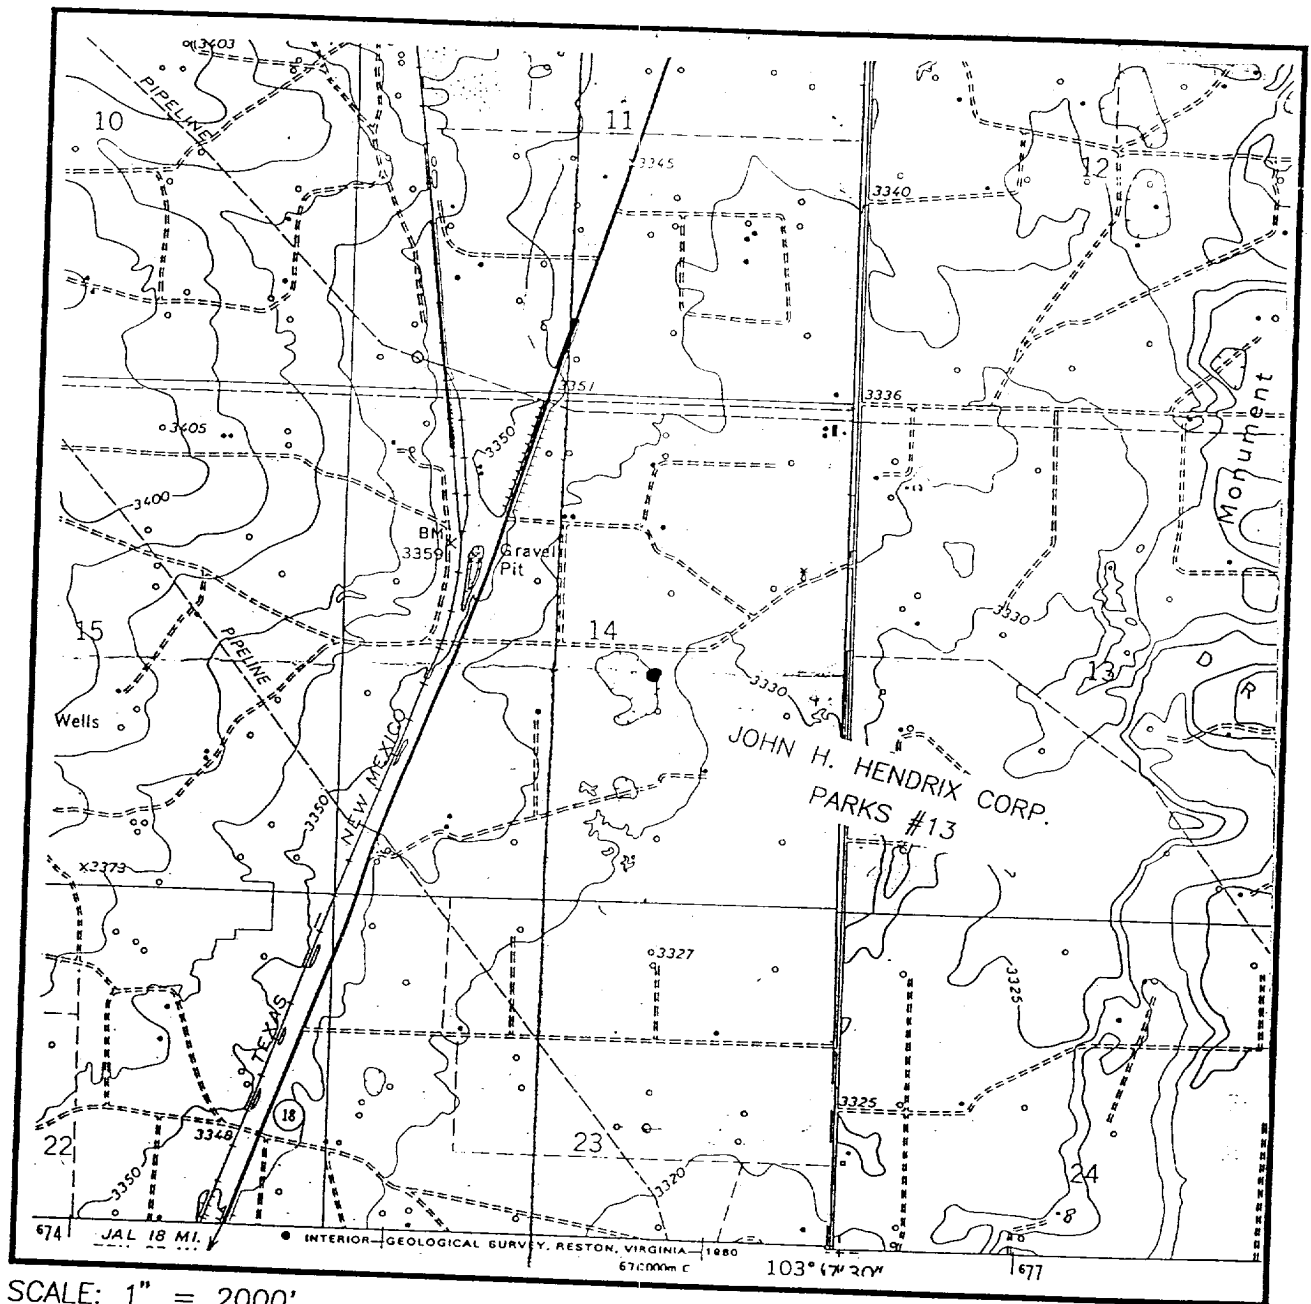

SCALE: 1" = 2000'

CONTOUR INTERVAL - 10'

SEC. 14 TWP. 22-S RGE. 37-E

SURVEY N.M.P.M.

COUNTY LEA

DESCRIPTION 2310' FSL & 1980' FEL

ELEVATION 3330'

OPERATOR JOHN H. HENDRIX CORP.

LEASE PARKS

U.S.G.S. TOPOGRAPHIC MAP

EUNICE, N.M.

**JOHN WEST ENGINEERING
HOBBS, NEW MEXICO**

(505) 393-3117

MINIMUM BLOWOUT PREVENTER REQUIREMENTS

3 000 psi Working Pressure

3 MWP

STACK REQUIREMENTS

No	Item	Min I.D.	Min Nominal
1	Flowline		
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min choke line outlets		
6b	2" min. kill line and 3" min. choke line outlets in ram. (Alternate to 6a above.)		
7	Valve Gate ☐ Plug ☐	3-1/8"	
8	Gate valve—power operated	3-1/8"	
9	Line to choke manifold		3"
10	Valves Gate ☐ Plug ☐	2-1/16"	
11	Check valve	2-1/16"	
12	Casing head		
13	Valve Gate ☐ Plug ☐	1-13/16"	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

OPTIONAL

16	Flanged valve	1-13/16"	1
----	---------------	----------	---

CONFIGURATION 1

