

DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
OCD-ARTESIA

APPLICATION FOR PERMIT TO DRILL OR DEEPEN

1a. TYPE OF WORK
c/k WELL DRILL ☒ 8097 DEEPEN ☐ E-06-29

b. TYPE OF WELL
OIL WELL ☒ GAS WELL ☐ OTHER ☐ SINGLE ZONE ☒ MULTIPLE ZONE ☐

2. NAME OF OPERATOR
POGO PRODUCING COMPANY (RICHARD WRIGHT 432-685-8140) 17891

3. ADDRESS AND TELEPHONE NO.
P.O. BOX 10340 MIDLAND, TEXAS 79702-7340 (432-685-8100)

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.)
At surface
1980' FNL & 330' FWL SECTION 28 T24S-R29E EDDY CO. NM
At proposed prod. zone SAME

14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN OR POST OFFICE
Approximately 6 miles Southeast of Malaga New Mexico

15. DISTANCE FROM PROPOSED LOCATION TO NEAREST PROPERTY OR LEASE LINE, FT.
(Also to nearest drlg. unit line, if any)
330'

18. DISTANCE FROM PROPOSED LOCATION TO NEAREST WELL, DRILLING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT.
2100'

21. ELEVATIONS (Show whether DF, RT, GR, etc.)
2945' GR.

22. APPROX. DATE WORK WILL START WHEN APPROVED

PROPOSED CASING AND CEMENTING PROGRAM

SIZE OF HOLE	GRADE SIZE OF CASING	WEIGHT PER FOOT	SETTING DEPTH	QUANTITY OF CEMENT
26"	Conductor	NA	40'	Redi-mix to Surface
12 1/2"	J-55 8 5/8"	32#	550'	550 Sx. circulate cement
7 7/8"	J-55 5 1/2"	15.5#	5500'	1350 Sx. two stage

1. Drill 26" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 12 1/2" hole to 550'. Run and set 550' of 8 5/8" 32# J-55 ST&C casing. Cement with 550 Sx. of Class "C" cement + 2% CaCl₂ + 1/4# Flocele/Sx., circulate cement to surface.
3. Drill 7 7/8" hole to 5500'. Run and set 5500' of 5 1/2" 15.5# J-55 ST&C casing. Cement in two stages with D.V. Tool at 2800'±. Cement 1st stage with 750 Sx. of Class "C" cement + additives, cement 2nd stage with 600 Sx. of Class "C" cement + additives. Cement is calculated to circulate.

APPROVAL SUBJECT TO
GENERAL REQUIREMENTS
AND SPECIAL STIPULATIONS

CARLSBAD CONTROLLED WATER BASIN

IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is to deepen, give data on present productive zone and proposed new productive zone. If proposal is to drill or deepen directionally, give pertinent data on subsurface locations and measured and true vertical depths. Give blowout preventer program, if any.

SIGNED Lee T. Garcia TITLE Agent DATE 02/13/06

(This space for Federal or State office use)

PERMIT NO.

Application approval does not warrant or certify that the applicant holds legal or equitable CONDITIONS OF APPROVAL, IF ANY:

If earthen pits are used in association with the drilling of this well, an OCD pit permit must be obtained prior to pit construction.

applicant to conduct operations thereon.

APPROVED BY /s/ James Stovall ACTING FIELD MANAGER TITLE DATE

JUN 02 2006

Salt 99.5

*See Instructions On Reverse Side

APPROVAL FOR 1 YEAR

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
DISTRICT II
811 South First, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised March 17, 1999

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION

2040 South Pacheco
Santa Fe, New Mexico 87504-2088

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code 11540	Pool Name CEDAR CANYON-DELAWARE
Property Code	Property Name CEDAR CANYON "28" FEDERAL	Well Number 7
OGRID No. 17891	Operator Name POGO PRODUCING COMPANY	Elevation 2945'

Surface Location

UL or lot No. E	Section 28	Township 24S	Range 29E	Lot Idn	Feet from the 1980	North/South line NORTH	Feet from the 330	East/West line WEST	County EDDY
--------------------	---------------	-----------------	--------------	---------	-----------------------	---------------------------	----------------------	------------------------	----------------




Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
Dedicated Acres 40	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

	OPERATOR CERTIFICATION	
	<p>I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.</p> <p><i>Joe T. Janica</i> Signature Joe T. Janica Printed Name Agent Title 02/13/06 Date</p>	
EXHIBIT "A"	SURVEYOR CERTIFICATION	
	<p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>JANUARY 4, 2006 Date Surveyed Signature & Seal of Professional Surveyor 7977 W.S. No. 6410 Certificate No. Gary Jones 7977 BASIN SURVEYS</p>	

SECTION 28, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.
EDDY COUNTY, NEW MEXICO

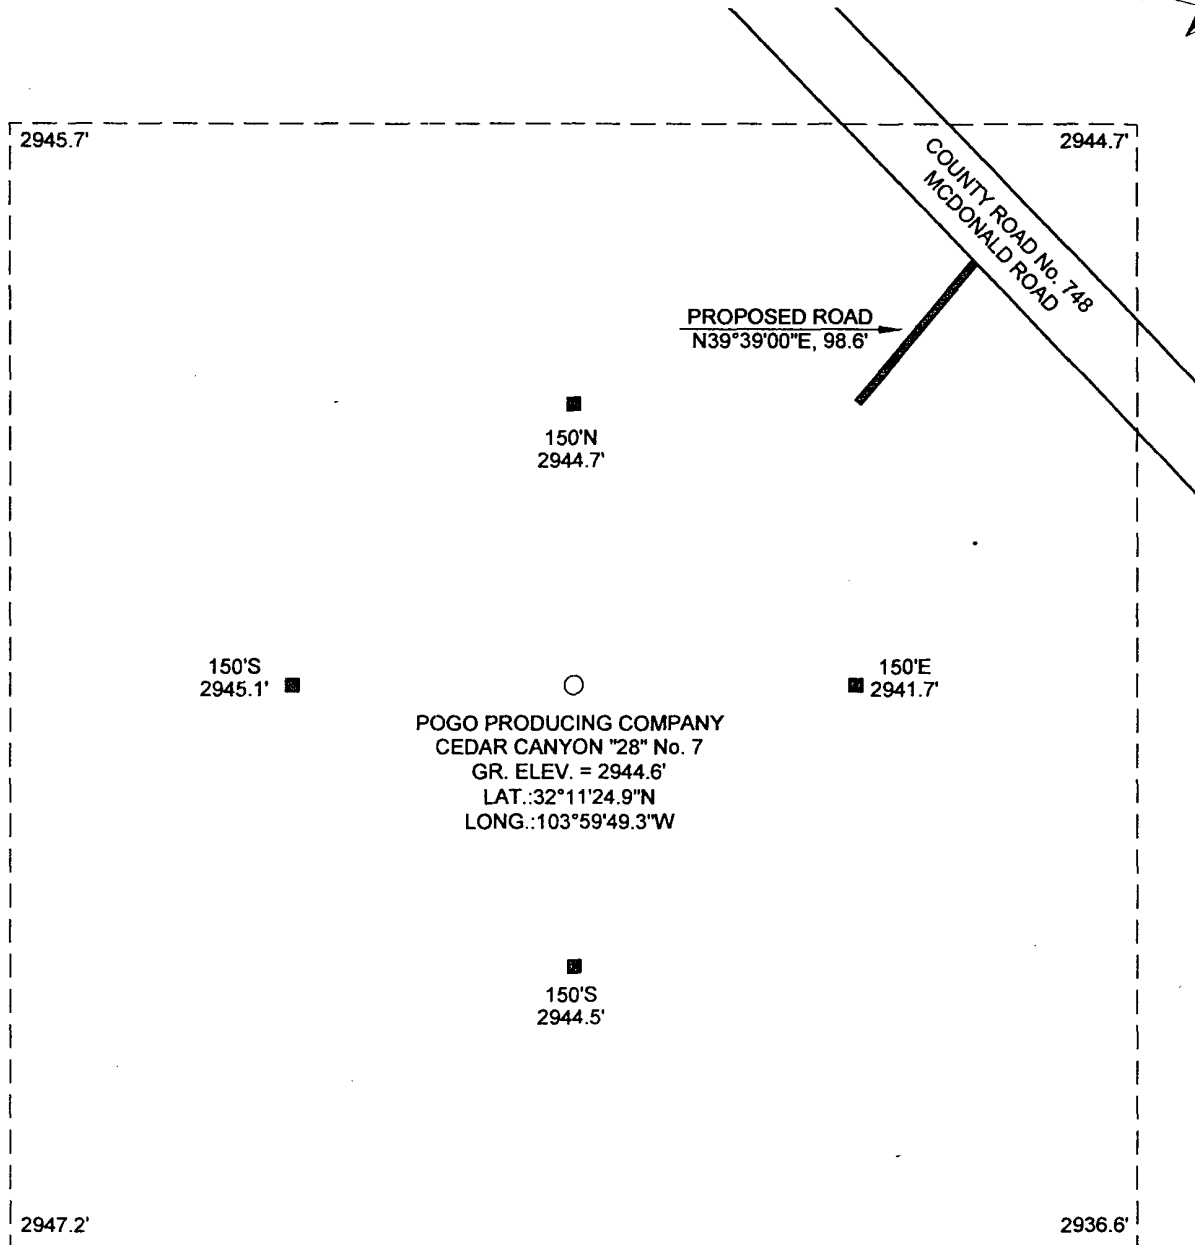

DIRECTIONS TO LOCATION:

BASIN SURVEYS P.O. BOX 1786 -HOBBS, NEW MEXICO

W.O. Number: 6110 Drawn By: S.STANFIELD



Date: 01-06-2005 Disk:C:\DRAWINGS\POGO\POGO6110-1

POGO PRODUCING COMPANY


CEDAR CANYON "28" FEDERAL No.7 WELL PAD TOPO

**CEDAR CANYON "28" FEDERAL No.7
LOCATED 1980' F.N.L. & 330' F.W.L., SECTION 28,
TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.
EDDY COUNTY, NEW MEXICO**

Survey Date: JANUARY 4, 2006 Sheet 1 of 1 Sheets

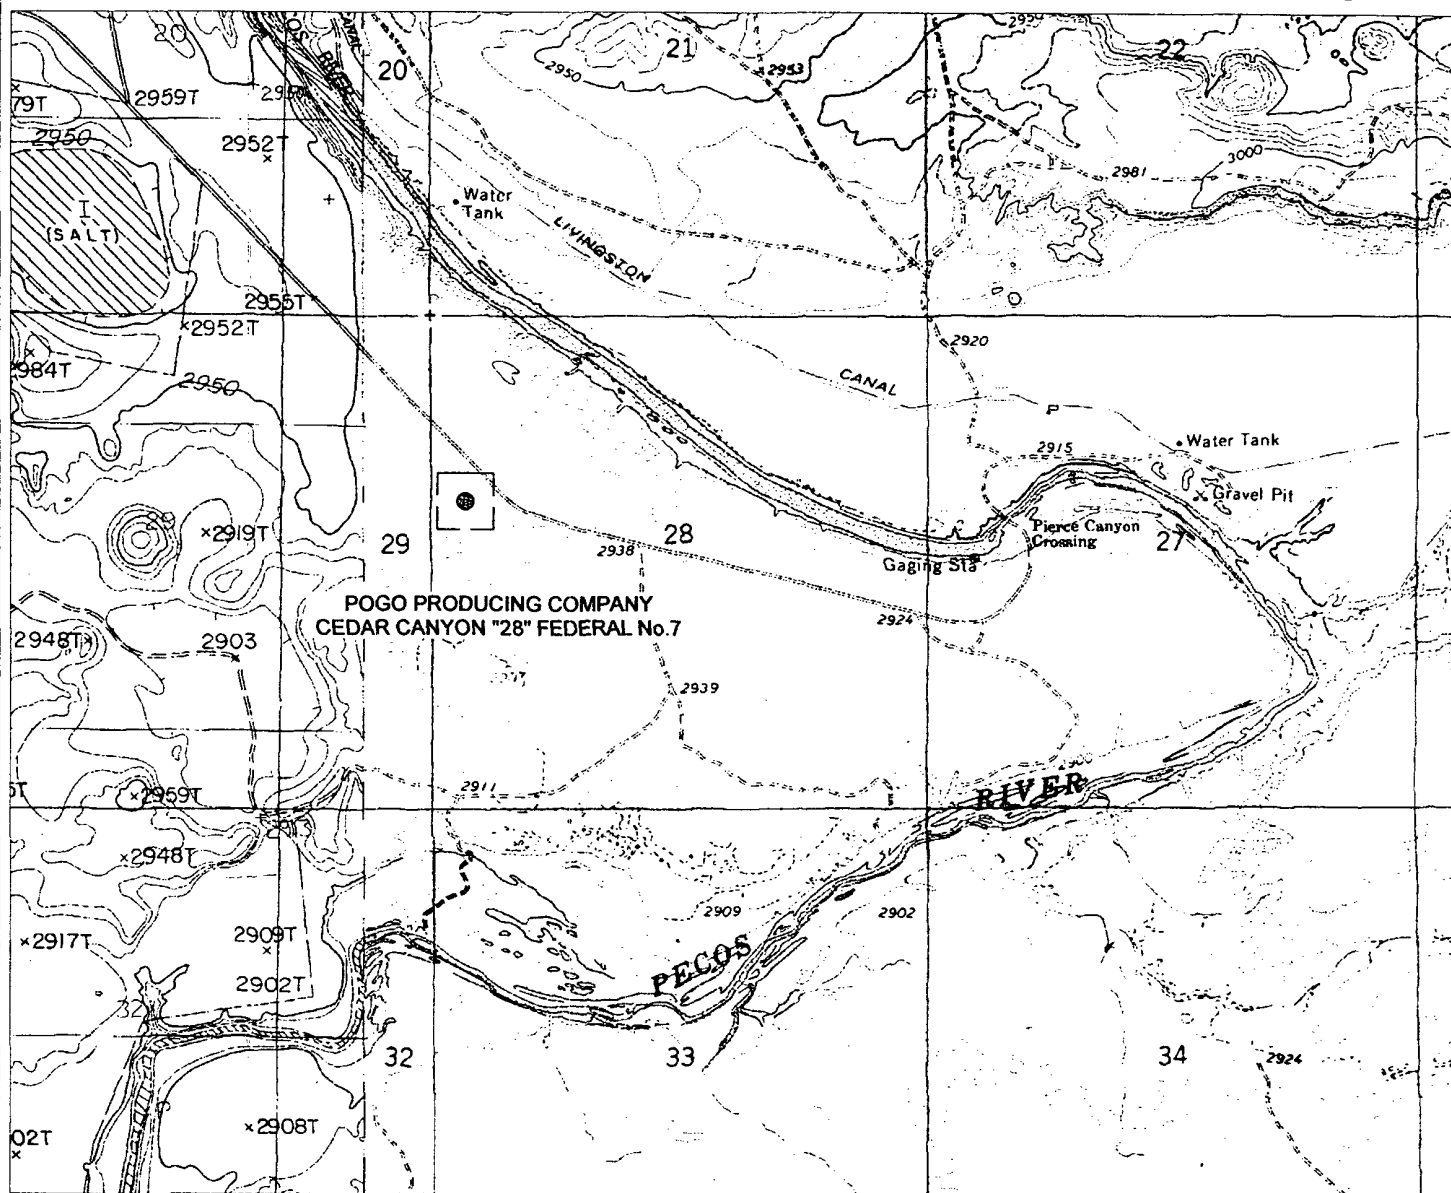

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL No. 7
SECTION 9, TOWNSHIP 24 SOUTH, RANGE 29 EAST, N.M.P.M.
EDDY COUNTY, NEW MEXICO



P.O. Box 1786
 1120 West County Rd.
 Hobbs, New Mexico 88241
 (505) 393-7316 - Office
 (505) 392-2206 - Fax
basinsurveys.com

W.O. Number:	C:\DRAWINGS\POGO\POGO6110-1
Survey Date:	JANUARY 4, 2006
SCALE:	1" = 2000'
Date:	JANUARY 6, 2006

POGO PRODUCING
COMPANY

APPLICATION TO DRILL

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

In response to questions asked under Section II of Bulletin NTL-6 the following information on the above well is provided for your consideration.

1. Location of well: 1980' FNL & 330' FWL SECTION 28 T24S-R29E EDDY CO. NM

2. Ground Elevation above Sea Level: 2945' GR.

3. Geological age of surface formation: Quaternary Deposits:

4. Drilling tools and associated equipment: Conventional rotary drilling rig using drilling mud as a circulating medium to remove solids from hole.

5. Proposed drilling depth: 5500'

6. Estimated tops of geological markers:

Salt	1400'	Bell Canyon	2930'
Anhydrite	2700'	Cherry Canyon	3800'
Delaware Lime	2900'	Brushy Canyon	5000'

7. Possible mineral bearing formations:

Brushy Canyon	Oil
---------------	-----

8. Casing Program:

Hole Size	Interval	OD of Casing	Weight	Thread	Collar	Grade
26"	0-40	20"	NA	NA	NA	Conductor
12 1/4"	0-550'	8 5/8"	32#	8-R	ST&C	J-55
7 7/8"	0-5500'	5 1/2"	15.5#	8-R	ST&C	J-55

APPLICATION TO DRILL

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

9. CEMENTING & CASING SETTING DEPTHS:

20"	Conductor	Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
8 5/8"	Surface	Set 550' of 8 5/8" 32# J-55 ST&C casing. Cement with 550 Sx. of Class "C" cement + 2% CaCl ₂ + 1/4# Flocele/Sx. circulate cement to surface.
5 1/2"	Production	Set 550' of 5 1/2" 15.5# J-55 ST&C casing. Cement in two stages with D.V. Tool at 2800'±. Cement 1st stage with 750 Sx. of Class "C" cement + additives, cement 2nd stage with 600 Sx. of Class "C" cement + additives.

10. PRESSURE CONTROL EQUIPMENT:

Exhibit "E" shows a 2000 PSI working pressure B.O.P., consisting of a stripper head instead of an annular preventor, blind rams, and pipe rams. This B.O.P. stack is being used because of Substructure height limitations of the drilling rig being used to drill this well. Pressures encountered during drilling are not expected to exceed 2000 PSI at total depth. Pogo requests permission to 3rd party test of the B.O.P., after setting 8 5/8" the blowout preventor will be tested according to API specifications. Exhibit "E-1" shows a manually operated choke manifold, as no remote B.O.P. equipment will be necessary.

11. PROPOSED MUD CIRCULATING SYSTEM:

DEPTH	MUD WT.	VISC.	FLUID LOSS	TYPE MUD
40-550'	8.5-8.7	29-32	NC	Fresh water use paper to control seepage
550-5500'	10.0-10.2	29-38	NC*	Brine water use paper to control seepage, Lime for pH control and use high viscosity sweeps to clean hole.

* Water loss control may have to be used to log well and run casing. If this is needed use a Polymer type mud system.

APPLICATION TO DRILL

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

12. LOGGING, CORING, AND TESTING PROGRAM:

- A. Open hole logs: Dual Laterolog, SNP, LDT, MSFL, Gamma Ray, Caliper from TD back to the 8 5/8" casing shoe. Run Gamma Ray, Neutron from 8 5/8" casing shoe back to surface.
- B. No DST's or cores are planned at this time.
- C. Mud logger may be used at the advice of the Geologist.

13. POTENTIAL HAZARDS:

No abnormal pressures or temperatures are expected. There is no known presence of H²S in this area. If H²S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6. No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 2800 PSI, and Estimated BHT 155°.

14. ANTICIPATED STARTING DATE AND DURATION OF OPERATION:

Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operation and drilling is expected to take 15 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flowlines in order to place well on production.

15. OTHER FACETS OF OPERATIONS:

After running casing, cased hole Gamma Ray, Neutron Collar logs will be run from TD back to all possible productive zones. The Delaware formation will be perforated and stimulated in order to establish production. The well will be swab tested and potentialized as an oil well.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H₂S safety instructor to the following:
 - A. Characteristics of H₂S
 - B. Physical effects and hazards
 - C. Proper use of safety equipment and life support systems.
 - D. Principle and operation of H₂S detectors, warning system and briefing areas.
 - E. Evacuation procedure, routes and first aid.
 - F. Proper use of 30 minute pressure demand air pack.
2. H₂S Detection and Alarm Systems
 - A. H₂S detectors and audio alarm system to be located at bell nipple, end of blooie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - A. Windsock at mudpit area should be high enough to be visible.
 - B. Windsock at briefing area should be high enough to be visible.
 - C. There should be a windsock at entrance to location.
4. Condition Flags and Signs
 - A. Warning sign on access road to location.
 - B. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H₂S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well control equipment
 - A. See exhibit "E"
6. Communication
 - A. While working under masks chalkboards will be used for communication.
 - B. Hand signals will be used where chalk board is inappropriate.
 - C. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephoned will be available at most drilling foreman's trailer or living quarters.
7. Drillstem Testing
 - A. Exhausts will be watered.
 - B. Flare line will be equipped with an electric ignitor or a propane pilot light in case gas reaches the surface.
 - C. If location is near any dwelling a closed D.S.T. will be performed.

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

8. Drilling contractor supervisor will be required to be familiar with the effects H_2S has on tubular goods and other mechanical equipment.
9. If H_2S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H_2S scavengers if necessary.

SURFACE USE PLAN

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

1. EXISTING ROADS: Area maps, Exhibit "B" is a reproduction of a County General Highway Map. Exhibit "C" is a reproduction of a USGS Topographic Map, showing existing roads and proposed roads. All existing roads will be maintained in a condition equal to or better than current conditions. Any new roads will be constructed to BLM specifications.
 - A. Exhibit "A" shows the proposed well site as staked.
 - B. From Malaga New Mexico take Co. Road 720 (Duarte) East for 1.3 miles to Co. Road 746 (McDonald Rd) go 4.8 miles and location is on the South side of road.
 - C. Exhibit "C" shows the proposed roads and flowlines that will be needed to produce this lease.
2. PLANNED ACCESS ROADS: No additional roads will be required.
 - A. The access road will be crowned and ditched to a 12'00" wide travel surface with a 40' right-of-way.
 - B. Gradient on all roads will be less than 5.00%.
 - C. Turn outs will be constructed where necessary.
 - D. If needed, road will be surfaced with a minimum of 4" of caliche. This material will be obtained from a local source.
 - E. Centerline for the new access road has been flagged. Earthwork will be as required by field conditions.
 - F. Culverts in the access road will not be used. The road will be constructed to utilize low water crossings for drainage as required by the Topography.
3. LOCATION OF EXISTING WELLS IN A ONE-MILE RADIUS EXHIBIT "A-1"
 - A. Water wells - None known
 - B. Disposal wells - One approximately 2100' Southeast of location.
 - C. Drilling wells - None known
 - D. Producing wells - As shown on Exhibit "A-1"
 - E. Abandoned wells - As shown on Exhibit "A-1"

SURFACE USE PLAN

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

4. If on completion this well is a producer the operator will lay pipelines and construct powerlines along existing road R-O-W's or other existing R-O-W's. Exhibit "C" shows proposed routes of roads, flowlines and powerlines.

5. LOCATION AND TYPE OF WATER SUPPLY:

Water will be purchased locally from a commercial source and trucked over the access roads or piped to location in flexible lines laid on top of the ground.

6. SOURCE OF CONSTRUCTION MATERIAL:

If possible construction material will be obtained from the excavation of drill site, if additional material is needed it will be obtained from a local source and transported over the access roads as shown on Exhibit "C".

7. METHODS OF HANDLING WASTE MATERIAL:

- A. Drill cuttings will be disposed of in the reserve pits.
- B. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in a approved sanitary land fill.
- C. Salts remaining after completion of well will be picked up by the supplier, including broken sacks.
- D. Waste water from living quarters will be drained into holes with a minimum of 10'. These holes will be covered during drilling and will be back filled when the well is completed. A Porto-John will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- E. Remaining drilling fluids will be allowed to evaporate in the reserve pits until the pits are dry enough to be broken out for further drying. If the drilling fluids do not evaporate in a reasonable time they will be hauled off by transports to a state approve disposal site. Later pits will be broken out to speed drying. Water produced during completion will be put in reserve pits. Oil and condensate produced will be put in storage tanks and sold.

8. ANCILLARY FACILITIES:

- A. No camps or air strips will be constructed on location.

SURFACE USE PLAN

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

9. WELL SITE LAYOUT:

- A. Exhibit "D" shows the proposed well site layout.
- B. This Exhibit shows the location of reserve pit, sump pits, and living facilities.
- C. Mud pits in the active circulating system will be steel pits and the reserve pits will be unlined unless subsurface conditions encountered during pit construction indicate that a plastic liner is required to contain lateral migration.
- D. If needed the reserve pits will be lined with polyethelene. The pit liner will be no less than 6 mils thick and the liner will be extended at least 3 feet over the top of the dikes and secured in place to keep edge of liner in place.
- E. The reserve pit will be fenced on three sides and fenced with four strands of barbed wire during drilling and completion phases. The 4th side will be fenced after drilling operations are complete and the drilling rig has moved out. If the well is a producer the mud pits will remain fenced in until the mud has dried up enough to break out the pits and reclaimed according to BLM requirements.

10. PLANS FOR RESTORATION OF SURFACE:

Rehabilitation of the location and reserve pits will be allowed to dry properly, fluids may be moved and disposed of in accordance with article 7-E as previously noted. The pit area will then be leveled and contoured to conform to the original and surrounding area. Drainage systems, if any will be reshaped to the original configuration with provisions made to alleviate future erosion. In case of the well completed as a producer the drilling pad will be necessary to construct production facilities. After the area has been shaped and contoured top soil from the spoil pile will be placed over the disturbed area to the extent possible so that revegetation procedures can be accomplished to comply with the BLM specifications.

If the well is a dry hole the pad and road area will be contoured to match the existing terrain. Top soil will be spread to the extent possible and revegetation will be carried out according to the BLM specifications.

Should the well be a producer the previously noted procedures will apply to those areas which are not required for production facilities.

SURFACE USE PLAN

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

11. OTHER INFORMATION:

- A. Topography is relatively flat with a slight dip to the East, with shallow drainage patterns. Vegetation consists of creosote bush, little leaf sumac, broom-snakeweed, and native grasses.
- B. Surface is owned by the U.S. Department of Interior and is administered by the Bureau of Land Management. The surface is leased to ranchers for grazing of live stock.
- C. An archaeological survey will be conducted and the results will be filed with The Bureau of Land Management Carlsbad Field office in Carlsbad NM.
- D. There are no domestic dwellings located within one mile of the location.

12. OPERATORS REPRESENTATIVE:

Before construction:

TIERRA EXPLORATION, INC.
P.O. BOX 2188
HOBBS, NEW MEXICO 88241
JOE T. JANICA
OFFICE PHONE 505-391-8503

During and after construction:

POGO PRODUCING COMPANY
P.O. BOX 10340
MIDLAND, TEXAS 79702-7340
RICHARD WRIGHT
OFFICE PHONE 915-685-8140

13. CERTIFICATION: I hereby certify that I or persons under my direct supervision have inspected the proposed drill site and access route, that I am familiar with the conditions which currently exist, that the statements made in this plan are to the best of my knowledge, are true and correct, and that the work associated with the operations proposed herein will be performed by POGO PRODUCING COMPANY it's contractors/subcontractors is in the conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provision of U.S.C. 1001 for the filing of a false statement.

NAME

:

Joe T. Janica

DATE

:


02/13/06

TITLE

:

Agent

CapStar Drilling, Inc.
LOCATION SPECIFICATIONS AND RIG LAYOUT
FOR EARTH PITS

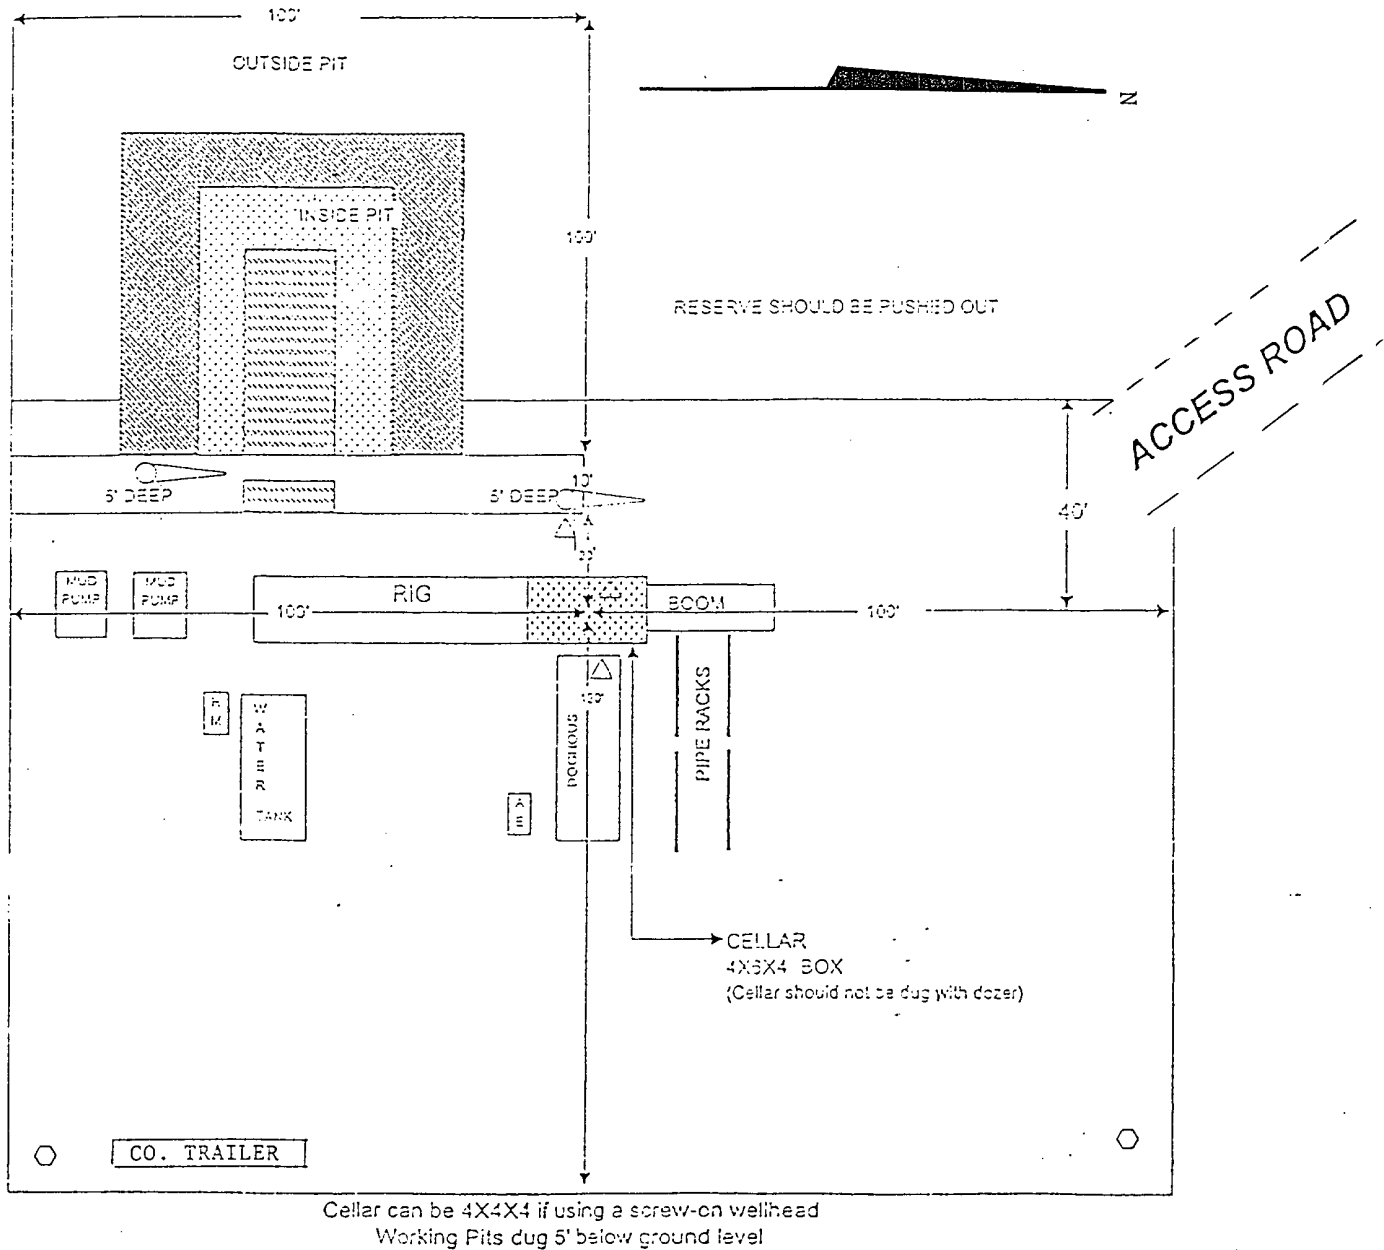

- Wind Direction Indicators
(wind sock or streamers)
- △ H2S Monitors
(alarms at bell nipple and shale shaker)
- Briefing Areas
- Remote BOP Closing Unit
- Sign and Condition Flags

Location Specs

EXHIBIT "D"
RIG LAY OUT PLAT

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

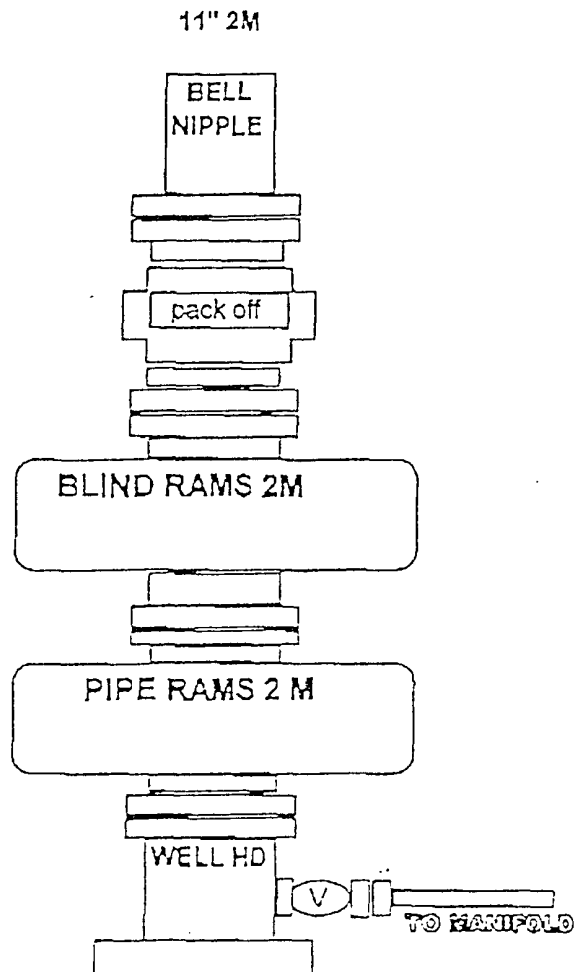


EXHIBIT "E"
 SKETCH OF B.O.P. TO BE USED ON

POGO PRODUCING COMPANY
 CEDAR CANYON "28" FEDERAL # 7
 UNIT "E" SECTION 28
 T24S-R29E EDDY CO. NM

CHOKE MANIFOLD

3000 PSI WP

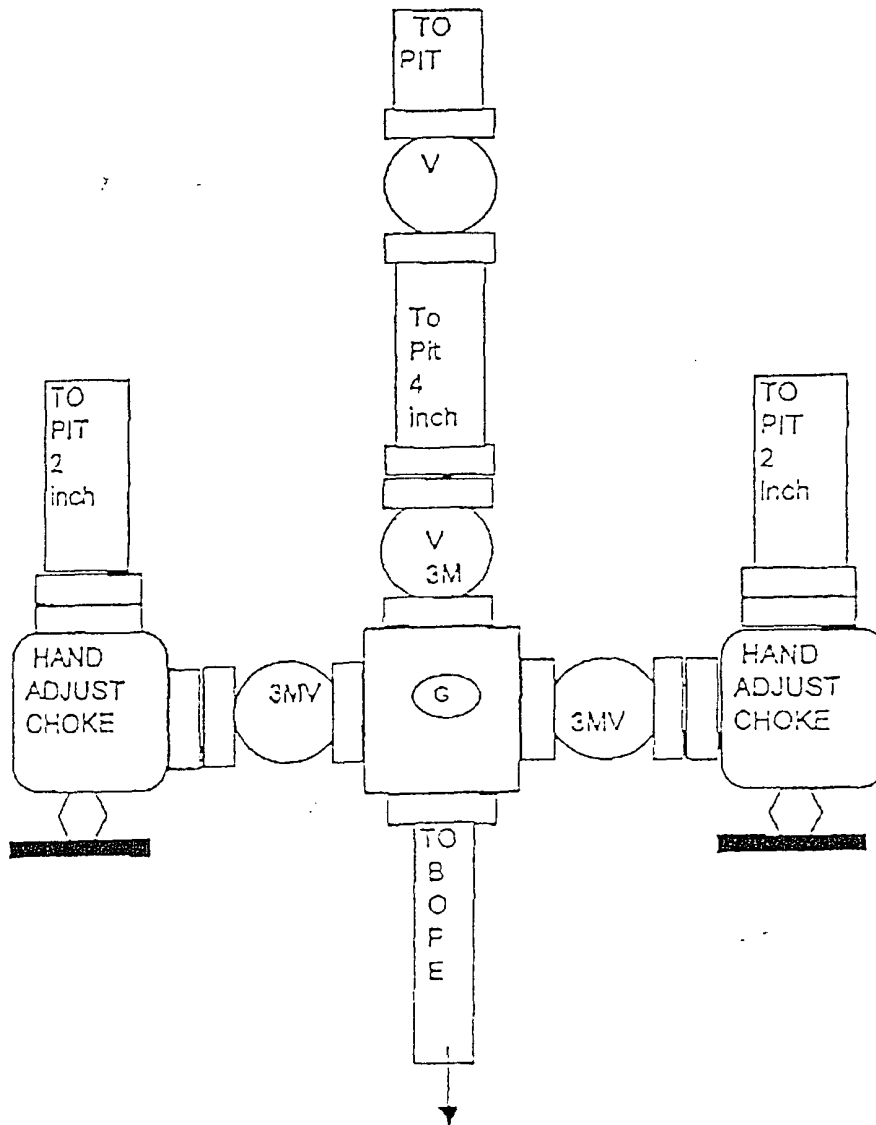


EXHIBIT "E-1"
CHOKE MANIFOLD & CLOSING UNIT

POGO PRODUCING COMPANY
CEDAR CANYON "28" FEDERAL # 7
UNIT "E" SECTION 28
T24S-R29E EDDY CO. NM

CONDITIONS OF APPROVAL - DRILLING

Operator's Name: Pogo Producing Company
Well Name & No. Cedar Canyon 28 Federal #7
Location: 1980' FNL, 330' FWL, Section 28, T. 24 S., R. 29 E., Eddy County, New Mexico
Lease: NM-94651

I. DRILLING OPERATIONS REQUIREMENTS:

1. The Bureau of Land Management (BLM) is to be notified at the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220, (505) 361-2822 for wells in Eddy County in sufficient time for a representative to witness:

- A. Well spud
- B. Cementing casing 8-5/8 inch 5-1/2 inch
- C. BOP tests

2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.

3. Submit a Sundry Notice (Form 3160-5, one original and five copies) for each casing string, describing the casing and cementing operations. Include pertinent information such as; spud date, hole size, casing (size, weight, grade and thread type), cement (type, quantity and top), water zones and problems or hazards encountered. The Sundry shall be submitted within 15 days of completion of each casing string. The reports may be combined into the same Sundry if they fall within the same 15 day time frame.

4. The API No. assigned to the well by NMOCD shall be included on the subsequent report of setting the first casing string.

II. CASING:

1. The 8-5/8 inch surface casing shall be set at approximately 550 feet and cement circulated to the surface. If cement does not circulate to the surface the appropriate BLM office shall be notified and a temperature survey or cement bond log shall be run to verify the top of the cement. Remedial cementing shall be completed prior to drilling out that string.

2. The minimum required fill of cement behind the 5-1/2 inch production casing is to be sufficient to reach at least 500 feet above the top of the uppermost hydrocarbon productive interval.

III. PRESSURE CONTROL:

1. All BOP systems and related equipment shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2. The BOP and related equipment shall be installed and operational before drilling below the 8-5/8 inch casing shoe and shall be tested as described in Onshore Order No. 2. Any equipment failing to test satisfactorily shall be repaired or replaced.

2. Minimum working pressure of the blowout preventer and related equipment (BOPE) shall be 2000 psi.

3. The appropriate BLM office shall be notified in sufficient time for a representative to witness the tests.

- The tests shall be done by an independent service company.
- The results of the test shall be reported to the appropriate BLM office.
- Testing fluid must be water or an appropriate clear liquid suitable for sub-freezing temperatures. Use of drilling mud for testing is not permitted since it can mask small leaks.
- Testing must be done in a safe workman-like manner. Hard line connections shall be required.

2/28/06

acs