



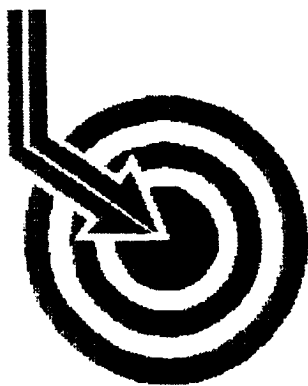

Scientific Drilling



30-005-63779

PARALLEL PETROLEUM


Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050
Survey: 01/15/06

This survey is correct to the best of my knowledge
and is supported by actual field data.

[Signature] Company Representative

Notorized this date 19th of January, 2006.

[Signature]
Notary Signature
County of Midland
State of Texas

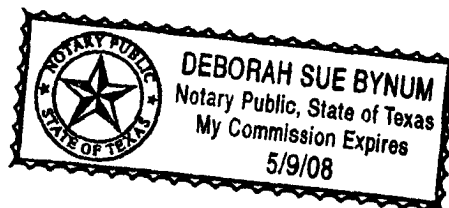



Scientific
Drilling

Scientific Drilling International Survey Report

Company: PARALLEL PETROLEUM
Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050

Date: 1/19/2006 Time: 16:32:25 Page: 1
Co-ordinate(N/E) Reference: Site: Chaves County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,235.11Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey: 01/15/06 Start Date: 1/15/2006
KSRG 0'-5371'
Company: Scientific Drilling International Engineer: Guebara/Madrid
Tool: Keeper/Keeper Gyro Tied-to: From Surface

Survey

MD ft	Incl deg	Azimuth deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	Chd ft	ChA deg
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100.00	0.25	254.94	100.00	0.21	-0.06	-0.21	0.25	0.22	254.94
200.00	0.52	210.01	200.00	0.82	-0.51	-0.65	0.39	0.82	232.01
300.00	0.61	236.30	299.99	1.76	-1.19	-1.32	0.27	1.78	227.81
400.00	0.65	246.00	399.99	2.85	-1.72	-2.28	0.11	2.86	232.95
500.00	0.63	246.64	499.98	3.95	-2.17	-3.30	0.02	3.95	236.70
600.00	0.40	151.27	599.98	4.53	-2.69	-3.64	0.78	4.53	233.49
700.00	0.99	134.81	699.97	4.41	-3.61	-2.86	0.62	4.60	218.38
800.00	1.50	147.91	799.95	4.32	-5.33	-1.55	0.58	5.55	196.23
900.00	1.59	154.75	899.91	4.61	-7.69	-0.26	0.21	7.69	181.96
1000.00	1.53	150.81	999.87	4.98	-10.11	0.98	0.12	10.16	174.46
1100.00	1.47	166.02	1099.84	5.57	-12.52	1.94	0.40	12.67	171.19
1200.00	1.13	193.56	1199.81	6.77	-14.72	2.02	0.70	14.86	172.19
1300.00	1.08	205.68	1299.80	8.32	-16.53	1.38	0.24	16.59	175.23
1400.00	1.29	219.19	1399.77	10.23	-18.25	0.26	0.35	18.26	179.18
1500.00	1.26	220.94	1499.75	12.38	-19.96	-1.17	0.05	19.99	183.36
1600.00	1.43	227.54	1599.72	14.68	-21.63	-2.81	0.23	21.81	187.41
1700.00	1.53	231.60	1699.69	17.25	-23.30	-4.78	0.14	23.79	191.59
1800.00	1.59	243.52	1799.65	19.95	-24.75	-7.07	0.33	25.74	195.94
1900.00	1.58	238.52	1899.61	22.70	-26.09	-9.48	0.14	27.76	199.98
2000.00	1.63	238.39	1999.57	25.50	-27.55	-11.87	0.05	30.00	203.31
2100.00	1.50	241.39	2099.54	28.22	-28.92	-14.23	0.15	32.24	206.20
2200.00	1.61	239.99	2199.50	30.92	-30.25	-16.60	0.12	34.51	208.75
2300.00	1.57	244.86	2299.46	33.67	-31.54	-19.05	0.14	36.85	211.14
2400.00	1.35	257.64	2399.43	36.11	-32.37	-21.44	0.39	38.83	213.52
2500.00	1.02	264.26	2499.41	37.97	-32.71	-23.48	0.36	40.27	215.67
2600.00	0.72	263.08	2599.40	39.31	-32.88	-24.99	0.30	41.30	217.24
2700.00	0.74	257.19	2699.39	40.46	-33.10	-26.24	0.08	42.24	218.41
2800.00	0.82	281.41	2799.38	41.55	-33.10	-27.58	0.34	43.08	219.80
2900.00	0.83	286.84	2899.37	42.49	-32.75	-28.97	0.08	43.72	221.50
3000.00	0.75	274.99	2999.36	43.45	-32.48	-30.32	0.18	44.43	223.02
3100.00	0.92	280.85	3099.35	44.51	-32.27	-31.76	0.19	45.28	224.54
3200.00	0.81	281.72	3199.34	45.55	-31.98	-33.24	0.11	46.12	226.10
3300.00	0.76	277.79	3299.33	46.53	-31.74	-34.59	0.07	46.95	227.45
3400.00	0.83	284.06	3399.32	47.49	-31.48	-35.94	0.11	47.78	228.79
3500.00	0.84	296.70	3499.31	48.31	-30.97	-37.30	0.18	48.49	230.30
3600.00	0.68	291.28	3599.30	48.99	-30.43	-38.51	0.18	49.08	231.69
3700.00	0.60	295.98	3699.29	49.58	-29.98	-39.53	0.10	49.62	232.82
3800.00	0.56	288.42	3799.29	50.13	-29.60	-40.47	0.09	50.14	233.82
3900.00	0.51	281.80	3899.28	50.72	-29.35	-41.37	0.08	50.72	234.64
4000.00	0.47	284.42	3999.28	51.30	-29.16	-42.20	0.05	51.30	235.35
4100.00	0.38	292.32	4099.28	51.74	-28.93	-42.90	0.11	51.75	236.01
4200.00	0.25	300.89	4199.28	52.01	-28.70	-43.40	0.14	52.03	236.53
4300.00	0.14	258.31	4299.28	52.21	-28.61	-43.71	0.17	52.24	236.79
4400.00	0.07	225.15	4399.28	52.39	-28.68	-43.87	0.09	52.41	236.83
4500.00	0.20	220.78	4499.27	52.62	-28.85	-44.03	0.13	52.64	236.76
4600.00	0.28	198.47	4599.27	52.98	-29.22	-44.22	0.12	53.00	236.55
4700.00	0.34	193.82	4699.27	53.40	-29.74	-44.37	0.07	53.41	236.17
4800.00	0.20	159.22	4799.27	53.66	-30.19	-44.37	0.21	53.67	235.77



Scientific Drilling International Survey Report

Company: PARALLEL PETROLEUM
Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050

Date: 1/19/2006 Time: 16:32:25 Page: 2
Co-ordinate(NE) Reference: Site: Chaves County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,235.11Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase


Survey

MD ft	Incl deg	Azimuth deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ChD ft	ChA deg
4900.00	0.16	98.27	4899.27	53.61	-30.37	-44.17	0.19	53.61	235.49
5000.00	0.16	120.21	4999.27	53.44	-30.46	-43.92	0.06	53.44	235.25
5100.00	0.11	129.17	5099.27	53.36	-30.59	-43.72	0.05	53.36	235.02
5200.00	0.19	67.37	5199.27	53.17	-30.59	-43.49	0.17	53.17	234.88
5300.00	0.41	356.88	5299.27	52.82	-30.17	-43.36	0.39	52.82	235.17
5371.00	0.44	144.54	5370.27	52.68	-30.14	-43.21	1.15	52.68	235.11



Scientific
Drilling

Field: Wildcat
Site: Chaves County, NM
Well: Affirmed #1
Wellpath: VH - Job #32K0106050
Survey: 01/15/06




Azimuths to Grid North
True North: 0.00°
Magnetic North: 0.00°

Magnetic Field
Strength: 0nT
Dip Angle: 0.00°
Date: 1/19/2006
Model: igrf2000

West(-)/East(+) [10ft/in]

South(-)/North(+) [10ft/in]

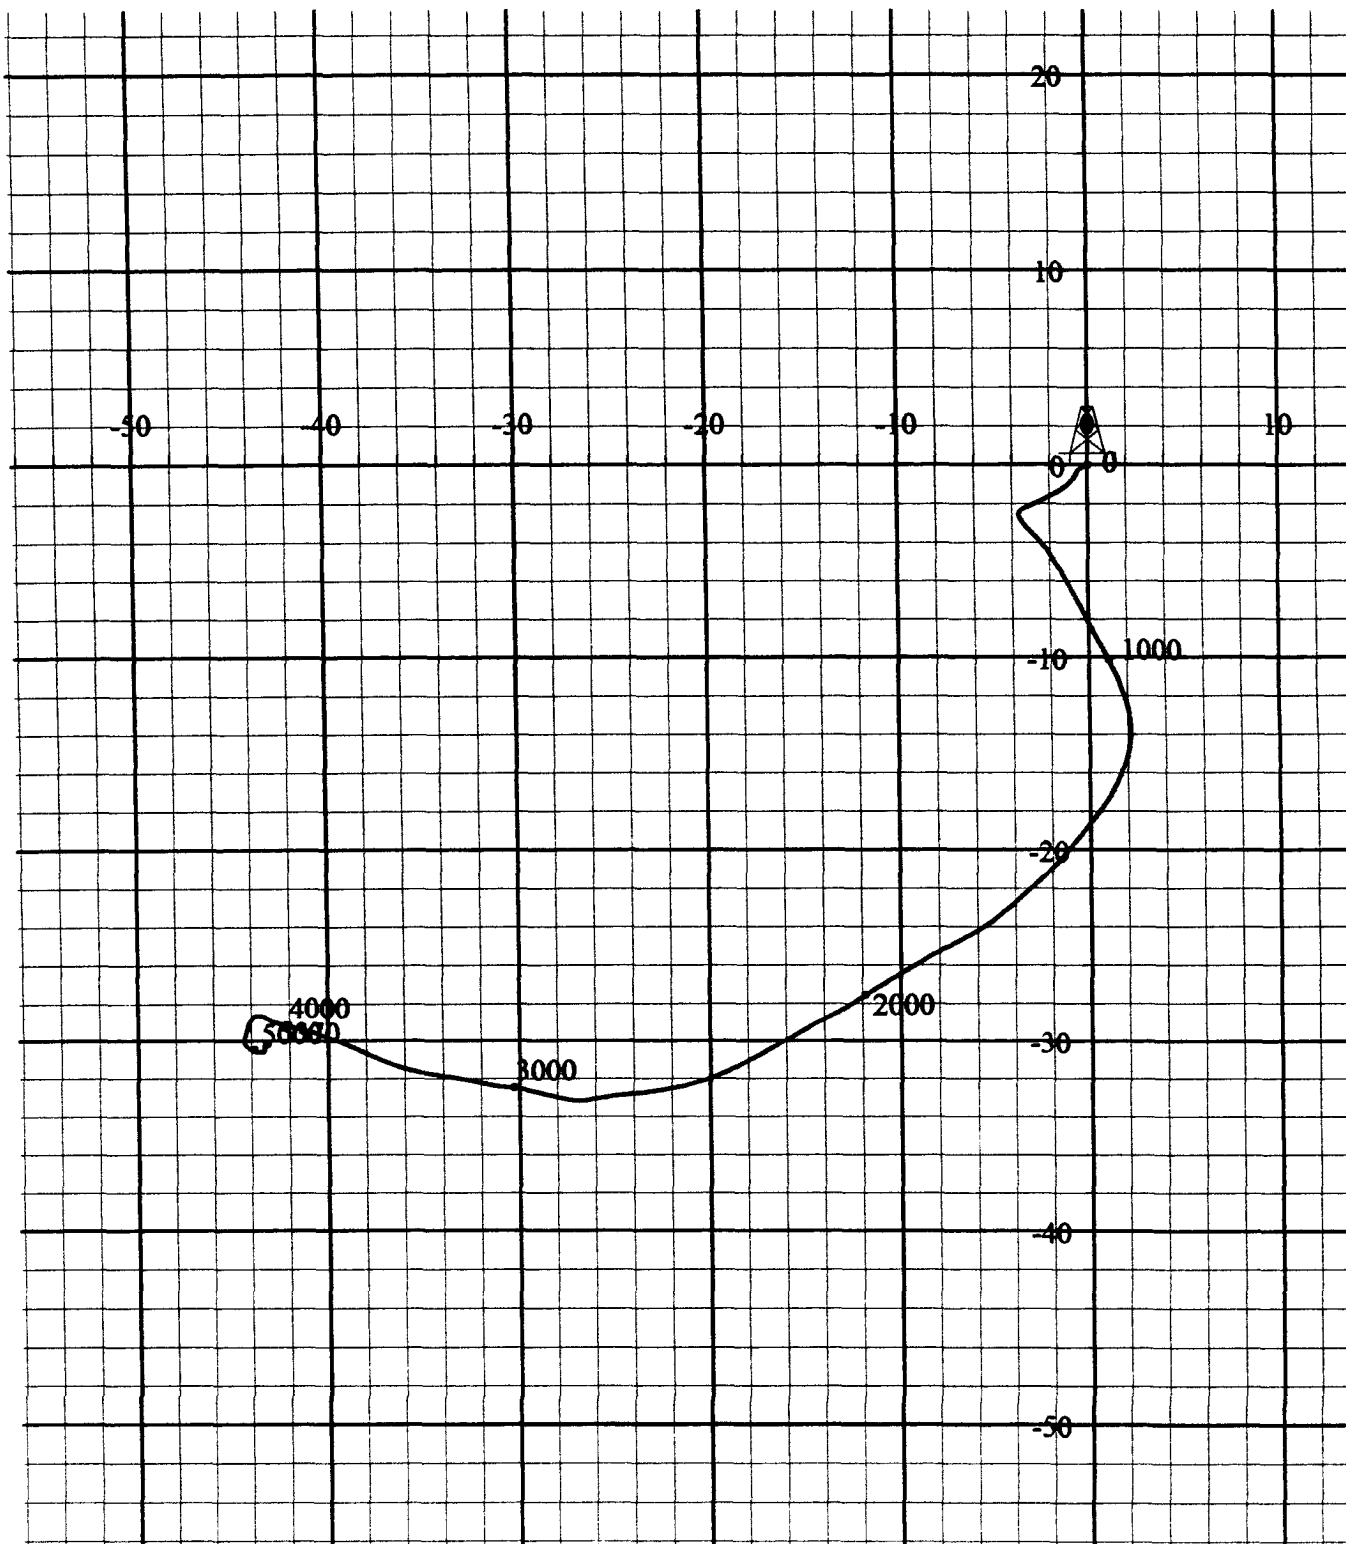

Survey Report



Report Date: February 16, 2006 Client: Parallel Petroleum Corp. Field: Chaves County, NM Structure / Slot: Affirmed #1 / Affirmed #1 Well: Affirmed #1 Borehole: Affirmed #1 UWVAPM: Survey Name / Date: Affirmed #1_surveys / January 18, 2006 Tort / AHD / DDI / ERD ratio: 178.744° / 4105.40 ft / 6.106 / 0.772 Grid Coordinate System: NAD27 New Mexico State Planes, Eastern Zone, US Feet Location Lat/Long: N 33 3 11.074, W 104 20 47.090 Location Grid N/E Y/X: N 746823.000 ftUS, E 495992.100 ftUS Grid Convergence Angle: -0.00713438° Grid Scale Factor: 0.99990911	Survey / DLS Computation Method: Minimum Curvature / Lubinski Vertical Section Azimuth: 359.800° Vertical Section Origin: N 0.000 ft, E 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 0.0 ft relative to Sea Bed / Ground Level Elevation: 0.000 ft relative to Magnetic Declination: 8.641° Total Field Strength: 49610.155 nT Magnetic Dip: 60.952° Declination Date: January 18, 2006 Magnetic Declination Model: IGRF 2005 North Reference: Grid North Total Corr Mag North -> Grid North: +8.648° Local Coordinates Referenced To: Well Head
--	--

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Tie-In	4800.00	0.20	159.22	4799.27	-30.03	-30.19	-44.37	53.67	235.77	0.00	2.10M
	4887.00	1.10	2.10	4886.27	-29.34	-29.49	-44.29	53.21	236.34	1.48	3.70M
	4897.00	1.80	3.70	4896.26	-29.09	-29.24	-44.28	53.06	236.56	7.01	2.80M
	4907.00	2.50	2.80	4906.26	-28.71	-28.87	-44.26	52.84	236.88	7.01	1.40M
	4919.00	3.30	1.40	4918.24	-28.11	-28.26	-44.23	52.49	237.43	6.69	3.60M
	4929.00	4.30	3.60	4928.22	-27.44	-27.60	-44.20	52.11	238.02	10.10	0.50M
	4949.00	6.60	0.50	4948.13	-25.55	-25.70	-44.15	51.08	239.79	11.59	-4.54G
	4959.00	7.60	359.90	4958.05	-24.31	-24.46	-44.14	50.47	241.00	10.03	-6.28G
	4969.00	8.70	359.10	4967.95	-22.89	-23.05	-44.16	49.81	242.44	11.06	-7.62G
	4980.00	10.00	358.10	4978.80	-21.11	-21.26	-44.20	49.05	244.31	11.91	0.00G
	4990.00	11.10	358.10	4988.63	-19.28	-19.43	-44.26	48.34	246.30	11.00	-8.58G
	5011.00	13.60	356.50	5009.15	-14.79	-14.95	-44.48	46.92	251.43	12.01	4.83G
	5026.00	15.50	357.10	5023.66	-11.03	-11.18	-44.69	46.07	255.95	12.71	9.88G
	5041.00	17.20	358.10	5038.06	-6.81	-6.96	-44.86	45.40	261.18	11.49	12.03G
	5072.00	20.90	0.30	5067.35	3.31	3.15	-44.99	45.10	274.01	12.16	7.70G
	5103.00	24.60	1.50	5095.94	15.29	15.13	-44.79	47.28	288.67	12.03	-0.63G
	5134.00	29.00	1.40	5123.60	29.26	29.10	-44.44	53.12	303.22	14.19	-6.48G
	5165.00	34.50	0.30	5149.95	45.56	45.41	-44.21	63.37	315.77	17.84	-6.91G
	5196.00	40.40	359.20	5174.55	64.40	64.25	-44.30	78.04	325.41	19.15	0.83G
	5228.00	45.30	359.30	5198.01	86.16	86.00	-44.58	96.87	332.60	15.31	-18.14G
	5258.00	50.00	357.30	5218.21	108.31	108.15	-45.26	117.24	337.29	16.42	-3.83G
	5289.00	54.90	356.90	5237.10	132.85	132.69	-46.50	140.61	340.69	15.84	-2.95G
	5319.00	58.20	356.70	5253.63	157.85	157.68	-47.90	164.80	343.10	11.01	23.87G
	5349.00	61.80	358.50	5268.63	183.80	183.63	-48.98	190.05	345.07	13.08	40.52G
	5382.00	65.80	2.20	5283.20	213.40	213.23	-48.78	218.74	347.11	15.75	17.83G
	5413.00	70.20	3.70	5294.81	242.09	241.93	-47.30	246.51	348.94	14.89	-21.10G
	5444.00	74.20	2.10	5304.29	271.56	271.40	-45.81	275.24	350.42	13.81	-50.73G
	5488.00	80.80	354.10	5313.82	314.43	314.27	-47.27	317.80	351.45	23.23	-6.55G
	5519.00	86.90	353.40	5317.14	345.07	344.89	-50.62	348.59	351.65	19.80	27.54G
	5549.00	91.70	355.90	5317.51	374.93	374.75	-53.42	378.54	351.89	18.04	87.11G
	5580.00	91.80	357.90	5316.56	405.88	405.69	-55.10	409.41	352.27	6.46	96.69G
	5611.00	91.60	359.60	5315.64	436.86	436.66	-55.77	440.21	352.72	5.52	80.52G
	5642.00	91.80	0.80	5314.72	467.84	467.65	-55.66	470.95	353.21	3.92	90.00G
	5673.00	91.80	2.10	5313.75	498.81	498.62	-54.88	501.63	353.72	4.19	-44.98G
	5704.00	91.90	2.00	5312.75	529.77	529.59	-53.77	532.31	354.20	0.46	-127.56G
	5735.00	90.90	0.70	5311.99	560.75	560.57	-53.04	563.07	354.59	5.29	165.96G
	5765.00	89.70	1.00	5311.83	590.74	590.56	-52.60	592.90	354.91	4.12	-113.64G
	5796.00	89.00	359.40	5312.18	621.74	621.56	-52.49	623.77	355.17	5.63	90.00G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	5827.00	89.00	359.50	5312.72	652.73	652.55	-52.79	654.69	355.38	0.32	-71.57G
	5890.00	89.30	358.60	5313.66	715.72	715.54	-53.83	717.56	355.70	1.51	0.00G
	5952.00	89.90	358.60	5314.09	777.71	777.52	-55.34	779.49	355.93	0.97	54.46G
	6013.00	90.40	359.30	5313.93	838.70	838.51	-56.46	840.41	356.15	1.41	49.39G
	6075.00	91.00	0.00	5313.17	900.69	900.50	-56.84	902.29	356.39	1.48	-108.43G
	6107.00	90.60	358.80	5312.73	932.69	932.50	-57.18	934.25	356.49	3.95	-122.73G
	6137.00	89.70	357.40	5312.65	962.67	962.48	-58.17	964.23	356.54	5.55	-140.72G
	6199.00	88.60	356.50	5313.57	1024.59	1024.38	-61.47	1026.22	356.57	2.29	50.20G
	6229.00	89.10	357.10	5314.17	1054.54	1054.33	-63.14	1056.22	356.57	2.60	135.00G
	6260.00	89.00	357.20	5314.68	1085.50	1085.29	-64.68	1087.21	356.59	0.46	0.00G
	6290.00	89.30	357.20	5315.13	1115.47	1115.25	-66.15	1117.21	356.61	1.00	-95.72G
	6321.00	89.20	356.20	5315.54	1146.42	1146.19	-67.93	1148.20	356.61	3.24	-98.14G
	6351.00	89.10	355.50	5315.98	1176.35	1176.11	-70.11	1178.20	356.59	2.36	0.00G
	6387.00	89.10	355.50	5316.55	1212.24	1211.99	-72.93	1214.19	356.56	0.00	18.44G
	6418.00	90.00	355.80	5316.79	1243.16	1242.90	-75.28	1245.18	356.53	3.06	46.31G
	6450.00	92.10	358.00	5316.20	1275.11	1274.85	-77.01	1277.17	356.54	9.50	-86.13G
	6507.00	92.30	355.00	5314.01	1331.97	1331.69	-80.49	1334.12	356.54	5.27	-90.00G
	6537.00	92.30	354.90	5312.81	1361.83	1361.55	-83.13	1364.09	356.51	0.33	180.00G
	6568.00	92.10	354.90	5311.62	1392.70	1392.41	-85.88	1395.05	356.47	0.65	-153.45G
	6599.00	91.90	354.80	5310.54	1423.56	1423.26	-88.66	1426.02	356.44	0.72	63.42G
	6629.00	92.00	355.00	5309.52	1453.44	1453.13	-91.33	1455.99	356.40	0.75	71.55G
	6660.00	92.10	355.30	5308.41	1484.32	1484.00	-93.95	1486.97	356.38	1.02	44.95G
	6692.00	93.10	356.30	5306.96	1516.20	1515.88	-96.29	1518.93	356.37	4.42	60.19G
	6722.00	93.50	357.00	5305.23	1546.11	1545.78	-98.04	1548.88	356.37	2.68	-116.60G
	6753.00	93.40	356.80	5303.36	1577.01	1576.67	-99.71	1579.82	356.38	0.72	92.13G
	6784.00	93.30	359.40	5301.55	1607.94	1607.60	-100.74	1610.75	356.41	8.38	127.39G
	6814.00	92.00	1.10	5300.17	1637.91	1637.57	-100.61	1640.65	356.48	7.13	100.27G
	6845.00	91.60	3.30	5299.19	1668.86	1668.53	-99.42	1671.49	356.59	7.21	71.55G
	6876.00	91.70	3.60	5298.30	1699.79	1699.46	-97.55	1702.26	356.71	1.02	180.00G
	6906.00	91.20	3.60	5297.54	1729.71	1729.39	-95.67	1732.03	356.83	1.67	-168.69G
	6937.00	90.20	3.40	5297.16	1760.65	1760.33	-93.78	1762.82	356.95	3.29	78.69G
	6968.00	90.30	3.90	5297.03	1791.57	1791.27	-91.80	1793.62	357.07	1.64	11.31G
	6999.00	90.80	4.00	5296.73	1822.49	1822.19	-89.67	1824.39	357.18	1.64	-146.31G
	7031.00	90.20	3.60	5296.45	1854.41	1854.12	-87.55	1856.18	357.30	2.25	45.00G
	7062.00	90.50	3.90	5296.26	1885.34	1885.05	-85.52	1886.99	357.40	1.37	-144.17G
	7093.00	88.70	2.60	5296.48	1916.28	1916.00	-83.76	1917.83	357.50	7.16	-71.56G
	7124.00	88.80	2.30	5297.15	1947.24	1946.96	-82.44	1948.71	357.58	1.02	0.00G
	7154.00	88.90	2.30	5297.75	1977.20	1976.93	-81.23	1978.60	357.65	0.33	8.13G
	7184.00	91.00	2.60	5297.78	2007.17	2006.90	-79.95	2008.50	357.72	7.07	-144.46G
	7214.00	90.30	2.10	5297.44	2037.14	2036.88	-78.72	2038.40	357.79	2.87	116.57G
	7245.00	90.20	2.30	5297.31	2068.11	2067.85	-77.53	2069.31	357.85	0.72	108.43G
	7276.00	90.10	2.60	5297.22	2099.08	2098.82	-76.21	2100.21	357.92	1.02	98.13G
	7309.00	90.00	3.30	5297.20	2132.03	2131.78	-74.51	2133.08	358.00	2.14	153.43G
	7340.00	89.80	3.40	5297.25	2162.97	2162.73	-72.70	2163.95	358.07	0.72	78.69G
	7371.00	89.90	3.90	5297.33	2193.90	2193.66	-70.72	2194.80	358.15	1.64	99.46G
	7402.00	89.80	4.50	5297.41	2224.81	2224.58	-68.45	2225.63	358.24	1.96	20.56G
	7432.00	90.60	4.80	5297.31	2254.70	2254.48	-66.02	2255.45	358.32	2.85	57.99G
	7478.00	91.10	5.60	5296.62	2300.49	2300.29	-61.85	2301.12	358.46	2.05	-12.52G
	7509.00	92.00	5.40	5295.79	2331.32	2331.13	-58.88	2331.88	358.55	2.97	90.00G
	7571.00	92.00	5.70	5293.62	2392.97	2392.80	-52.89	2393.39	358.73	0.48	0.00G
	7602.00	92.20	5.70	5292.49	2423.79	2423.63	-49.81	2424.14	358.82	0.65	0.00G
	7634.00	92.20	5.70	5291.26	2455.60	2455.45	-46.64	2455.89	358.91	0.00	36.84G
	7664.00	92.60	6.00	5290.00	2485.40	2485.27	-43.58	2485.65	359.00	1.67	-135.03G
	7694.00	92.50	5.90	5288.67	2515.20	2515.07	-40.47	2515.40	359.08	0.47	168.70G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	7726.00	92.00	6.00	5287.41	2546.99	2546.88	-37.16	2547.15	359.16	1.59	180.00G
	7757.00	91.30	6.00	5286.52	2577.80	2577.70	-33.92	2577.92	359.25	2.26	174.81G
	7787.00	90.20	6.10	5286.13	2607.62	2607.52	-30.76	2607.71	359.32	3.68	180.00G
	7848.00	89.80	6.10	5286.13	2668.25	2668.18	-24.28	2668.29	359.48	0.66	45.00G
	7910.00	89.90	6.20	5286.29	2729.87	2729.82	-17.63	2729.88	359.63	0.23	-108.44G
	7971.00	89.60	5.30	5286.55	2790.54	2790.51	-11.52	2790.54	359.76	1.56	-95.71G
	8034.00	89.50	4.30	5287.05	2853.29	2853.29	-6.25	2853.30	359.87	1.60	26.57G
	8096.00	89.90	4.50	5287.37	2915.09	2915.11	-1.50	2915.11	359.97	0.72	29.05G
	8157.00	90.80	5.00	5287.00	2975.86	2975.90	3.56	2975.90	0.07	1.69	-119.74G
	8218.00	90.00	3.60	5286.57	3036.67	3036.72	8.13	3036.73	0.15	2.64	-100.62G
	8280.00	89.70	2.00	5286.74	3098.59	3098.64	11.16	3098.66	0.21	2.63	-45.00G
	8311.00	89.90	1.80	5286.85	3129.56	3129.63	12.19	3129.65	0.22	0.91	-69.44G
	8373.00	90.20	1.00	5286.79	3191.54	3191.61	13.70	3191.64	0.25	1.38	28.60G
	8404.00	91.30	1.60	5286.39	3222.53	3222.60	14.40	3222.63	0.26	4.04	-90.00G
	8466.00	91.30	1.00	5284.98	3284.49	3284.56	15.81	3284.60	0.28	0.97	-116.57G
	8527.00	91.20	0.80	5283.65	3345.46	3345.54	16.77	3345.58	0.29	0.37	-26.56G
	8589.00	91.40	0.70	5282.24	3407.44	3407.52	17.58	3407.57	0.30	0.36	0.00G
	8681.00	91.70	0.70	5279.75	3499.39	3499.48	18.70	3499.53	0.31	0.33	56.29G
	8712.00	91.90	1.00	5278.78	3530.37	3530.46	19.16	3530.51	0.31	1.16	-116.57G
	8732.00	91.80	0.80	5278.13	3550.36	3550.45	19.48	3550.50	0.31	1.12	-26.55G
	8773.00	92.00	0.70	5276.77	3591.33	3591.42	20.01	3591.48	0.32	0.55	-172.40G
	8828.00	90.50	0.50	5275.57	3646.31	3646.40	20.59	3646.46	0.32	2.75	-135.00G
	8860.00	89.60	359.60	5275.55	3678.31	3678.40	20.62	3678.46	0.32	3.98	-9.46G
	8892.00	90.20	359.50	5275.60	3710.31	3710.40	20.37	3710.46	0.31	1.90	67.38G
	8922.00	90.70	0.70	5275.37	3740.31	3740.40	20.42	3740.46	0.31	4.33	-90.00G
	8952.00	90.70	0.00	5275.00	3770.30	3770.40	20.60	3770.45	0.31	2.33	-130.60G
	8983.00	90.10	359.30	5274.78	3801.30	3801.40	20.41	3801.45	0.31	2.97	175.43G
	9014.00	87.60	359.50	5275.41	3832.29	3832.39	20.09	3832.44	0.30	8.09	-71.56G
	9046.00	87.70	359.20	5276.72	3864.26	3864.36	19.72	3864.41	0.29	0.99	-150.29G
	9077.00	87.00	358.80	5278.15	3895.23	3895.32	19.18	3895.37	0.28	2.60	14.02G
	9107.00	87.40	358.90	5279.62	3925.19	3925.28	18.58	3925.32	0.27	1.37	135.03G
	9137.00	87.30	359.00	5281.00	3955.15	3955.24	18.03	3955.28	0.26	0.47	0.00G
	9168.00	87.40	359.00	5282.44	3986.12	3986.20	17.49	3986.24	0.25	0.32	44.97G
	9190.00	87.50	359.10	5283.42	4008.09	4008.18	17.13	4008.21	0.24	0.64	0.00G
Projected TD	9250.00	87.50	359.10	5286.03	4068.03	4068.11	16.19	4068.14	0.23	0.00	0.00G