

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

| | | |
|--|---------------------------------------|---|
| 1a. Type of work: <input type="checkbox"/> DRILL <input type="checkbox"/> REENTER 1b. Type of Well: <input type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other 1c. Type of Completion: <input type="checkbox"/> Hydraulic Fracturing <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone | | 5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. <div style="text-align: center; font-weight: bold; font-size: 1.2em;">[320524]</div> |
| 2. Name of Operator <div style="text-align: center; font-weight: bold; font-size: 1.2em;">[260297]</div> | | 9. API Well No. 30-025-49307 |
| 3a. Address | 3b. Phone No. (include area code) | 10. Field and Pool, or Exploratory [97900] |
| 4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone | | 11. Sec., T. R. M. or Blk. and Survey or Area |
| 14. Distance in miles and direction from nearest town or post office* | | 12. County or Parish 13. State |
| 15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) | 16. No of acres in lease | 17. Spacing Unit dedicated to this well |
| 18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. | 19. Proposed Depth | 20. BLM/BIA Bond No. in file |
| 21. Elevations (Show whether DF, KDB, RT, GL, etc.) | 22. Approximate date work will start* | 23. Estimated duration |
| 24. Attachments | | |

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor. 2. A Drilling Plan. 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). 5. Operator certification. 6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

| | | |
|-------------------------|----------------------|------|
| 25. Signature | Name (Printed/Typed) | Date |
| Title | | |
| Approved by (Signature) | Name (Printed/Typed) | Date |
| Title | | |
| Office | | |

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NGMP Rec 08/11/2021

KZ

08/13/2021

SL

(Continued on page 2)

*(Instructions on page 2)



DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6173 Fax: (505) 334-6170

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 746-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

DAMENDE REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT


| | | |
|-----------------------------------|---|--|
| API Number 30-025-49307 | Pool Code 97900 | PoolName RED HILLS;UPR BONE SPRING SHALE |
| Property Code 320524 | Property Name ROJO 7811 34-27 FEDERAL COM | Well Number 62H |
| OGRID No. 260297 | Operator Name BTA OIL PRODUCERS, LLC | Elevation 3327' |

| Surface Location | | | | | | | | | |
|------------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
| F | 34 | 25-S | 33-E | | 2055 | NORTH | 1935 | WEST | LEA |

Bottom Hole Location If Different From Surface

| | | | | | | | | | |
|-------------------------------|----------------------|-------------------------|----------------------|-----------|---------------|----------------------------------|---------------|-------------------------------|----------------------|
| UL or lot No. C | Section 27 | Township 25-S | Range 33-E | Lot Idn | Feet from the | North/South line NORTH | Feet from the | East/West line WEST | County LEA |
| Dedicated Acres 240 | Joint or Infill | Consolidation Code | | Order No. | | | | | |

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

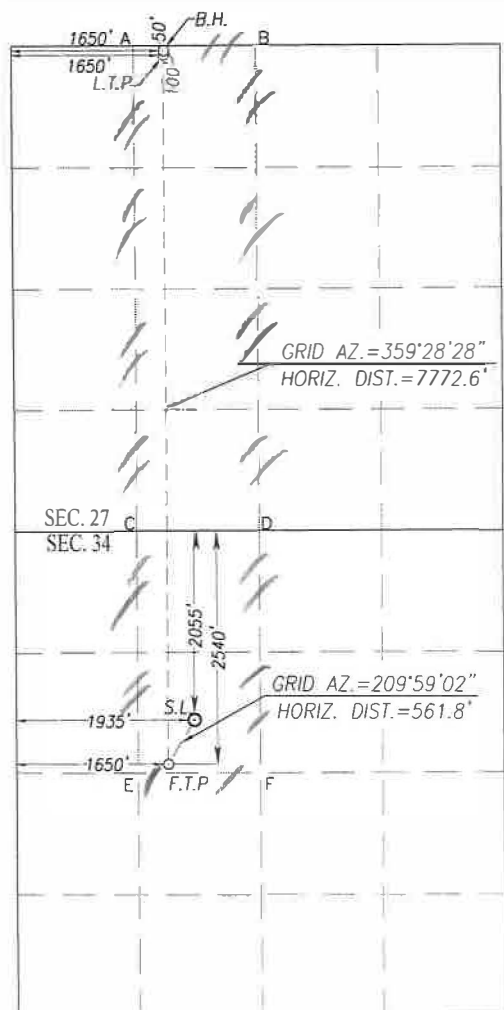

SCALE: 1"=2000'

BOTTOM HOLE LOCATION

NAD 27 NME
Y= 404055.9 N
X= 738522.8 E
LAT.=32.108523° N
LONG.=103.562993° W

LAST TAKE POINT
NAD 27 NME
Y= 404005.9 N
X= 738523.3 E
LAT.=32.108385° N
LONG.=103.562993° W

CORNER COORDINATES TABLE

NAD 27 NME

| | | | | |
|--------|----------|-------|----------|---|
| A - Y= | 404103.8 | N, X= | 738199.0 | E |
| B - Y= | 404112.5 | N, X= | 739525.3 | E |
| C - Y= | 398822.6 | N, X= | 738243.9 | E |
| D - Y= | 398831.1 | N, X= | 739566.4 | E |
| E - Y= | 396185.7 | N, X= | 738267.7 | E |
| F - Y= | 396193.1 | N, X= | 739589.6 | E |

CORNER COORDINATES TABLE

| | NAD 83 NME | | |
|---------|-------------|----------------|--|
| A - Y = | 404161.5 N, | X = 779385.3 E | |
| B - Y = | 404170.2 N, | X = 780711.6 E | |
| C - Y = | 398880.2 N, | X = 779430.4 E | |
| D - Y = | 398888.7 N, | X = 780753.0 E | |
| E - Y = | 396243.2 N, | X = 779454.0 E | |
| F - Y = | 396250.6 N, | X = 780776.3 E | |

FIRST TAKE POINT
NAD 27 NME
Y= 396285.3 N
X= 738593.8 E
LAT.=32.087162° N
ONG.=103.562943° W

GEODETIC COORDINATES
 NAD 27 NME
 SURFACE LOCATION
 Y= 396771.8 N
 X= 738874.5 E
 LAT.=32.088493° N
 LONG.=103.562026° W

BOTTOM HOLE LOCATION

NAD 83 NME
Y= 404113.6 N
X= 779709.1 E
LAT.=32.108648° N
LONG.=103.563464° W

LAST TAKE POINT
NAD 83 NME
Y= 404063.6 N
X= 779709.6 E
LAT.=32.108510° N
LONG.=103.563464° W

NAMES TABLE

| NME | |
|-----|------------|
| X= | 738199.0 E |
| X= | 739525.3 E |
| X= | 738243.9 E |
| X= | 739566.4 E |
| X= | 738267.7 E |
| X= | 739589.6 E |

FIRST TAKE POINT
NAD 83 NME
Y= 396342.8 N
X= 779780.4 E
LAT.=32.087286° N
LONG.=103.563413° W

GEODETIC COORDINATES
 NAD 83 NME
 SURFACE LOCATION
 Y= 396829.3 N
 X= 780061.1 E
 LAT.=32.088618° N
 LONG.=103.562495° W

OPERATOR CERTIFICATION

I hereby certify that the information herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

Signature
Sammy Hajar

10/13/2020

Date _____

Printed Name
SHAJAR@BTAOIL.COM

E-mail Address

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

Date of Survey: 3239
Signature & Seal of Professional Surveyor: [Signature]

Ronald J. Eidson 09/16/2020
Certificate Number Gary G. Eidson 1264
Ronald J. Eidson 3239

ACK JWSC W O 2011 0311

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

| | |
|------------------------------|--|
| OPERATOR'S NAME: | BTA OIL PRODUCERS LLC |
| LEASE NO.: | NMNM0005792 |
| WELL NAME & NO.: | ROJO 7811 34-27 FED COM 62H |
| SURFACE HOLE FOOTAGE: | 2055'/N & 1935'/W |
| BOTTOM HOLE FOOTAGE: | 50'/N & 1650'/W |
| LOCATION: | Section 34, T.25 S., R.33 E., NMP |
| COUNTY: | Lea County, New Mexico |

COA

| | | | |
|----------------------|--|--|---------------------------------------|
| H2S | <input type="radio"/> Yes | <input checked="" type="radio"/> No | |
| Potash | <input checked="" type="radio"/> None | <input type="radio"/> Secretary | <input type="radio"/> R-111-P |
| Cave/Karst Potential | <input checked="" type="radio"/> Low | <input type="radio"/> Medium | <input type="radio"/> High |
| Cave/Karst Potential | <input type="radio"/> Critical | | |
| Variance | <input type="radio"/> None | <input checked="" type="radio"/> Flex Hose | <input type="radio"/> Other |
| Wellhead | <input type="radio"/> Conventional | <input type="radio"/> Multibowl | <input checked="" type="radio"/> Both |
| Other | <input type="checkbox"/> 4 String Area | <input type="checkbox"/> Capitan Reef | <input type="checkbox"/> WIPP |
| Other | <input checked="" type="checkbox"/> Fluid Filled | <input type="checkbox"/> Cement Squeeze | <input type="checkbox"/> Pilot Hole |
| Special Requirements | <input type="checkbox"/> Water Disposal | <input checked="" type="checkbox"/> COM | <input type="checkbox"/> Unit |

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

Casing Design:

1. The **13-3/8** inch surface casing shall be set at approximately **1,065** feet (a minimum of **25 feet (Lea County)**) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after

- completing the cement job.
- b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8 hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.

Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.

2. The minimum required fill of cement behind the **9-5/8** inch intermediate casing, which shall be set at approximately **4,972** feet is:
 - Cement to surface. If cement does not circulate see B.1.a, c-d above.
3. The minimum required fill of cement behind the **5-1/2** inch production casing is:
 - Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
- 2.

Option 1:

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.

- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **3000 (3M)** psi.

Option 2:

1. Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
 - e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Carlsbad Field Office, 620 E Greene St. Carlsbad, New Mexico 88220, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

BOP Break Testing Variance (Note: For 5M BOP or less)

- BOPE Break Testing is ONLY permitted for 5M BOPE or less.
- BOPE Break Testing is NOT permitted to drilling the production hole section.
- While in transfer between wells, the BOPE shall be secured by the hydraulic carrier or cradle.
- Any well control event while drilling require notification to the BLM Petroleum Engineer prior to the commencement of any BOPE Break Testing operations.
- A full BOPE test is required prior to drilling the first deep intermediate hole section. If any subsequent hole interval is deeper than the first, a full BOPE test will be required.
- The BLM is to be contacted (575-361-2822 Eddy County) (575-393-3612 Lea County) 4 hours prior to BOPE tests.
- As a minimum, a full BOPE test shall be performed at 21-day intervals.
- In the event any repairs or replacement of the BOPE is required, the BOPE shall test as per Onshore Oil and Gas Order No. 2.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240,
(575) 393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).

- b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.

4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.

- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
- a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).
 - b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
 - c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
 - d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall

have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.

- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

OTA07132021



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Operator Certification Data Report

08/02/2021

Operator Certification

I hereby certify that I, or someone under my direct supervision, have inspected the drill site and access route proposed herein; that I am familiar with the conditions which currently exist; that I have full knowledge of state and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or the company I represent, am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

NAME: Sammy Hajar**Signed on:** 11/13/2020**Title:** Regulatory Analyst**Street Address:** 104 S. Pecos**City:** Midland**State:** TX**Zip:** 79701**Phone:** (432)682-3753**Email address:** shajar@btaoil.com

Field Representative

Representative Name:**Street Address:****City:****State:****Zip:****Phone:****Email address:**



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Application Data Report

08/02/2021

APD ID: 10400065178

Submission Date: 11/13/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

APD ID: 10400065178

Tie to previous NOS?

Submission Date: 11/13/2020

BLM Office: Carlsbad

User: Sammy Hajar

Title: Regulatory Analyst

Federal/Indian APD: FED

Is the first lease penetrated for production Federal or Indian? FED

Lease number: NMNM05792

Lease Acres:

Surface access agreement in place?

Allotted?

Reservation:

Agreement in place? NO

Federal or Indian agreement:

Agreement number:

Agreement name:

Keep application confidential? Y

Permitting Agent? NO

APD Operator: BTA OIL PRODUCERS LLC

Operator letter of designation:

Operator Info

Operator Organization Name: BTA OIL PRODUCERS LLC

Operator Address: 104 S. Pecos

Zip: 79701

Operator PO Box:

Operator City: Midland

State: TX

Operator Phone: (432)682-3753

Operator Internet Address:

Section 2 - Well Information

Well in Master Development Plan? NO

Master Development Plan name:

Well in Master SUPO? NO

Master SUPO name:

Well in Master Drilling Plan? NO

Master Drilling Plan name:

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Well API Number:

Field/Pool or Exploratory? Field and Pool

Field Name: WildCat upper
Wolfcamp

Pool Name: AVALON

Is the proposed well in an area containing other mineral resources? NONE

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Is the proposed well in an area containing other mineral resources?** NONE**Is the proposed well in a Helium production area?** N**Use Existing Well Pad?** N**New surface disturbance?****Type of Well Pad:** MULTIPLE WELL**Multiple Well Pad Name:** ROJO 7811 34-27 FEDERAL COM**Number:** 59H, 60H, 61H and 62H**Well Class:** HORIZONTAL**Number of Legs:** 1**Well Work Type:** Drill**Well Type:** OIL WELL**Describe Well Type:****Well sub-Type:** INFILL**Describe sub-type:****Distance to town:****Distance to nearest well:** 721 FT**Distance to lease line:** 2055 FT**Reservoir well spacing assigned acres Measurement:** 240 Acres**Well plat:** Signed_ROJO_7811_27_22_Federal_Com_62H_C102_20201113085311.pdf**Well work start Date:** 04/08/2021**Duration:** 30 DAYS**Section 3 - Well Location Table****Survey Type:** RECTANGULAR**Describe Survey Type:****Datum:** NAD83**Vertical Datum:** NGVD29**Survey number:****Reference Datum:** GROUND LEVEL

| Wellbore | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude | Longitude | County | State | Meridian | Lease Type | Lease Number | Elevation | MD | TVD | Will this well produce from this lease? |
|--------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|-------------|--------|------------|------------|------------|--------------|-----------|-------|------|---|
| SHL Leg #1 | 2055 | FNL | 1935 | FWL | 25S | 33E | 34 | Aliquot SENW | 32.088618 | -103.562495 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 05792 | 3327 | 0 | 0 | Y |
| KOP Leg #1 | 2540 | FNL | 1650 | FWL | 25S | 33E | 34 | Aliquot SENW | 32.087286 | -103.563413 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 05792 | -6137 | 9497 | 9464 | Y |
| PPP Leg #1-1 | 2540 | FNL | 1650 | FWL | 25S | 33E | 34 | Aliquot SENW | 32.087286 | -103.563413 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 05792 | -6565 | 10024 | 9892 | Y |

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H

| Wellbore | NS-Foot | NS Indicator | EW-Foot | EW Indicator | Twsp | Range | Section | Aliquot/Lot/Tract | Latitude | Longitude | County | State | Meridian | Lease Type | Lease Number | Elevation | MD | TVD | Will this well produce from this lease? |
|--------------|---------|--------------|---------|--------------|------|-------|---------|-------------------|-----------|-------------|--------|------------|------------|------------|--------------|-----------|-------|------|---|
| PPP Leg #1-2 | 10 | FSL | 1650 | FWL | 25S | 33E | 27 | Aliquot SESW | 32.094303 | -103.56343 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 15091 | -6615 | 12400 | 9942 | Y |
| EXIT Leg #1 | 100 | FSL | 1650 | FWL | 25S | 33E | 27 | Aliquot NENW | 32.10851 | -103.563464 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 15091 | -6615 | 17339 | 9942 | Y |
| BHL Leg #1 | 50 | FSL | 1650 | FWL | 25S | 33E | 27 | Aliquot NENW | 32.108648 | -103.563464 | LEA | NEW MEXICO | NEW MEXICO | F | NMNM 15091 | -6615 | 17619 | 9942 | Y |



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

08/02/2021

APD ID: 10400065178

Submission Date: 11/13/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

| Formation ID | Formation Name | Elevation | True Vertical Depth | Measured Depth | Lithologies | Mineral Resources | Producing Formation |
|--------------|--------------------|-----------|---------------------|----------------|------------------|-------------------|---------------------|
| 1143206 | QUATERNARY | 3327 | 0 | 0 | ALLUVIUM | NONE | N |
| 1143207 | RUSTLER | 2345 | 982 | 982 | ANHYDRITE | NONE | N |
| 1143208 | TOP SALT | 1775 | 1552 | 1552 | SALT | NONE | N |
| 1143209 | BASE OF SALT | -1435 | 4762 | 4762 | SALT | NONE | N |
| 1143210 | DELAWARE | -1665 | 4992 | 4992 | LIMESTONE | NATURAL GAS, OIL | N |
| 1143219 | BELL CANYON | -1700 | 5027 | 5027 | SANDSTONE | NATURAL GAS, OIL | N |
| 1143212 | CHERRY CANYON | -3045 | 6372 | 6372 | SANDSTONE | NATURAL GAS, OIL | N |
| 1143213 | BRUSHY CANYON | -4215 | 7542 | 7542 | SANDSTONE | NATURAL GAS, OIL | N |
| 1143214 | BONE SPRING LIME | -5760 | 9087 | 9087 | LIMESTONE | NATURAL GAS, OIL | N |
| 1143227 | UPPER AVALON SHALE | -5935 | 9262 | 9262 | LIMESTONE, SHALE | NATURAL GAS, OIL | Y |

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 12000

Equipment: The blowout preventer equipment (BOP) shown in Exhibit A will consist of a (5M system) double ram type (5,000 psi WP) preventer and a bag-type (Hydril) preventer (5000 psi WP). Both units will be hydraulically operated and the ram type preventer will be equipped with blind rams on top and 5" drill pipe rams on bottom. The BOPs will be installed on the 13-3/8" surface casing and utilized continuously until total depth is reached. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. A remote kill line will be used for the 5M system as per onshore order #2. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines, and choke manifold having a 5,000 psi WP rating. The 5M annular will be tested as per BLM drilling Operations Order No. 2, and will be test to 100% of working pressure.

Requesting Variance? NO

Variance request:

Testing Procedure: Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. All BOPs and associated equipment will be tested as

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H

per BLM drilling Operations Order No. 2.

Choke Diagram Attachment:

5M_choke_mannifold_20200917143047.pdf

Choke_Hose___Test_Chart_and_Specs_20190723082742.pdf

BOP Diagram Attachment:

5M_BOP_diagram_20200917143053.pdf

Section 3 - Casing

| Casing ID | String Type | Hole Size | Csg Size | Condition | Standard | Tapered String | Top Set MD | Bottom Set MD | Top Set TVD | Bottom Set TVD | Top Set MSL | Bottom Set MSL | Calculated casing length MD | Grade | Weight | Joint Type | Collapse SF | Burst SF | Joint SF Type | Joint SF | Body SF Type | Body SF |
|-----------|--------------|-----------|----------|-----------|----------|----------------|------------|---------------|-------------|----------------|-------------|----------------|-----------------------------|-------|--------|------------|-------------|----------|---------------|----------|--------------|---------|
| 1 | SURFACE | 17.5 | 13.375 | NEW | API | N | 0 | 1050 | 0 | 1050 | 3327 | 2277 | 1050 | J-55 | 54.5 | ST&C | 2.5 | 6 | DRY | 9 | DRY | 14.9 |
| 2 | INTERMEDIATE | 12.25 | 9.625 | NEW | API | N | 0 | 4992 | 0 | 4972 | 3419 | -1645 | 4992 | J-55 | 40 | LT&C | 1.9 | 1.6 | DRY | 2.6 | DRY | 3.2 |
| 3 | PRODUCTION | 8.75 | 5.5 | NEW | API | N | 0 | 17619 | 0 | 9942 | 3419 | -6615 | 17619 | P-110 | 17 | BUTT | 1.5 | 2.2 | DRY | 1.9 | DRY | 1.8 |

Casing Attachments**Casing ID:** 1 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Rojo_62H_Casing_assumption_20201113091030.JPG

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Casing Attachments

Casing ID: 2 String Type: INTERMEDIATE

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_62H_Casing_assumption_20201113090954.JPG

Casing ID: 3 String Type: PRODUCTION

Inspection Document:

Spec Document:

Tapered String Spec:

Casing Design Assumptions and Worksheet(s):

Rojo_62H_Casing_assumption_20201113090900.JPG

Section 4 - Cement

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|--------------|-----------|------------------|--------|-----------|--------------|-------|---------|--------|---------|---------------------|-----------------|
| SURFACE | Lead | | 0 | 715 | 575 | 1.73 | 13.5 | 994.75 | 100 | Class C | 2% CaCl2 |
| SURFACE | Tail | | 715 | 1050 | 340 | 1.35 | 14.8 | 459 | 100 | Class C | 2% CaCl2 |
| INTERMEDIATE | Lead | | 0 | 4435 | 1310 | 2.46 | 12.8 | 3222.6 | 100 | Class C | 0.5% CaCl2 |
| INTERMEDIATE | Tail | | 4435 | 4992 | 200 | 1.34 | 14.8 | 268 | 25 | Class C | 1% CaCl2 |
| PRODUCTION | Lead | | 3992 | 9910 | 580 | 3.9 | 10.5 | 2262 | 60 | 25% Poz 75% Class C | 0.4% Fluid Loss |

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H

| String Type | Lead/Tail | Stage Tool Depth | Top MD | Bottom MD | Quantity(sx) | Yield | Density | Cu Ft | Excess% | Cement type | Additives |
|-------------|-----------|------------------|--------|-----------|--------------|-------|---------|--------|---------|-------------|------------------|
| PRODUCTION | Tail | | 9910 | 17619 | 1950 | 1.25 | 14.4 | 2437.5 | 25 | Class H | 0.2% LT Retarder |

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.**Describe the mud monitoring system utilized:** PVT/Pason/Visual Monitoring

Circulating Medium Table

| Top Depth | Bottom Depth | Mud Type | Min Weight (lbs/gal) | Max Weight (lbs/gal) | Density (lbs/cu ft) | Gel Strength (lbs/100 sqft) | PH | Viscosity (CP) | Salinity (ppm) | Filtration (cc) | Additional Characteristics |
|-----------|--------------|-------------------|----------------------|----------------------|---------------------|-----------------------------|----|----------------|----------------|-----------------|----------------------------|
| 0 | 1050 | OTHER : FW SPUD | 8.3 | 8.4 | | | | | | | |
| 1050 | 4972 | OTHER : FW GEL | 9 | 9.4 | | | | | | | |
| 4972 | 9942 | OTHER : CUT BRINE | 8.7 | 9.3 | | | | | | | |

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H

Section 6 - Test, Logging, Coring

List of production tests including testing procedures, equipment and safety measures:

Drill Stem Tests will be based on geological sample shows.

List of open and cased hole logs run in the well:

MUD LOG/GEOLOGICAL LITHOLOGY LOG,GAMMA RAY LOG,CEMENT BOND LOG,

Coring operation description for the well:

None planned

Section 7 - Pressure

Anticipated Bottom Hole Pressure: 4860**Anticipated Surface Pressure:** 2672**Anticipated Bottom Hole Temperature(F):** 160**Anticipated abnormal pressures, temperatures, or potential geologic hazards?** NO**Describe:****Contingency Plans geohazards description:****Contingency Plans geohazards attachment:****Hydrogen Sulfide drilling operations plan required?** YES**Hydrogen sulfide drilling operations plan:**

BTA_Oil_Producers_LLC___EMERGENCY_CALL_LIST_20190723161502.pdf

H2S_Equipment_Schematic_20190723161502.pdf

H2S_Plan_20190723161502.pdf

Section 8 - Other Information

Proposed horizontal/directional/multi-lateral plan submission:

QES___Rojo_7811_34_27_Fed_Com_62H___Geo_Survey_Rpt_20201113091439.pdf

Rojo_7811_34_27_Fed_Com_62H_WM_20201113091450.pdf

Rojo_62H_Gas_Capture_Plan_20201113091502.pdf

Other proposed operations facets description:

A variance is requested for a Multi Bowl Wellhead. See the attached schematic. *All strings will be kept 1/3 full while running.

Other proposed operations facets attachment:**Other Variance attachment:**

BOP_Break_Testing_Variance_20200917143242.pdf

Multi_Bowl_Diagram_13_38_x_9_58_x_5_12_20200917143315.pdf



[54 FR 39528, Sept. 27, 1989]



ContiTech

| | |
|-------------------------------------|---------------------------------------|
| CONTITECH RUBBER Industrial Kft. | No:QC-DB- 599/ 2014 Page: 16 / 176 |
|-------------------------------------|---------------------------------------|

Rig 94

ASSET 24455


| QUALITY CONTROL INSPECTION AND TEST CERTIFICATE | | | | CERT. N°: 1592 | |
|--|--|--|--|--|--|
| PURCHASER: ContiTech Oil & Marine Corp. | | | | P.O. N°: 4500461753 | |
| CONTITECH ORDER N°: 539225 | | HOSE TYPE: 3" ID Choke & Kill Hose | | | |
| HOSE SERIAL N°: 68547 | | NOMINAL / ACTUAL LENGTH: 7,62 m / 7,66 m | | | |
| W.P. 68,9 MPa 10000 psi | | T.P. 103,4 MPa 15000 psi | | Duration: 60 min. | |
| Pressure test with water at ambient temperature | | | | | |
| See attachment. (1 page) | | | | | |
| → 10 Min. | | | | | |
| ↑ 50 MPa | | | | | |
| COUPLINGS Type | | Serial N° | | Quality | |
| 3" coupling with | | 2574 5533 | | AISI 4130 | |
| 4 1/16" 10K API Swivel Flange end | | | | AISI 4130 | |
| Hub | | | | AISI 4130 | |
| | | | | A1582N H8672 | |
| | | | | 58855 | |
| | | | | A1199N A1423N | |
| Not Designed For Well Testing | | | | API Spec 16 C | |
| Fire Rated | | | | Temperature rate:"B" | |
| All metal parts are flawless | | | | | |
| WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT. | | | | | |
| STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements. | | | | | |
| Date: 04. September 2014. | | Inspector | | Quality Control | |
| | | | | ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i> | |

ContiTech Rubber Industrial Kft. | Budapesti út 10. 11 672 Szeged | H-6701 P.O.Box 152 Szeged, Hungary
 Phone: +36 62 566 737 | Fax: +36 62 566 738 | e-mail: info@bud.contitech.hu | Internet: www.contitech-rubber.hu, www.contitech.hu
 The Court of Szeged County as Registry Court | Registry Court No. Cg 06 09 002572 | EU VAT No. HU11067206
 Bank: Erste Commercial Zrt., Budapest | 14220100 26831003

File Name : 000220_68543_68545-547.GEV.....000236_68543_68545-547.GEV
File Message : 68543_68545_58547
Device Type : GX10
Serial No. : S3F606399
Data Count : 9046
Print Group :
Print Range :
Comment : Press-Temp
2014/09/04 01:53:54.000 - 2014/09/04 04:39:39.000


Sampling Int. : 1.000 sec
Start Time : 2014/09/04 01:53:54.000
Stop Time : 2014/09/04 04:39:39.000

| Data No. | Cursor A | Cursor B | Difference |
|-------------------------|-------------------------|-------------------------|--------------|
| Absolute Time | 2014/09/04 02:51:05.000 | 2014/09/04 03:51:06.000 | 01:00:01.000 |
| Toy Comment | Value A | Value B | Value B-A |
| Pressure[bar] | 1062.95 | 1048.57 | -14.38 |
| Ambient Temperature[°C] | 23.24 | 23.14 | -0.10 |

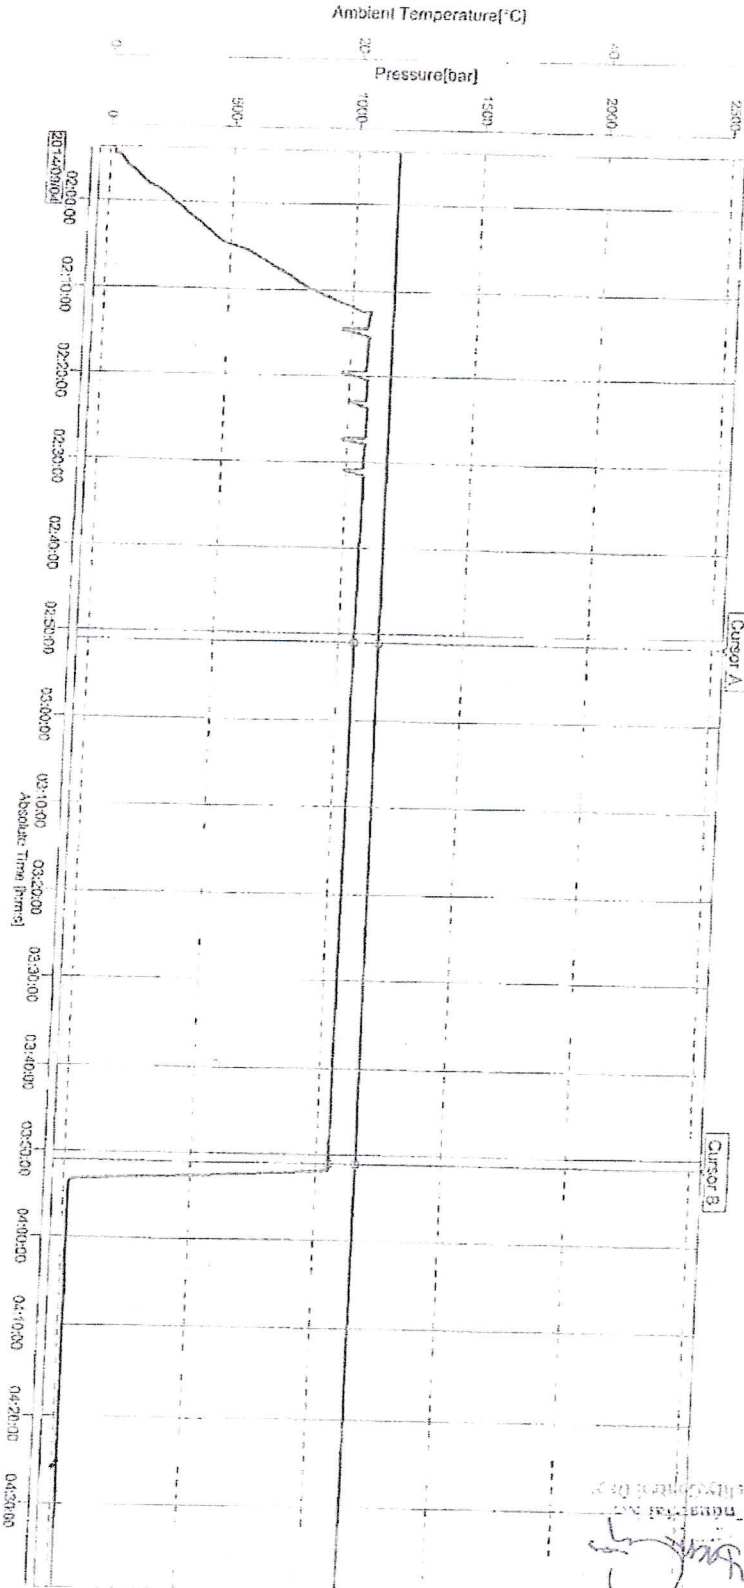

10mm/div

13-5/8" 5,000 PSI BOP

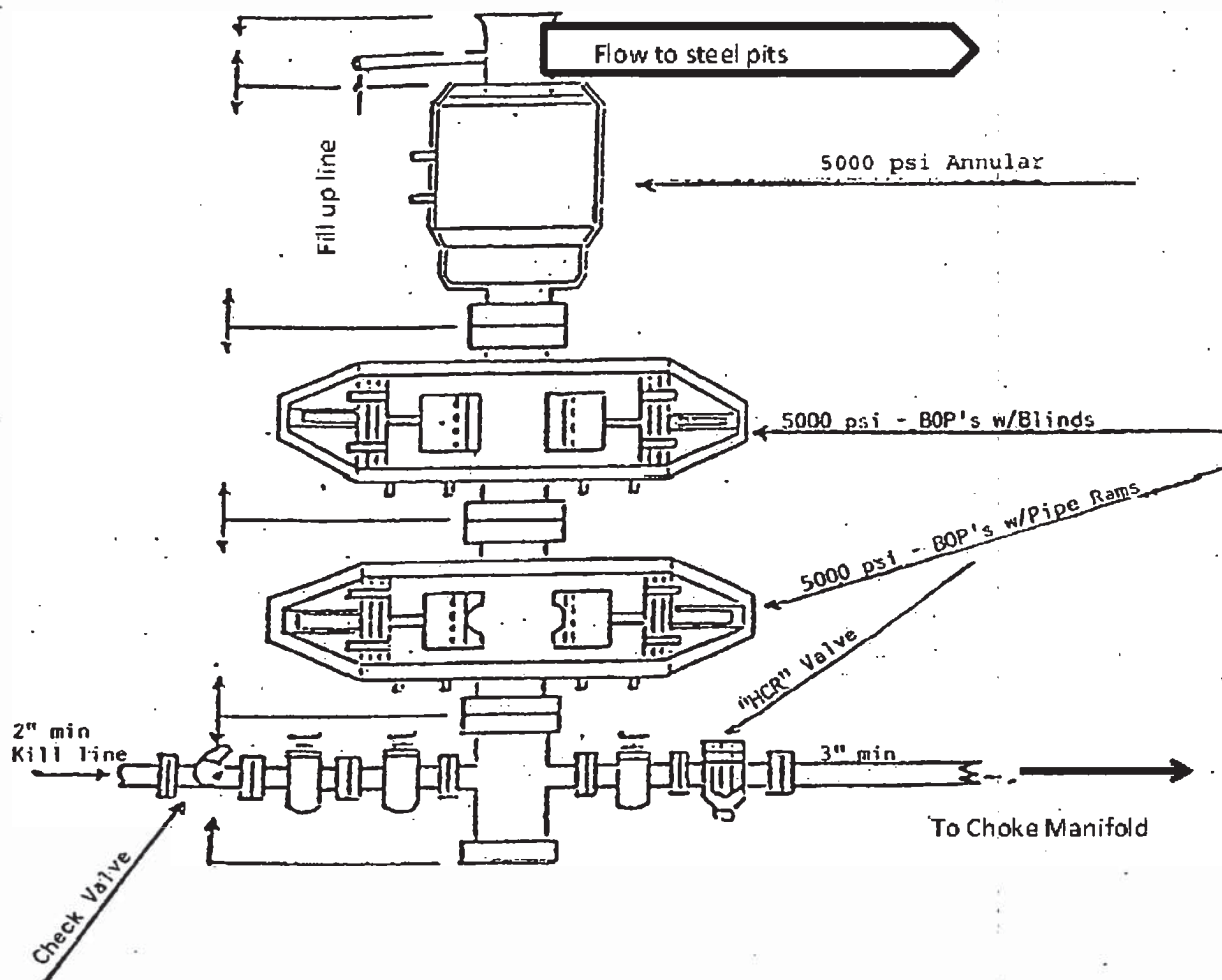


EMERGENCY CALL LIST

| | <u>OFFICE</u> | <u>MOBILE</u> |
|------------------------------|----------------------|----------------------|
| BTA Oil Producers LLC OFFICE | 432-682-3753 | |
| BEN GRIMES, Operations | 432-682-3753 | 432-559-4309 |
| NICK EATON, Drilling | 432-682-3753 | 432-260-7841 |
| TRACE WOHLFAHRT, Completions | 432-682-3753 | |

EMERGENCY RESPONSE NUMBERS

| | <u>OFFICE</u> |
|--|----------------------|
| STATE POLICE | 575-748-9718 |
| EDDY COUNTY SHERIFF | 575-746-2701 |
| EMERGENCY MEDICAL SERVICES (AMBULANCE) | 911 or 575-746-2701 |
| EDDY COUNTY EMERGENCY MANAGEMENT (HARRY BURGESS) | 575-887-9511 |
| STATE EMERGENCY RESPONSE CENTER (SERC) | 575-476-9620 |
| CARLSBAD POLICE DEPARTMENT | 575-885-2111 |
| CARLSBAD FIRE DEPARTMENT | 575-885-3125 |
| NEW MEXICO OIL CONSERVATION DIVISION | 575-748-1283 |
| INDIAN FIRE & SAFETY | 800-530-8693 |
| HALLIBURTON SERVICES | 800-844-8451 |

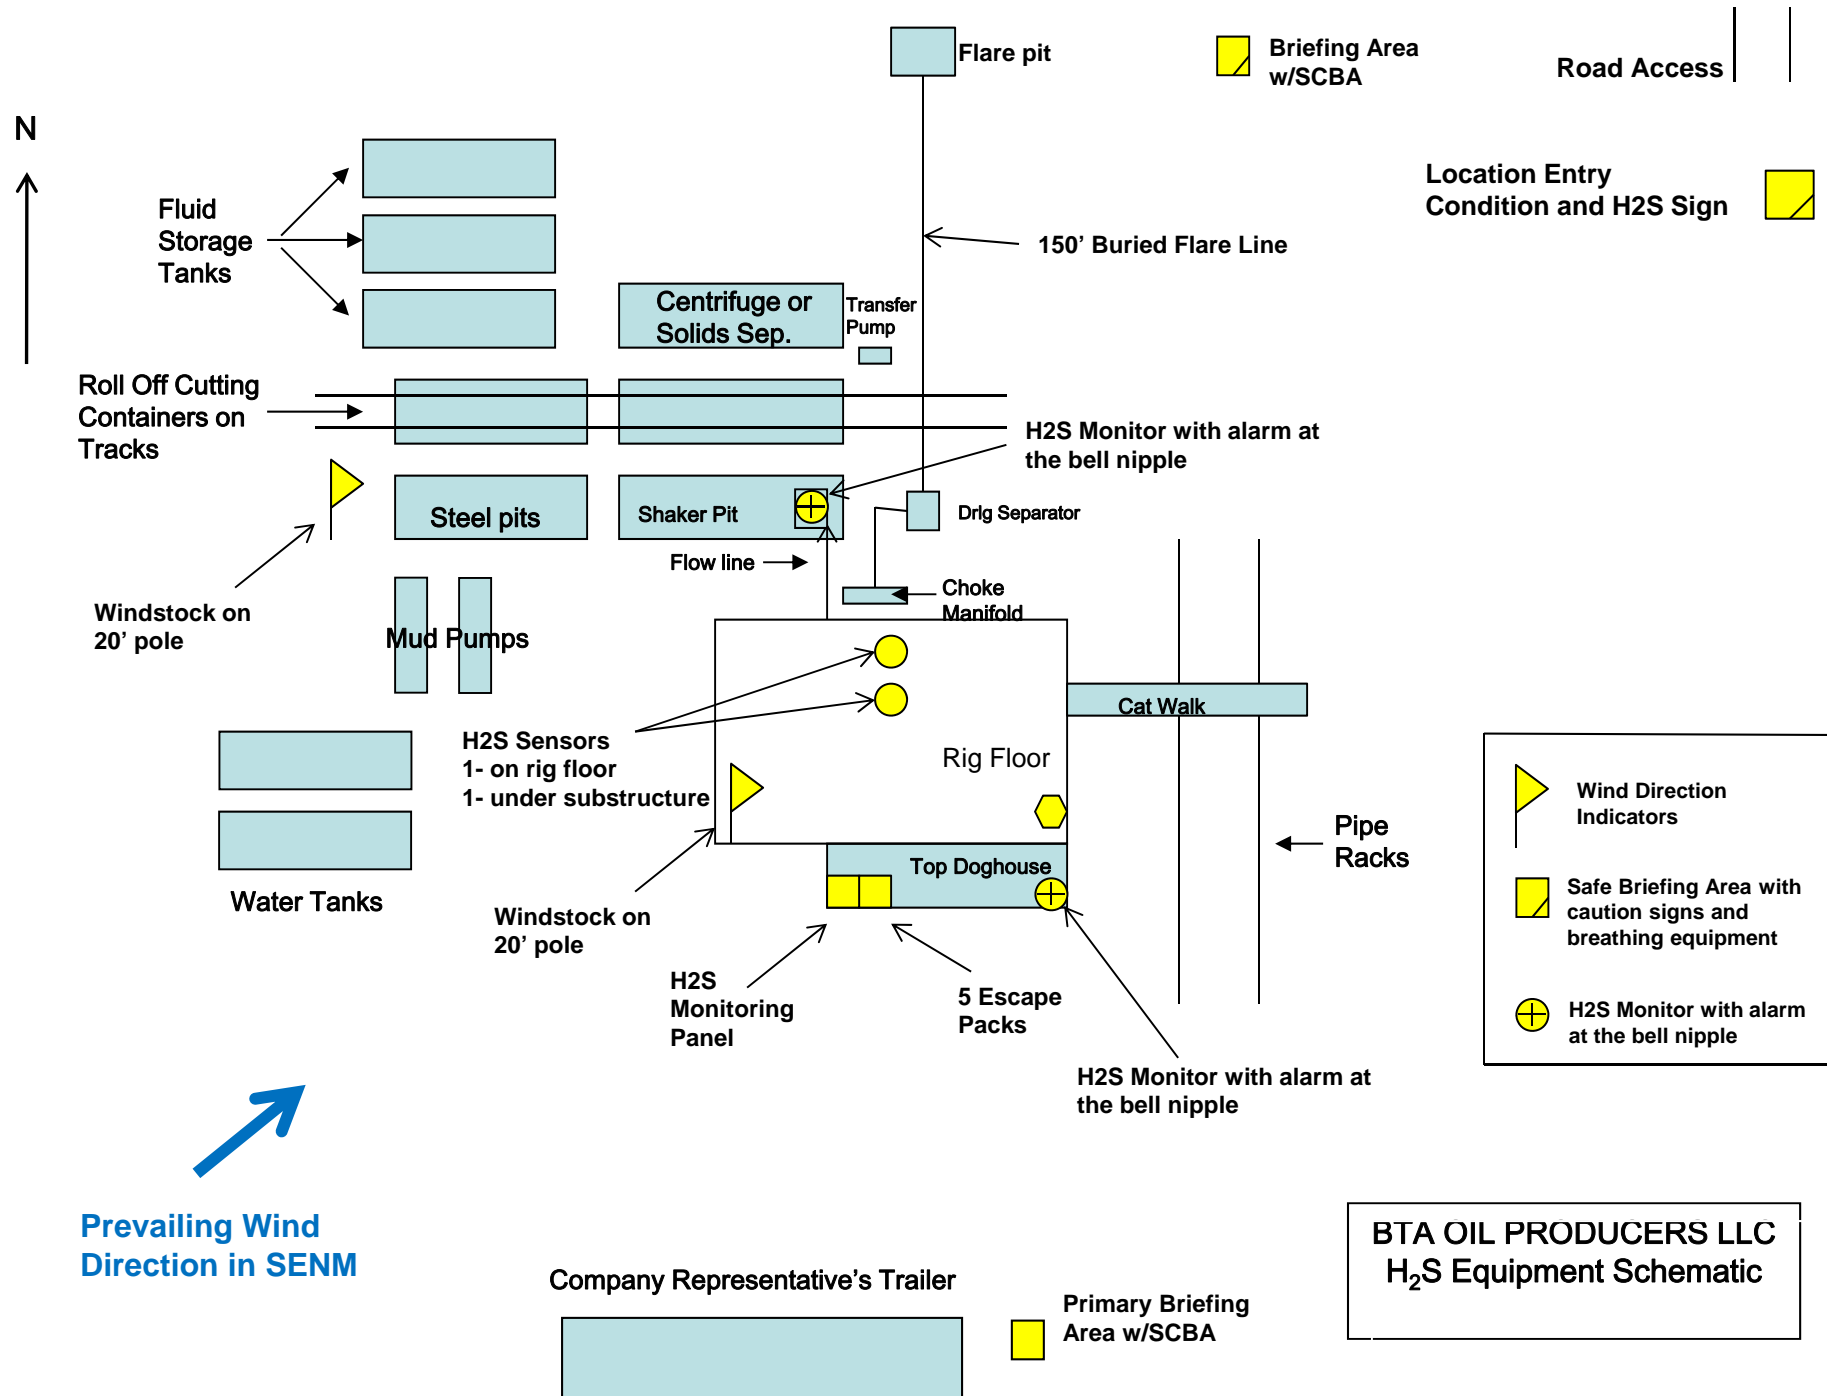

BTA OIL PRODUCERS LLC**HYDROGEN SULFIDE DRILLING OPERATIONS PLAN****1. HYDROGEN SULFIDE TRAINING**

All personnel, whether regularly assigned, contracted, or employed on an unscheduled basis, will receive training from a qualified instructor in the following areas prior to commencing drilling operations on this well:

- a. The hazards and characteristics of hydrogen sulfide (H₂S).
- b. The proper use and maintenance of personal protective equipment and life support systems.
- c. The proper use of H₂S detectors, alarms, warning systems, briefing areas, evacuation procedures, and prevailing winds.
- d. The proper techniques for first aid and rescue procedures.

In addition, supervisory personnel will be trained in the following areas:

- a. The effects of H₂S on metal components. If high tensile tubulars are to be used, personnel will be trained in their special maintenance requirements.
- b. Corrective action and shut-in procedures when drilling or reworking a well and blowout prevention and well control procedures.
- c. The contents and requirements of the H₂S Drilling Operations Plan and the Public Protection Plan.

There will be an initial training session just prior to encountering a known or probable H₂S zone (within 3 days or 500 feet) and weekly H₂S and well control drills for all personnel in each crew. The initial training session shall include a review of the site specific H₂S Drilling Operations Plan and the Public Protection Plan. This plan shall be available at the well site. All personnel will be required to carry documentation that they have received the proper training.

2. H₂S SAFETY EQUIPMENT AND SYSTEMS

Note: All H₂S safety equipment and systems will be installed, tested, and operational when drilling reaches a depth of 500 feet above, or three days prior to penetrating the first zone containing or reasonably expected to contain H₂S. If H₂S greater than 100 ppm is encountered in the gas stream we will shut in and install H₂S equipment.

- a. Well Control Equipment:
 - Flare line.
 - Choke manifold with remotely operated choke.
 - Blind rams and pipe rams to accommodate all pipe sizes with properly sized closing unit.
 - Auxiliary equipment to include: annular preventer, mud-gas separator, rotating head.
- b. Protective equipment for essential personnel:
 - Mark II Surviveair 30-minute units located in the dog house and at briefing areas.
- c. H₂S detection and monitoring equipment:

- 2 - portable H2S monitor positioned on location for best coverage and response. These units have warning lights and audible sirens when H2S levels of 20 ppm are reached.
- d. Visual warning systems:
Caution/Danger signs shall be posted on roads providing direct access to location. Signs will be painted a high visibility yellow with black lettering of sufficient size to be readable at a reasonable distance from the immediate location. Bilingual signs will be used, when appropriate. See example attached.
- e. Mud Program:
The mud program has been designed to minimize the volume of H2S circulated to the surface.
- f. Metallurgy:
All drill strings, casings, tubing, wellhead, blowout preventers, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service.
- g. Communication:
Company vehicles equipped with cellular telephone.


W A R N I N G

**YOU ARE ENTERING AN H₂S AREA
AUTHORIZED PERSONNEL ONLY**

- 1. BEARDS OR CONTACT LENSES NOT ALLOWED**
- 2. HARD HATS REQUIRED**
- 3. SMOKING IN DESIGNATED AREAS ONLY**
- 4. BE WIND CONSCIOUS AT ALL TIMES**
- 5. CK WITH BTA OIL PRODUCERS LLC FOREMAN AT MAIN OFFICE**

BTA OIL PRODUCERS LLC

1-432-682-3753

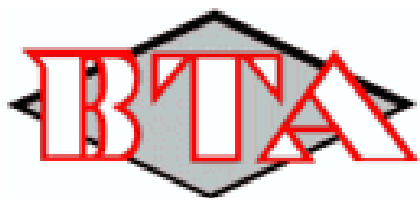

BTA Oil Producers, LLC

Lea County, NM (NAD 83)

Sec 34, T25-S, R33-E

Rojo 7811 34-27 Fed Com #62H

Wellbore #1

Plan: Design #1

Survey Report - Geographic

11 November, 2020





QES
Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| | | | |
|--------------------|---------------------------|----------------------|----------------|
| Project | Lea County, NM (NAD 83) | | |
| Map System: | US State Plane 1983 | System Datum: | Mean Sea Level |
| Geo Datum: | North American Datum 1983 | | |
| Map Zone: | New Mexico Eastern Zone | | |

| Site | | Sec 34, T25-S, R33-E | | | |
|-----------------------|----------|----------------------|-----------------|-------------------|-------------|
| Site Position: | | Northing: | 396,110.60 usft | Latitude: | 32.086642 |
| From: | Map | Easting: | 780,112.60 usft | Longitude: | -103.562346 |
| Position Uncertainty: | 0.0 usft | Slot Radius: | 13-3/16 " | Grid Convergence: | 0.41 ° |

| Well | Rojo 7811 34-27 Fed Com #62H | | | | | |
|----------------------|------------------------------|----------|---------------------|-----------------|---------------|--------------|
| Well Position | +N/-S | 0.0 usft | Northing: | 396,829.30 usft | Latitude: | 32.088618 |
| | +E/-W | 0.0 usft | Easting: | 780,061.10 usft | Longitude: | -103.562496 |
| Position Uncertainty | | 0.0 usft | Wellhead Elevation: | usft | Ground Level: | 3,327.0 usft |

| | | | | | |
|------------------|-------------------|--------------------|------------------------|----------------------|----------------------------|
| Wellbore | Wellbore #1 | | | | |
| Magnetics | Model Name | Sample Date | Declination (°) | Dip Angle (°) | Field Strength (nT) |
| | HDGM2020 | 10/23/2020 | 6.48 | 59.67 | 47,603.40000000 |

| | | | | | |
|--------------------------|--------------------------------|---------------------|----------------------|----------------------|--|
| Design | Design #1 | | | | |
| Audit Notes: | | | | | |
| Version: | Phase: | PLAN | Tie On Depth: | 0.0 | |
| Vertical Section: | Depth From (TVD) (usft) | +N/-S (usft) | +E/-W (usft) | Direction (°) | |
| | 0.0 | 0.0 | 0.0 | 357.23 | |

| | | | | | |
|----------------------------|------------------|--------------------------|------------------|---------------------|--|
| Survey Tool Program | Date | 10/23/2020 | | | |
| From (usft) | To (usft) | Survey (Wellbore) | Tool Name | Description | |
| 0.0 | 17,618.7 | Design #1 (Wellbore #1) | MWD | OWSG MWD - Standard | |

| | | | | | | | | | |
|------------------------------|------------------------|--------------------|------------------------------|---------------------|---------------------|----------------------------|---------------------------|-----------------|------------------|
| Planned Survey | | | | | | | | | |
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 0.0 | 0.00 | 0.00 | 0.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 100.0 | 0.00 | 0.00 | 100.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 200.0 | 0.00 | 0.00 | 200.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 300.0 | 0.00 | 0.00 | 300.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 400.0 | 0.00 | 0.00 | 400.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 500.0 | 0.00 | 0.00 | 500.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 600.0 | 0.00 | 0.00 | 600.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 700.0 | 0.00 | 0.00 | 700.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 800.0 | 0.00 | 0.00 | 800.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 900.0 | 0.00 | 0.00 | 900.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 1,000.0 | 0.00 | 0.00 | 1,000.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |
| 1,100.0 | 0.00 | 0.00 | 1,100.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 |



QES

Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| Planned Survey | | | | | | | | | | |
|-------------------------------|--------------------|----------------|-----------------|-----------------|-----------------|--------------------|-------------------|-----------|-------------|--|
| Measured | | | Vertical | | | Map | Map | | | |
| Depth (usft) | Inclination (°) | Azimuth (°) | Depth (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | Longitude | |
| 1,200.0 | 0.00 | 0.00 | 1,200.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 | |
| 1,300.0 | 0.00 | 0.00 | 1,300.0 | 0.0 | 0.0 | 396,829.30 | 780,061.10 | 32.088618 | -103.562496 | |
| Build 2°/100' | | | | | | | | | | |
| 1,400.0 | 2.00 | 206.39 | 1,400.0 | -1.6 | -0.8 | 396,827.74 | 780,060.32 | 32.088614 | -103.562498 | |
| 1,500.0 | 4.00 | 206.39 | 1,499.8 | -6.3 | -3.1 | 396,823.05 | 780,058.00 | 32.088601 | -103.562506 | |
| 1,602.7 | 6.05 | 206.39 | 1,602.2 | -14.3 | -7.1 | 396,814.98 | 780,053.99 | 32.088579 | -103.562519 | |
| EOB @ 6.05° Inc / 206.39° Azm | | | | | | | | | | |
| 1,700.0 | 6.05 | 206.39 | 1,698.9 | -23.5 | -11.7 | 396,805.79 | 780,049.43 | 32.088554 | -103.562534 | |
| 1,800.0 | 6.05 | 206.39 | 1,798.3 | -33.0 | -16.4 | 396,796.35 | 780,044.75 | 32.088528 | -103.562549 | |
| 1,900.0 | 6.05 | 206.39 | 1,897.8 | -42.4 | -21.0 | 396,786.90 | 780,040.06 | 32.088502 | -103.562565 | |
| 2,000.0 | 6.05 | 206.39 | 1,997.2 | -51.8 | -25.7 | 396,777.45 | 780,035.37 | 32.088476 | -103.562580 | |
| 2,100.0 | 6.05 | 206.39 | 2,096.7 | -61.3 | -30.4 | 396,768.00 | 780,030.68 | 32.088450 | -103.562595 | |
| 2,200.0 | 6.05 | 206.39 | 2,196.1 | -70.7 | -35.1 | 396,758.55 | 780,025.99 | 32.088424 | -103.562611 | |
| 2,300.0 | 6.05 | 206.39 | 2,295.5 | -80.2 | -39.8 | 396,749.11 | 780,021.31 | 32.088399 | -103.562626 | |
| 2,400.0 | 6.05 | 206.39 | 2,395.0 | -89.6 | -44.5 | 396,739.66 | 780,016.62 | 32.088373 | -103.562641 | |
| 2,500.0 | 6.05 | 206.39 | 2,494.4 | -99.1 | -49.2 | 396,730.21 | 780,011.93 | 32.088347 | -103.562657 | |
| 2,600.0 | 6.05 | 206.39 | 2,593.9 | -108.5 | -53.9 | 396,720.76 | 780,007.24 | 32.088321 | -103.562672 | |
| 2,700.0 | 6.05 | 206.39 | 2,693.3 | -118.0 | -58.5 | 396,711.31 | 780,002.55 | 32.088295 | -103.562687 | |
| 2,800.0 | 6.05 | 206.39 | 2,792.8 | -127.4 | -63.2 | 396,701.86 | 779,997.87 | 32.088269 | -103.562703 | |
| 2,900.0 | 6.05 | 206.39 | 2,892.2 | -136.9 | -67.9 | 396,692.42 | 779,993.18 | 32.088243 | -103.562718 | |
| 3,000.0 | 6.05 | 206.39 | 2,991.6 | -146.3 | -72.6 | 396,682.97 | 779,988.49 | 32.088217 | -103.562734 | |
| 3,100.0 | 6.05 | 206.39 | 3,091.1 | -155.8 | -77.3 | 396,673.52 | 779,983.80 | 32.088192 | -103.562749 | |
| 3,200.0 | 6.05 | 206.39 | 3,190.5 | -165.2 | -82.0 | 396,664.07 | 779,979.11 | 32.088166 | -103.562764 | |
| 3,300.0 | 6.05 | 206.39 | 3,290.0 | -174.7 | -86.7 | 396,654.62 | 779,974.43 | 32.088140 | -103.562780 | |
| 3,400.0 | 6.05 | 206.39 | 3,389.4 | -184.1 | -91.4 | 396,645.18 | 779,969.74 | 32.088114 | -103.562795 | |
| 3,500.0 | 6.05 | 206.39 | 3,488.9 | -193.6 | -96.0 | 396,635.73 | 779,965.05 | 32.088088 | -103.562810 | |
| 3,600.0 | 6.05 | 206.39 | 3,588.3 | -203.0 | -100.7 | 396,626.28 | 779,960.36 | 32.088062 | -103.562826 | |
| 3,700.0 | 6.05 | 206.39 | 3,687.7 | -212.5 | -105.4 | 396,616.83 | 779,955.67 | 32.088036 | -103.562841 | |
| 3,800.0 | 6.05 | 206.39 | 3,787.2 | -221.9 | -110.1 | 396,607.38 | 779,950.98 | 32.088010 | -103.562856 | |
| 3,900.0 | 6.05 | 206.39 | 3,886.6 | -231.4 | -114.8 | 396,597.94 | 779,946.30 | 32.087984 | -103.562872 | |
| 4,000.0 | 6.05 | 206.39 | 3,986.1 | -240.8 | -119.5 | 396,588.49 | 779,941.61 | 32.087959 | -103.562887 | |
| 4,100.0 | 6.05 | 206.39 | 4,085.5 | -250.3 | -124.2 | 396,579.04 | 779,936.92 | 32.087933 | -103.562902 | |
| 4,200.0 | 6.05 | 206.39 | 4,184.9 | -259.7 | -128.9 | 396,569.59 | 779,932.23 | 32.087907 | -103.562918 | |
| 4,300.0 | 6.05 | 206.39 | 4,284.4 | -269.2 | -133.6 | 396,560.14 | 779,927.54 | 32.087881 | -103.562933 | |
| 4,400.0 | 6.05 | 206.39 | 4,383.8 | -278.6 | -138.2 | 396,550.69 | 779,922.86 | 32.087855 | -103.562948 | |
| 4,500.0 | 6.05 | 206.39 | 4,483.3 | -288.1 | -142.9 | 396,541.25 | 779,918.17 | 32.087829 | -103.562964 | |
| 4,600.0 | 6.05 | 206.39 | 4,582.7 | -297.5 | -147.6 | 396,531.80 | 779,913.48 | 32.087803 | -103.562979 | |
| 4,700.0 | 6.05 | 206.39 | 4,682.2 | -306.9 | -152.3 | 396,522.35 | 779,908.79 | 32.087777 | -103.562995 | |
| 4,800.0 | 6.05 | 206.39 | 4,781.6 | -316.4 | -157.0 | 396,512.90 | 779,904.10 | 32.087752 | -103.563010 | |
| 4,900.0 | 6.05 | 206.39 | 4,881.0 | -325.8 | -161.7 | 396,503.45 | 779,899.42 | 32.087726 | -103.563025 | |
| 5,000.0 | 6.05 | 206.39 | 4,980.5 | -335.3 | -166.4 | 396,494.01 | 779,894.73 | 32.087700 | -103.563041 | |
| 5,100.0 | 6.05 | 206.39 | 5,079.9 | -344.7 | -171.1 | 396,484.56 | 779,890.04 | 32.087674 | -103.563056 | |
| 5,200.0 | 6.05 | 206.39 | 5,179.4 | -354.2 | -175.7 | 396,475.11 | 779,885.35 | 32.087648 | -103.563071 | |
| 5,300.0 | 6.05 | 206.39 | 5,278.8 | -363.6 | -180.4 | 396,465.66 | 779,880.66 | 32.087622 | -103.563087 | |
| 5,400.0 | 6.05 | 206.39 | 5,378.3 | -373.1 | -185.1 | 396,456.21 | 779,875.98 | 32.087596 | -103.563102 | |
| 5,500.0 | 6.05 | 206.39 | 5,477.7 | -382.5 | -189.8 | 396,446.77 | 779,871.29 | 32.087570 | -103.563117 | |
| 5,600.0 | 6.05 | 206.39 | 5,577.1 | -392.0 | -194.5 | 396,437.32 | 779,866.60 | 32.087545 | -103.563133 | |
| 5,700.0 | 6.05 | 206.39 | 5,676.6 | -401.4 | -199.2 | 396,427.87 | 779,861.91 | 32.087519 | -103.563148 | |
| 5,800.0 | 6.05 | 206.39 | 5,776.0 | -410.9 | -203.9 | 396,418.42 | 779,857.22 | 32.087493 | -103.563163 | |
| 5,900.0 | 6.05 | 206.39 | 5,875.5 | -420.3 | -208.6 | 396,408.97 | 779,852.54 | 32.087467 | -103.563179 | |
| 6,000.0 | 6.05 | 206.39 | 5,974.9 | -429.8 | -213.3 | 396,399.52 | 779,847.85 | 32.087441 | -103.563194 | |
| 6,100.0 | 6.05 | 206.39 | 6,074.4 | -439.2 | -217.9 | 396,390.08 | 779,843.16 | 32.087415 | -103.563209 | |
| 6,200.0 | 6.05 | 206.39 | 6,173.8 | -448.7 | -222.6 | 396,380.63 | 779,838.47 | 32.087389 | -103.563225 | |
| 6,300.0 | 6.05 | 206.39 | 6,273.2 | -458.1 | -227.3 | 396,371.18 | 779,833.78 | 32.087363 | -103.563240 | |
| 6,400.0 | 6.05 | 206.39 | 6,372.7 | -467.6 | -232.0 | 396,361.73 | 779,829.09 | 32.087338 | -103.563256 | |



QES
Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| Planned Survey | | | | | | | | | |
|-----------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 6,500.0 | 6.05 | 206.39 | 6,472.1 | -477.0 | -236.7 | 396,352.28 | 779,824.41 | 32.087312 | -103.563271 |
| 6,600.0 | 6.05 | 206.39 | 6,571.6 | -486.5 | -241.4 | 396,342.84 | 779,819.72 | 32.087286 | -103.563286 |
| 6,700.0 | 6.05 | 206.39 | 6,671.0 | -495.9 | -246.1 | 396,333.39 | 779,815.03 | 32.087260 | -103.563302 |
| 6,800.0 | 6.05 | 206.39 | 6,770.4 | -505.4 | -250.8 | 396,323.94 | 779,810.34 | 32.087234 | -103.563317 |
| 6,900.0 | 6.05 | 206.39 | 6,869.9 | -514.8 | -255.4 | 396,314.49 | 779,805.65 | 32.087208 | -103.563332 |
| 7,000.0 | 6.05 | 206.39 | 6,969.3 | -524.3 | -260.1 | 396,305.04 | 779,800.97 | 32.087182 | -103.563348 |
| 7,100.0 | 6.05 | 206.39 | 7,068.8 | -533.7 | -264.8 | 396,295.60 | 779,796.28 | 32.087156 | -103.563363 |
| 7,200.0 | 6.05 | 206.39 | 7,168.2 | -543.2 | -269.5 | 396,286.15 | 779,791.59 | 32.087130 | -103.563378 |
| 7,272.0 | 6.05 | 206.39 | 7,239.8 | -550.0 | -272.9 | 396,279.34 | 779,788.21 | 32.087112 | -103.563389 |
| Drop 2°/100' | | | | | | | | | |
| 7,300.0 | 5.49 | 206.39 | 7,267.7 | -552.5 | -274.1 | 396,276.82 | 779,786.96 | 32.087105 | -103.563394 |
| 7,400.0 | 3.49 | 206.39 | 7,367.4 | -559.5 | -277.6 | 396,269.80 | 779,783.48 | 32.087086 | -103.563405 |
| 7,500.0 | 1.49 | 206.39 | 7,467.3 | -563.4 | -279.6 | 396,265.90 | 779,781.54 | 32.087075 | -103.563411 |
| 7,574.7 | 0.00 | 0.00 | 7,542.0 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| EOD @ Vert | | | | | | | | | |
| 7,600.0 | 0.00 | 0.00 | 7,567.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 7,700.0 | 0.00 | 0.00 | 7,667.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 7,800.0 | 0.00 | 0.00 | 7,767.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 7,900.0 | 0.00 | 0.00 | 7,867.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,000.0 | 0.00 | 0.00 | 7,967.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,100.0 | 0.00 | 0.00 | 8,067.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,200.0 | 0.00 | 0.00 | 8,167.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,300.0 | 0.00 | 0.00 | 8,267.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,400.0 | 0.00 | 0.00 | 8,367.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,500.0 | 0.00 | 0.00 | 8,467.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,600.0 | 0.00 | 0.00 | 8,567.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,700.0 | 0.00 | 0.00 | 8,667.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,800.0 | 0.00 | 0.00 | 8,767.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 8,900.0 | 0.00 | 0.00 | 8,867.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,000.0 | 0.00 | 0.00 | 8,967.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,100.0 | 0.00 | 0.00 | 9,067.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,200.0 | 0.00 | 0.00 | 9,167.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,300.0 | 0.00 | 0.00 | 9,267.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,400.0 | 0.00 | 0.00 | 9,367.3 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| 9,497.2 | 0.00 | 0.00 | 9,464.5 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| Build 12°/100' | | | | | | | | | |
| 9,500.0 | 0.33 | 359.47 | 9,467.3 | -564.3 | -280.0 | 396,265.04 | 779,781.11 | 32.087073 | -103.563413 |
| 9,525.0 | 3.33 | 359.47 | 9,492.2 | -563.5 | -280.0 | 396,265.83 | 779,781.10 | 32.087075 | -103.563413 |
| 9,550.0 | 6.33 | 359.47 | 9,517.1 | -561.4 | -280.0 | 396,267.94 | 779,781.08 | 32.087081 | -103.563413 |
| 9,575.0 | 9.33 | 359.47 | 9,541.9 | -558.0 | -280.0 | 396,271.34 | 779,781.05 | 32.087090 | -103.563413 |
| 9,600.0 | 12.33 | 359.47 | 9,566.5 | -553.3 | -280.1 | 396,276.04 | 779,781.01 | 32.087103 | -103.563413 |
| 9,625.0 | 15.33 | 359.47 | 9,590.7 | -547.3 | -280.1 | 396,282.02 | 779,780.96 | 32.087119 | -103.563413 |
| 9,650.0 | 18.33 | 359.47 | 9,614.7 | -540.0 | -280.2 | 396,289.25 | 779,780.89 | 32.087139 | -103.563413 |
| 9,675.0 | 21.33 | 359.47 | 9,638.2 | -531.6 | -280.3 | 396,297.73 | 779,780.81 | 32.087163 | -103.563413 |
| 9,700.0 | 24.33 | 359.47 | 9,661.2 | -521.9 | -280.4 | 396,307.43 | 779,780.72 | 32.087189 | -103.563413 |
| 9,725.0 | 27.33 | 359.47 | 9,683.7 | -511.0 | -280.5 | 396,318.32 | 779,780.62 | 32.087219 | -103.563413 |
| 9,750.0 | 30.33 | 359.47 | 9,705.6 | -498.9 | -280.6 | 396,330.38 | 779,780.51 | 32.087252 | -103.563413 |
| 9,775.0 | 33.33 | 359.47 | 9,726.8 | -485.7 | -280.7 | 396,343.56 | 779,780.39 | 32.087289 | -103.563413 |
| 9,800.0 | 36.33 | 359.47 | 9,747.4 | -471.5 | -280.8 | 396,357.84 | 779,780.26 | 32.087328 | -103.563413 |
| 9,825.0 | 39.33 | 359.47 | 9,767.1 | -456.1 | -281.0 | 396,373.17 | 779,780.12 | 32.087370 | -103.563413 |
| 9,850.0 | 42.33 | 359.47 | 9,786.0 | -439.8 | -281.1 | 396,389.51 | 779,779.97 | 32.087415 | -103.563414 |
| 9,875.0 | 45.33 | 359.47 | 9,804.1 | -422.5 | -281.3 | 396,406.82 | 779,779.81 | 32.087462 | -103.563414 |
| 9,900.0 | 48.33 | 359.47 | 9,821.2 | -404.2 | -281.5 | 396,425.05 | 779,779.64 | 32.087513 | -103.563414 |
| 9,925.0 | 51.33 | 359.47 | 9,837.3 | -385.1 | -281.6 | 396,444.15 | 779,779.47 | 32.087565 | -103.563414 |
| 9,950.0 | 54.33 | 359.47 | 9,852.4 | -365.2 | -281.8 | 396,464.07 | 779,779.28 | 32.087620 | -103.563414 |



QES

Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| Planned Survey | | | | | | | | | |
|--|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 9,975.0 | 57.33 | 359.47 | 9,866.4 | -344.5 | -282.0 | 396,484.75 | 779,779.10 | 32.087677 | -103.563414 |
| 10,000.0 | 60.33 | 359.47 | 9,879.4 | -323.2 | -282.2 | 396,506.14 | 779,778.90 | 32.087735 | -103.563414 |
| 10,025.0 | 63.33 | 359.47 | 9,891.2 | -301.1 | -282.4 | 396,528.17 | 779,778.70 | 32.087796 | -103.563414 |
| 10,050.0 | 66.33 | 359.47 | 9,901.8 | -278.5 | -282.6 | 396,550.80 | 779,778.49 | 32.087858 | -103.563415 |
| 10,075.0 | 69.33 | 359.47 | 9,911.2 | -255.4 | -282.8 | 396,573.94 | 779,778.28 | 32.087922 | -103.563415 |
| 10,100.0 | 72.33 | 359.47 | 9,919.4 | -231.7 | -283.0 | 396,597.55 | 779,778.06 | 32.087987 | -103.563415 |
| 10,125.0 | 75.33 | 359.47 | 9,926.4 | -207.7 | -283.3 | 396,621.56 | 779,777.84 | 32.088053 | -103.563415 |
| 10,150.0 | 78.33 | 359.47 | 9,932.1 | -183.4 | -283.5 | 396,645.90 | 779,777.62 | 32.088120 | -103.563415 |
| 10,175.0 | 81.33 | 359.47 | 9,936.5 | -158.8 | -283.7 | 396,670.50 | 779,777.39 | 32.088187 | -103.563415 |
| 10,200.0 | 84.33 | 359.47 | 9,939.6 | -134.0 | -283.9 | 396,695.30 | 779,777.16 | 32.088255 | -103.563416 |
| 10,225.0 | 87.33 | 359.47 | 9,941.4 | -109.1 | -284.2 | 396,720.23 | 779,776.93 | 32.088324 | -103.563416 |
| 10,247.2 | 90.00 | 359.47 | 9,942.0 | -86.8 | -284.4 | 396,742.47 | 779,776.73 | 32.088385 | -103.563416 |
| EOB @ 90° Inc / 359.47° Azm / 9942' TVD | | | | | | | | | |
| 10,300.0 | 90.00 | 359.47 | 9,942.0 | -34.1 | -284.9 | 396,795.22 | 779,776.25 | 32.088530 | -103.563416 |
| 10,400.0 | 90.00 | 359.47 | 9,942.0 | 65.9 | -285.8 | 396,895.22 | 779,775.33 | 32.088805 | -103.563417 |
| 10,500.0 | 90.00 | 359.47 | 9,942.0 | 165.9 | -286.7 | 396,995.21 | 779,774.41 | 32.089080 | -103.563418 |
| 10,600.0 | 90.00 | 359.47 | 9,942.0 | 265.9 | -287.6 | 397,095.21 | 779,773.49 | 32.089355 | -103.563418 |
| 10,700.0 | 90.00 | 359.47 | 9,942.0 | 365.9 | -288.5 | 397,195.21 | 779,772.58 | 32.089630 | -103.563419 |
| 10,800.0 | 90.00 | 359.47 | 9,942.0 | 465.9 | -289.4 | 397,295.20 | 779,771.66 | 32.089904 | -103.563419 |
| 10,900.0 | 90.00 | 359.47 | 9,942.0 | 565.9 | -290.4 | 397,395.20 | 779,770.74 | 32.090179 | -103.563420 |
| 11,000.0 | 90.00 | 359.47 | 9,942.0 | 665.9 | -291.3 | 397,495.19 | 779,769.82 | 32.090454 | -103.563421 |
| 11,100.0 | 90.00 | 359.47 | 9,942.0 | 765.9 | -292.2 | 397,595.19 | 779,768.91 | 32.090729 | -103.563421 |
| 11,200.0 | 90.00 | 359.47 | 9,942.0 | 865.9 | -293.1 | 397,695.18 | 779,767.99 | 32.091004 | -103.563422 |
| 11,300.0 | 90.00 | 359.47 | 9,942.0 | 965.9 | -294.0 | 397,795.18 | 779,767.07 | 32.091279 | -103.563423 |
| 11,400.0 | 90.00 | 359.47 | 9,942.0 | 1,065.9 | -294.9 | 397,895.18 | 779,766.15 | 32.091554 | -103.563423 |
| 11,500.0 | 90.00 | 359.47 | 9,942.0 | 1,165.9 | -295.9 | 397,995.17 | 779,765.24 | 32.091829 | -103.563424 |
| 11,600.0 | 90.00 | 359.47 | 9,942.0 | 1,265.9 | -296.8 | 398,095.17 | 779,764.32 | 32.092104 | -103.563425 |
| 11,700.0 | 90.00 | 359.47 | 9,942.0 | 1,365.9 | -297.7 | 398,195.16 | 779,763.40 | 32.092378 | -103.563425 |
| 11,800.0 | 90.00 | 359.47 | 9,942.0 | 1,465.9 | -298.6 | 398,295.16 | 779,762.48 | 32.092653 | -103.563426 |
| 11,900.0 | 90.00 | 359.47 | 9,942.0 | 1,565.9 | -299.5 | 398,395.15 | 779,761.57 | 32.092928 | -103.563427 |
| 12,000.0 | 90.00 | 359.47 | 9,942.0 | 1,665.9 | -300.4 | 398,495.15 | 779,760.65 | 32.093203 | -103.563427 |
| 12,100.0 | 90.00 | 359.47 | 9,942.0 | 1,765.8 | -301.4 | 398,595.15 | 779,759.73 | 32.093478 | -103.563428 |
| 12,200.0 | 90.00 | 359.47 | 9,942.0 | 1,865.8 | -302.3 | 398,695.14 | 779,758.81 | 32.093753 | -103.563429 |
| 12,300.0 | 90.00 | 359.47 | 9,942.0 | 1,965.8 | -303.2 | 398,795.14 | 779,757.90 | 32.094028 | -103.563429 |
| 12,400.0 | 90.00 | 359.47 | 9,942.0 | 2,065.8 | -304.1 | 398,895.13 | 779,756.98 | 32.094303 | -103.563430 |
| 12,500.0 | 90.00 | 359.47 | 9,942.0 | 2,165.8 | -305.0 | 398,995.13 | 779,756.06 | 32.094577 | -103.563431 |
| 12,600.0 | 90.00 | 359.47 | 9,942.0 | 2,265.8 | -306.0 | 399,095.13 | 779,755.14 | 32.094852 | -103.563431 |
| 12,700.0 | 90.00 | 359.47 | 9,942.0 | 2,365.8 | -306.9 | 399,195.12 | 779,754.23 | 32.095127 | -103.563432 |
| 12,800.0 | 90.00 | 359.47 | 9,942.0 | 2,465.8 | -307.8 | 399,295.12 | 779,753.31 | 32.095402 | -103.563433 |
| 12,900.0 | 90.00 | 359.47 | 9,942.0 | 2,565.8 | -308.7 | 399,395.11 | 779,752.39 | 32.095677 | -103.563433 |
| 13,000.0 | 90.00 | 359.47 | 9,942.0 | 2,665.8 | -309.6 | 399,495.11 | 779,751.47 | 32.095952 | -103.563434 |
| 13,100.0 | 90.00 | 359.47 | 9,942.0 | 2,765.8 | -310.5 | 399,595.10 | 779,750.56 | 32.096227 | -103.563435 |
| 13,200.0 | 90.00 | 359.47 | 9,942.0 | 2,865.8 | -311.5 | 399,695.10 | 779,749.64 | 32.096502 | -103.563435 |
| 13,300.0 | 90.00 | 359.47 | 9,942.0 | 2,965.8 | -312.4 | 399,795.10 | 779,748.72 | 32.096776 | -103.563436 |
| 13,400.0 | 90.00 | 359.47 | 9,942.0 | 3,065.8 | -313.3 | 399,895.09 | 779,747.80 | 32.097051 | -103.563437 |
| 13,500.0 | 90.00 | 359.47 | 9,942.0 | 3,165.8 | -314.2 | 399,995.09 | 779,746.89 | 32.097326 | -103.563437 |
| 13,600.0 | 90.00 | 359.47 | 9,942.0 | 3,265.8 | -315.1 | 400,095.08 | 779,745.97 | 32.097601 | -103.563438 |
| 13,700.0 | 90.00 | 359.47 | 9,942.0 | 3,365.8 | -316.0 | 400,195.08 | 779,745.05 | 32.097876 | -103.563439 |
| 13,800.0 | 90.00 | 359.47 | 9,942.0 | 3,465.8 | -317.0 | 400,295.07 | 779,744.13 | 32.098151 | -103.563439 |
| 13,900.0 | 90.00 | 359.47 | 9,942.0 | 3,565.8 | -317.9 | 400,395.07 | 779,743.22 | 32.098426 | -103.563440 |
| 14,000.0 | 90.00 | 359.47 | 9,942.0 | 3,665.8 | -318.8 | 400,495.07 | 779,742.30 | 32.098701 | -103.563441 |
| 14,100.0 | 90.00 | 359.47 | 9,942.0 | 3,765.8 | -319.7 | 400,595.06 | 779,741.38 | 32.098975 | -103.563441 |
| 14,200.0 | 90.00 | 359.47 | 9,942.0 | 3,865.8 | -320.6 | 400,695.06 | 779,740.46 | 32.099250 | -103.563442 |
| 14,300.0 | 90.00 | 359.47 | 9,942.0 | 3,965.8 | -321.6 | 400,795.05 | 779,739.55 | 32.099525 | -103.563442 |
| 14,400.0 | 90.00 | 359.47 | 9,942.0 | 4,065.8 | -322.5 | 400,895.05 | 779,738.63 | 32.099800 | -103.563443 |



QES

Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| Planned Survey | | | | | | | | | |
|----------------------------|-----------------|-------------|-----------------------|--------------|--------------|---------------------|--------------------|-----------|-------------|
| Measured Depth (usft) | Inclination (°) | Azimuth (°) | Vertical Depth (usft) | +N/-S (usft) | +E/-W (usft) | Map Northing (usft) | Map Easting (usft) | Latitude | Longitude |
| 14,500.0 | 90.00 | 359.47 | 9,942.0 | 4,165.7 | -323.4 | 400,995.05 | 779,737.71 | 32.100075 | -103.563444 |
| 14,600.0 | 90.00 | 359.47 | 9,942.0 | 4,265.7 | -324.3 | 401,095.04 | 779,736.79 | 32.100350 | -103.563444 |
| 14,700.0 | 90.00 | 359.47 | 9,942.0 | 4,365.7 | -325.2 | 401,195.04 | 779,735.88 | 32.100625 | -103.563445 |
| 14,800.0 | 90.00 | 359.47 | 9,942.0 | 4,465.7 | -326.1 | 401,295.03 | 779,734.96 | 32.100900 | -103.563446 |
| 14,900.0 | 90.00 | 359.47 | 9,942.0 | 4,565.7 | -327.1 | 401,395.03 | 779,734.04 | 32.101174 | -103.563446 |
| 15,000.0 | 90.00 | 359.47 | 9,942.0 | 4,665.7 | -328.0 | 401,495.02 | 779,733.12 | 32.101449 | -103.563447 |
| 15,100.0 | 90.00 | 359.47 | 9,942.0 | 4,765.7 | -328.9 | 401,595.02 | 779,732.21 | 32.101724 | -103.563448 |
| 15,200.0 | 90.00 | 359.47 | 9,942.0 | 4,865.7 | -329.8 | 401,695.02 | 779,731.29 | 32.101999 | -103.563448 |
| 15,300.0 | 90.00 | 359.47 | 9,942.0 | 4,965.7 | -330.7 | 401,795.01 | 779,730.37 | 32.102274 | -103.563449 |
| 15,400.0 | 90.00 | 359.47 | 9,942.0 | 5,065.7 | -331.6 | 401,895.01 | 779,729.45 | 32.102549 | -103.563450 |
| 15,500.0 | 90.00 | 359.47 | 9,942.0 | 5,165.7 | -332.6 | 401,995.00 | 779,728.54 | 32.102824 | -103.563450 |
| 15,600.0 | 90.00 | 359.47 | 9,942.0 | 5,265.7 | -333.5 | 402,095.00 | 779,727.62 | 32.103099 | -103.563451 |
| 15,700.0 | 90.00 | 359.47 | 9,942.0 | 5,365.7 | -334.4 | 402,195.00 | 779,726.70 | 32.103374 | -103.563452 |
| 15,800.0 | 90.00 | 359.47 | 9,942.0 | 5,465.7 | -335.3 | 402,294.99 | 779,725.78 | 32.103648 | -103.563452 |
| 15,900.0 | 90.00 | 359.47 | 9,942.0 | 5,565.7 | -336.2 | 402,394.99 | 779,724.87 | 32.103923 | -103.563453 |
| 16,000.0 | 90.00 | 359.47 | 9,942.0 | 5,665.7 | -337.1 | 402,494.98 | 779,723.95 | 32.104198 | -103.563454 |
| 16,100.0 | 90.00 | 359.47 | 9,942.0 | 5,765.7 | -338.1 | 402,594.98 | 779,723.03 | 32.104473 | -103.563454 |
| 16,200.0 | 90.00 | 359.47 | 9,942.0 | 5,865.7 | -339.0 | 402,694.97 | 779,722.11 | 32.104748 | -103.563455 |
| 16,300.0 | 90.00 | 359.47 | 9,942.0 | 5,965.7 | -339.9 | 402,794.97 | 779,721.20 | 32.105023 | -103.563456 |
| 16,400.0 | 90.00 | 359.47 | 9,942.0 | 6,065.7 | -340.8 | 402,894.97 | 779,720.28 | 32.105298 | -103.563456 |
| 16,500.0 | 90.00 | 359.47 | 9,942.0 | 6,165.7 | -341.7 | 402,994.96 | 779,719.36 | 32.105573 | -103.563457 |
| 16,600.0 | 90.00 | 359.47 | 9,942.0 | 6,265.7 | -342.7 | 403,094.96 | 779,718.44 | 32.105847 | -103.563458 |
| 16,700.0 | 90.00 | 359.47 | 9,942.0 | 6,365.7 | -343.6 | 403,194.95 | 779,717.53 | 32.106122 | -103.563458 |
| 16,800.0 | 90.00 | 359.47 | 9,942.0 | 6,465.6 | -344.5 | 403,294.95 | 779,716.61 | 32.106397 | -103.563459 |
| 16,900.0 | 90.00 | 359.47 | 9,942.0 | 6,565.6 | -345.4 | 403,394.94 | 779,715.69 | 32.106672 | -103.563460 |
| 17,000.0 | 90.00 | 359.47 | 9,942.0 | 6,665.6 | -346.3 | 403,494.94 | 779,714.77 | 32.106947 | -103.563460 |
| 17,100.0 | 90.00 | 359.47 | 9,942.0 | 6,765.6 | -347.2 | 403,594.94 | 779,713.86 | 32.107222 | -103.563461 |
| 17,200.0 | 90.00 | 359.47 | 9,942.0 | 6,865.6 | -348.2 | 403,694.93 | 779,712.94 | 32.107497 | -103.563462 |
| 17,300.0 | 90.00 | 359.47 | 9,942.0 | 6,965.6 | -349.1 | 403,794.93 | 779,712.02 | 32.107772 | -103.563462 |
| 17,400.0 | 90.00 | 359.47 | 9,942.0 | 7,065.6 | -350.0 | 403,894.92 | 779,711.10 | 32.108046 | -103.563463 |
| 17,500.0 | 90.00 | 359.47 | 9,942.0 | 7,165.6 | -350.9 | 403,994.92 | 779,710.19 | 32.108321 | -103.563464 |
| 17,600.0 | 90.00 | 359.47 | 9,942.0 | 7,265.6 | -351.8 | 404,094.92 | 779,709.27 | 32.108596 | -103.563464 |
| 17,618.7 | 90.00 | 359.47 | 9,942.0 | 7,284.3 | -352.0 | 404,113.60 | 779,709.10 | 32.108648 | -103.563464 |
| TD @ 17619' MD / 9942' TVD | | | | | | | | | |

| Design Targets | | | | | | | | | |
|--|---------------|--------------|------------|--------------|--------------|-----------------|----------------|-----------|-------------|
| Target Name | Dip Angle (°) | Dip Dir. (°) | TVD (usft) | +N/-S (usft) | +E/-W (usft) | Northing (usft) | Easting (usft) | Latitude | Longitude |
| VP Rojo 62H - hit/miss target - Shape - Point | 0.00 | 0.00 | 7,542.0 | -564.3 | -280.0 | 396,265.03 | 779,781.11 | 32.087073 | -103.563413 |
| PBHL Rojo 7811 34-27 F - plan hits target center - Rectangle (sides W60.0 H0.0 D7,850.0) | 90.00 | 359.47 | 9,942.0 | 7,284.3 | -352.0 | 404,113.60 | 779,709.10 | 32.108648 | -103.563464 |



QES
Survey Report - Geographic



| | | | |
|------------------|------------------------------|-------------------------------------|-----------------------------------|
| Company: | BTA Oil Producers, LLC | Local Co-ordinate Reference: | Well Rojo 7811 34-27 Fed Com #62H |
| Project: | Lea County, NM (NAD 83) | TVD Reference: | WELL @ 3352.0usft (Patterson) |
| Site: | Sec 34, T25-S, R33-E | MD Reference: | WELL @ 3352.0usft (Patterson) |
| Well: | Rojo 7811 34-27 Fed Com #62H | North Reference: | Grid |
| Wellbore: | Wellbore #1 | Survey Calculation Method: | Minimum Curvature |
| Design: | Design #1 | Database: | EDM 5000.1 Single User Db |

| Plan Annotations | | | | |
|-----------------------------|-----------------------------|-------------------|-----------------|---|
| Measured Depth (usft) | Vertical Depth (usft) | Local Coordinates | | Comment |
| | | +N/-S (usft) | +E/-W (usft) | |
| 1300 | 1300 | 0 | 0 | Build 2°/100' |
| 1603 | 1602 | -14 | -7 | EOB @ 6.05° Inc / 206.39° Azm |
| 7272 | 7240 | -550 | -273 | Drop 2°/100' |
| 7575 | 7542 | -564 | -280 | EOD @ Vert |
| 9497 | 9464 | -564 | -280 | Build 12°/100' |
| 10,247 | 9942 | -87 | -284 | EOB @ 90° Inc / 359.47° Azm / 9942' TVD |
| 17,619 | 9942 | 7284 | -352 | TD @ 17619' MD / 9942' TVD |

Company Name: BTA Oil Producers, LLC
Rojo 7811 34-27 Fed Com #62H
Lea County, NM (NAD 83)
Rig: Patterson
Created By: Shane Robbins
Date: 10/21/2020

Rojo 7811 34-27 Fed Com #62H
Lea County, NM (NAD 83)
Q200*** & WT-200***
Design #1

| | |
|--|---------------------------|
| PROJECT DETAILS: Lea County, NM (NAD 83) | |
| Geodetic System: | US State Plane 1983 |
| Datum: | North American Datum 1983 |
| Ellipsoid: | GRS 1980 |
| Zone: | New Mexico Eastern Zone |
| System Datum: | Mean Sea Level |



T

G

M

Azimuths to Grid North

Correction: 6.07°

Magnetic Field


Strength: 47603.4nT

Dip Angle: 59.67°



Date: 10/23/2020

Model: HDGM2020

| WELL DETAILS: Rojo 7811 34-27 Fed Com #62H | | | | | |
|--|-------|-----------|-----------|-----------------|-------------------|
| | | | 3327.0 | | |
| +N/-S | +E/-W | Northing | Easting | Latitude | Longitude |
| 0.0 | 0.0 | 396529.30 | 750061.10 | 32° 5' 19.025 N | 103° 33' 44.984 W |

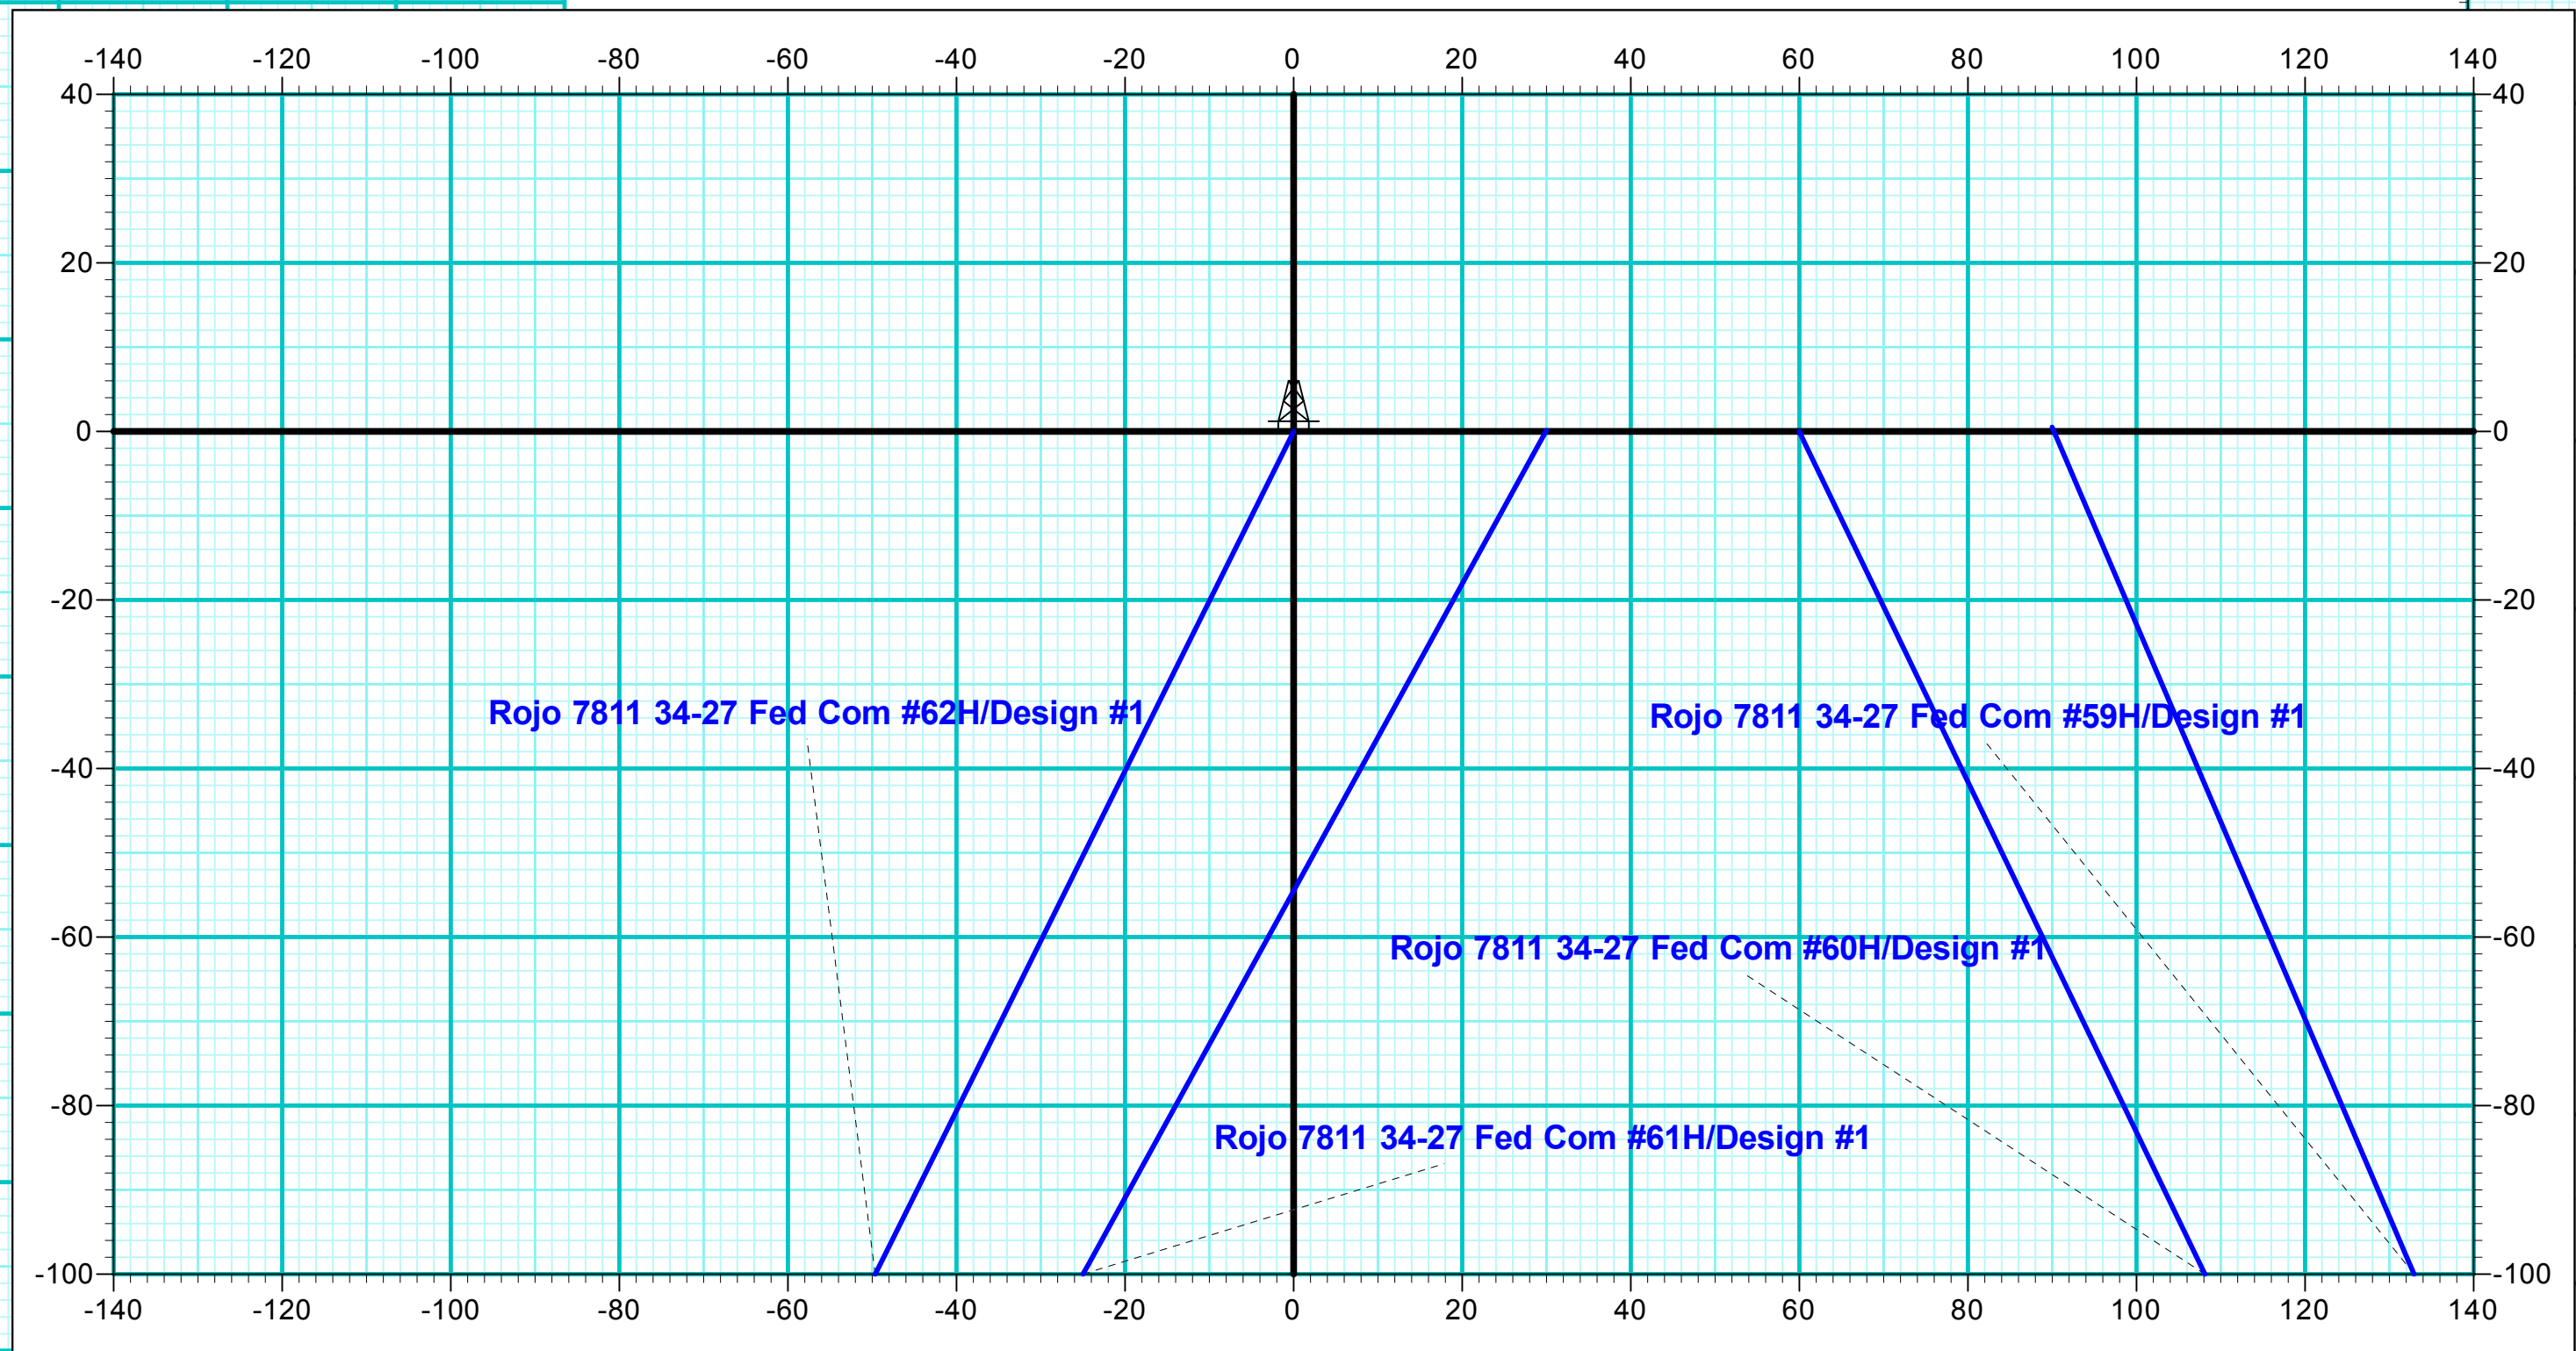

| ANNOTATIONS | | | | | | | | | |
|-------------|-------|--------|--------|--------|--------|--------|-----------|---|--|
| MD | Inc | Azi | TVD | +N/-S | +E/-W | VSect | Departure | Annotation | |
| 1300.0 | 0.00 | 0.00 | 1300.0 | 0.0 | 0.0 | 0.0 | 0.0 | Build 2°/100' | |
| 1602.7 | 6.05 | 206.39 | 1602.2 | -14.3 | -7.1 | -14.0 | 16.0 | EOB @ 6.05° Inc / 206.39° Azm | |
| 7272.0 | 6.05 | 206.39 | 7239.8 | -550.0 | -272.9 | -536.1 | 613.9 | Drop 2°/100' | |
| 7574.7 | 0.00 | 0.00 | 7542.0 | -564.3 | -280.0 | -550.1 | 629.9 | EOD @ Vert | |
| 9497.2 | 0.00 | 0.00 | 9464.5 | -564.3 | -280.0 | -550.1 | 629.9 | Build 12°/100' | |
| 10247.2 | 90.00 | 359.47 | 9942.0 | -86.8 | -284.4 | -73.0 | 1107.4 | EOB @ 90° Inc / 359.47° Azm / 9942' TVD | |
| 17618.7 | 90.00 | 359.47 | 9942.0 | 7284.3 | -352.0 | 7292.8 | 8478.8 | TD @ 17619' MD / 9942' TVD | |

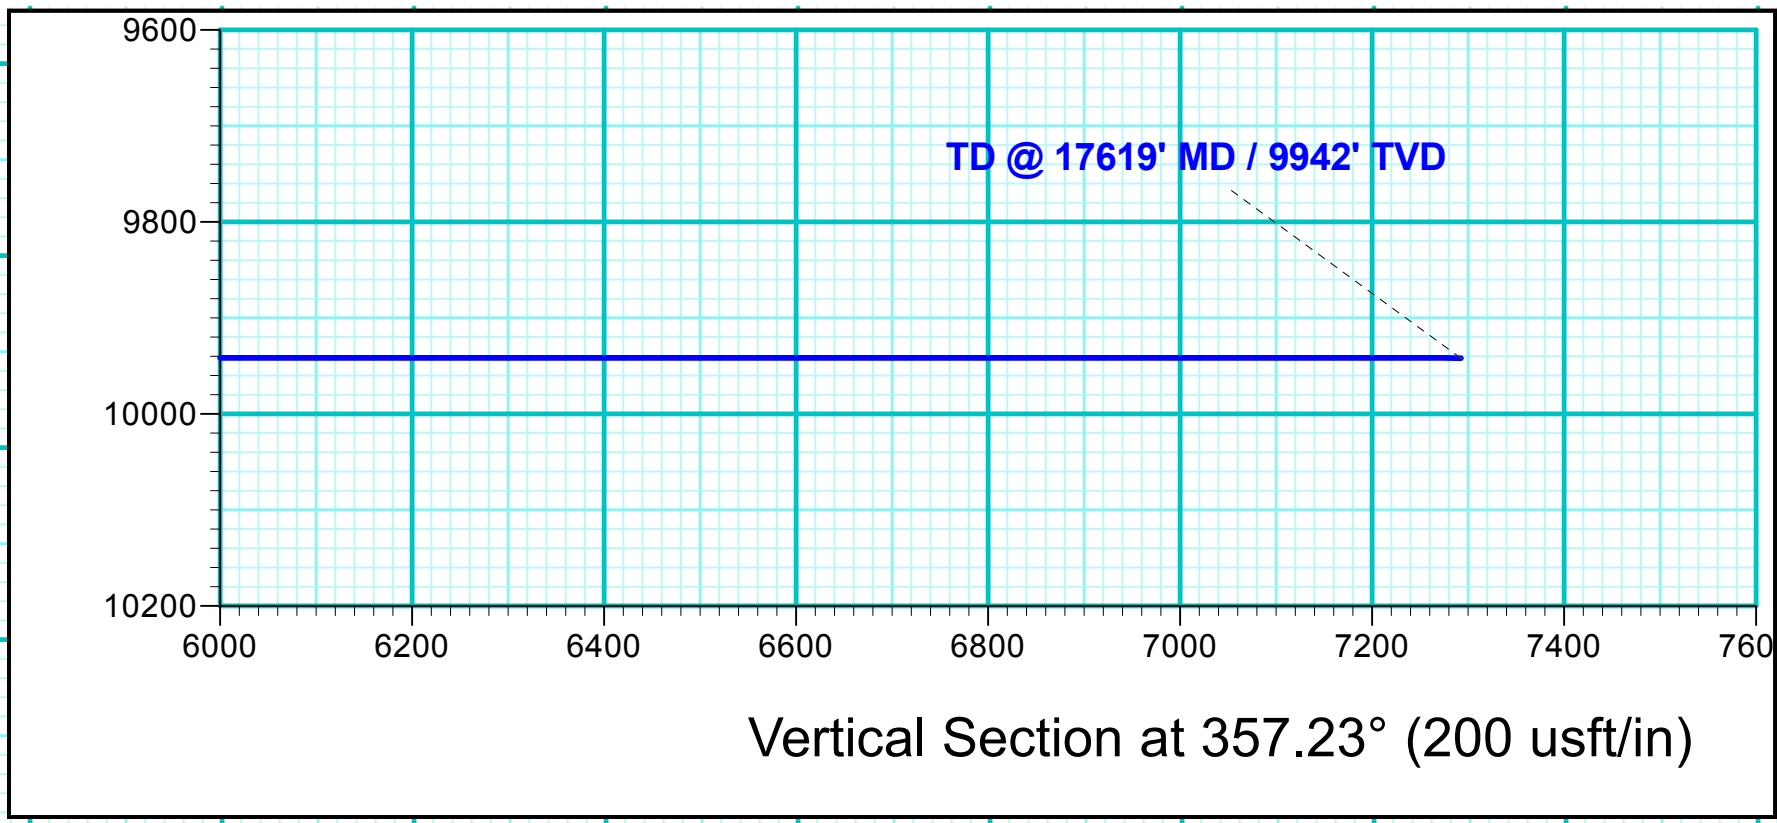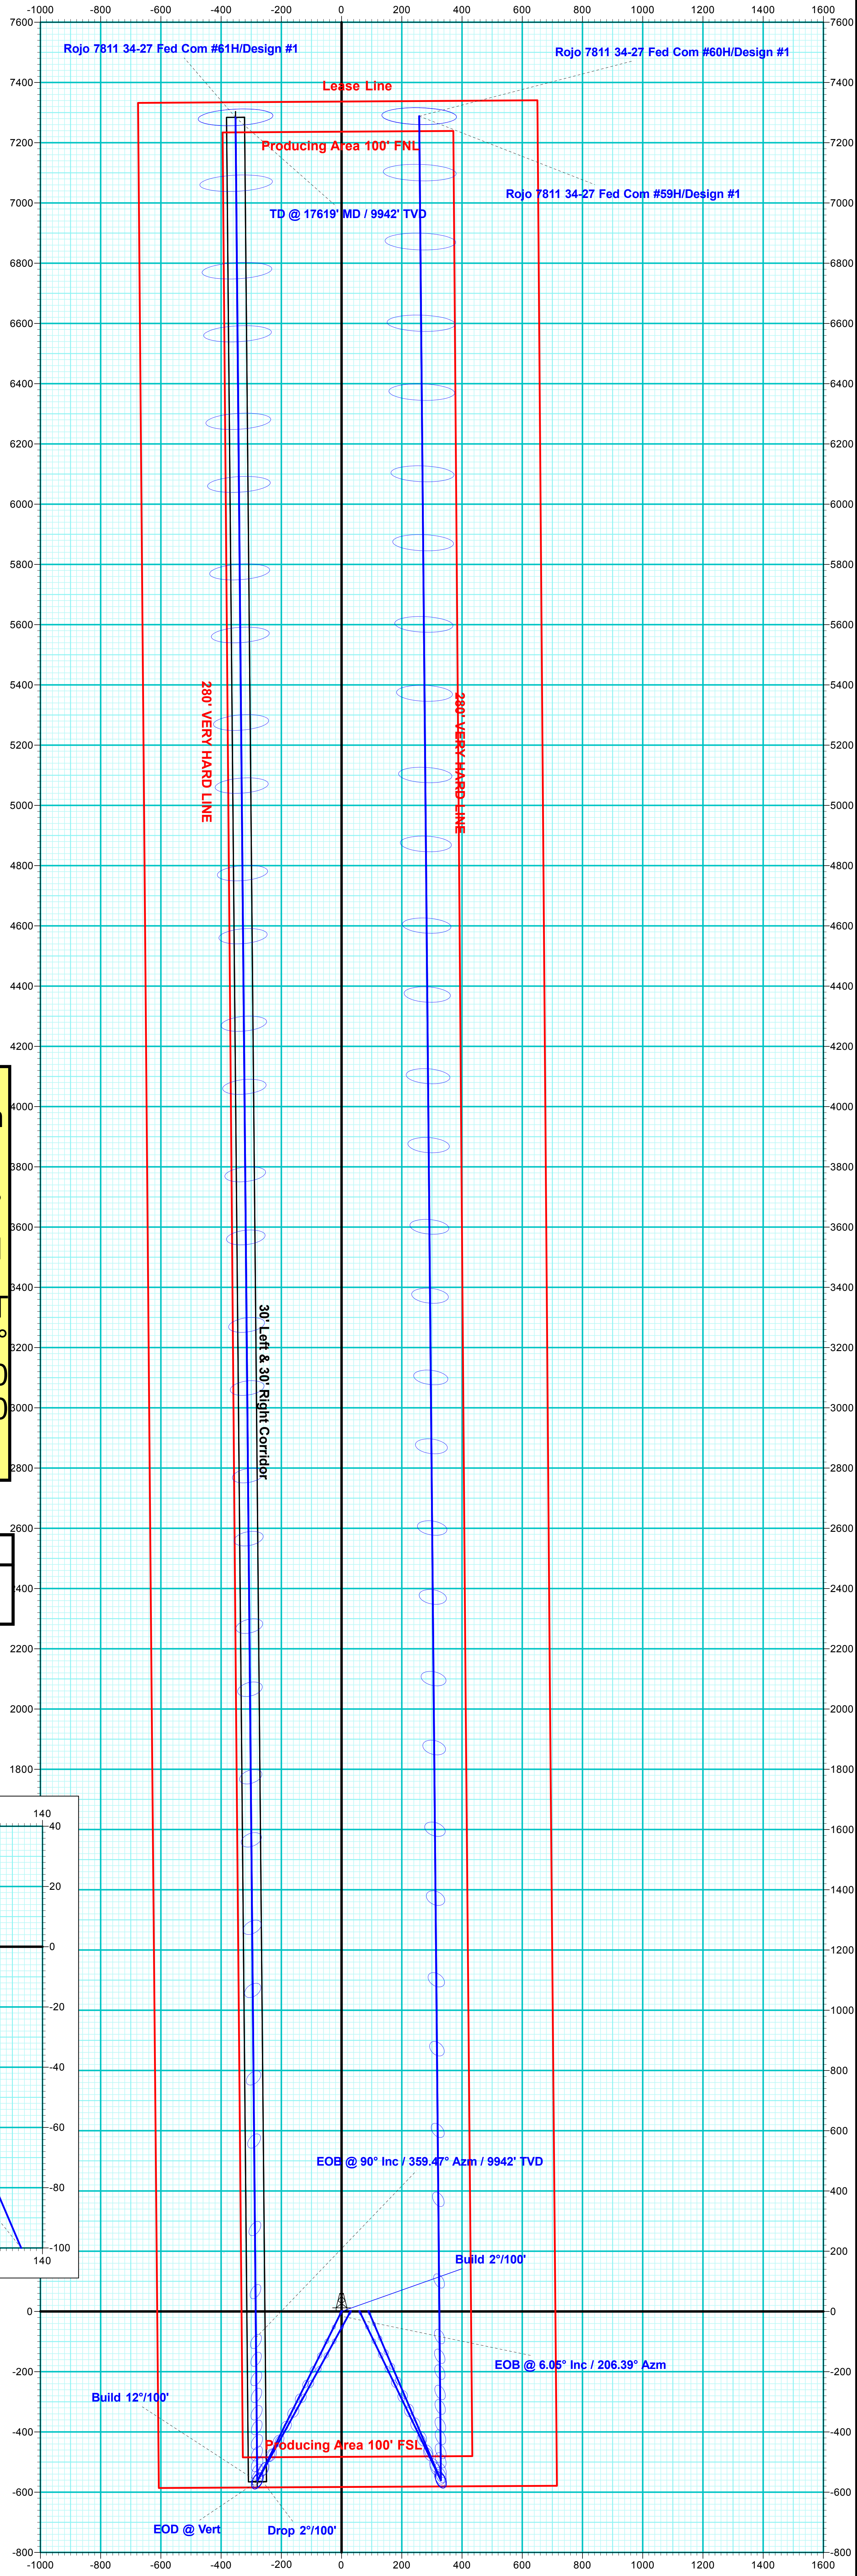

BOP Break Testing Request

BTA requests permission to allow BOP Break Testing under the following conditions:

- After a full BOP test is conducted on the first well on the pad.
- When skidding to drill a hole section that does not penetrate into the Wolfcamp.
- Full BOP test will be required prior to drilling any production hole.



Multi-Bowl System

13-3/8" X 9-5/8" X 5-1/2"

Tubing Head-TCM-PP

13-5/8"- M X 7-1/16"- M
w/(2) 1-13/16"- M Gate Valves

7-1/16- M

Casing Spool- MBS

13-5/8"-5M X 13-5/8"- M
w/(2) 1-13/16"- M SSO

13-5/8"- M

7" Dbl P Seal

13-5/8" X 7" C-22
Casing Hanger

Casing Head- MBS

13-5/8"-5M X 13-3/8" SOW
w/36" Base Plate

13-5/8"-5M

13-5/8" X 9-5/8" MBS
Packoff Assembly

13-5/8" X 9-5/8" Mandrel
Casing Hanger

13-3/8" SOW



SYENERGY
WELLHEAD & FRAC



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

SUPO Data Report

08/02/2021

APD ID: 10400065178**Submission Date:** 11/13/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H[Show Final Text](#)**Well Type:** OIL WELL**Well Work Type:** Drill

Section 1 - Existing Roads

Will existing roads be used? YES**Existing Road Map:**

20110311_Rojo_7811_34_27_Fed_Com_62H_Vicinity_Topo____Access_Rd_Map_20201113091531.pdf

Existing Road Purpose: ACCESS**Row(s) Exist?** NO**ROW ID(s)****ID:****Do the existing roads need to be improved?** NO**Existing Road Improvement Description:****Existing Road Improvement Attachment:**

Section 2 - New or Reconstructed Access Roads

Will new roads be needed? YES**New Road Map:**

20110311_Rojo_7811_34_27_Fed_Com_62H_Vicinity_Topo____Access_Rd_Map_20201113091553.pdf

New road type: RESOURCE**Length:** 319

Feet

Width (ft.): 30**Max slope (%):** 2**Max grade (%):** 2**Army Corp of Engineers (ACOE) permit required?** N**ACOE Permit Number(s):****New road travel width:** 15**New road access erosion control:** Road construction requirements and regular maintenance would alleviate potential impacts to the access road from water erosion damage.**New road access plan or profile prepared?** N**New road access plan attachment:****Access road engineering design?** N**Access road engineering design attachment:**

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Turnout?** N**Access surfacing type:** OTHER**Access topsoil source:** BOTH**Access surfacing type description:** Native Caliche**Access onsite topsoil source depth:** 6**Offsite topsoil source description:** Material will be obtained from the closest existing caliche pit as designated by the BLM.**Onsite topsoil removal process:** The top 6 inches of topsoil is pushed off and stockpiled along the side of the location. An approximate 160 X 160 area is used within the proposed well site to remove caliche. Subsoil is removed and stockpiled within the pad site to build the location and road. Then subsoil is pushed back in the hole and caliche is spread accordingly across proposed access road**Access other construction information:****Access miscellaneous information:****Number of access turnouts:****Access turnout map:**

Drainage Control

New road drainage crossing: OTHER**Drainage Control comments:** Proposed access road will be crowned and ditched and constructed of 6 inch rolled and compacted caliche. Water will be diverted where necessary to avoid ponding, maintain good drainage, and to be consistent with local drainage patterns.**Road Drainage Control Structures (DCS) description:** Any ditches will be at 3:1 slope and 3 feet wide.**Road Drainage Control Structures (DCS) attachment:**

Access Additional Attachments

Section 3 - Location of Existing Wells

Existing Wells Map? YES**Attach Well map:**

20110311_Rojo_7811_34_27_Fed_Com_62H_1_Mile_Radius___C102_20201113091609.pdf

Section 4 - Location of Existing and/or Proposed Production Facilities

Submit or defer a Proposed Production Facilities plan? DEFER**Estimated Production Facilities description:** Defer, CTB will be sundried at a later date.

Section 5 - Location and Types of Water Supply

Water Source Table

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Water source type:** OTHER**Describe type:** PIT

Water source use type: SURFACE CASING
STIMULATION
DUST CONTROL
INTERMEDIATE/PRODUCTION
CASING

Source latitude:**Source longitude:****Source datum:****Water source permit type:** PRIVATE CONTRACT**Water source transport method:** TRUCKING**Source land ownership:** FEDERAL**Source transportation land ownership:** PRIVATE**Water source volume (barrels):** 100000**Source volume (acre-feet):** 12.88930963**Source volume (gal):** 4200000**Water source and transportation map:**

Rojo_7811_Water_Transportation_Map__SESE_Quarter_Quarter_of_Section_S22_T25S_R33E__20201103153339.pdf

Water source comments: Water Pit is in SESE Quarter Quarter of Section 22 ; T25S ; R33E**New water well?** N**New Water Well Info****Well latitude:****Well Longitude:****Well datum:****Well target aquifer:****Est. depth to top of aquifer(ft):****Est thickness of aquifer:****Aquifer comments:****Aquifer documentation:****Well depth (ft):****Well casing type:****Well casing outside diameter (in.):****Well casing inside diameter (in.):****New water well casing?****Used casing source:****Drilling method:****Drill material:****Grout material:****Grout depth:**

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Casing length (ft.):****Casing top depth (ft.):****Well Production type:****Completion Method:****Water well additional information:****State appropriation permit:****Additional information attachment:**

Section 6 - Construction Materials

Using any construction materials: YES

Construction Materials description: Caliche used for construction of the drilling pad and access road will be obtained from the closest existing caliche pit as approved by the BLM or from prevailing deposits found under the location. If there is not sufficient material available, caliche will be purchased from the nearest caliche pit located in the SWNW Quarter Quarter of Section 23 ; T25S ; R33E Lea County, NM.

Construction Materials source location attachment:

Section 7 - Methods for Handling Waste

Waste type: GARBAGE**Waste content description:** Trash**Amount of waste:** 500 pounds**Waste disposal frequency :** One Time Only

Safe containment description: Trash produced during drilling and completion operations will be collected in a trash container and disposed of properly.

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:**Disposal location description:** Trucked to a state approved disposal facility.**Waste type:** SEWAGE**Waste content description:** Human waste and grey water.**Amount of waste:** 1000 gallons**Waste disposal frequency :** One Time Only

Safe containment description: Waste material will be stored safely and disposed of properly.

Safe containmant attachment:

Waste disposal type: HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL

Disposal type description:**Disposal location description:** Trucked to a state approved disposal facility.

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Waste type:** DRILLING**Waste content description:** Drilling fluids and cuttings.**Amount of waste:** 4164 barrels**Waste disposal frequency :** One Time Only**Safe containment description:** All drilling fluids will be stored safely and disposed of properly.**Safe containmant attachment:****Waste disposal type:** HAUL TO COMMERCIAL FACILITY **Disposal location ownership:** COMMERCIAL**Disposal type description:****Disposal location description:** Trucked to a state approved disposal facility.

Reserve Pit

Reserve Pit being used? NO**Temporary disposal of produced water into reserve pit?** NO**Reserve pit length (ft.)** **Reserve pit width (ft.)****Reserve pit depth (ft.)** **Reserve pit volume (cu. yd.)****Is at least 50% of the reserve pit in cut?****Reserve pit liner****Reserve pit liner specifications and installation description**

Cuttings Area

Cuttings Area being used? NO**Are you storing cuttings on location?** N**Description of cuttings location****Cuttings area length (ft.)** **Cuttings area width (ft.)****Cuttings area depth (ft.)** **Cuttings area volume (cu. yd.)****Is at least 50% of the cuttings area in cut?****WCuttings area liner****Cuttings area liner specifications and installation description**

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Section 8 - Ancillary Facilities

Are you requesting any Ancillary Facilities?: N

Ancillary Facilities attachment:

Comments:

Section 9 - Well Site Layout

Well Site Layout Diagram:

Rig_Layout_20190930140859.pdf

20110308_Access_Rd_for_Rojo_7811_34_27_FC_59H_62H_Pad_20201111150532.pdf

20110311_Rojo_7811_34_27_Fed_Com_62H_Well_Site_Plan__600s__20201113091636.pdf

Comments:

Section 10 - Plans for Surface Reclamation

Type of disturbance: New Surface Disturbance

Multiple Well Pad Name: ROJO 7811 34-27 FEDERAL COM

Multiple Well Pad Number: 59H, 60H, 61H and 62H

Recontouring attachment:

Drainage/Erosion control construction: During construction proper erosion control methods will be used to control erosion, runoff, and siltation of the surrounding area.

Drainage/Erosion control reclamation: Proper erosion control methods will be used on the area to control erosion, runoff, and siltation of the surrounding area.

| | | |
|--|---|---|
| Well pad proposed disturbance (acres): 4.49 | Well pad interim reclamation (acres): 0.56 | Well pad long term disturbance (acres): 3.93 |
| Road proposed disturbance (acres): 0 | Road interim reclamation (acres): 0 | Road long term disturbance (acres): 0 |
| Powerline proposed disturbance (acres): 0 | Powerline interim reclamation (acres): 0 | Powerline long term disturbance (acres): 0 |
| Pipeline proposed disturbance (acres): 0 | Pipeline interim reclamation (acres): 0 | Pipeline long term disturbance (acres): 0 |
| Other proposed disturbance (acres): 0 | Other interim reclamation (acres): 0 | Other long term disturbance (acres): 0 |
| Total proposed disturbance: 4.49 | Total interim reclamation: 0.56 | Total long term disturbance: 3.93 |

Disturbance Comments:

Reconstruction method: The areas planned for interim reclamation will then be recontoured to the original contour if feasible, or if not feasible, to an interim contour that blends with the surrounding topography as much as possible. Where applicable, the fill material of the well pad will be backfilled into the cut to bring the area back to the original contour. The interim cut and fill slopes prior to re-seeding will not be steeper than a 3:1 ratio, unless the adjacent native topography is steeper. Note: Constructed slopes may be much steeper during drilling, but will be recontoured to the above ratios during interim reclamation.

Topsoil redistribution: Topsoil will be evenly respread and aggressively revegetated over the entire disturbed area not needed for all-weather operations.

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H

Soil treatment: To seed the area, the proper BLM seed mixture, free of noxious weeds, will be used. Final seedbed preparation will consist of contour cultivating to a depth of 4 to 6 inches within 24 hours prior to seeding, dozer tracking, or other imprinting in order to break the soil crust and create seed germination micro-sites.

Existing Vegetation at the well pad: The historic climax plant community is a grassland dominated by black grama, dropseeds, and blue stems with sand sage and shinnery oak distributed evenly throughout. Current landscape displays mesquite, shinnery oak, yucca, desert sage, fourwing saltbush, snakeweed, and bunch grasses.

Existing Vegetation at the well pad attachment:

Existing Vegetation Community at the road: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the road attachment:

Existing Vegetation Community at the pipeline: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at the pipeline attachment:

Existing Vegetation Community at other disturbances: Refer to "Existing Vegetation at the well pad"

Existing Vegetation Community at other disturbances attachment:

Non native seed used? N

Non native seed description:

Seedling transplant description:

Will seedlings be transplanted for this project? N

Seedling transplant description attachment:

Will seed be harvested for use in site reclamation?

Seed harvest description:

Seed harvest description attachment:

Seed Management

Seed Table

Seed Summary

Total pounds/Acre:

| Seed Type | Pounds/Acre |
|-----------|-------------|
|-----------|-------------|

Seed reclamation attachment:

Operator Contact/Responsible Official Contact Info

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**First Name:** Chad**Last Name:** Smith**Phone:** (432)682-3753**Email:** CSMITH@BTAOIL.COM**Seedbed prep:****Seed BMP:****Seed method:****Existing invasive species?** N**Existing invasive species treatment description:****Existing invasive species treatment attachment:****Weed treatment plan description:** No invasive species present. Standard regular maintenance to maintain a clear location and road.**Weed treatment plan attachment:****Monitoring plan description:** Identify areas supporting weeds prior to construction; prevent the introduction and spread of weeds from construction equipment during construction; and contain weed seeds and propagules by preventing segregated topsoil from being spread to adjacent areas. No invasive species present. Standard regular maintenance to maintain a clear location and road.**Monitoring plan attachment:****Success standards:** To maintain all disturbed areas as per Gold Book standards.**Pit closure description:** N/A**Pit closure attachment:**

Section 11 - Surface Ownership

Disturbance type: WELL PAD**Describe:****Surface Owner:** BUREAU OF LAND MANAGEMENT**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:**

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**USFS Forest/Grassland:****USFS Ranger District:****Disturbance type:** NEW ACCESS ROAD**Describe:****Surface Owner:** BUREAU OF LAND MANAGEMENT**Other surface owner description:****BIA Local Office:****BOR Local Office:****COE Local Office:****DOD Local Office:****NPS Local Office:****State Local Office:****Military Local Office:****USFWS Local Office:****Other Local Office:****USFS Region:****USFS Forest/Grassland:****USFS Ranger District:**

Section 12 - Other Information

Right of Way needed? N**Use APD as ROW?****ROW Type(s):**

ROW Applications

SUPO Additional Information:**Use a previously conducted onsite?** Y

Operator Name: BTA OIL PRODUCERS LLC


Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Previous Onsite information: Onsite conducted by McKenna Ryder BLM on 10/8/2020

Other SUPO Attachment

VICINITY, TOPOGRAPHIC AND ACCESS ROAD MAP

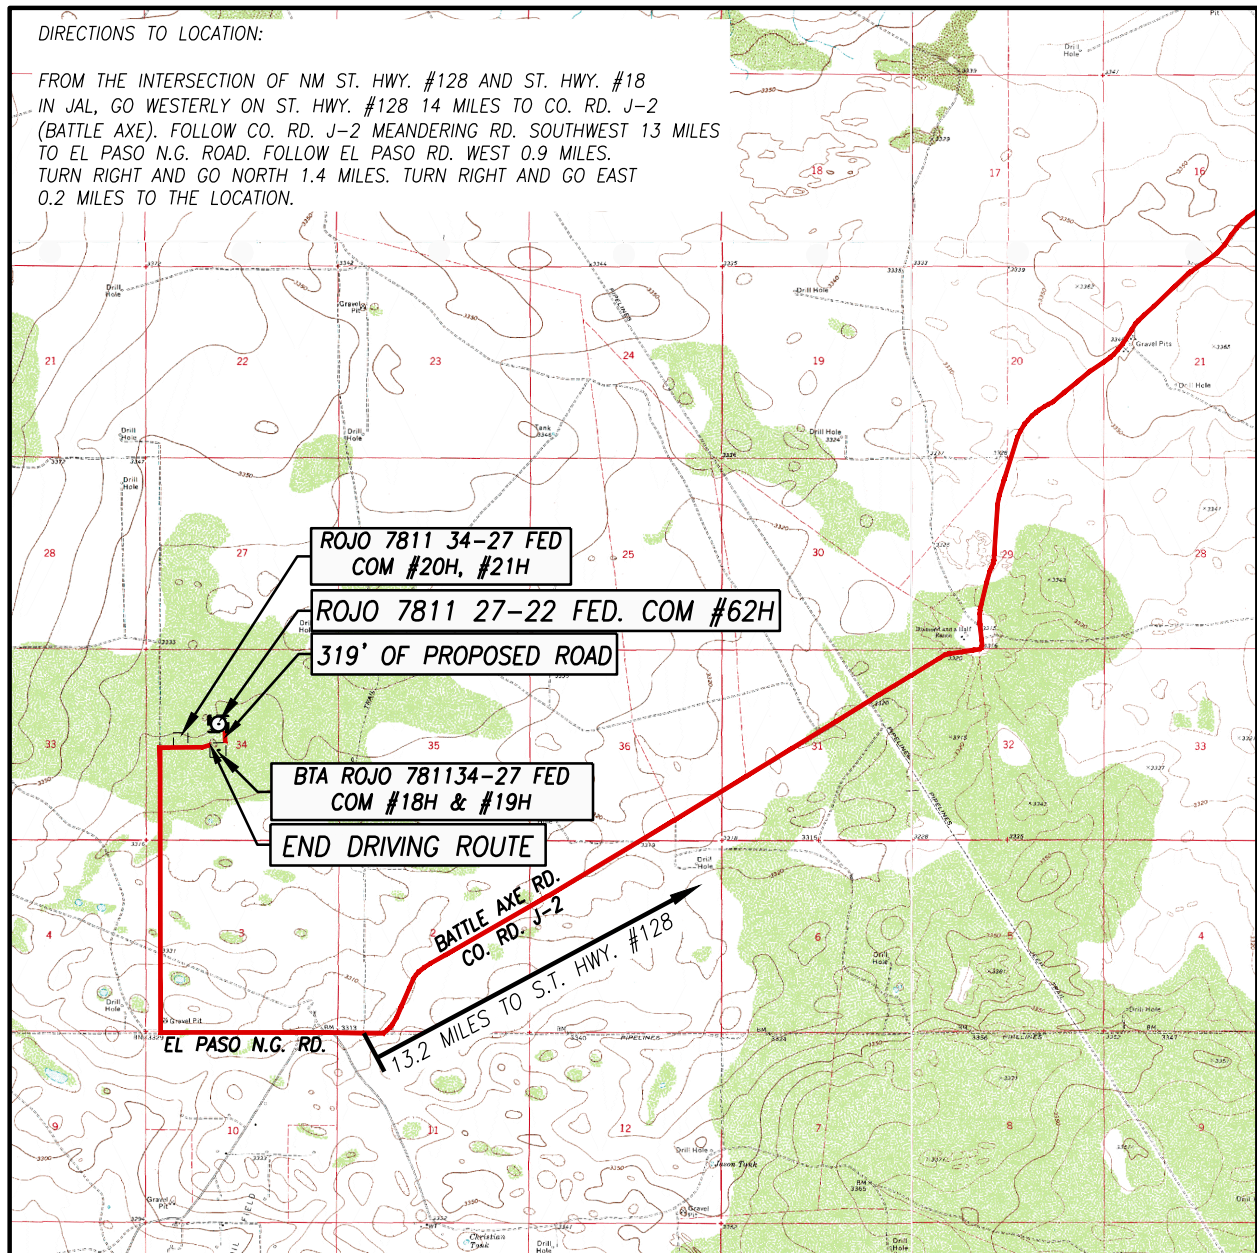

CONTOUR INTERVAL: PADUCA BREAKS EAST, N.M. - 10'

SCALE: 1" = 1 MILE

SEC. 34 TWP. 25-S RGE. 33-E

SURVEY N.M.P.M.

COUNTY LEA STATE NEW MEXICO

DESCRIPTION 2055' FNL & 1935' FWL

ELEVATION 3327'

OPERATOR BTA OIL PRODUCERS, LLC

LEASE ROJO 7811 34-27 FEDERAL COM

U.S.G.S. TOPOGRAPHIC MAP
PADUCA BREAKS EAST, N.M.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.


RONALD J. EIDSON *Ronald J. Eidson*

DATE: 09/16/2020



PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

VICINITY, TOPOGRAPHIC AND ACCESS ROAD MAP

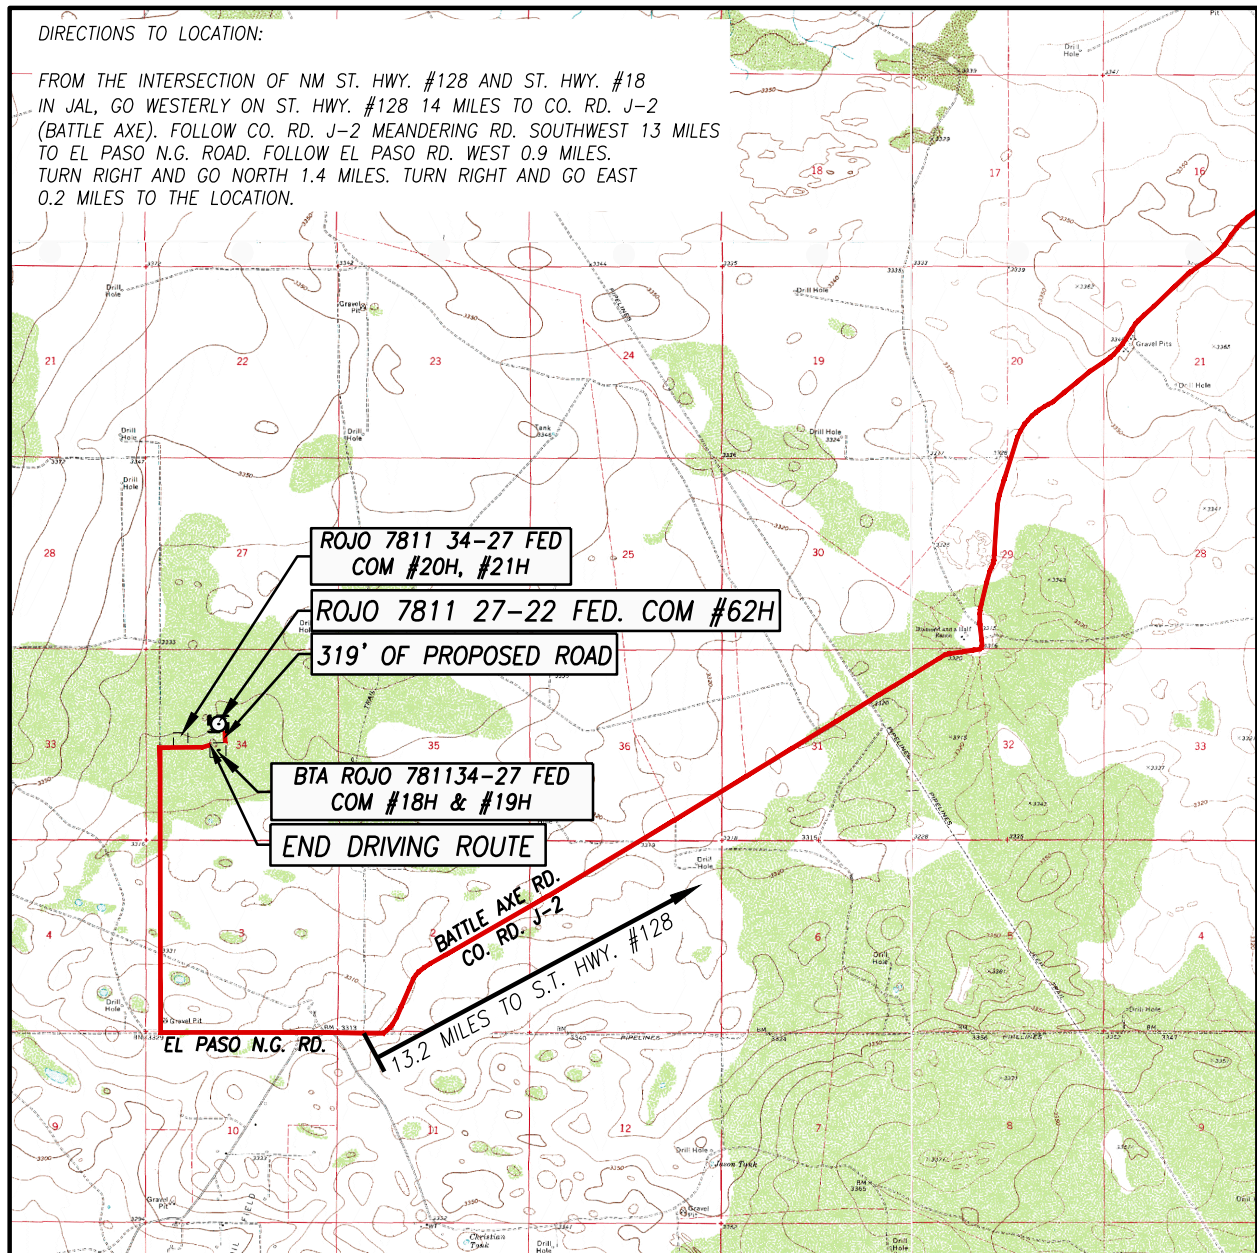

CONTOUR INTERVAL: PADUCA BREAKS EAST, N.M. - 10'

SCALE: 1" = 1 MILE

SEC. 34 TWP. 25-S RGE. 33-E

SURVEY N.M.P.M.

COUNTY LEA STATE NEW MEXICO

DESCRIPTION 2055' FNL & 1935' FWL

ELEVATION 3327'

OPERATOR BTA OIL PRODUCERS, LLC

LEASE ROJO 7811 34-27 FEDERAL COM

U.S.G.S. TOPOGRAPHIC MAP
PADUCA BREAKS EAST, N.M.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON *Ronald J. Eidson*

DATE: 09/16/2020



PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
DISTRICT II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
DISTRICT III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

| | | | |
|----------------------------|---|-----------|--|
| API Number | | Pool Code | Pool Name Red Hills ; Avalon |
| Property Code | Property Name ROJO 7811 34-27 FEDERAL COM | | Well Number 62H |
| OGRID No. 260297 | Operator Name BTA OIL PRODUCERS, LLC | | Elevation 3327' |

Surface Location


| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| F | 34 | 25-S | 33-E | | 2055 | NORTH | 1935 | WEST | LEA |

Bottom Hole Location If Different From Surface

| UL or lot No. | Section | Township | Range | Lot Idn | Feet from the | North/South line | Feet from the | East/West line | County |
|---------------|---------|----------|-------|---------|---------------|------------------|---------------|----------------|--------|
| C | 27 | 25-S | 33-E | | 50 | NORTH | 1650 | WEST | LEA |

| | | | |
|-------------------------------|-----------------|--------------------|-----------|
| Dedicated Acres 240 | Joint or Infill | Consolidation Code | Order No. |
|-------------------------------|-----------------|--------------------|-----------|


NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

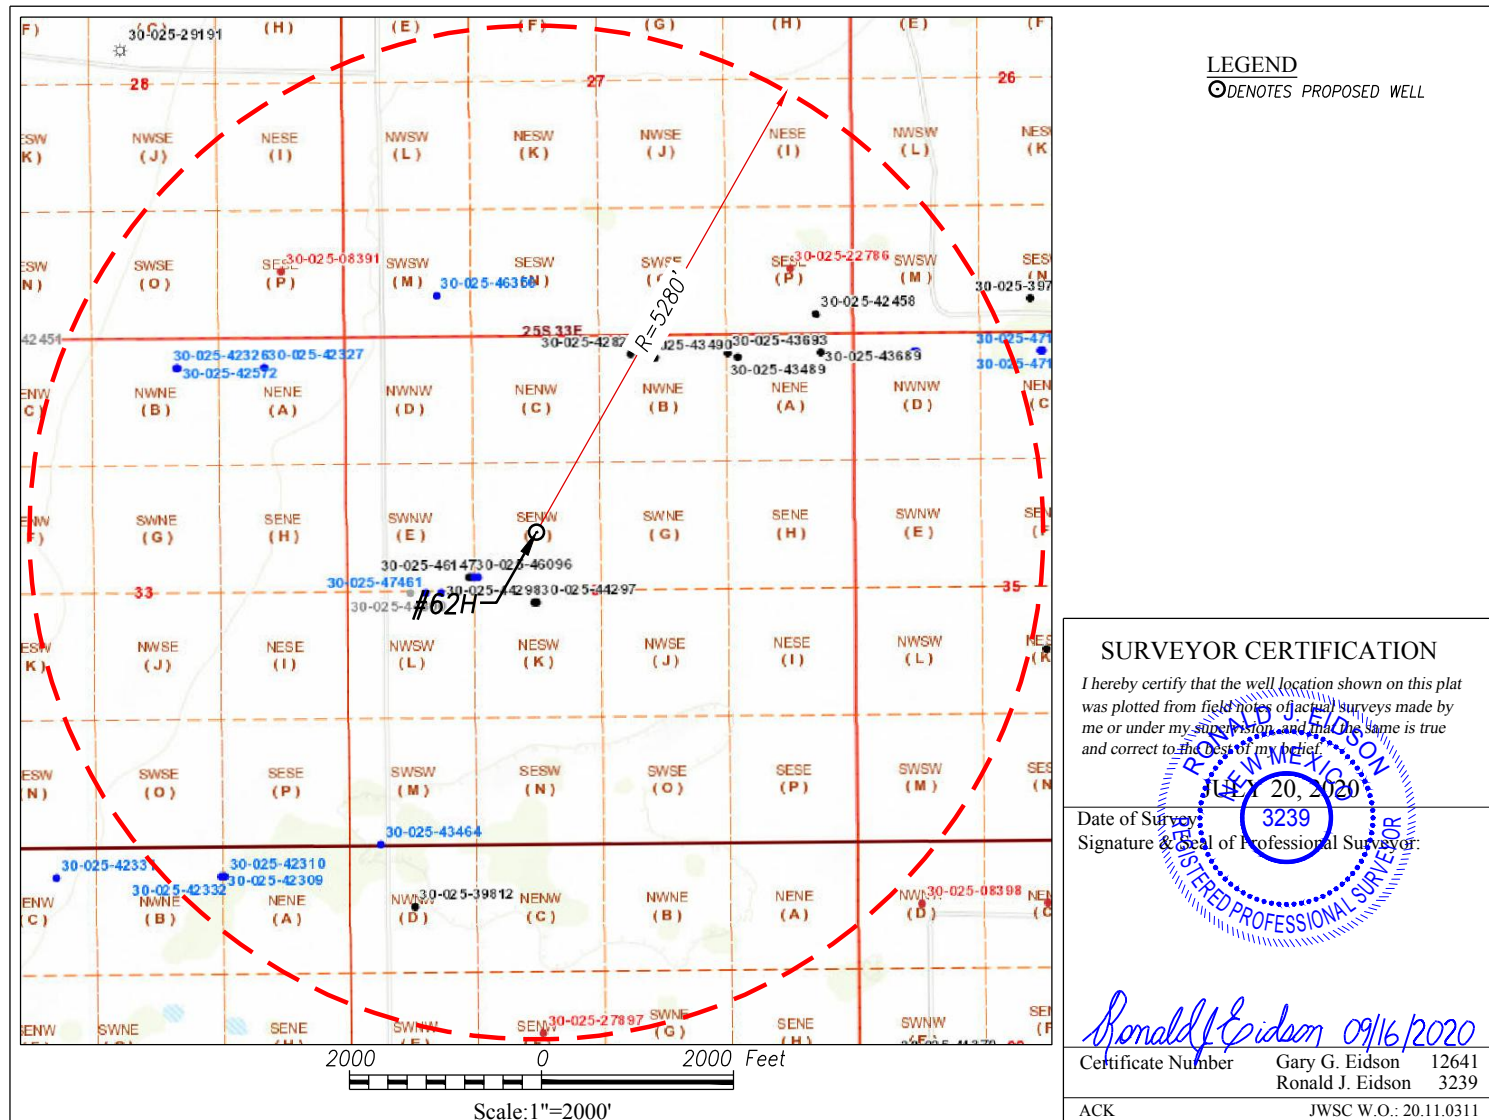




BTA OIL PRODUCERS, LLC
WATER TRANSPORTATION MAP
ROJO 7811 Federal WATER PIT
SEC 22 ; T25S ; R33E (Water Pit is in SESE QUARTER QUARTER)
LEA COUNTY, NM



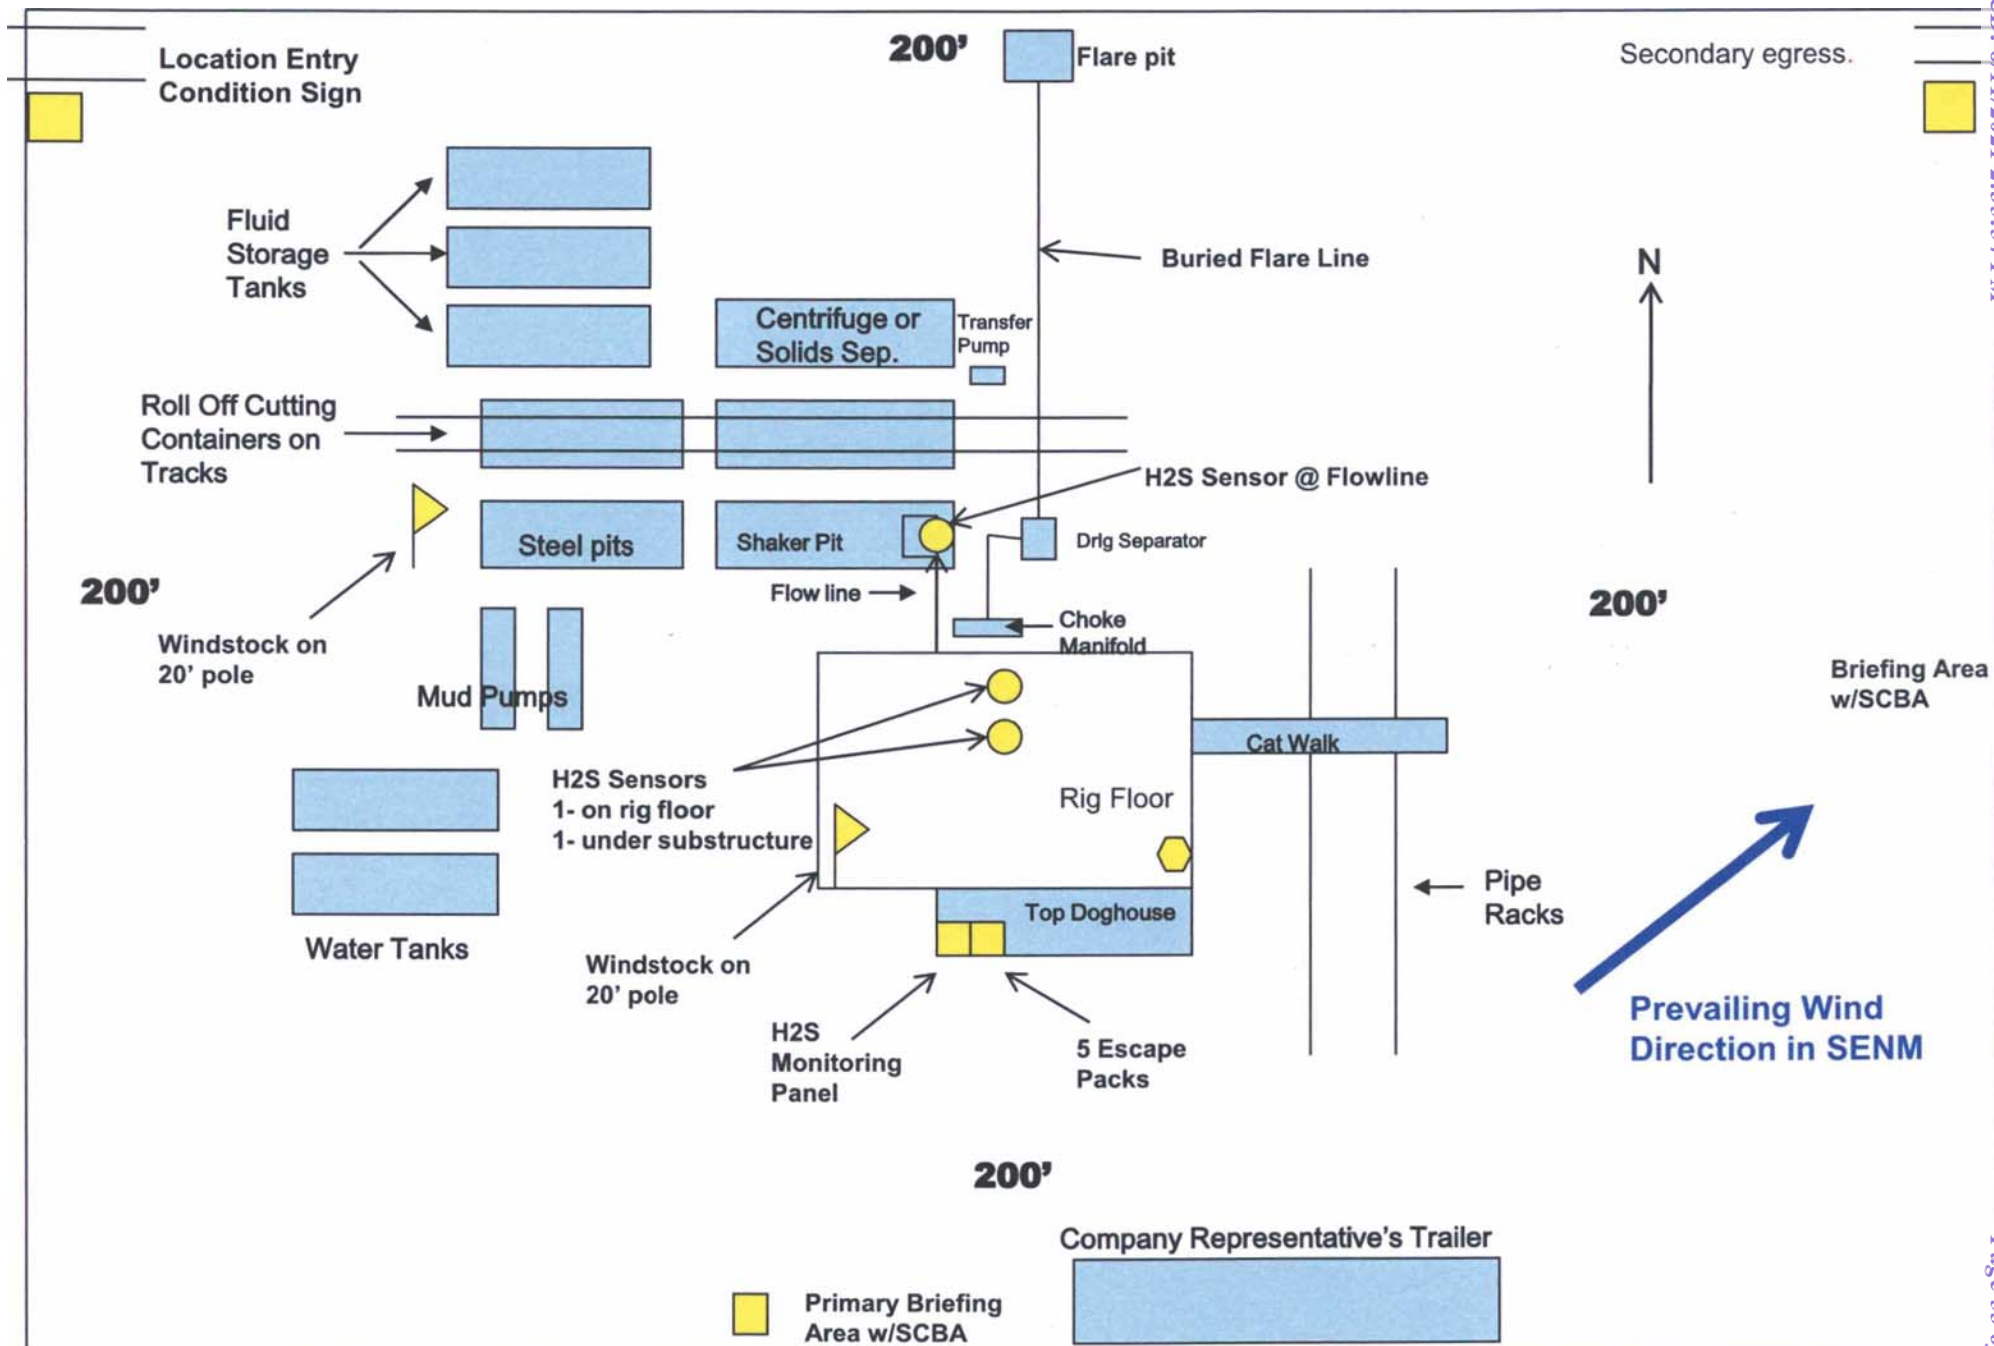

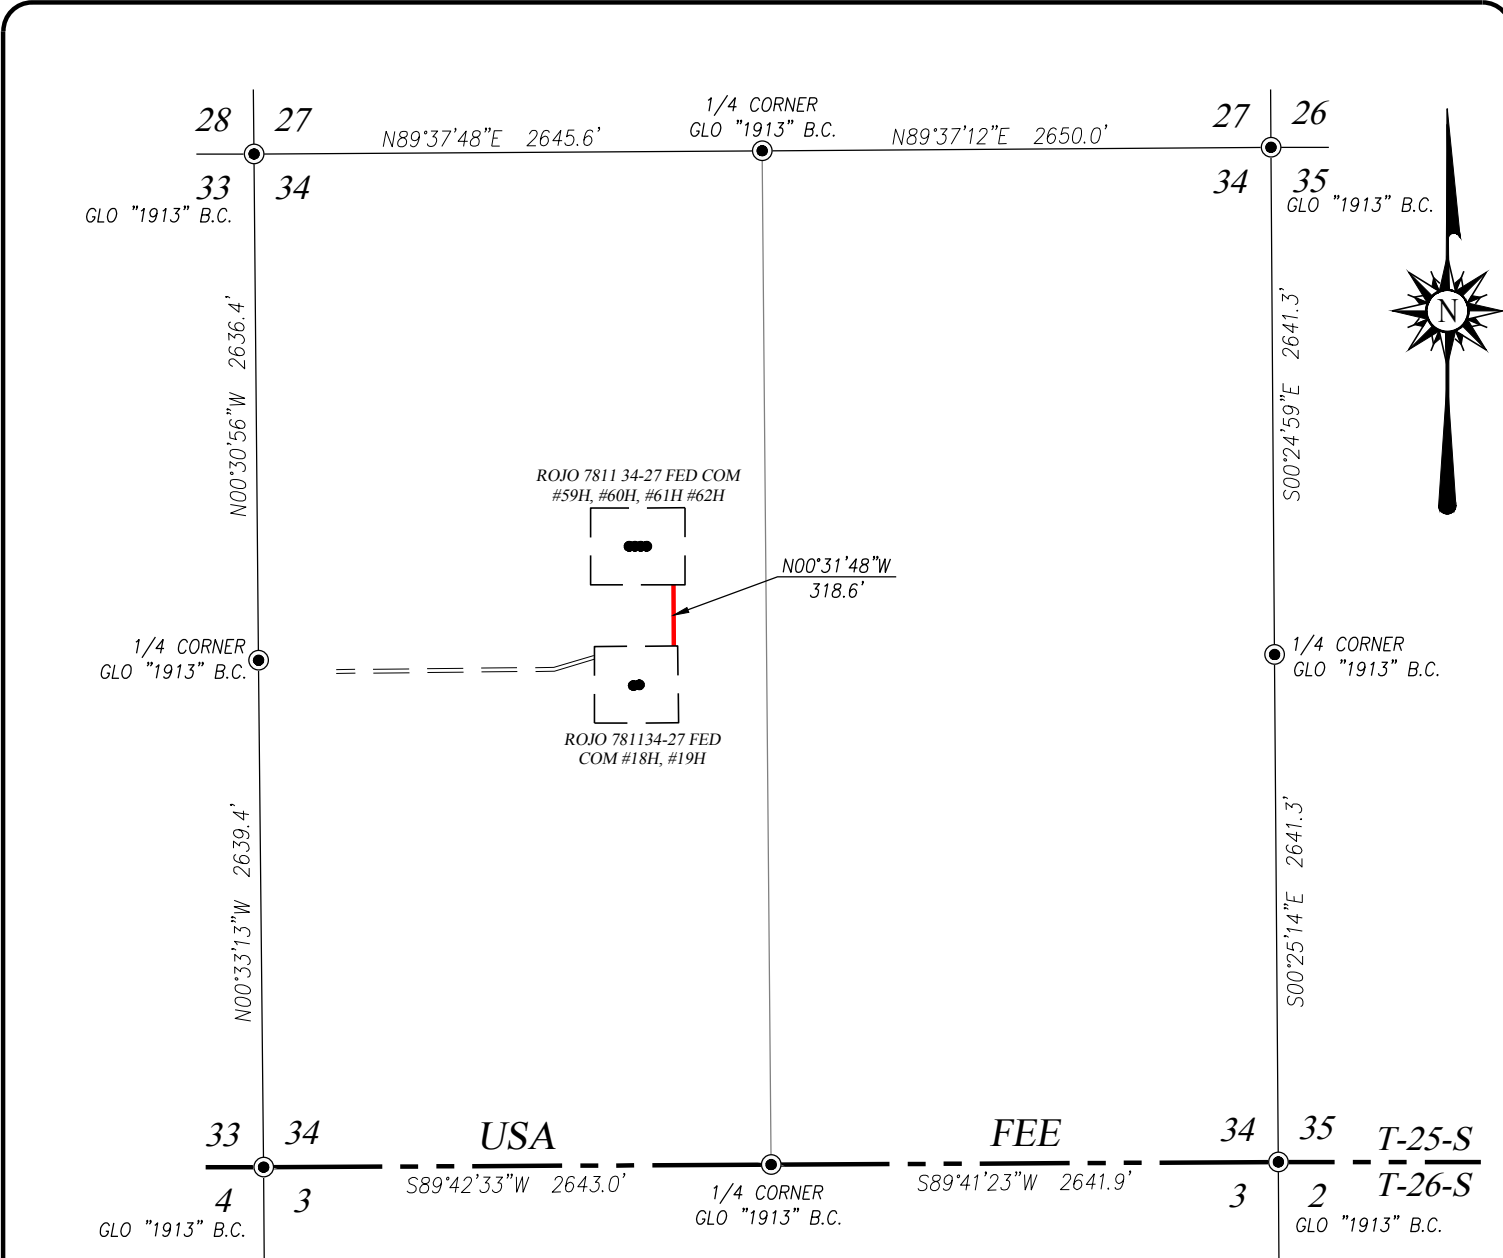

DESCRIPTION

SURVEY OF A STRIP OF LAND 30.0 FEET WIDE AND 318.6 FEET OR 0.060 MILES IN LENGTH CROSSING USA LAND IN SECTION 34, TOWNSHIP 25 SOUTH, RANGE 33 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO, AND BEING 15.0 FEET LEFT AND 15.0 FEET RIGHT OF THE ABOVE PLATTED CENTERLINE SURVEY.

NOTE


BEARINGS SHOWN HEREON ARE MERCATOR GRID AND CONFORM TO THE NEW MEXICO COORDINATE SYSTEM "NEW MEXICO EAST ZONE" NORTH AMERICAN DATUM 1983. DISTANCES ARE SURFACE VALUES.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239, DO HEREBY CERTIFY THAT THIS SURVEY PLAT AND THE ACTUAL SURVEY ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

RONALD J. EIDSON *Ronald J. Eidson*
DATE: 09/17/2020

LEGEND

- - DENOTES FOUND CORNER AS NOTED
- (red line) - DENOTES CENTERLINE SURVEY




BTA OIL PRODUCERS, LLC

SURVEY FOR AN ACCESS ROAD TO THE ROJO 7811 34-27 FEDERAL COM #59H, #60H, #61H & #62H WELL PAD CROSSING SECTION 34, TOWNSHIP 25 SOUTH, RANGE 33 EAST, N.M.P.M., LEA COUNTY, NEW MEXICO

| | | |
|------------------------|---------------------|-------------------------|
| Survey Date: 7/20/2020 | CAD Date: 9/16/2020 | Drawn By: ACK |
| W.O. No.: 20110308 | Rev. : | Rel. W.O.: Sheet 1 of 1 |



PROVIDING SURVEYING SERVICES
SINCE 1946
JOHN WEST SURVEYING COMPANY
412 N. DAL PASO HOBBS, N.M. 88240
(575) 393-3117 www.jwsc.biz
TBPLS# 10021000

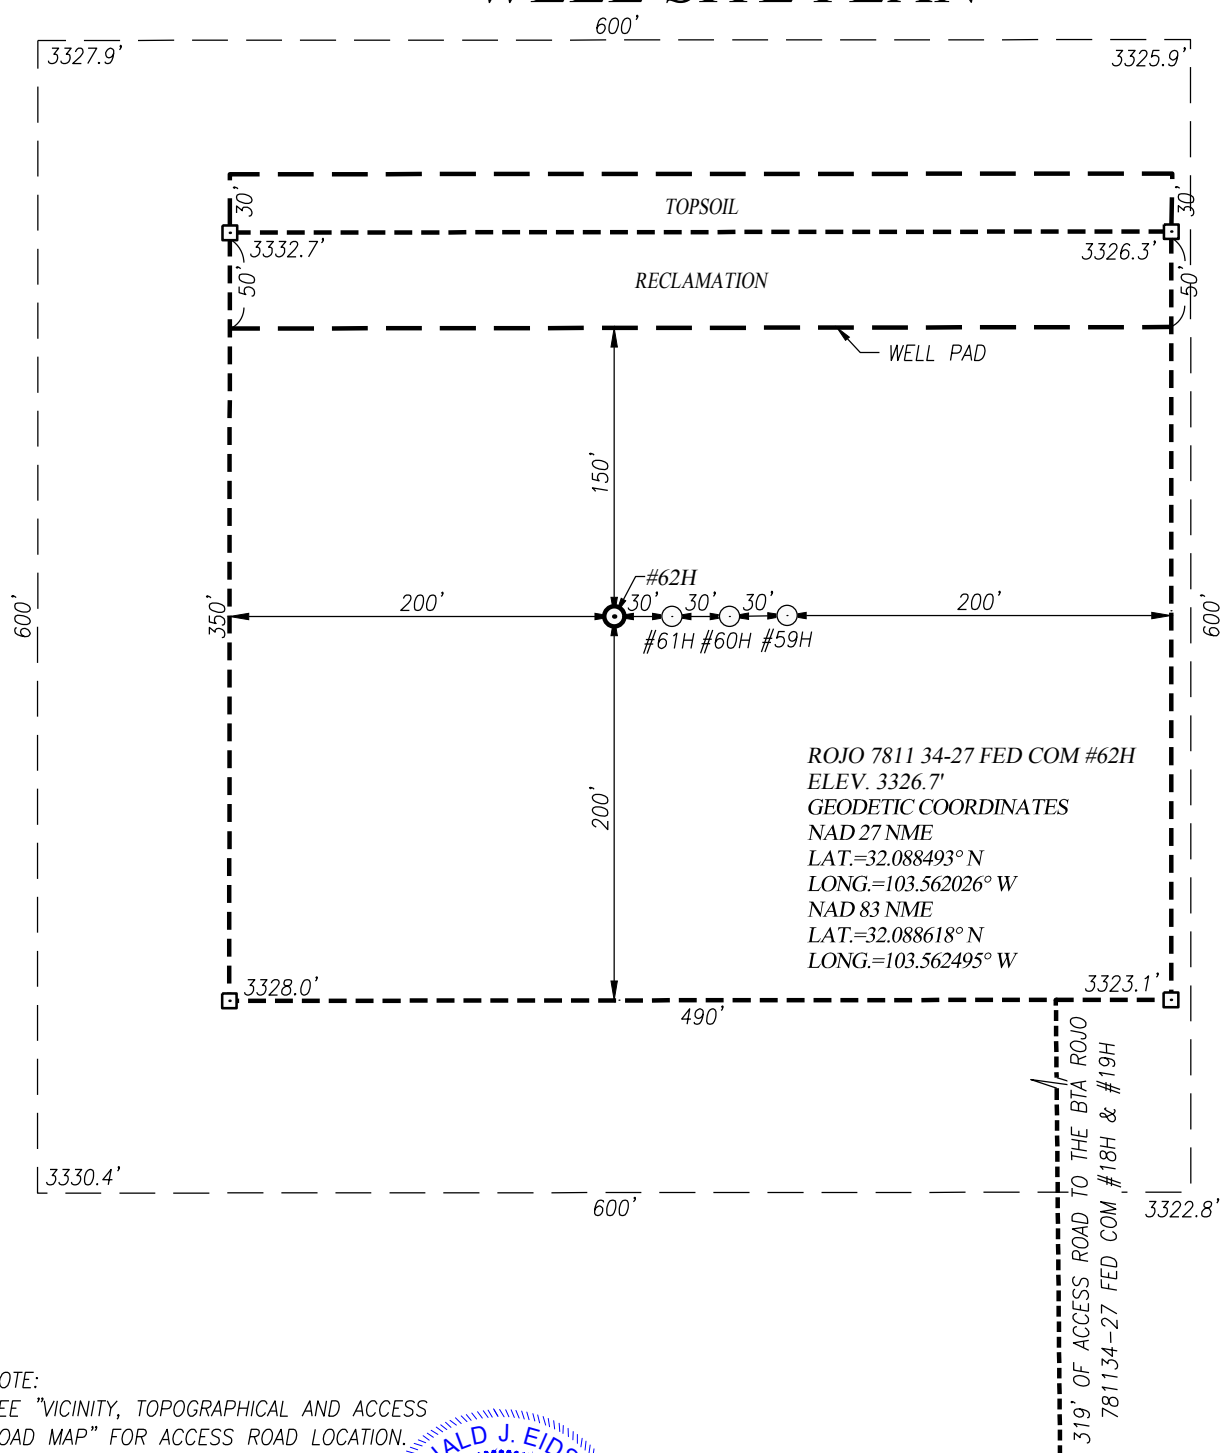

SEE "VICINITY, TOPOGRAPHICAL AND ACCESS ROAD MAP" FOR ACCESS ROAD LOCATION.

I, RONALD J. EIDSON, NEW MEXICO PROFESSIONAL SURVEYOR No. 3239,
DO HEREBY CERTIFY THAT THIS SURVEY PLAN AND THE ACTUAL SURVEY
ON THE GROUND UPON WHICH IT IS BASED WERE PERFORMED BY ME
OR UNDER MY DIRECT SUPERVISION; THAT I AM RESPONSIBLE FOR THIS
SURVEY; THAT THIS SURVEY MEETS THE MINIMUM STANDARDS FOR
SURVEYING IN NEW MEXICO; AND THAT IT IS TRUE AND CORRECT
TO THE BEST OF MY KNOWLEDGE AND BELIEF.

DATE: 09/16/2020

PROVIDING SURVEYING SERVICES
SINCE 1946

JOHN WEST SURVEYING COMPANY

412 N. DAL PASO HOBBS, N.M. 88240

(575) 393-3117 www.iwsc.biz

TBPLS# 10021000

100 0 100 200 Feet

Scale: 1"=100'

BTA OIL PRODUCERS, LLC

ROJO 7811 34-27 FEDERAL COM #60H WELL LOCATED 2055 FEET
FROM THE NORTH LINE AND 1935 FEET FROM THE WEST LINE
OF SECTION 34, TOWNSHIP 25 SOUTH, RANGE 33 EAST, N.M.P.M.,
LEA COUNTY, NEW MEXICO

Survey Date: 7/20/2020

CAD Date: 9/15/2020

Drawn By: ACK

W.O. No.: 20110311

Rev: .

Rel. W.O.:

Sheet 1 of 1



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

PWD Data Report

08/02/2021

APD ID: 10400065178

Submission Date: 11/13/2020

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - General

Would you like to address long-term produced water disposal? NO

Section 2 - Lined Pits

Would you like to utilize Lined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD surface owner:

PWD disturbance (acres):

Lined pit PWD on or off channel:

Lined pit PWD discharge volume (bbl/day):

Lined pit specifications:

Pit liner description:

Pit liner manufacturers information:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Lined pit precipitated solids disposal schedule:

Lined pit precipitated solids disposal schedule attachment:

Lined pit reclamation description:

Lined pit reclamation attachment:

Leak detection system description:

Leak detection system attachment:

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Lined pit Monitor description:

Lined pit Monitor attachment:

Lined pit: do you have a reclamation bond for the pit?

Is the reclamation bond a rider under the BLM bond?

Lined pit bond number:

Lined pit bond amount:

Additional bond information attachment:

Section 3 - Unlined Pits

Would you like to utilize Unlined Pit PWD options? N

Produced Water Disposal (PWD) Location:

PWD disturbance (acres):

PWD surface owner:

Unlined pit PWD on or off channel:

Unlined pit PWD discharge volume (bbl/day):

Unlined pit specifications:

Precipitated solids disposal:

Describe precipitated solids disposal:

Precipitated solids disposal permit:

Unlined pit precipitated solids disposal schedule:

Unlined pit precipitated solids disposal schedule attachment:

Unlined pit reclamation description:

Unlined pit reclamation attachment:

Unlined pit Monitor description:

Unlined pit Monitor attachment:

Do you propose to put the produced water to beneficial use?

Beneficial use user confirmation:

Estimated depth of the shallowest aquifer (feet):

Does the produced water have an annual average Total Dissolved Solids (TDS) concentration equal to or less than that of the existing water to be protected?

TDS lab results:

Geologic and hydrologic evidence:

State authorization:

Unlined Produced Water Pit Estimated percolation:

Unlined pit: do you have a reclamation bond for the pit?

Operator Name: BTA OIL PRODUCERS LLC**Well Name:** ROJO 7811 34-27 FEDERAL COM**Well Number:** 62H**Is the reclamation bond a rider under the BLM bond?****Unlined pit bond number:****Unlined pit bond amount:****Additional bond information attachment:**

Section 4 - Injection

Would you like to utilize Injection PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Injection PWD discharge volume (bbl/day):****Injection well mineral owner:****Injection well type:****Injection well number:****Injection well name:****Assigned injection well API number?****Injection well API number:****Injection well new surface disturbance (acres):****Minerals protection information:****Mineral protection attachment:****Underground Injection Control (UIC) Permit?****UIC Permit attachment:**

Section 5 - Surface Discharge

Would you like to utilize Surface Discharge PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Surface discharge PWD discharge volume (bbl/day):****Surface Discharge NPDES Permit?****Surface Discharge NPDES Permit attachment:****Surface Discharge site facilities information:****Surface discharge site facilities map:**

Section 6 - Other

Would you like to utilize Other PWD options? N**Produced Water Disposal (PWD) Location:****PWD surface owner:****PWD disturbance (acres):****Other PWD discharge volume (bbl/day):**

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

Other PWD type description:

Other PWD type attachment:

Have other regulatory requirements been met?

Other regulatory requirements attachment:



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Bond Info Data Report

08/02/2021

APD ID: 10400065178

Submission Date: 11/13/2020

Highlighted data
reflects the most
recent changes

Operator Name: BTA OIL PRODUCERS LLC

Well Name: ROJO 7811 34-27 FEDERAL COM

Well Number: 62H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Bond Information

Federal/Indian APD: FED

BLM Bond number: NMB001711

BIA Bond number:

Do you have a reclamation bond? NO

Is the reclamation bond a rider under the BLM bond?

Is the reclamation bond BLM or Forest Service?

BLM reclamation bond number:

Forest Service reclamation bond number:

Forest Service reclamation bond attachment:

Reclamation bond number:

Reclamation bond amount:

Reclamation bond rider amount:

Additional reclamation bond information attachment:

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: BTA Oil Producers, LLC **OGRID:** 260297 **Date:** 08 / 09 / 2021

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | ULSTR | Footages | Anticipated Oil BBL/D | Anticipated Gas MCF/D | Anticipated Produced Water BBL/D |
|-----------------|-------------------------|------------------------|--------------------|-----------------------|-----------------------|----------------------------------|
| ROJO 7811 34-27 | 30-025-49307 | F ; SEC 34 ; 25S ; 33E | 2055 FNL, 1935 FWL | +/- 800 | +/- 2000 | +/- 1200 |
| FEDERAL COM 62H | | | | | | |

IV. Central Delivery Point Name: Rojo 7811 CTB [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

| Well Name | API | Spud Date | TD Reached Date | Completion Commencement Date | Initial Flow Back Date | First Production Date |
|-----------------|-------------------------|-----------|-----------------|------------------------------|------------------------|-----------------------|
| ROJO 7811 34-27 | 30-025-49307 | 8/9/2022 | 8/29/2022 | 9/12/2022 | 10/3/2022 | 11/2/2022 |
| FEDERAL COM 62H | | | | | | |

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan

EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

| Well | API | Anticipated Average Natural Gas Rate MCF/D | Anticipated Volume of Natural Gas for the First Year MCF |
|------|-----|--|--|
| | | | |
| | | | |

X. Natural Gas Gathering System (NGGS):

| Operator | System | ULSTR of Tie-in | Anticipated Gathering Start Date | Available Maximum Daily Capacity of System Segment Tie-in |
|----------|--------|-----------------|----------------------------------|---|
| | | | | |
| | | | | |

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

| |
|--|
| Signature:  |
| Printed Name: Sammy Hajar |
| Title: Regulatory Analyst |
| E-mail Address: SHAJAR@BTAOIL.COM |
| Date: 8/9/2021 |
| Phone: 432-682-3753 |
| OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form) |
| Approved By: |
| Title: |
| Approval Date: |
| Conditions of Approval: |

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Separation equipment will allow for adequate retention time to allow gas and liquids to separate.
- Separation equipment will separate all three phases (Oil, Water, and Gas).
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering is selected to be serviced without flow interruptions or the need to release gas from the well.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

Drilling Operations

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All natural gas produced during drilling operations will be flared, unless there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and the environment, at which point the gas will be vented.

Completions/Recompletions Operations

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

Production Operations

- Weekly AVOs will be performed on all facilities that produce more than 60 MCFD.
- Leaking thief hatches and pressure safety valves found during AVOs will be cleaned and properly re-sealed.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All gas lift systems will be optimized to limit the amount of waste.
- All tanks will have automatic gauging equipment installed.

Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.
- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- All gas will have multiple points of separation to ensure no liquids enter flares, combustors, or gas sales line.
- Weekly AVOs will be performed on all wells and facilities that produce more than 60 MCFD.
- All OOOOa facilities will be filmed with an Optical Gas Imaging Thermographer camera once per month to check for fugitive emissions.

Measurement & Estimation

- All volume that is flared and vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- All meters will be calibrated at regular intervals according to meter manufacturer recommendations.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, BTA will use best management practices to vent as minimally as possible.
- Prior to the commencement of any maintenance, the tank or vessel will be isolated from the rest of the facilities.
- All valves upstream of the equipment will be closed and isolated.
- After equipment has been isolated, the equipment will be blown down to as low a pressure as possible into the collection system.
- If the equipment being maintained cannot be relieved into the collection system, it shall be released to a tank where the vapor can either be captured or combusted if possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.

District I

1625 N. French Dr., Hobbs, NM 88240
Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 41451

CONDITIONS

| | |
|---|---|
| Operator: BTA OIL PRODUCERS, LLC 104 S Pecos Midland, TX 79701 | OGRID: 260297 |
| | Action Number: 41451 |
| | Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3) |

CONDITIONS

| Created By | Condition | Condition Date |
|------------|--|----------------|
| pkautz | Will require a File As Drilled C-102 and a Directional Survey with the C-104 | 8/13/2021 |
| pkautz | Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string | 8/13/2021 |