

Submit To Appropriate District Office State Lease - 6 copies Fee Lease - 5 copies <u>District I</u> 1625 N French Dr., Hobbs, NM 88240 <u>District II</u> 1301 W Grand Avenue, Artesia, NM 88210 <u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410 <u>District IV</u> 1220 S St. Francis Dr., Santa Fe, NM 87505	State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505	Form C-105 Revised June 10, 2003 WELL API NO. 30-015-34235 5. Indicate Type of Lease STATE ☒ FEE ☐ State Oil & Gas Lease No.
WELL COMPLETION OR RECOMPLETION REPORT AND LOG		
1a Type of Well OIL WELL ☐ GAS WELL ☐ DRY ☒ OTHER _____ b. Type of Completion NEW ☒ WORK ☐ DEEPEN ☐ PLUG ☐ DIFF WELL OVER BACK RESVR. ☐ OTHER		7 Lease Name or Unit Agreement Name Ross 1724 SEP 06 2007 OCD ARTESIA
2 Name of Operator LCX Energy, LLC		8. Well No 121
3 Address of Operator 110 N. Marienfeld, Ste. 200, Midland, TX 79701		9 Pool name or Wildcat Cottonwood Creek - Wolfcamp
4 Well Location Unit Letter <u>O</u> : <u>660</u> Feet From The <u>South</u> Line and <u>1880</u> Feet From The <u>East</u> Line Section <u>12</u> Township <u>17S</u> Range <u>24E</u> NMPM <u>Eddy</u> County		
10 Date Spudded 10/06/05	11. Date T.D Reached 11/21/05	12. Date Compl. (Ready to Prod.)
13 Elevations (DF& RKB, RT, GR, etc.) 3669' GR		14 Elev. Casinghead
15. Total Depth 9020'	16. Plug Back T.D. 8977'	17. If Multiple Compl. How Many Zones?
18 Intervals Drilled By		Rotary Tools Cable Tools
19. Producing Interval(s), of this completion - Top, Bottom, Name 5300' - 8220'		20 Was Directional Survey Made Yes
21. Type Electric and Other Logs Run Density/Neutron/GR/Micro Log		22. Was Well Cored No
23. CASING RECORD (Report all strings set in well)		
CASING SIZE	WEIGHT LB/FT.	DEPTH SET
13 3/8"	48#	386'
9 5/8"	36#	1340'
5 1/2"	17#	9020'
24. LINER RECORD		25. TUBING RECORD
SIZE	TOP	BOTTOM
		SACKS CEMENT
		SCREEN
		SIZE
		DEPTH SET
		PACKER SET
26 Perforation record (interval, size, and number) 5300' - 8220'		27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL 5300' - 8220' AMOUNT AND KIND MATERIAL USED 16500 gals 15% HCl Acid, 872650 gals Foamed Slick Wtr, W/214412# 100 MSH Sand, 204381# Brn Snd
28 PRODUCTION		
Date First Production		Production Method (Flowing, gas lift, pumping - Size and type pump)
		Well Status (Prod. or Shut-in) Plan to Plug No Well Test - Dry Hole
Date of Test	Hours Tested	Choke Size
		Prod'n For Test Period
		Oil - Bbl
		Gas - MCF
		Water - Bbl
		Gas - Oil Ratio
Flow Tubing Press	Casing Pressure	Calculated 24-Hour Rate
		Oil - Bbl.
		Gas - MCF
		Water - Bbl.
		Oil Gravity - API - (Corr)
29 Disposition of Gas (Sold, used for fuel, vented, etc.)		Test Witnessed By
30 List Attachments		
31 I hereby certify that the information shown on both sides of this form as true and complete to the best of my knowledge and belief		
Signature <u>Vickie L. Gotcher</u>		Printed Name Vickie L. Gotcher
E-mail Address vickie@eeronline.com		File Regulatory Analyst Date 09/05/07

INSTRUCTIONS

This form is to be filed with the appropriate District Office of the Division not later than 20 days after the completion of any newly-drilled or deepened well. It shall be accompanied by one copy of all electrical and radio-activity logs run on the well and a summary of all special tests conducted, including drill stem tests. All depths reported shall be measured depths. In the case of directionally drilled wells, true vertical depths shall also be reported. For multiple completions, items 25 through 29 shall be reported for each zone. The form is to be filed in quintuplicate except on state land, where six copies are required. See Rule 1105.

INDICATE FORMATION TOPS IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy	T. Canyon	T. Ojo Alamo	T. Penn. "B"
T. Salt	T. Strawn	T. Kirtland-Fruitland	T. Penn. "C"
B. Salt	T. Atoka	T. Pictured Cliffs	T. Penn. "D"
T. Yates	T. Miss	T. Cliff House	T. Leadville
T. 7 Rivers	T. Devonian	T. Menefee	T. Madison
T. Queen	T. Silurian	T. Point Lookout	T. Elbert
T. Grayburg	T. Montoya	T. Mancos	T. McCracken
T. San Andres 540	T. Simpson	T. Gallup	T. Ignacio Otzte
T. Glorieta 1760	T. McKee	Base Greenhorn	T. Granite
T. Paddock	T. Ellenburger	T. Dakota	T.
T. Blinebry	T. Gr. Wash	T. Morrison	T.
T. Tubb 3216	T. Delaware Sand	T. Todilto	T.
T. Drinkard	T. Bone Springs	T. Entrada	T.
T. Abo 3864	T.	T. Wingate	T.
T. Wolfcamp 4926	T.	T. Chinle	T.
T. Penn	T.	T. Permian	T.
T. Cisco (Bough C)	T.	T. Penn "A"	T.

OIL OR GAS SANDS OR ZONES

No. 1, from.....to..... No. 3, from.....to.....
 No. 2, from.....to..... No. 4, from.....to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from.....to.....feet.....
 No. 2, from.....to.....feet.....
 No. 3, from.....to.....feet.....

LITHOLOGY RECORD (Attach additional sheet if necessary)

From	To	Thickness In Feet	Lithology	From	To	Thickness In Feet	Lithology
			SEE ATTACHMENT				

1724 ROSS #121 LITHOLOGY RECORD

<u>FROM</u>	<u>TO</u>	<u>THICKNESS IN FEET</u>	<u>LITHOLOGY</u>
1200	1470	270	ANHYDRITE/DOLOMITE
1470	1800	330	DOLOMITE/LIMESTONE
1800	1840	40	DOLOMITE/LIMESTONE/SAND
1840	2120	280	ANHYDRITE/DOLOMITE
2120	2140	20	DOLOMITE
2140	2210	70	ANHYDRITE/DOLOMITE
2210	2280	70	ANHYDRITE/DOLOMITE/LIMESTONE
2280	2420	140	DOLOMITE/SAND/LIMESTONE
2420	2680	240	DOLOMITE/ANHYDRITE/SAND/LIMESTONE
2680	2830	150	DOLOMITE/SAND/SHALE/SILT
2380	2880	500	ANHYDRITE/DOLOMITE/LIMESTONE
2880	3000	120	ANHYDRITE/DOLOMITE
3000	3160	160	DOLOMITE/LIMESTONE/SHALE
3160	3440	280	ANHYDRITE/DOLOMITE/LIMESTONE/SAND/SHALE
3440	3700	260	ANHYDRITE/DOLOMITE/SHALE/LIMESTONE
3700	3780	80	ANHYDRITE/LIME/DOLOMITE
3780	3785	5	ANHYDRITE/DOLOMITE
3785	4900	1115	ANHYDRITE/DOLOMITE/SHALE
4900	4920	20	ANHYDRITE/DOLOMITE/SHALE/LIME/CHERT
4920	4960	40	ANHYDRITE/DOLOMITE/SHALE/CHERT
4960	4970	10	ANHYDRITE/DOLOMITE/SHALE
4970	5000	30	ANHYDRITE/DOLOMITE/LIME/SHALE
5000	5049	49	DOLOMITE/LIME/SHALE

DISTRICT I
1825 N. French Dr., Hobbs, NM 88240

DISTRICT II
P.O. Drawer DD, Artesia, NM 88211-0719

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
2040 South Pacheco, Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised August 15, 2000
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
2040 South Pacheco
Santa Fe, NM 87505

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

API Number	Pool Code	Pool Name
		-----WOLFCAMP
Property Code	Property Name	Well Number
	1724 ROSS	121
OGRID No.	Operator Name	Elevation
218885	LCX ENERGY, LLC	3669' GR.

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	12	17 S	24 E		660	SOUTH	1880	EAST	EDDY

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	12	17 S	24 E		660	NORTH	1880	EAST	EDDY

Dedicated Acres	Joint or Infill	Consolidation Code	Order No.
320			

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

NOTE:

1) Plane Coordinates shown hereon are Transverse Mercator Grid and Conform to the "New Mexico Coordinate System", New Mexico East Zone, North American Datum of 1983. Distances shown hereon are mean horizontal surface values.

PROJECT AREA

PRODUCING AREA

Plane Coordinate
X = 77,989.5
Y = 571,137.1

OPERATOR CERTIFICATION

I hereby certify the the information contained herein is true and complete to the best of my knowledge and belief.

Signature

Joe T. Janica

Printed Name

Agent

Title

07/21/05

Date

SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision and that the same is true and correct to the best of my belief.

June 20, 2005

Date Surveyed

JSR

Signature & Seal of
Professional Surveyor

W.O. Num. 2005-0526

Certificate No. MACON McDONALD 12185

1. Drill 26" hole to 40'. Set 40' of 20" conductor pipe and cement to surface with Redi-mix.
2. Drill 17½" hole to 350'. Run and set 350' of 13 3/8" 48# H-40 ST&C casing. Cement with 400 Sx. of Class "C" cement + 2% CaCl, + ¼# Flocele/Sx. circulate cement to surface.
3. Drill 12¼" hole to 1250'. Run and set 1250' of 9 5/8" 40# J-55 ST&C casing. Cement with 500 Sx. of Class "C" cement + 2% CaCl, + 5% NaCl, + 6% Bentonite, + ¼# Flocele/Sx, tail in with 200 Sx. of Class "C" cement + 2% CaCl, + ¼# Flocele/Sx. Circulate cement to surface.
4. Drill 8 3/4" hole to 5000'. Run and set 5000' of 7" 26# L-80 LT&C casing. Cement with 500 Sx. of Class "C" cement + 6% Bentonite, + 5% Salt, + ¼# Flocele/Sx., tail in with 200 Sx. of Class "C" cement + 2% CaCl, estimate to- of cement 900' from surface.
5. Run in hole with CIBP on wireline and set at 4750'±. Run in hole with Whipstock set at 4690'± orient 180° South, Run in hole with mill and cut a window at 4690'±. Run in hole with 6 1/8" bit and bottom hole assembly to drill horizontal hole to TVD of 4940'±, MD of 8790±.
6. Run and set 4400' of 4½" 11.6# L-80 liner from 4390' to 8790'±. Cement with 425 Sx. of Class "C" Premium Plus cement + additives. Cement to top of liner.

There is no known presence of H₂S in this area, no H₂S has been encountered in any of the wells drilled in this area. The Bureau of Land Management does not have any record of H₂S being present there.


Joel J. J. J.

BLOWOUT PREVENTER SYSTEM


3000 PSI

Fill Line

Flow Line

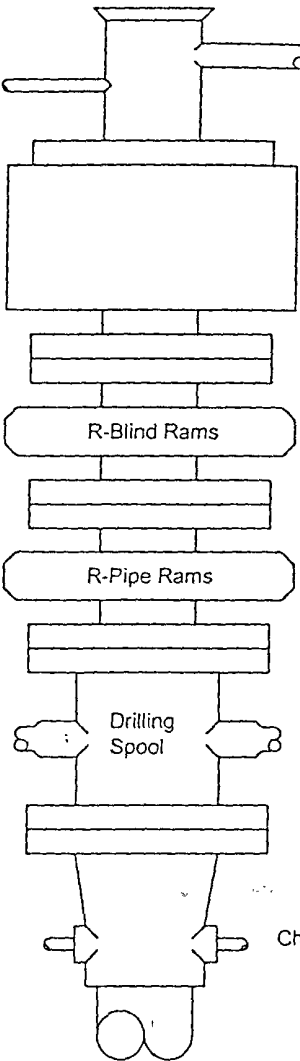


Choke Manifold Assembly for 5M WP System

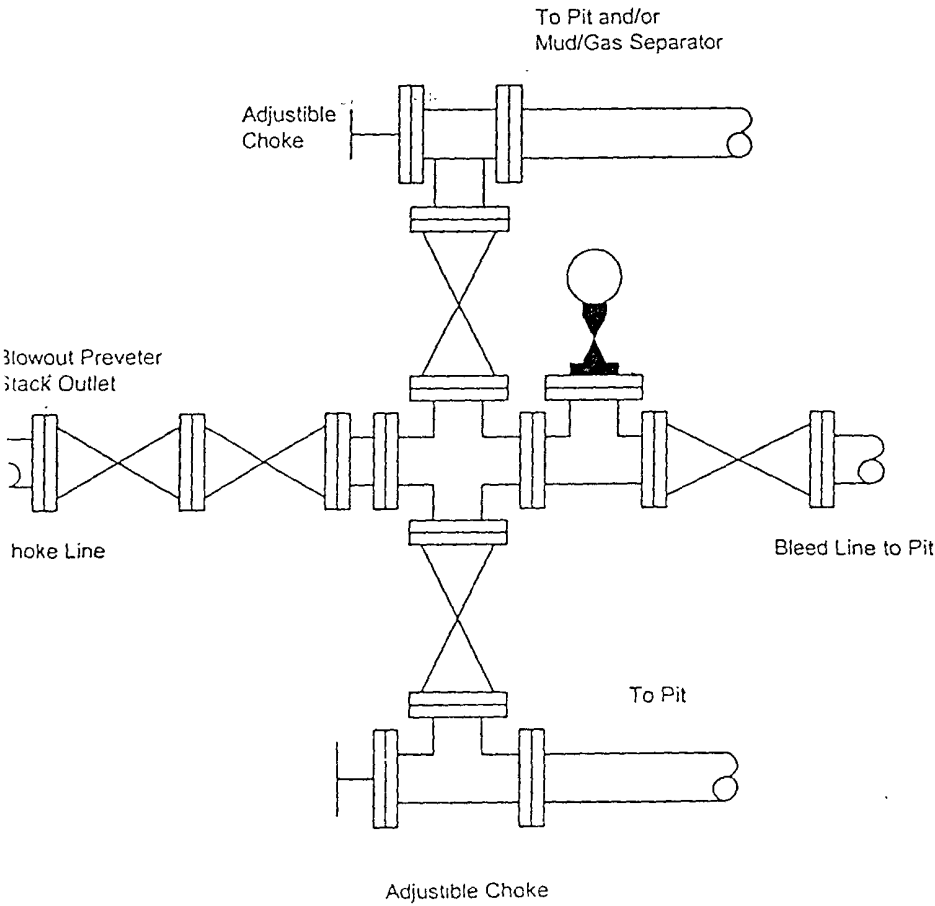

900 SERIES
3000 PSI WP

LOCATION VERIFICATION MAP

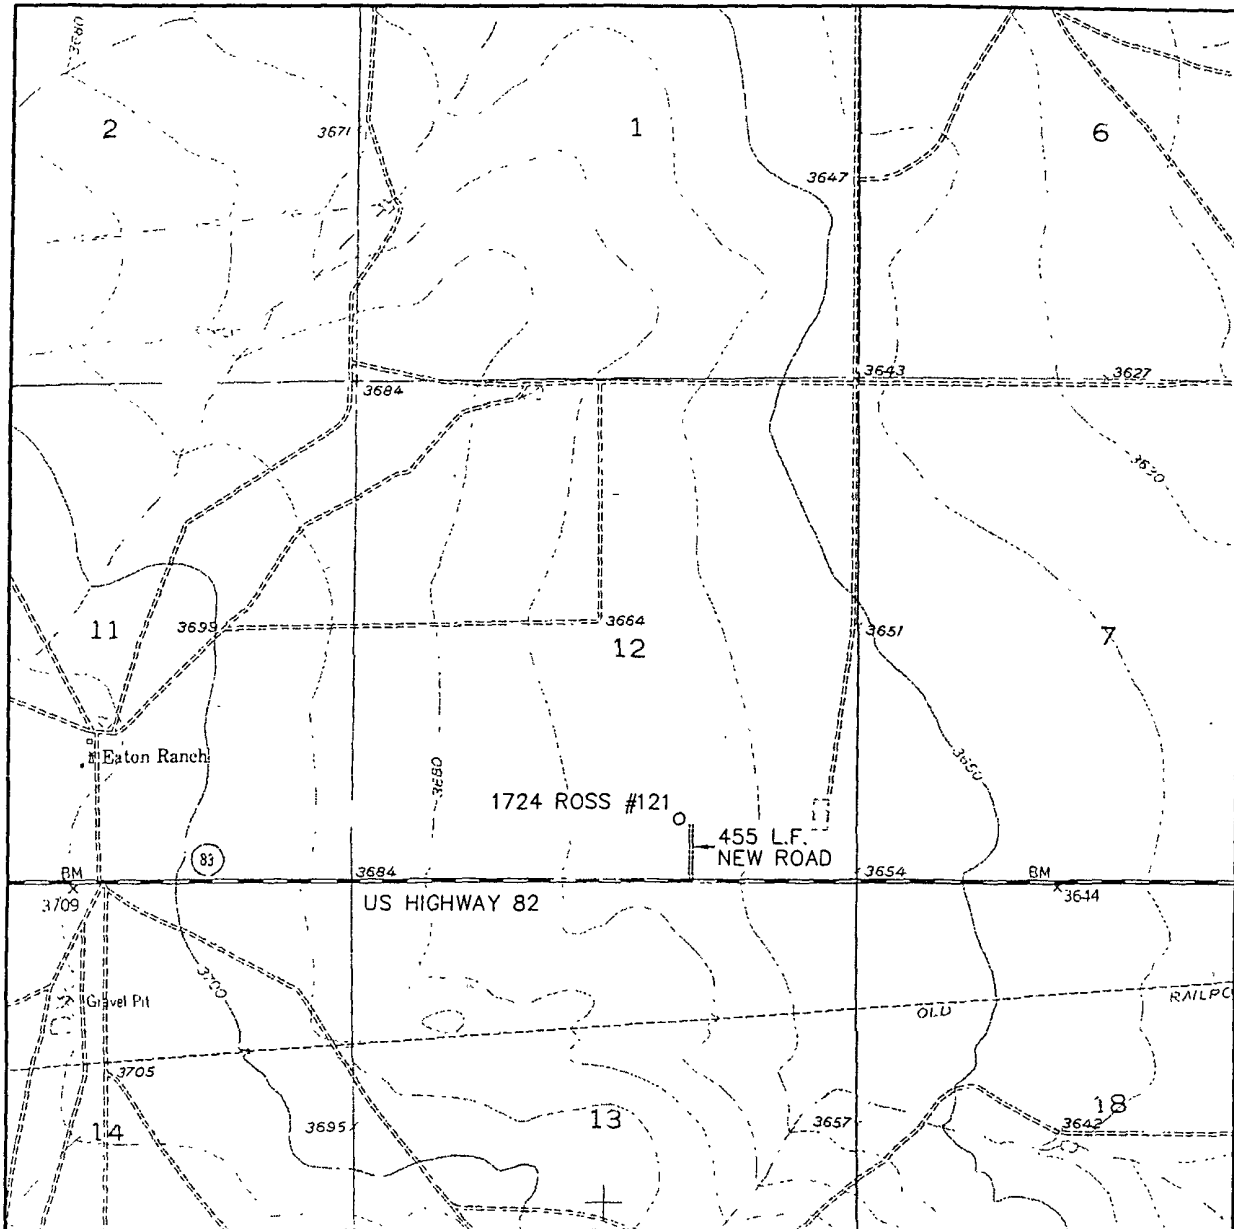

SCALE: 1" = 2000'

CONTOUR INTERVAL:
HOPE SE - 20'

SEC. 12 TWP. 17-S RGE. 24-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 1880' FEL & 660' FSL

ELEVATION 3669'

OPERATOR LCX ENERGY, LLC

LEASE 1724 ROSS


U.S.G.S. TOPOGRAPHIC MAP
HOPE NE, N.M.



**WEST
COMPANY**
of Midland, Inc.

110 W. LOUISIANA, STE. 110
MIDLAND TEXAS, 79701
(432) 687-0865 - (432) 687-0868 FAX

VICINITY MAP

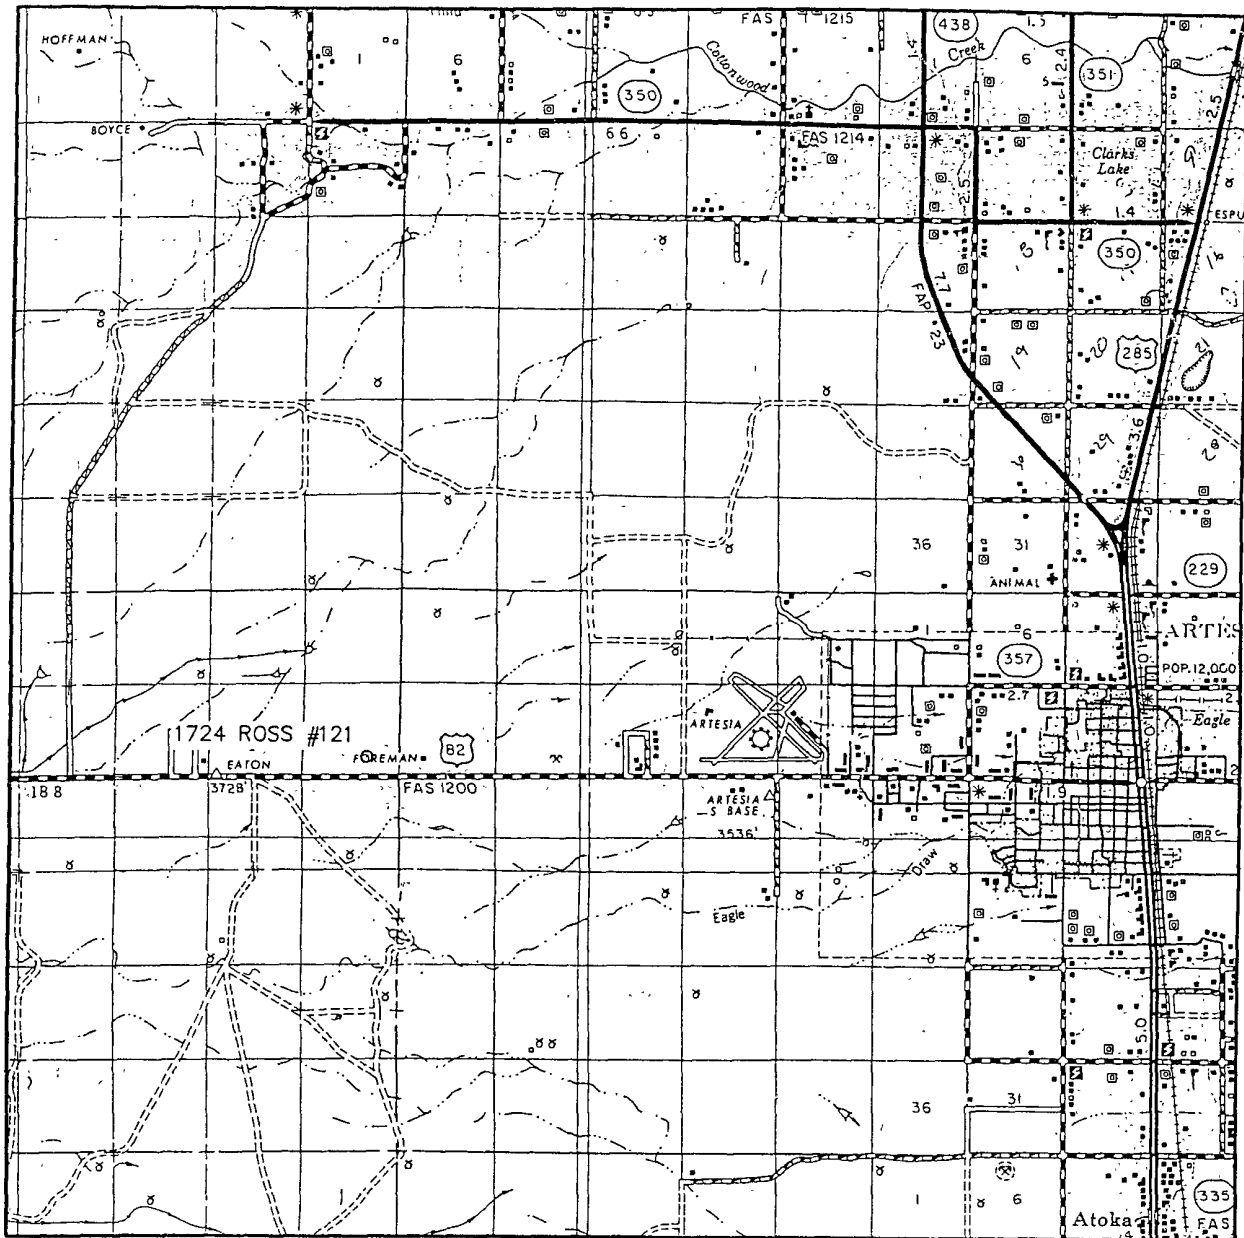

SCALE: 1" = 2 MILES

SEC. 12 TWP. 17-S RGE. 24-E

SURVEY N.M.P.M.

COUNTY EDDY

DESCRIPTION 660' FSL & 1880' FEL

ELEVATION 3669'

OPERATOR LCX ENERGY, LLC

LEASE 1724 ROSS



**WEST
COMPANY**
of Midland, Inc.

110 W. LOUISIANA, STE. 110
MIDLAND TEXAS, 79701
(432) 687-0865 - (432) 687-0868 FAX

SECTION 12, TOWNSHIP 17 SOUTH, RANGE 24 EAST, N.M.P.M.

EDDY COUNTY

NEW MEXICO

L-2005-0495

150' NORTH
OFFSET
Elev. 3669.1'
□

150' WEST
OFFSET □
Elev. 3669.6'

1724 ROSS #121
Gr. El. 3669'
Lat. 32°50'42.48" N
Long. 104°24'19.87" W
(NAD '83)

150' EAST
□ OFFSET
Elev. 3668.1'

□
150' SOUTH
OFFSET
Elev. 3668.9'



DRIVING DIRECTIONS

FROM THE INTERSECTION OF US HIGHWAY 285 AND 82 IN ARTESIA, DRIVE WEST ALONG HIGHWAY 82 APPROXIMATELY 8.2 MILES. LOCATION IS NORTH OF HIGHWAY 82 660'.

PERENCO, LLC

1724 ROSS #121

Located 660' FSL & 1880' FEL, Section 12
Township 17 South, Range 24 E, N.M.P.M.
Eddy County, New Mexico

WEST
COMPANY
of Midland, Inc.

110 W. LOUISIANA, STE. 110
MIDLAND TEXAS, 79701
(432) 687-0865 - (432) 687-0868 FAX

Drawn By: JSR	Date: June 22, 2005
Scale: 1"=100'	Field Book: 303 / 19-26
Revision Date:	Quadrangle: Espuela
W.O. No: 2005-0526	Dwg. No.: L-2005-0526

Proposal




Report Date: June 6, 2005	Survey / DLS Computation Method: Minimum Curvature / Lubinski
Client: Endeavor Energy	Vertical Section Azimuth: 0.000°
Field: Eddy County, NM Nad 83	Vertical Section Origin: N 0.000 ft, E 0.000 ft
Structure / Slot: 1724 Ross #121 / 1724 Ross #121	TVD Reference Datum: RKB
Well: 1724 Ross #121	TVD Reference Elevation: 0.0 ft relative to
Borehole: 1724 Ross #121	Sea Bed / Ground Level Elevation: 0.000 ft relative to
UWI/API#:	Magnetic Declination: 8.638°
Survey Name / Date: 1724 Ross 121_r1 / June 6, 2005	Total Field Strength: 49318.957 nT
Tort / AHD / DDI / ERD ratio: 90.000° / 3960.00 ft / 5.802 / 0.802	Magnetic Dip: 60.427°
Grid Coordinate System: NAD83 New Mexico State Planes, Eastern Zone, US Feet	Declination Date: June 06, 2005
Location Lat/Long: N 32 27 58.536, W 104 17 54.240	Magnetic Declination Model: IGRF 2005
Location Grid N/E Y/X: N 533358.051 ftUS, E 552111.259 ftUS	North Reference: Grid North
Grid Convergence Angle: +0.01875232°	Total Corr Mag North -> Grid North: +8.619°
Grid Scale Factor: 0.99990922	Local Coordinates Referenced To: Well Head

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Tic-In	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00M
KOP	4687.89	0.00	0.00	4687.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00M
	4700.00	2.79	0.00	4700.00	0.29	0.29	0.00	0.29	0.00	23.00	0.00M
	4800.00	25.79	0.00	4796.25	24.80	24.80	0.00	24.80	0.00	23.00	0.00G
	4900.00	48.79	0.00	4875.28	84.98	84.98	0.00	84.98	0.00	23.00	0.00G
	5000.00	71.79	0.00	4924.52	171.25	171.25	0.00	171.25	0.00	23.00	0.00G
EOC	5079.19	90.00	0.00	4937.00	249.11	249.11	0.00	249.11	0.00	23.00	0.00G
PBHL	8790.08	90.00	0.00	4937.00	3960.00	3960.00	0.00	3960.00	0.00	0.00	0.00G

Endeavor Energy

WELL 1724 Ross #121	FIELD Eddy County, NM Nad 83	STRUCTURE 1724 Ross #121
-------------------------------	--	------------------------------------

Magnetic Parameters Model: KGRF 2005	Dip: 00.427° Mag Dec: +8.638°	Date: June 06, 2006 FS	Surface Location Lat: N32 27 56.536 Long: W104 17 54.240	NADES New Mexico State Plane, Eastern Zone, US Feet Northing: 533366.06 RL/S Easting: 562111.26 RL/S	Grid Conv: +0.01875232° Scale Fact: 0.999992236	Miscellaneous Blot: 1724 Ross #121 Plan: 1724 Ross 121.r1	TVD Ref: RKB (0.00 ft above) Brwy Date: Mon 09:00 AM June 06 2006
---	----------------------------------	---------------------------	--	--	--	---	--

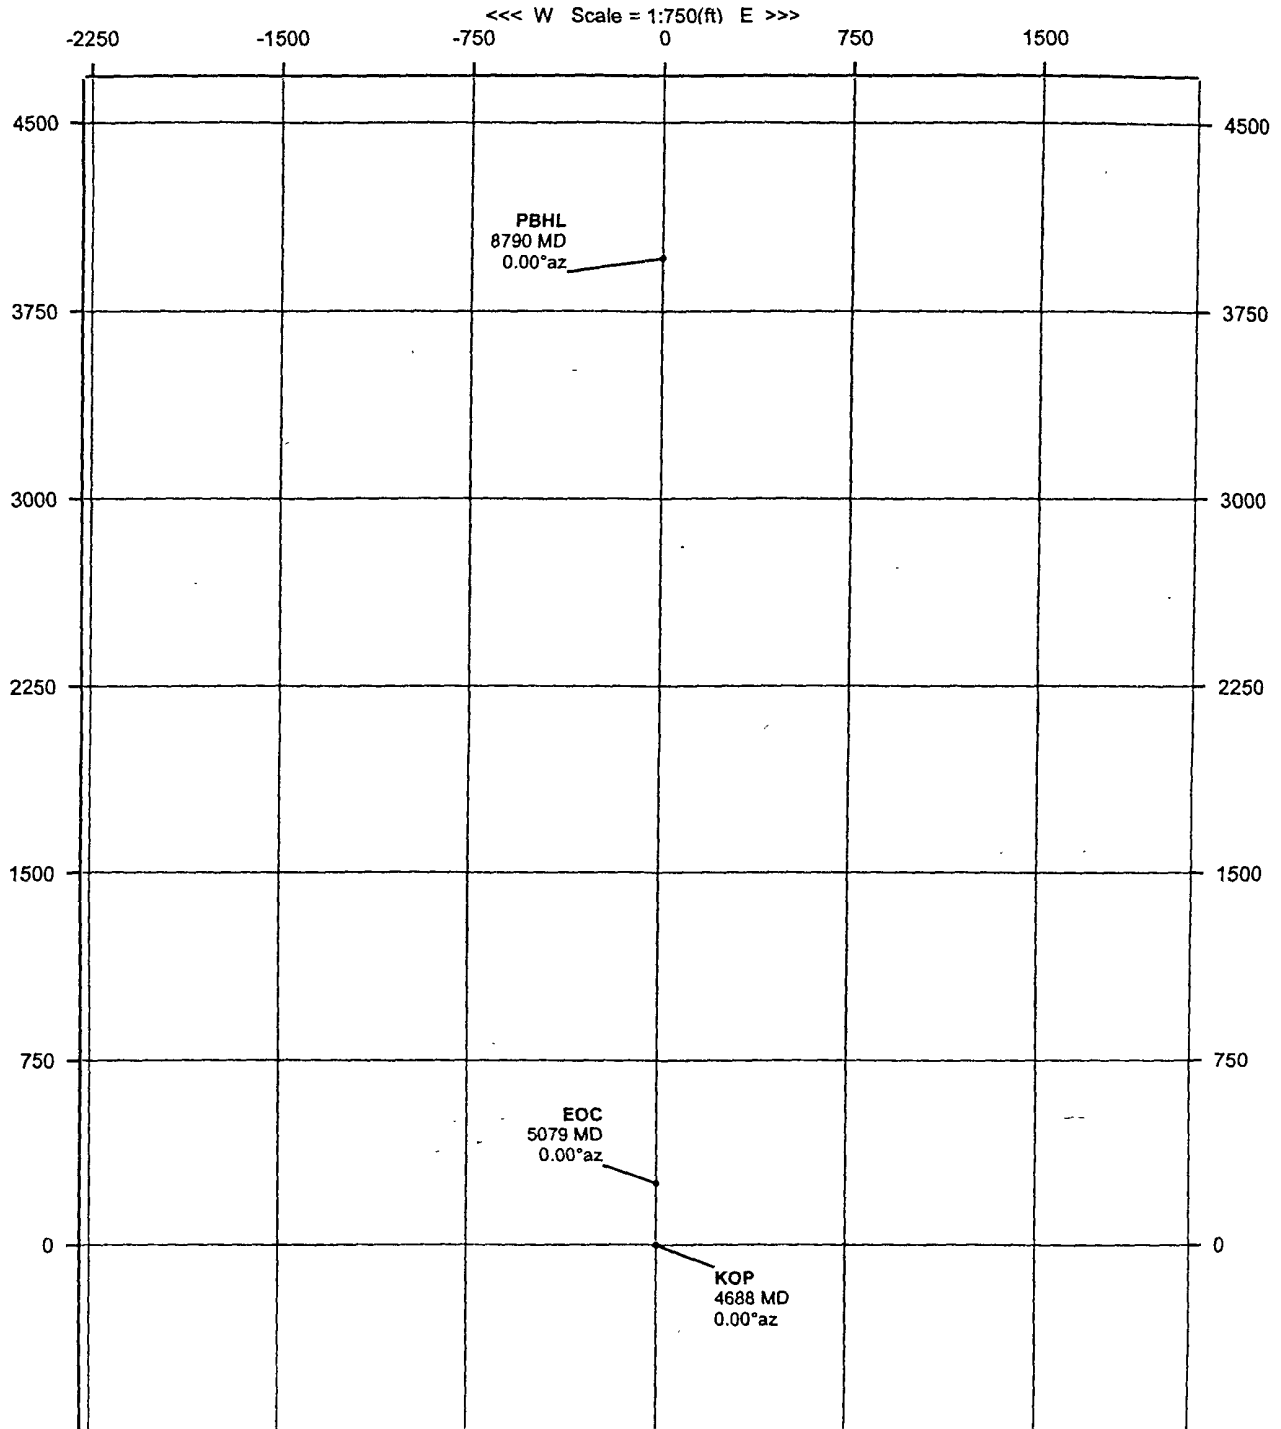


INTREPID
Directional Drilling Specialists



Endeavor Energy

WELL	1724 Ross #121	FIELD	Eddy County, NM Nad 83	STRUCTURE	1724 Ross #121
Magnetic Parameters		Surface Location		Miscellaneous	
Model	IGRF 2005	Lat	N32 27 56 536	Site	1724 Ross #121
Dip	00 427"	Lon	W104 17 54 240	Plan	1724 Ross 121_r1
Mag Dec	+8 638"	Northing	533358 05 RUS	TVD Ref	RKB (0 00 ft above)
Date	June 06, 2005	Eastng	552111 26 RUS	Srvy Date	Mon 09:00 AM June 06, 2005
FS	40319 0 nT	Scale Fact	0.9999992238		

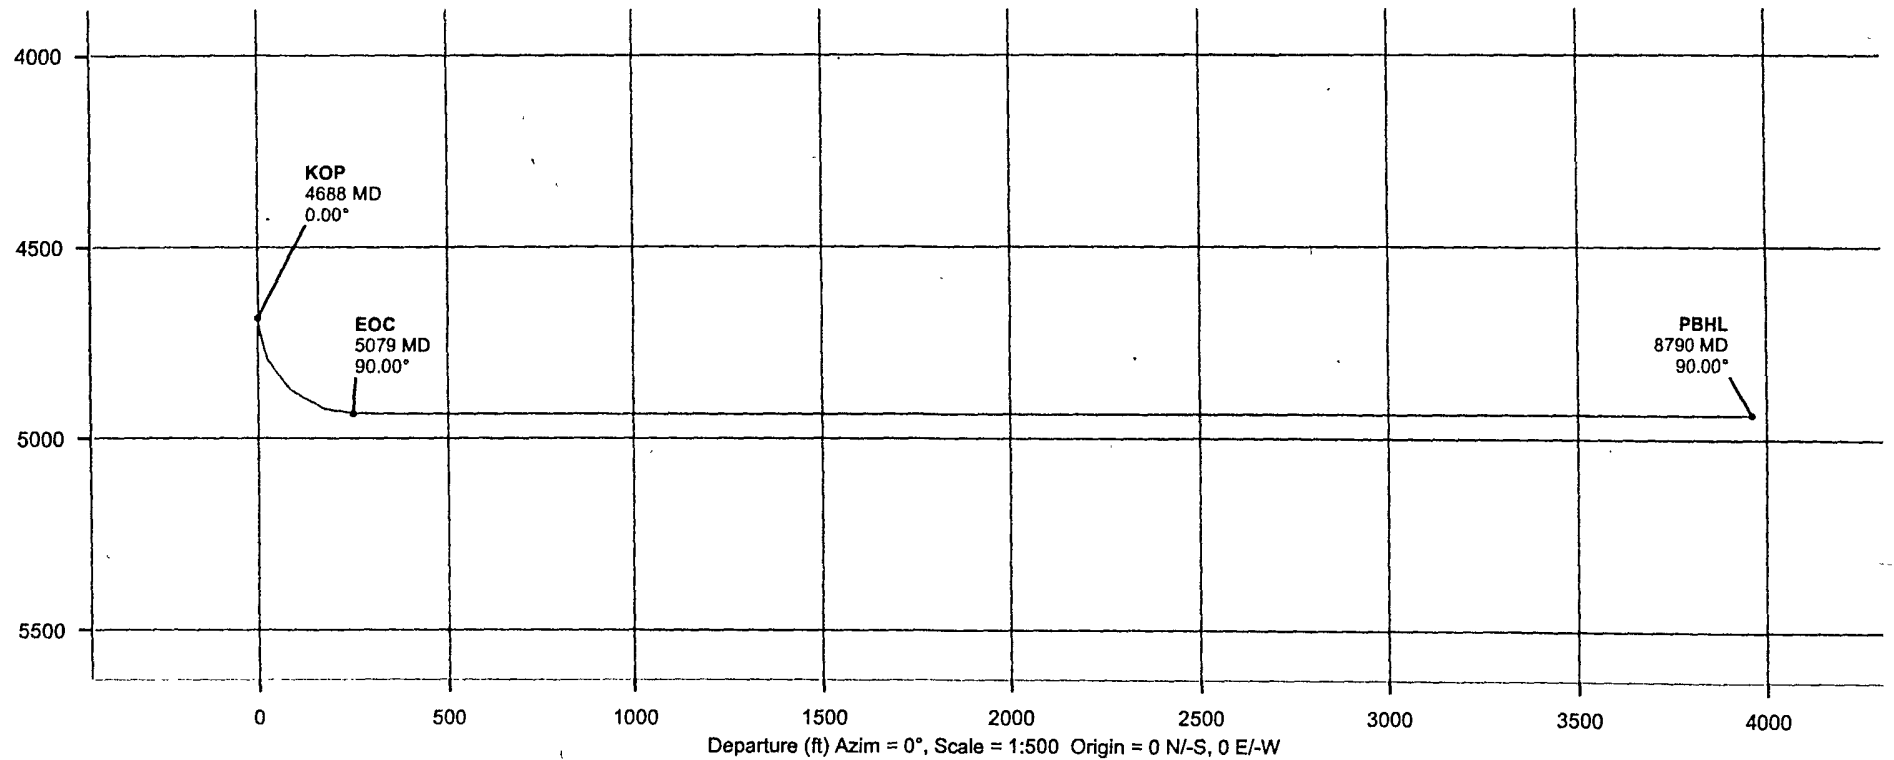

INTREPID
Directional Drilling Specialists



Survey Report

Report Date: November 21, 2005	Survey / DLS Computation Method: Minimum Curvature / Lubinski
Client: LCX Energy LLC.	Vertical Section Azimuth: 0.090°
Field: Eddy County, NM Nad 83	Vertical Section Origin: N 0.000 ft, E 0.000 ft
Structure / Slot: 1724 Ross #121 / 1724 Ross #121	TVD Reference Datum: RKB
Well: 1724 Ross #121	TVD Reference Elevation: 0 0 ft relative to
Borehole: 1724 Ross #121	Sea Bed / Ground Level Elevation: 0.000 ft relative to
UWI/API#:	Magnetic Declination: 8 734°
Survey Name / Date: 1724 Ross #121_surveys / October 25, 2005	Total Field Strength: 49482.064 nT
Tort / AHD / DDI / ERD ratio: 200.910° / 4300.34 ft / 6.197 / 0.868	Magnetic Dip: 60.727°
Grid Coordinate System: NAD83 New Mexico State Planes, Eastern Zone, US Feet	Declination Date: October 25, 2005
Location Lat/Long: N 32 50 41.318, W 104 32 22.571	Magnetic Declination Model: IGRF 2005
Location Grid N/E Y/X: N 671137.100 ftUS, E 477989.500 ftUS	North Reference: Grid North
Grid Convergence Angle: -0.11187393°	Total Corr Mag North -> Grid North: +8 846°
Grid Scale Factor: 0.99991369	Local Coordinates Referenced To: Well Head


Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Tie-In	4409.40	5.20	96.26	4408.08	-12.51	-12.46	-29.55	32.07	247.13	0.00	78.78G
	4452.00	5.30	100.90	4450.50	-13.09	-13.05	-25.70	28.82	243.08	1.02	147.71G
	4484.00	5.20	101.60	4482.37	-13.65	-13.62	-22.82	26.58	239.18	0.37	3.76G
	4515.00	6.60	102.40	4513.20	-14.31	-14.28	-19.71	24.34	234.07	4.52	-4.02G
	4546.00	10.50	100.90	4543.85	-15.22	-15.20	-15.19	21.49	224.99	12.60	-21.53G
	4578.00	14.70	94.50	4575.08	-16.08	-16.07	-8.28	18.08	207.25	13.81	-29.80G
	4609.00	19.30	86.80	4604.72	-16.09	-16.09	0.76	16.11	177.28	16.49	-24.80G
	4640.00	24.30	81.30	4633.49	-14.82	-14.84	12.19	19.21	140.60	17.41	-22.29G
	4672.00	29.40	77.10	4662.04	-12.05	-12.09	26.37	29.01	114.63	17.00	-25.14G
	4703.00	34.70	72.80	4688.31	-7.71	-7.78	42.23	42.94	100.44	18.60	-35.09G
	4734.00	38.30	68.80	4713.23	-1.60	-1.69	59.62	59.65	91.63	13.91	-27.50G
	4766.00	44.30	64.40	4737.26	6.86	6.73	78.97	79.25	85.13	20.82	-55.50G
	4799.00	47.80	57.90	4760.17	18.37	18.22	99.73	101.38	79.65	17.70	-47.44G
	4831.00	50.10	54.70	4781.19	31.80	31.61	119.80	123.90	75.22	10.42	-33.09G
	4862.00	52.30	52.90	4800.61	46.10	45.88	139.28	146.65	71.77	8.42	-31.16G
	4894.00	53.50	52.00	4819.92	61.69	61.44	159.52	170.94	68.94	4.37	-141.25G
	4925.00	53.40	51.90	4838.38	77.07	76.79	179.13	194.89	66.80	0.41	-11.69G
	4956.00	55.80	51.30	4856.33	92.80	92.48	198.93	219.38	65.07	7.90	-17.51G
	4998.00	60.80	49.50	4878.40	115.62	115.26	226.44	254.09	63.02	12.45	-7.74G
	5029.00	62.10	49.30	4893.21	133.37	132.99	247.12	280.63	61.71	4.23	-6.40G
	5061.00	63.70	49.10	4907.79	152.02	151.60	268.68	308.50	60.57	5.03	32.77G
	5082.00	65.40	50.30	4916.81	164.31	163.86	283.14	327.14	59.94	9.60	1.84G
	5113.00	68.30	50.40	4929.00	182.53	182.05	305.09	355.27	59.18	9.36	2.33G
	5145.00	73.00	50.60	4939.60	201.76	201.25	328.38	385.14	58.50	14.70	-3.01G
	5176.00	78.60	50.30	4947.20	220.93	220.38	351.54	414.91	57.92	18.09	-1.90G
	5207.00	84.60	50.10	4951.73	240.59	240.00	375.09	445.30	57.39	19.37	-28.33G
	5239.00	88.50	48.00	4953.65	261.55	260.93	399.21	476.92	56.83	13.84	-38.09G
	5270.00	92.20	45.10	4953.46	282.90	282.24	421.71	507.44	56.21	15.16	-48.06G
	5313.00	96.30	40.50	4950.28	314.39	313.69	450.83	549.23	55.17	14.31	-69.06G
	5344.00	97.80	36.50	4946.47	338.49	337.76	469.98	578.76	54.30	13.69	-82.53G
	5376.00	98.30	32.50	4941.99	364.63	363.86	487.93	608.66	53.29	12.47	-97.30G
	5407.00	97.80	28.70	4937.64	391.07	390.28	503.55	637.08	52.22	12.24	-120.92G
	5439.00	95.70	25.20	4933.88	419.41	418.60	517.94	665.95	51.05	12.69	-119.13G
	5470.00	93.80	21.80	4931.31	447.76	446.93	530.26	693.48	49.87	12.53	-129.57G
	5502.00	91.40	18.90	4929.86	477.74	476.89	541.37	721.47	48.62	11.76	-131.00G
	5534.00	89.40	16.60	4929.64	508.23	507.37	551.13	749.11	47.37	9.52	-104.06G
	5565.00	88.60	13.40	4930.18	538.18	537.30	559.15	775.46	46.14	10.64	-81.28G
	5596.00	89.00	10.80	4930.83	568.49	567.60	565.64	801.33	44.90	8.48	-80.93G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	5628.00	89.40	8.30	4931.28	600.05	599.15	570.95	827.63	43.62	7.91	-127.27G
	5659.00	87.50	5.80	4932.12	630.81	629.90	574.76	852.72	42.38	10.13	-111.86G
	5691.00	86.90	4.30	4933.68	662.65	661.74	577.57	878.34	41.11	5.04	-74.05G
	5722.00	87.10	3.60	4935.30	693.53	692.62	579.70	903.21	39.93	2.35	-81.89G
	5753.00	87.30	2.20	4936.82	724.46	723.55	581.27	928.11	38.78	4.56	-119.79G
	5785.00	86.90	1.50	4938.43	756.40	755.49	582.30	953.85	37.62	2.52	-153.47G
	5816.00	86.70	1.40	4940.17	787.35	786.43	583.08	979.01	36.55	0.72	-44.99G
	5848.00	87.70	0.40	4941.73	819.30	818.39	583.59	1005.15	35.49	4.42	-31.84G
	5908.00	90.60	358.60	4942.62	879.28	878.37	583.06	1054.27	33.58	5.69	-153.43G
	5971.00	90.40	358.50	4942.07	942.26	941.35	581.47	1106.45	31.70	0.35	-90.00G
	6034.00	90.40	357.70	4941.63	1005.22	1004.31	579.38	1159.45	29.98	1.27	-6.01G
	6096.00	92.30	357.50	4940.17	1067.14	1066.24	576.78	1212.25	28.41	3.08	-74.03G
	6159.00	92.50	356.80	4937.53	1130.00	1129.10	573.65	1266.47	26.93	1.15	-48.76G
	6200.00	93.20	356.00	4935.49	1170.87	1169.97	571.08	1301.91	26.02	2.59	0.00G
	6262.00	94.10	356.00	4931.54	1232.58	1231.69	566.77	1355.84	24.71	1.45	-149.42G
	6324.00	91.90	354.70	4928.30	1294.28	1293.40	561.75	1410.12	23.48	4.12	-145.30G
	6387.00	90.60	353.80	4926.93	1356.94	1356.07	555.44	1465.41	22.27	2.51	-125.54G
	6450.00	90.10	353.10	4926.54	1419.51	1418.65	548.25	1520.91	21.13	1.37	-101.31G
	6513.00	90.00	352.60	4926.49	1482.01	1481.16	540.41	1576.67	20.04	0.81	-146.31G
	6576.00	89.70	352.40	4926.65	1544.46	1543.62	532.19	1632.79	19.02	0.57	-9.46G
	6638.00	90.30	352.30	4926.65	1605.89	1605.07	523.93	1688.42	18.08	0.98	-26.56G
	6701.00	90.90	352.00	4925.99	1668.28	1667.48	515.33	1745.29	17.17	1.06	-41.17G
	6764.00	91.70	351.30	4924.56	1730.59	1729.79	506.18	1802.33	16.31	1.69	-154.65G
	6827.00	89.80	350.40	4923.74	1792.76	1791.98	496.16	1859.40	15.48	3.34	-20.22G
	6889.00	91.70	349.70	4922.93	1853.80	1853.04	485.45	1915.57	14.68	3.27	169.70G
	6952.00	90.60	349.90	4921.66	1915.77	1915.03	474.30	1972.89	13.91	1.77	170.54G
	7014.00	89.40	350.10	4921.66	1976.81	1976.09	463.53	2029.73	13.20	1.96	-145.32G
	7077.00	88.10	349.20	4923.04	2038.75	2038.05	452.22	2087.61	12.51	2.51	29.74G
	7148.00	88.80	349.60	4924.96	2108.50	2107.81	439.16	2153.07	11.77	1.14	-125.55G
	7211.00	88.30	348.90	4926.55	2170.35	2169.68	427.42	2211.38	11.14	1.37	63.44G
	7273.00	88.70	349.70	4928.17	2231.23	2230.58	415.91	2269.03	10.56	1.44	45.00G
	7336.00	89.00	350.00	4929.44	2293.22	2292.58	404.81	2328.05	10.01	0.67	16.70G
	7399.00	90.00	350.30	4929.99	2355.27	2354.65	394.03	2387.39	9.50	1.66	9.46G
	7462.00	91.80	350.60	4929.00	2417.37	2416.77	383.58	2447.02	9.02	2.90	-75.95G
	7524.00	91.90	350.20	4927.00	2478.45	2477.87	373.25	2505.82	8.57	0.66	-73.27G
	7587.00	92.20	349.20	4924.74	2540.38	2539.81	361.99	2565.48	8.11	1.66	153.44G
	7649.00	91.60	349.50	4922.69	2601.26	2600.71	350.54	2624.23	7.68	1.08	-161.57G
	7717.00	91.30	349.40	4920.97	2668.07	2667.54	338.09	2688.88	7.22	0.47	24.99G
	7778.00	92.80	350.10	4918.78	2728.04	2727.53	327.24	2747.09	6.84	2.71	85.56G
	7839.00	92.90	351.40	4915.75	2788.15	2787.66	317.45	2805.67	6.50	2.13	111.81G
	7901.00	92.70	351.90	4912.72	2849.41	2848.93	308.46	2865.58	6.18	0.87	149.75G
	7962.00	91.50	352.60	4910.49	2909.80	2909.33	300.24	2924.78	5.89	2.28	160.02G
	8024.00	90.40	353.00	4909.46	2971.29	2970.83	292.47	2985.19	5.62	1.89	175.24G
	8085.00	89.20	353.10	4909.67	3031.82	3031.38	285.09	3044.76	5.37	1.97	174.81G
	8147.00	88.10	353.20	4911.13	3093.35	3092.92	277.70	3105.36	5.13	1.78	-18.43G
	8209.00	89.00	352.90	4912.70	3154.86	3154.44	270.20	3165.99	4.90	1.53	153.45G
	8270.00	88.20	353.30	4914.19	3215.39	3214.98	262.87	3225.71	4.67	1.47	-9.46G
	8332.00	89.40	353.10	4915.49	3276.93	3276.53	255.53	3286.48	4.46	1.96	14.04G
	8394.00	90.60	353.40	4915.49	3338.49	3338.10	248.24	3347.32	4.25	2.00	18.43G
	8456.00	90.90	353.50	4914.68	3400.07	3399.69	241.17	3408.23	4.06	0.51	-167.00G
	8517.00	89.60	353.20	4914.41	3460.64	3460.28	234.11	3468.19	3.87	2.19	14.93G
	8579.00	91.10	353.60	4914.03	3522.22	3521.86	226.98	3529.17	3.69	2.50	-44.99G
	8640.00	91.20	353.50	4912.81	3582.81	3582.47	220.13	3589.22	3.52	0.23	-164.74G
	8702.00	90.10	353.20	4912.11	3644.37	3644.04	212.95	3650.26	3.34	1.84	0.00G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
Proj. TD	8764.00	90.60	353.20	4911.73	3705.92	3705.61	205.61	3711.31	3.18	0.81	-90.00G
	8825.00	90.60	353.10	4911.09	3766.47	3766.17	198.34	3771.39	3.01	0.16	-172.87G
	8887.00	89.80	353.00	4910.87	3828.01	3827.71	190.83	3832.47	2.85	1.30	0.00G
	8948.00	90.20	353.00	4910.87	3888.54	3888.26	183.40	3892.58	2.70	0.66	180.00G
	8967.00	90.10	353.00	4910.82	3907.39	3907.11	181.08	3911.31	2.65	0.53	180.00G
	9020.00	89.80	353.00	4910.87	3959.99	3959.72	174.62	3963.57	2.53	0.57	0.00G


LCX Energy LLC.

WELL	1724 Ross #121	FIELD	Eddy County, NM	STRUCTURE	1724 Ross #121
Magnetic Parameters Model IGRF 2005 Dip 60.727° Mag Dec +8.734° Date FS October 25, 2005 49462.1 nT Surface Location Lat N32 50 41.318 Lon W104 32 22.571 Northing 671137.10 RUS Easting 477989.50 RUS NAD83 New Mexico State Planes, Eastern Zone, US Feet Grid Conv -0.11167393° Scale Fact 0.9999136863 Miscellaneous Slot 1724 Ross #121 Plan 1724 Ross #121 surveys TVD Ref RKB (0.00 ft above) Srvy Date Tue 02 24 AM October 25, 2005					

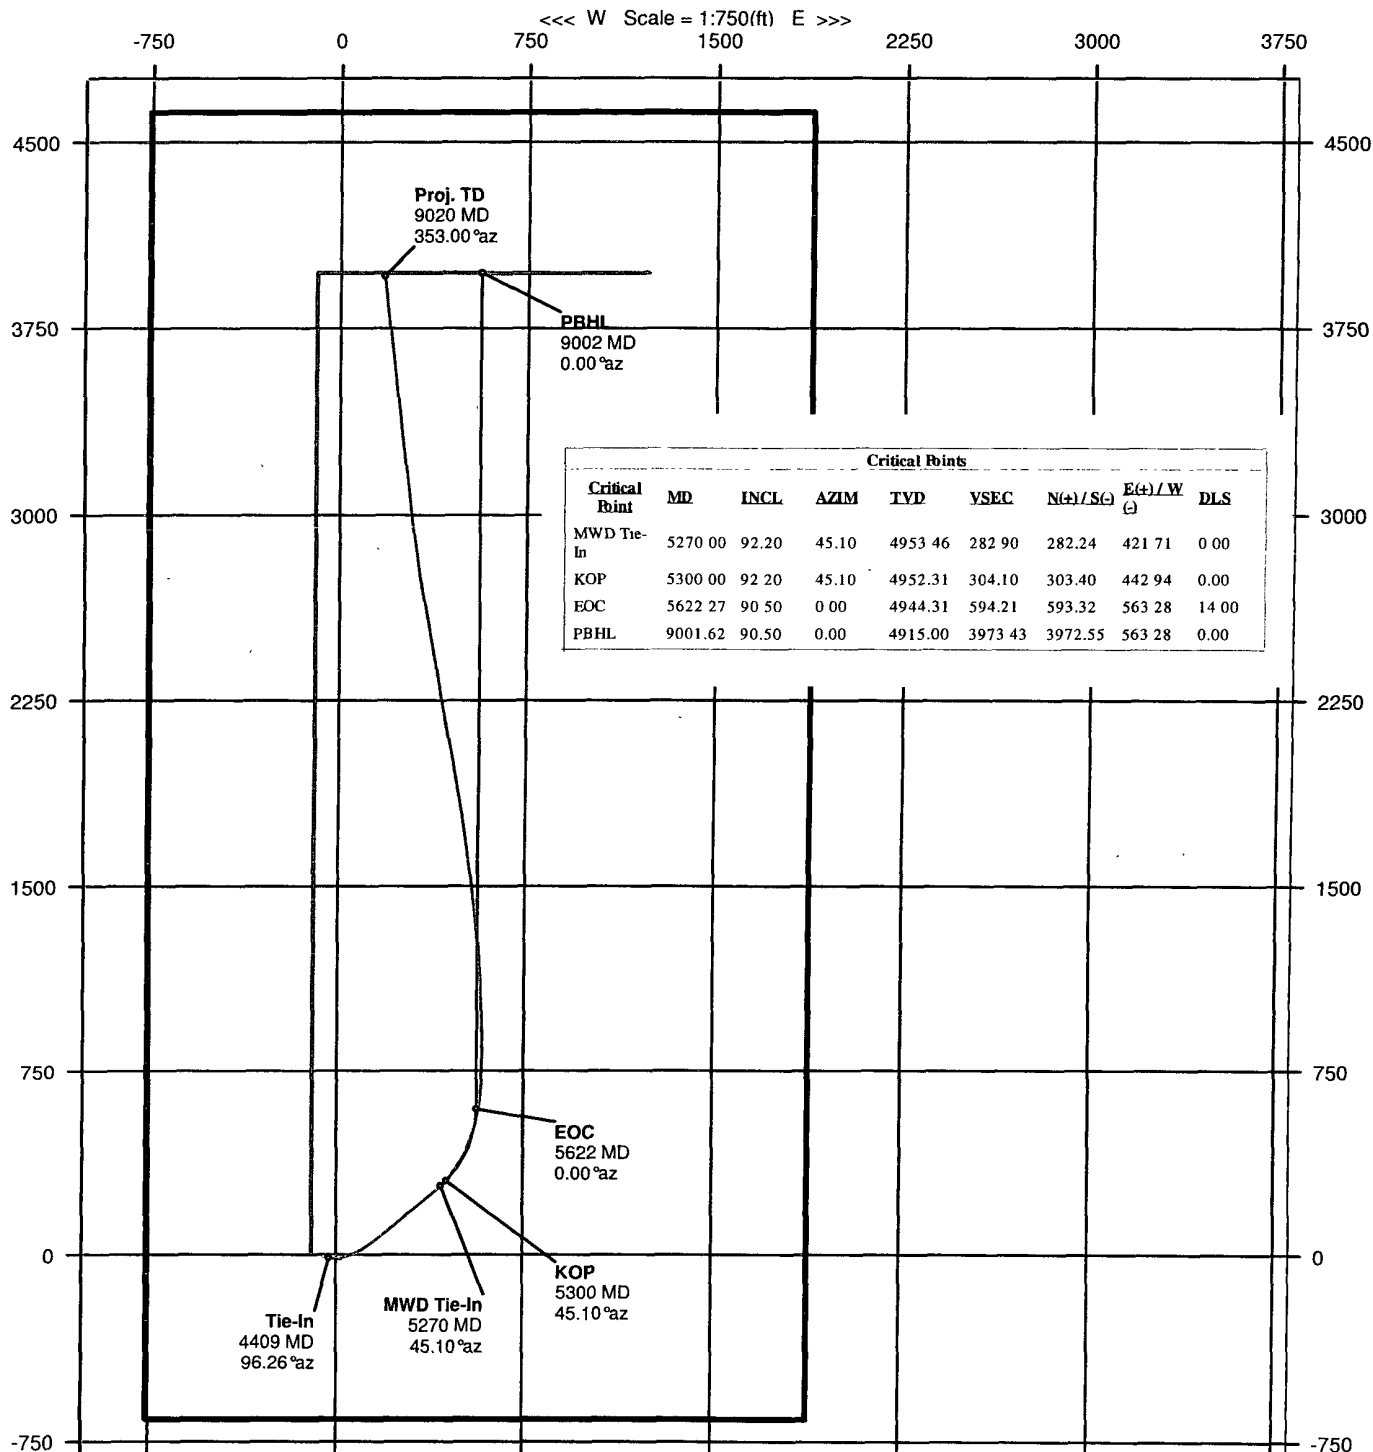

LCX Energy LLC.

WELL	1724 Ross #121	FIELD	Eddy County, NM	STRUCTURE	1724 Ross #121
Magnetic Parameters Model IGRF 2005		Surface Location Lat N32 50 41 318 Lon W104 32 22 571		Miscellaneous Slot 1724 Ross #121 Plan 1724 Ross #121 surveys	
Dip: 60 727° Mag Dec: +8 734°		Date: October 25, 2005 FS 49482.1 nT		TVD Ref: RKB (0.00 ft above) Srvy Date: Tue 02:24 AM October 25, 2005	
		NAD83 New Mexico State Planes, Eastern Zone, US Feet Northing 671137.10 nUS Easting 477989.50 nUS Gnd Conv -0.11167393° Scale Fact 0.9999138863			

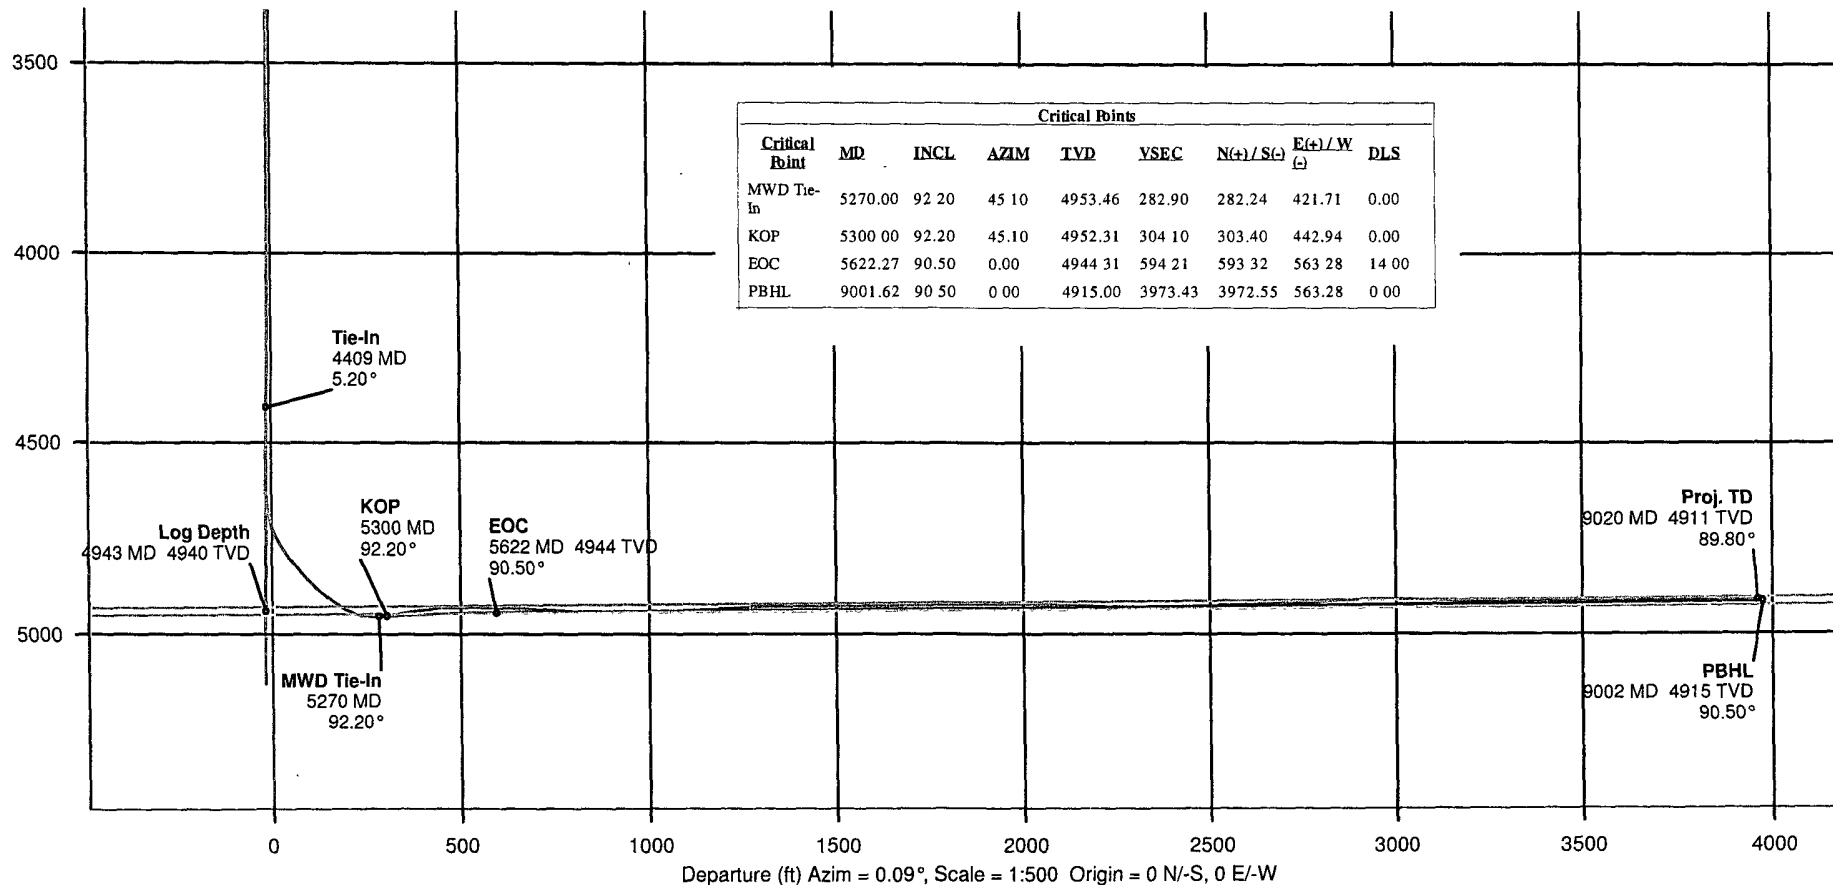

INTREPID
Directional Drilling Specialists



Survey Report

Report Date:	November 21, 2005	Survey / DLS Computation Method:	Minimum Curvature / Lubinski
Client:	LCX Energy LLC.	Vertical Section Azimuth:	0.090°
Field:	Eddy County, NM Nad 83	Vertical Section Origin:	N 0.000 ft, E 0.000 ft
Structure / Slot:	1724 Ross #121 / 1724 Ross #121	TVD Reference Datum:	RKB
Well:	1724 Ross #121	TVD Reference Elevation:	0.0 ft relative to
Borehole:	1724 Ross #121	Sea Bed / Ground Level Elevation:	0.000 ft relative to
UWI/API#:		Magnetic Declination:	8.734°
Survey Name / Date:	1724 Ross #121_surveys / October 25, 2005	Total Field Strength:	49482.064 nT
Tort / AHD / DDI / ERD ratio:	200.910° / 4300.34 ft / 6.197 / 0.868	Magnetic Dip:	60.727°
Grid Coordinate System:	NAD83 New Mexico State Planes, Eastern Zone, US Feet	Declination Date:	October 25, 2005
Location Lat/Long:	N 32 50 41.318, W 104 32 22.571	Magnetic Declination Model:	IGRF 2005
Location Grid N/E Y/X:	N 671137.100 ftUS, E 477989.500 ftUS	North Reference:	Grid North
Grid Convergence Angle:	-0.11187393°	Total Corr Mag North -> Grid North:	+8.846°
Grid Scale Factor:	0.99991369	Local Coordinates Referenced To:	Well Head

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
ie-In	4409.40	5.20	96.26	4408.08	-12.51	-12.46	-29.55	32.07	247.13	0.00	78.78G
	4452.00	5.30	100.90	4450.50	-13.09	-13.05	-25.70	28.82	243.08	1.02	147.71G
	4484.00	5.20	101.60	4482.37	-13.65	-13.62	-22.82	26.58	239.18	0.37	3.76G
	4515.00	6.60	102.40	4513.20	-14.31	-14.28	-19.71	24.34	234.07	4.52	-4.02G
	4546.00	10.50	100.90	4543.85	-15.22	-15.20	-15.19	21.49	224.99	12.60	-21.53G
	4578.00	14.70	94.50	4575.08	-16.08	-16.07	-8.28	18.08	207.25	13.81	-29.80G
	4609.00	19.30	86.80	4604.72	-16.09	-16.09	0.76	16.11	177.28	16.49	-24.80G
	4640.00	24.30	81.30	4633.49	-14.82	-14.84	12.19	19.21	140.60	17.41	-22.29G
	4672.00	29.40	77.10	4662.04	-12.05	-12.09	26.37	29.01	114.63	17.00	-25.14G
	4703.00	34.70	72.80	4688.31	-7.71	-7.78	42.23	42.94	100.44	18.60	-35.09G
	4734.00	38.30	68.80	4713.23	-1.60	-1.69	59.62	59.65	91.63	13.91	-27.50G
	4766.00	44.30	64.40	4737.26	6.86	6.73	78.97	79.25	85.13	20.82	-55.50G
	4799.00	47.80	57.90	4760.17	18.37	18.22	99.73	101.38	79.65	17.70	-47.44G
	4831.00	50.10	54.70	4781.19	31.80	31.61	119.80	123.90	75.22	10.42	-33.09G
	4862.00	52.30	52.90	4800.61	46.10	45.88	139.28	146.65	71.77	8.42	-31.16G
	4894.00	53.50	52.00	4819.92	61.69	61.44	159.52	170.94	68.94	4.37	-141.25G
	4925.00	53.40	51.90	4838.38	77.07	76.79	179.13	194.89	66.80	0.41	-11.69G
	4956.00	55.80	51.30	4856.33	92.80	92.48	198.93	219.38	65.07	7.90	-17.51G
	4998.00	60.80	49.50	4878.40	115.62	115.26	226.44	254.09	63.02	12.45	-7.74G
	5029.00	62.10	49.30	4893.21	133.37	132.99	247.12	280.63	61.71	4.23	-6.40G
	5061.00	63.70	49.10	4907.79	152.02	151.60	268.68	308.50	60.57	5.03	32.77G
	5082.00	65.40	50.30	4916.81	164.31	163.86	283.14	327.14	59.94	9.60	1.84G
	5113.00	68.30	50.40	4929.00	182.53	182.05	305.09	355.27	59.18	9.36	2.33G
	5145.00	73.00	50.60	4939.60	201.76	201.25	328.38	385.14	58.50	14.70	-3.01G
	5176.00	78.60	50.30	4947.20	220.93	220.38	351.54	414.91	57.92	18.09	-1.90G
	5207.00	84.60	50.10	4951.73	240.59	240.00	375.09	445.30	57.39	19.37	-28.33G
	5239.00	88.50	48.00	4953.65	261.55	260.93	399.21	476.92	56.83	13.84	-38.09G
	5270.00	92.20	45.10	4953.46	282.90	282.24	421.71	507.44	56.21	15.16	-48.06G
	5313.00	96.30	40.50	4950.28	314.39	313.69	450.83	549.23	55.17	14.31	-69.06G
	5344.00	97.80	36.50	4946.47	338.49	337.76	469.98	578.76	54.30	13.69	-82.53G
	5376.00	98.30	32.50	4941.99	364.63	363.86	487.93	608.66	53.29	12.47	-97.30G
	5407.00	97.80	28.70	4937.64	391.07	390.28	503.55	637.08	52.22	12.24	-120.92G
	5439.00	95.70	25.20	4933.88	419.41	418.60	517.94	665.95	51.05	12.69	-119.13G
	5470.00	93.80	21.80	4931.31	447.76	446.93	530.26	693.48	49.87	12.53	-129.57G
	5502.00	91.40	18.90	4929.86	477.74	476.89	541.37	721.47	48.62	11.76	-131.00G
	5534.00	89.40	16.60	4929.64	508.23	507.37	551.13	749.11	47.37	9.52	-104.06G
	5565.00	88.60	13.40	4930.18	538.18	537.30	559.15	775.46	46.14	10.64	-81.28G
	5596.00	89.00	10.80	4930.83	568.49	567.60	565.64	801.33	44.90	8.48	-80.93G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	5628.00	89.40	8.30	4931.28	600.05	599.15	570.95	827.63	43.62	7.91	-127.27G
	5659.00	87.50	5.80	4932.12	630.81	629.90	574.76	852.72	42.38	10.13	-111.86G
	5691.00	86.90	4.30	4933.68	662.65	661.74	577.57	878.34	41.11	5.04	-74.05G
	5722.00	87.10	3.60	4935.30	693.53	692.62	579.70	903.21	39.93	2.35	-81.89G
	5753.00	87.30	2.20	4936.82	724.46	723.55	581.27	928.11	38.78	4.56	-119.79G
	5785.00	86.90	1.50	4938.43	756.40	755.49	582.30	953.85	37.62	2.52	-153.47G
	5816.00	86.70	1.40	4940.17	787.35	786.43	583.08	979.01	36.55	0.72	-44.99G
	5848.00	87.70	0.40	4941.73	819.30	818.39	583.59	1005.15	35.49	4.42	-31.84G
	5908.00	90.60	358.60	4942.62	879.28	878.37	583.06	1054.27	33.58	5.69	-153.43G
	5971.00	90.40	358.50	4942.07	942.26	941.35	581.47	1106.45	31.70	0.35	-90.00G
	6034.00	90.40	357.70	4941.63	1005.22	1004.31	579.38	1159.45	29.98	1.27	-6.01G
	6096.00	92.30	357.50	4940.17	1067.14	1066.24	576.78	1212.25	28.41	3.08	-74.03G
	6159.00	92.50	356.80	4937.53	1130.00	1129.10	573.65	1266.47	26.93	1.15	-48.76G
	6200.00	93.20	356.00	4935.49	1170.87	1169.97	571.08	1301.91	26.02	2.59	0.00G
	6262.00	94.10	356.00	4931.54	1232.58	1231.69	566.77	1355.84	24.71	1.45	-149.42G
	6324.00	91.90	354.70	4928.30	1294.28	1293.40	561.75	1410.12	23.48	4.12	-145.30G
	6387.00	90.60	353.80	4926.93	1356.94	1356.07	555.44	1465.41	22.27	2.51	-125.54G
	6450.00	90.10	353.10	4926.54	1419.51	1418.65	548.25	1520.91	21.13	1.37	-101.31G
	6513.00	90.00	352.60	4926.49	1482.01	1481.16	540.41	1576.67	20.04	0.81	-146.31G
	6576.00	89.70	352.40	4926.65	1544.46	1543.62	532.19	1632.79	19.02	0.57	-9.46G
	6638.00	90.30	352.30	4926.65	1605.89	1605.07	523.93	1688.42	18.08	0.98	-26.56G
	6701.00	90.90	352.00	4925.99	1668.28	1667.48	515.33	1745.29	17.17	1.06	-41.17G
	6764.00	91.70	351.30	4924.56	1730.59	1729.79	506.18	1802.33	16.31	1.69	-154.65G
	6827.00	89.80	350.40	4923.74	1792.76	1791.98	496.16	1859.40	15.48	3.34	-20.22G
	6889.00	91.70	349.70	4922.93	1853.80	1853.04	485.45	1915.57	14.68	3.27	169.70G
	6952.00	90.60	349.90	4921.66	1915.77	1915.03	474.30	1972.89	13.91	1.77	170.54G
	7014.00	89.40	350.10	4921.66	1976.81	1976.09	463.53	2029.73	13.20	1.96	-145.32G
	7077.00	88.10	349.20	4923.04	2038.75	2038.05	452.22	2087.61	12.51	2.51	29.74G
	7148.00	88.80	349.60	4924.96	2108.50	2107.81	439.16	2153.07	11.77	1.14	-125.55G
	7211.00	88.30	348.90	4926.55	2170.35	2169.68	427.42	2211.38	11.14	1.37	63.44G
	7273.00	88.70	349.70	4928.17	2231.23	2230.58	415.91	2269.03	10.56	1.44	45.00G
	7336.00	89.00	350.00	4929.44	2293.22	2292.58	404.81	2328.05	10.01	0.67	16.70G
	7399.00	90.00	350.30	4929.99	2355.27	2354.65	394.03	2387.39	9.50	1.66	9.46G
	7462.00	91.80	350.60	4929.00	2417.37	2416.77	383.58	2447.02	9.02	2.90	-75.95G
	7524.00	91.90	350.20	4927.00	2478.45	2477.87	373.25	2505.82	8.57	0.66	-73.27G
	7587.00	92.20	349.20	4924.74	2540.38	2539.81	361.99	2565.48	8.11	1.66	153.44G
	7649.00	91.60	349.50	4922.69	2601.26	2600.71	350.54	2624.23	7.68	1.08	-161.57G
	7717.00	91.30	349.40	4920.97	2668.07	2667.54	338.09	2688.88	7.22	0.47	24.99G
	7778.00	92.80	350.10	4918.78	2728.04	2727.53	327.24	2747.09	6.84	2.71	85.56G
	7839.00	92.90	351.40	4915.75	2788.15	2787.66	317.45	2805.67	6.50	2.13	111.81G
	7901.00	92.70	351.90	4912.72	2849.41	2848.93	308.46	2865.58	6.18	0.87	149.75G
	7962.00	91.50	352.60	4910.49	2909.80	2909.33	300.24	2924.78	5.89	2.28	160.02G
	8024.00	90.40	353.00	4909.46	2971.29	2970.83	292.47	2985.19	5.62	1.89	175.24G
	8085.00	89.20	353.10	4909.67	3031.82	3031.38	285.09	3044.76	5.37	1.97	174.81G
	8147.00	88.10	353.20	4911.13	3093.35	3092.92	277.70	3105.36	5.13	1.78	-18.43G
	8209.00	89.00	352.90	4912.70	3154.86	3154.44	270.20	3165.99	4.90	1.53	153.45G
	8270.00	88.20	353.30	4914.19	3215.39	3214.98	262.87	3225.71	4.67	1.47	-9.46G
	8332.00	89.40	353.10	4915.49	3276.93	3276.53	255.53	3286.48	4.46	1.96	14.04G
	8394.00	90.60	353.40	4915.49	3338.49	3338.10	248.24	3347.32	4.25	2.00	18.43G
	8456.00	90.90	353.50	4914.68	3400.07	3399.69	241.17	3408.23	4.06	0.51	-167.00G
	8517.00	89.60	353.20	4914.41	3460.64	3460.28	234.11	3468.19	3.87	2.19	14.93G
	8579.00	91.10	353.60	4914.03	3522.22	3521.86	226.98	3529.17	3.69	2.50	-44.99G
	8640.00	91.20	353.50	4912.81	3582.81	3582.47	220.13	3589.22	3.52	0.23	-164.74G
	8702.00	90.10	353.20	4912.11	3644.37	3644.04	212.95	3650.26	3.34	1.84	0.00G

Comments	Measured Depth (ft)	Inclination (deg)	Azimuth (deg)	TVD (ft)	Vertical Section (ft)	NS (ft)	EW (ft)	Closure (ft)	Closure Azimuth (deg)	DLS (deg/100 ft)	Tool Face (deg)
	8764.00	90.60	353.20	4911.73	3705.92	3705.61	205.61	3711.31	3.18	0.81	-90.00G
	8825.00	90.60	353.10	4911.09	3766.47	3766.17	198.34	3771.39	3.01	0.16	-172.87G
	8887.00	89.80	353.00	4910.87	3828.01	3827.71	190.83	3832.47	2.85	1.30	0.00G
	8948.00	90.20	353.00	4910.87	3888.54	3888.26	183.40	3892.58	2.70	0.66	180.00G
	8967.00	90.10	353.00	4910.82	3907.39	3907.11	181.08	3911.31	2.65	0.53	180.00G
roj. TD	9020.00	89.80	353.00	4910.87	3959.99	3959.72	174.62	3963.57	2.53	0.57	0.00G