

Form 3160-3
(June 2015)FORM APPROVED
OMB No. 1004-0137
Expires: January 31, 2018

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: ☐ DRILL ☐ REENTER 1b. Type of Well: ☐ Oil Well ☐ Gas Well ☐ Other 1c. Type of Completion: ☐ Hydraulic Fracturing ☐ Single Zone ☐ Multiple Zone		5. Lease Serial No. 6. If Indian, Allottee or Tribe Name 7. If Unit or CA Agreement, Name and No. 8. Lease Name and Well No. [332045]
2. Name of Operator [372137]		9. API Well No. 30-025-49678
3a. Address	3b. Phone No. (include area code)	10. Field and Pool, or Exploratory
4. Location of Well (Report location clearly and in accordance with any State requirements. *) At surface At proposed prod. zone		11. Sec., T. R. M. or Blk. and Survey or Area
14. Distance in miles and direction from nearest town or post office*		12. County or Parish
13. State		
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any)	16. No of acres in lease	17. Spacing Unit dedicated to this well
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth	20. BLM/BIA Bond No. in file
21. Elevations (Show whether DF, KDB, RT, GL, etc.)	22. Approximate date work will start*	23. Estimated duration
24. Attachments		

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, and the Hydraulic Fracturing rule per 43 CFR 3162.3-3 (as applicable)

- | | |
|---|---|
| 1. Well plat certified by a registered surveyor.
2. A Drilling Plan.
3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
5. Operator certification.
6. Such other site specific information and/or plans as may be requested by the BLM. |
|---|---|

25. Signature	Name (Printed/Typed)	Date
Title		
Approved by (Signature)	Name (Printed/Typed)	Date
Title		
Office		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
 Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

NGMP Rec 12/21/2021

SL

(Continued on page 2)



Approval Date: 12/02/2021

 KZ
 12/29/2021

*(Instructions on page 2)

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240
Phone (575) 393-6161 Fax: (575) 393-0720

DISTRICT II
811 S. First St., Artesia, NM 88210
Phone (575) 748-1283 Fax: (575) 748-9720

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410
Phone (505) 334-6178 Fax: (505) 334-6170

DISTRICT IV
1226 S. St. Francis Dr., Santa Fe, NM 87505
Phone (505) 476-3480 Fax: (505) 476-3482

State of New Mexico
Energy, Minerals and Natural Resources Department

OIL CONSERVATION DIVISION
1226 South St. Francis Dr.
Santa Fe, New Mexico 87505

Form C-102

Revised August 1, 2011

Submit one copy to appropriate
District Office

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-025-49678	Pool Code 8146	Pool Name BUFFALO; BONE SPRING, SE
Property Code 332045	Property Name RAM 2-11 FED 2BS COM	Well Number 7H
OGRID No. 372137	Operator Name CHISHOLM ENERGY OPERATING, LLC	Elevation 3767'


Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	North/South line	FEET from the	East/West line	County
LOT 4	2	19 S	33 E		238	NORTH	1295	WEST	LEA

Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	FEET from the	North/South line	FEET from the	East/West line	County
M	11	19 S	33 E		100	SOUTH	400	WEST	LEA
Dedicated Acres 323.8	Joint or Infill	Consolidation Code	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

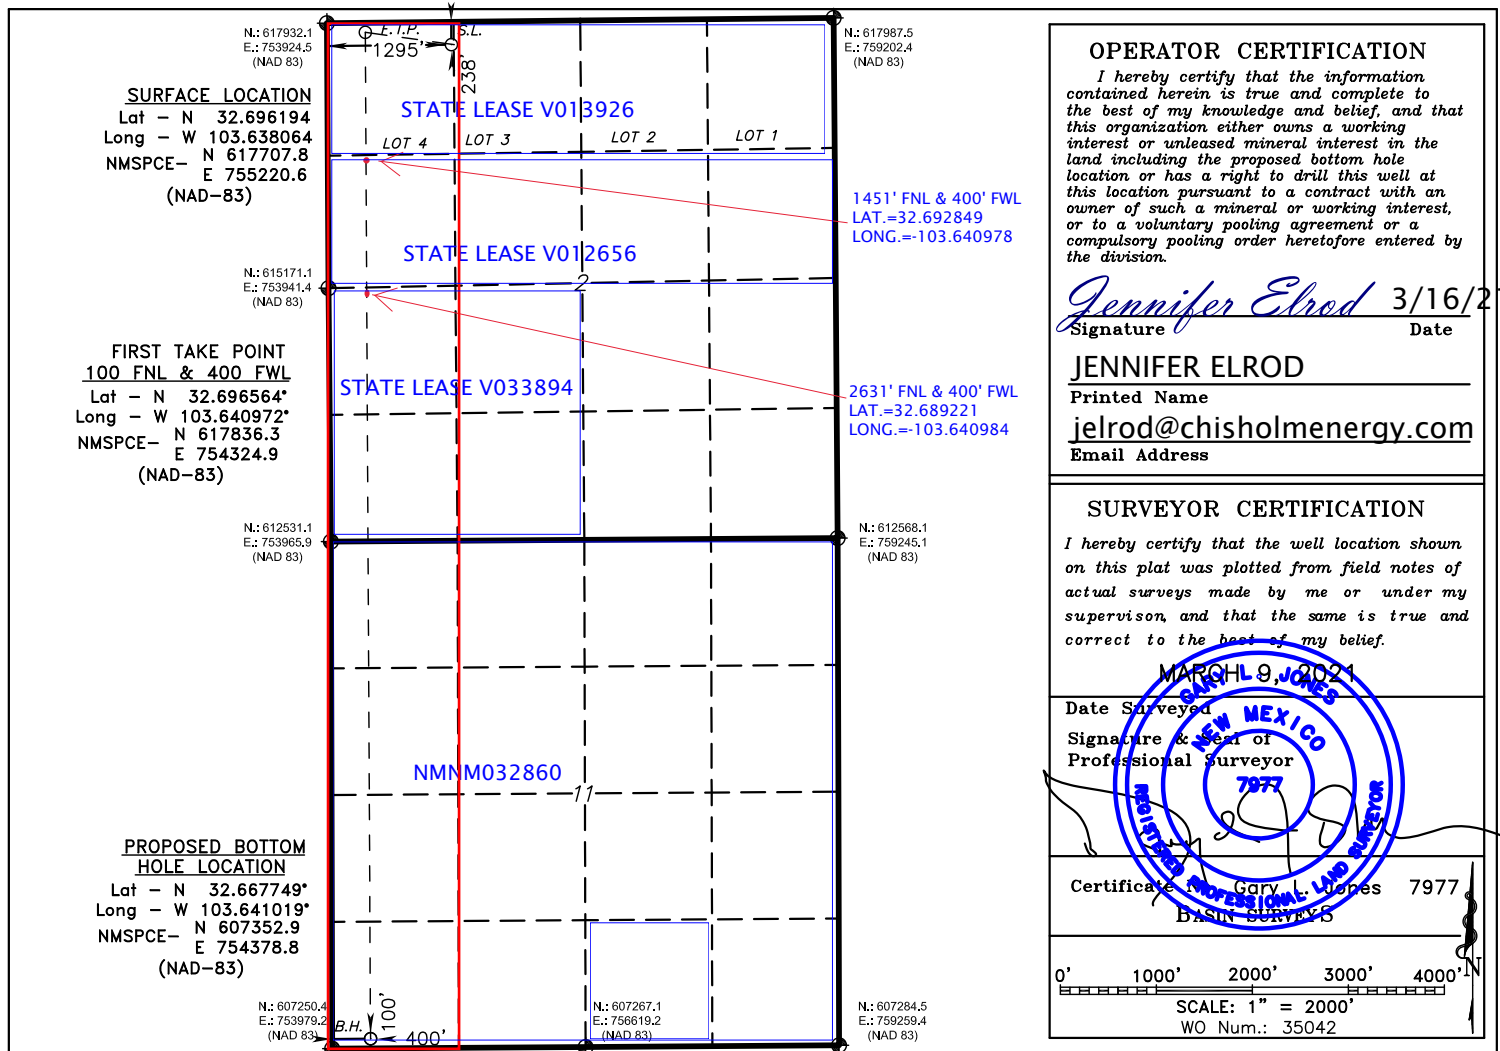

Intent ☒ As Drilled ☐

API #

Operator Name: CHISHOLM ENERGY OPERATING, LLC	Property Name: RAM 2-11 FED 2BS COM	Well Number 7H
---	---	--------------------------

Kick Off Point (KOP)

UL	Section 2	Township 19S	Range 33E	Lot 4	Feet 238	From N/S NORTH	Feet 1295	From E/W WEST	County LEA
Latitude 32.696194					Longitude -103.638064			NAD 83	

First Take Point (FTP)

UL	Section 2	Township 19S	Range 33E	Lot 4	Feet 100	From N/S NORTH	Feet 400	From E/W WEST	County LEA
Latitude 32.696564					Longitude -103.640972			NAD 83	

Last Take Point (LTP)

UL M	Section 11	Township 19S	Range 33E	Lot	Feet 100	From N/S SOUTH	Feet 400	From E/W WEST	County LEA
Latitude 32.667749					Longitude -103.641019			NAD 83	

Is this well the defining well for the Horizontal Spacing Unit?

☐ NO

Is this well an infill well?

☒ YES

If infill is yes please provide API if available, Operator Name and well number for Defining well for Horizontal Spacing Unit.

API #
30-025 43829

Operator Name: CHISHOLM ENERGY OPERATING, LLC	Property Name: BUFFALO WEST 2 STATE 2BS COM	Well Number 2H
---	---	--------------------------

KZ 06/29/2018

State of New Mexico
Energy, Minerals and Natural Resources Department

Submit Electronically
Via E-permitting

Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description

Effective May 25, 2021

I. Operator: CHISHOLM ENERGY OPERATING, LLC **OGRID:** 372137 **Date:** 07 / 08 / 2021

II. Type: ☒ Original ☐ Amendment due to ☐ 19.15.27.9.D(6)(a) NMAC ☐ 19.15.27.9.D(6)(b) NMAC ☐ Other.

If Other, please describe: _____

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	Anticipated Produced Water BBL/D
RAM 2-11 FED 2BS COM 7H		LOT 4-2-19S-33E	238 FNL, 1295 FEL	2000	2000	6000
RAM 2-11 FED 2BS COM 8H		LOT 4-2-19S-33E	238 FNL, 1325 FEL	2000	2000	6000

IV. Central Delivery Point Name: RAM 2-11 FED WEST BATTERY [See 19.15.27.9(D)(1) NMAC]

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

Well Name	API	Spud Date	TD Reached Date	Completion Commencement Date	Initial Flow Back Date	First Production Date
RAM 2-11 FED 2BS COM 7H		12/05/2022	12/30/2022	02/13/2023	03/13/2023	03/14/2023
RAM 2-11 FED 2BS COM 8H		01/01/2023	01/26/2023	02/21/2023	03/13/2023	03/14/2023

VI. Separation Equipment: ☒ Attach a complete description of how Operator will size separation equipment to optimize gas capture.

VII. Operational Practices: ☒ Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F of 19.15.27.8 NMAC.

VIII. Best Management Practices: ☒ Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

Section 2 – Enhanced Plan
EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☐ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in

XI. Map. ☐ Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.

XII. Line Capacity. The natural gas gathering system ☐ will ☐ will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.

XIII. Line Pressure. Operator ☐ does ☐ does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).

☐ Attach Operator's plan to manage production in response to the increased line pressure.

XIV. Confidentiality: ☐ Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

Section 3 - Certifications

Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal:

☒ Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system; or

☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system.

If Operator checks this box, Operator will select one of the following:

Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or

Venting and Flaring Plan. ☐ Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including:

- (a) power generation on lease;
- (b) power generation for grid;
- (c) compression on lease;
- (d) liquids removal on lease;
- (e) reinjection for underground storage;
- (f) reinjection for temporary storage;
- (g) reinjection for enhanced oil recovery;
- (h) fuel cell production; and
- (i) other alternative beneficial uses approved by the division.

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:


(a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or

(b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.

2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

Page 8

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: 
Printed Name: JENNIFER ELROD
Title: SR. REGULATORY ANALYST
E-mail Address: JELROD@CHISHOLMENERGY.COM
Date: 07/08/2021
Phone: (817)953-3728
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

**CEH Natural Gas Management
Plan Items VI-VIII****VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.**

- Separation equipment will be sized to provide adequate separation for anticipated rates.
- Adequate separation relates to retention time for Liquid – Liquid separation and velocity for Gas-Liquid separation.
- Collection systems are appropriately sized to handle facility production rates on all (3) phases.
- Ancillary equipment and metering are selected to be serviced without flow interruptions or the need to release gas from the well.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.**Drilling Operations**

- All flare stacks will be properly sized. The flare stacks will be located at a minimum 100' from the nearest surface hole location on the pad.
- All-natural gas produced during drilling operations will be flared, unless there is an equipment malfunction and/or to avoid risk of an immediate and substantial adverse impact on safety and the environment, at which point the gas will be vented.

Completions/Recompletions Operations

- New wells will not be flowed back until they are connected to a properly sized gathering system.
- The facility will be built/sized for maximum anticipated flowrates and pressures to minimize waste.
- For flowback operations, multiple stages of separation will be used as well as excess VRU and blowers to make sure waste is minimized off the storage tanks and facility.
- During initial flowback, the well stream will be routed to separation equipment.
- At an existing facility, when necessary, post separation natural gas will be flared until it meets pipeline specifications, at which point it will be turned into a collection system.
- At a new facility, post separation natural gas will be vented until storage tanks can safely function, at which point it will be flared until it meets pipeline spec.

Production Operations

- Weekly AVOs will be performed on all facilities.
- All flares will be equipped with auto-ignition systems and continuous pilot operations.
- After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- All tanks will have sight glasses installed, but no electronic gauging equipment.
- Leaking thief hatches found during AVOs will be cleaned and properly re-sealed.
- There will be no gas re-injection for underground storage, temporary storage, or for enhanced oil recovery; however, gas injection will be used for gas lift applications in which the gas would be circulated through a closed loop system.
- If H₂S is encountered, gas will be treated to pipeline spec to avoid shut-in's and/or flaring.

Performance Standards

- Production equipment will be designed to handle maximum anticipated rates and pressure.

Page 5

- All flared gas will be combusted in a flare stack that is properly sized and designed to ensure proper combustion.
- Weekly AVOs will be performed on all wells and facilities that produce more than 50MCFPD.

Measurement & Estimation

- All volume that is flared or vented that is not measured will be estimated.
- All measurement equipment for flared volumes will conform to API 14.10.
- No meter bypasses will be installed.
- When metering is not practical due to low pressure/low rate, the vented or flared volume will be estimated.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- During downhole well maintenance, CEH will use best management practices to vent as minimally as possible.
- After downhole well maintenance, natural gas will be flared until it reaches pipeline specification.

Casing Program: Buffalo West 2-11 2BS Fed Com 7H

Open Hole Size (Inches)	Casing Depth; From (ft)	Casing Setting Depth (ft) MD	Casing Setting Depth (ft) TVD	Casing Size (inches)	Casing Weight (lb/ft)	Casing Grade	Thread	Condition	Anticipated Mud Weight (ppg)	Burst (psi)	Burst SF (1.125)	Collapse (psi)	Collapse SF (1.125)	Tension Joint (klbs)	Air Weight (lbs)	Tension Joint SF (1.8)	Tension Body (klbs)	Air Weight (lbs)	Tension Body SF (1.8)
Surface																			
17.5"	0'	1,600'	1,600'	13 3/8"	54.5	J-55	BTC	New	8.4	2730	3.91	1130	1.62	909,000	87,200	10.42	853,000	87,200	9.78
Intermediate																			
12.25"	0'	5,300'	5,300'	9 5/8"	40	J-55	LTC	New	10.2	3950	1.41	2570	1.83	520,000	212,000	2.45	630,000	212,000	2.97
Production																			
8.75"	0'	19,842'	9,686'	5 1/2"	20	P-110	BTC	New	9.5	12640	2.73	11080	2.39	667,000	193,720	3.44	641,000	193,720	3.31

Casing Design Criteria and Casing Loading Assumptions:	
Surface	
Tension A 1.8 design factor with effects of buoyancy with a fluid equal to a mud weight of:	8.4 ppg
Collapse A 1.125 design factor with full internal evacuation and collapse force equal to a mud gradient of:	8.4 ppg
Burst A 1.125 design factor with full external evacuation and burst force equal to a mud gradient of:	8.4 ppg
Intermediate	
Tension A 1.8 design factor with effects of buoyancy with a fluid equal to a mud weight of:	10.2 ppg
Collapse A 1.125 design factor with 1/2 TVD internal evacuation and collapse force equal to a mud gradient of:	10.2 ppg
Burst A 1.125 design factor with full external evacuation and burst force equal to a mud gradient of:	10.2 ppg
Production	
Tension A 1.8 design factor with effects of buoyancy with a fluid equal to a mud weight of:	9.2 ppg
Collapse A 1.125 design factor with full internal evacuation and collapse force equal to a mud gradient of:	9.2 ppg
Burst A 1.125 design factor with full external evacuation and burst force equal to a mud gradient of:	9.2 ppg

Operator Name: CHISHOLM ENERGY OPERATING LLC**Well Name:** RAM 2-11 FED 2BS COM**Well Number:** 7H**Casing Attachments****Casing ID:** 2 **String Type:** INTERMEDIATE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Casing_Calculator___Buffalo_West_2_11_2BS_Fed_Com_7H_20210709121008.pdf

Casing ID: 3 **String Type:** PRODUCTION**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Casing_Calculator___Buffalo_West_2_11_2BS_Fed_Com_7H_20210709120948.pdf

Section 4 - Cement

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
SURFACE	Lead		0	1100	760	2.01	12.8	1528	100	Class C	Sodium Metasilicate, Defoamer, KCL
SURFACE	Tail		1100	1600	525	1.33	14.8	698	100	Class C	none
INTERMEDIATE	Lead		0	4800	1480	2.43	11.5	3596	200	Class C	Sodium Metasilicate, Defoamer, KCL, Kol-Seal, Cellophane Flakes, ROF SealCheck
INTERMEDIATE	Tail		4800	5300	355	1.33	14.8	472	200	Class C	Fluid Loss, Dispercent, Retarder

Operator Name: CHISHOLM ENERGY OPERATING LLC**Well Name:** RAM 2-11 FED 2BS COM**Well Number:** 7H

String Type	Lead/Tail	Stage Tool Depth	Top MD	Bottom MD	Quantity(sx)	Yield	Density	Cu Ft	Excess%	Cement type	Additives
PRODUCTION	Lead		4300	9500	545	2.62	11.3	1428	10	Class H	Bentonite, Compressive Strength Enhancer, Silica Fume Alternative, Fluid Loss, Defoamer, Sodium Metasilicate, Retarder
PRODUCTION	Tail		9500	1984 2	1470	1.82	13.2	2675	10	Class H	Fluid Loss, Suspension Agent, Retarder, Defoamer, Dispersant

Section 5 - Circulating Medium

Mud System Type: Closed**Will an air or gas system be Used?** NO**Description of the equipment for the circulating system in accordance with Onshore Order #2:****Diagram of the equipment for the circulating system in accordance with Onshore Order #2:****Describe what will be on location to control well or mitigate other conditions:** Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.**Describe the mud monitoring system utilized:** Pason PVT system will be in place throughout the well as well as visual checks

Circulating Medium Table

Top Depth	Bottom Depth	Mud Type	Min Weight (lbs/gal)	Max Weight (lbs/gal)	Density (lbs/cu ft)	Gel Strength (lbs/100 sqft)	PH	Viscosity (CP)	Salinity (ppm)	Filtration (cc)	Additional Characteristics
0	1600	SPUD MUD	8.5	9.2							38-40 VIS 8-10 PV 8-10 YP
5300	1984 2	OIL-BASED MUD	9.3	9.8							15-20 PV 8-12 YP
1600	5300	SALT SATURATED	9.8	10.2							28-32 VIS 1-3 PV 1-3 YP

Operator Name: CHISHOLM ENERGY OPERATING LLC**Well Name:** RAM 2-11 FED 2BS COM**Well Number:** 7H**Section 3 - Casing**

Casing ID	String Type	Hole Size	Csg Size	Condition	Standard	Tapered String	Top Set MD	Bottom Set MD	Top Set TVD	Bottom Set TVD	Top Set MSL	Bottom Set MSL	Calculated casing length MD	Grade	Weight	Joint Type	Collapse SF	Burst SF	Joint SF Type	Joint SF	Body SF Type	Body SF
1	SURFACE	17.5	13.375	NEW	API	N	0	1600	0	1600	3767	2167	1600	J-55	54.5	BUTT	1.62	3.91	DRY	10.42	DRY	9.78
2	INTERMEDIATE	12.25	9.625	NEW	API	N	0	5300	0	5300	3728	-1533	5300	J-55	40	LT&C	1.83	1.41	DRY	2.45	DRY	2.97
3	PRODUCTION	8.75	5.5	NEW	API	N	0	19842	0	9686	3728	-5919	19842	P-110	20	BUTT	2.39	2.73	DRY	3.44	DRY	3.31



Casing Attachments**Casing ID:** 1 **String Type:** SURFACE**Inspection Document:****Spec Document:****Tapered String Spec:****Casing Design Assumptions and Worksheet(s):**

Casing_Calculator___Buffalo_West_2_11_2BS_Fed_Com_7H_20210709121026.pdf

Borehole:	Well:	Field:	Structure:
Buffalo West 2-11 2BS Fed Com 7H	Buffalo West 2-11 2BS Fed Com 7H	NM Lea County (NAD 83)	Chisholm Buffalo West 2-11 2BS Fed Com 7H

Gravity & Magnetic Parameters					Surface Location				NAD83 New Mexico State Plane, Eastern Zone, US Feet				Miscellaneous			
Model:	HDGM 2020	Dip:	60.625°	Date:	06-May-2020	Lat:	N 32 41 46.30	Northing:	617707.8ftUS	Grid Conv:	0.3756°	Slot:	New Slot	TVD Ref:	RKB(3798ft above MSL)	
MagDec:	6.535°	FS:	48094.532nT	Gravity FS:	998.511mgn (9.80665 Based)	Lon:	W 103 38 17.03	Easting:	755220.6ftUS	Scale Fact:	0.99996148	Plan:	Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20			

Critical Points								
Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
SHL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler	1463.00	0.00	283.80	1463.00	0.00	0.00	0.00	0.00
Nudge 1.5" DLS	1600.00	0.00	283.80	1600.00	0.00	0.00	0.00	0.00
Salado	1746.04	2.19	283.80	1746.00	-0.68	0.67	-2.71	1.50
Hold	2000.00	6.00	283.80	1999.27	-5.09	4.99	-20.32	1.50
13-3/8" Casing	2466.00	6.00	283.80	2462.72	-16.95	16.61	-67.63	0.00
7 Rivers	3650.77	6.00	283.80	3641.00	-47.10	46.15	-187.89	0.00
Queen	4277.21	6.00	283.80	4264.00	-63.04	61.77	-251.48	0.00
Delaware Mtn Gr	6547.64	6.00	283.80	6522.00	-120.82	118.38	-481.96	0.00
Bone Spring	7645.66	6.00	283.80	7614.00	-148.76	145.76	-593.42	0.00
1st Bone Spring SS	8938.74	6.00	283.80	8900.00	-181.66	178.00	-724.68	0.00
KOP, Build 10" DLS	8942.99	6.00	283.80	8904.23	-181.77	178.10	-725.11	0.00
Build & Turn 10" DLS	9278.69	35.00	211.82	9217.67	-102.20	98.18	-794.92	10.00
9-5/8" Casing	9566.00	59.95	191.87	9411.35	93.26	-97.64	-865.42	10.00
2nd Bone Spring SS	9631.19	65.94	188.97	9441.00	150.28	-154.71	-875.88	10.00
Landing Point	9877.72	88.90	179.71	9494.45	388.29	-392.82	-893.06	10.00
Chisholm Buffalo West 2-11 2BS Fed Com 7H - BHL	19842.19	88.90	179.71	9685.75	10350.93	-10355.32	-841.83	0.00
3rd Bone Spring SS	NaN			10312.00				

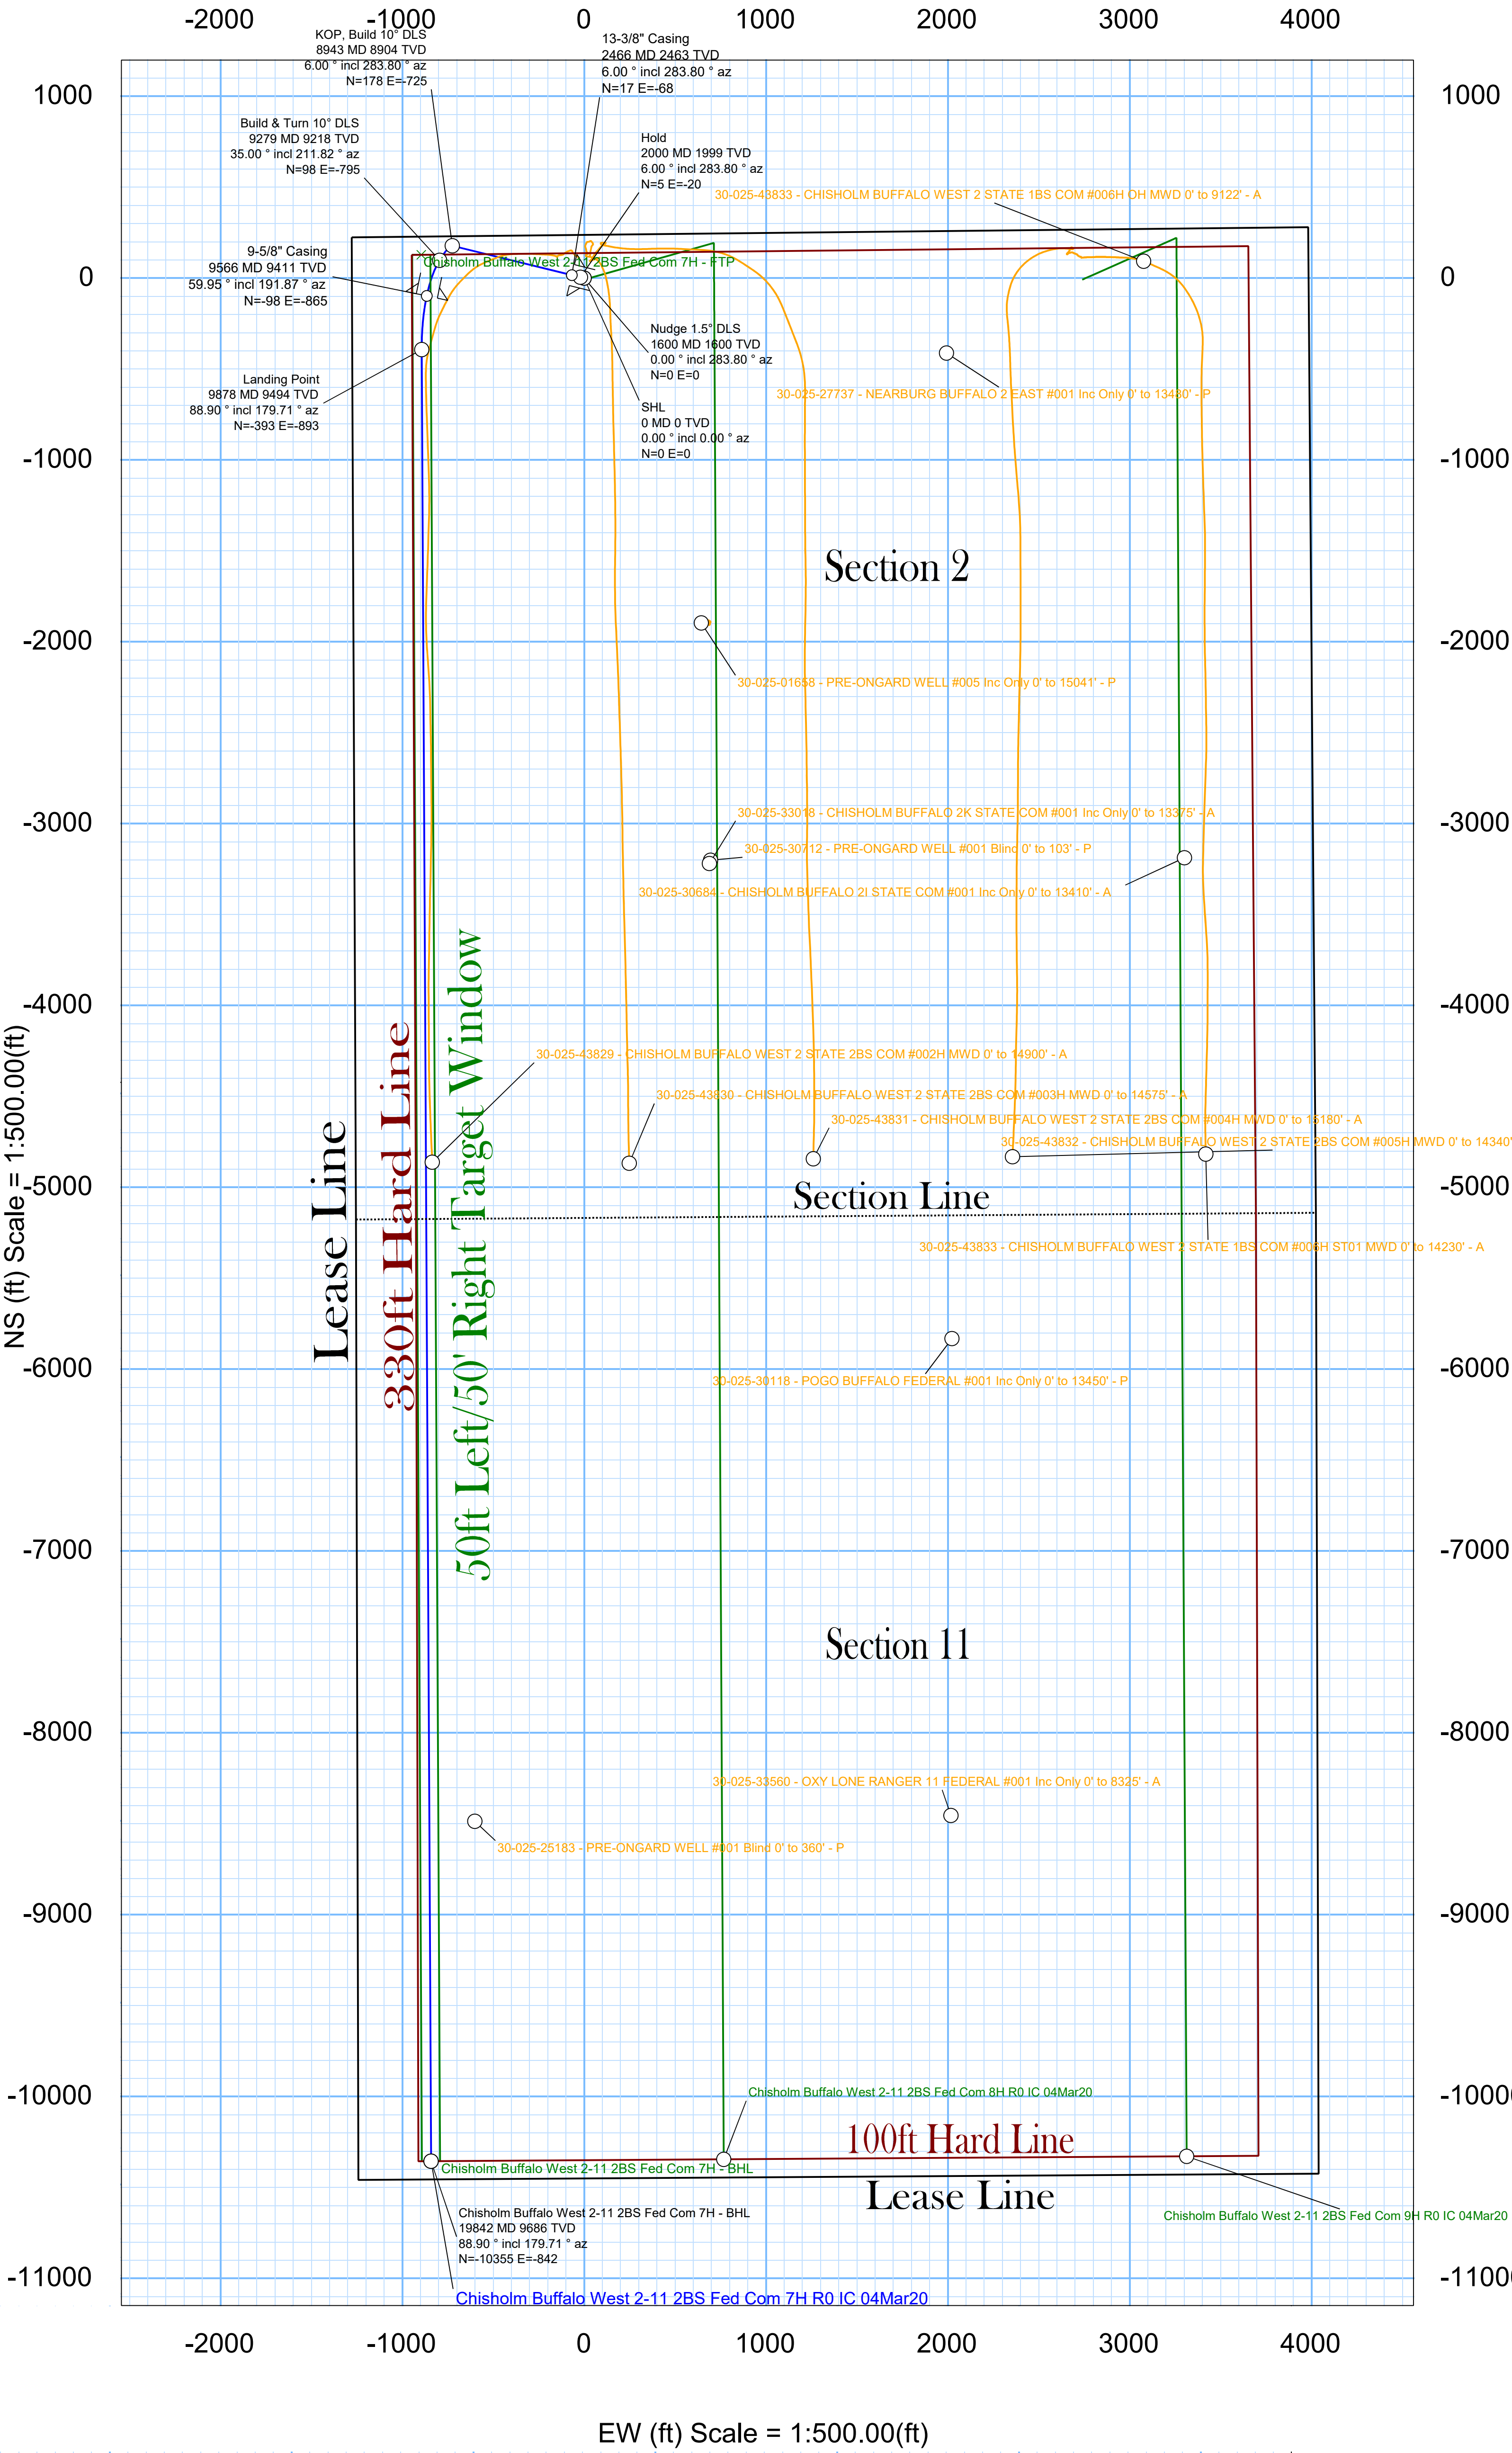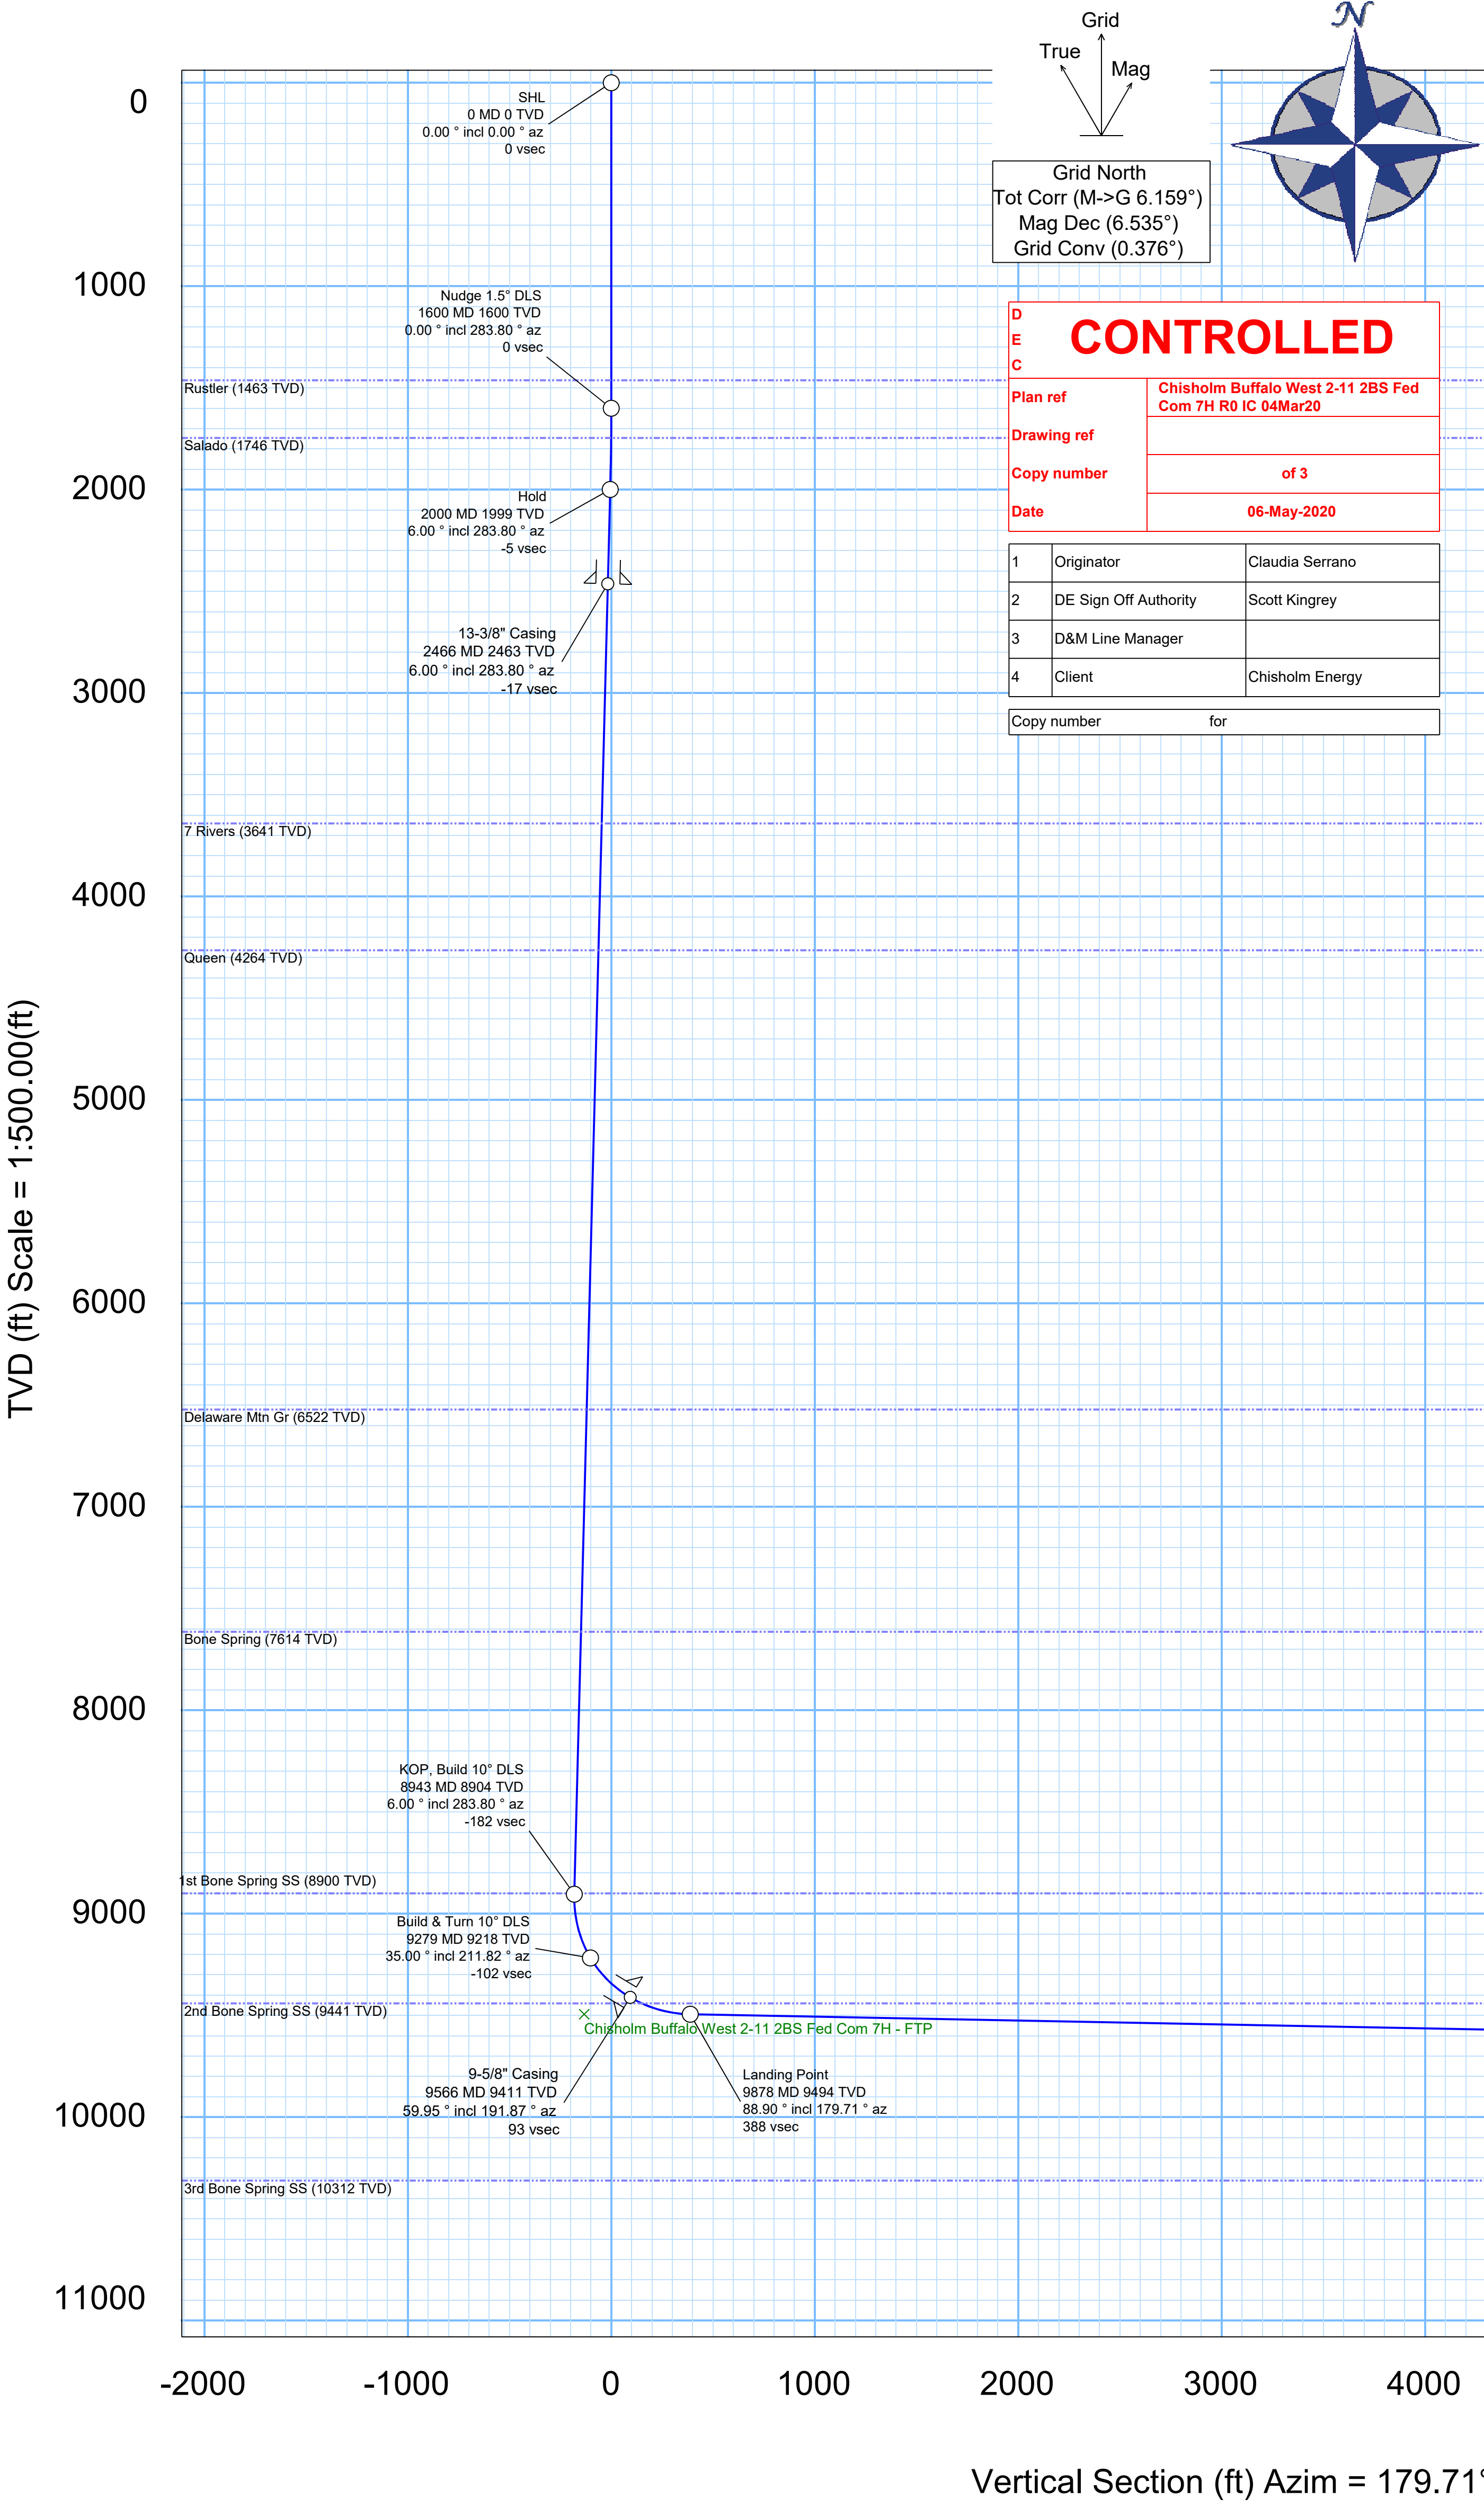

Vertical Section (ft) Azim = 179.71° Scale = 1:500.00(ft) Origin = 0N/-S, 0E/-W



Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20 Proposal Geodetic Report (Non-Def Plan)

Report Date: May 06, 2020 - 02:07 PM
Client: Chisholm
Field: NM Lea County (NAD 83)
Structure / Slot: Chisholm Buffalo West 2-11 2BS Fed Com 7H / New Slot
Well: Buffalo West 2-11 2BS Fed Com 7H
Borehole: Buffalo West 2-11 2BS Fed Com 7H
UWI / API#: Unknown / Unknown
Survey Name: Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20
Survey Date: May 06, 2020
Tort / AHD / DDI / ERD Ratio: 99.473 ° / 11324.097 ft / 6.363 / 1.169
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 41' 46.29970", W 103° 38' 17.02908"
Location Grid N/E Y/X: N 617707.800 ftUS, E 755220.600 ftUS
CRS Grid Convergence Angle: 0.3756 °
Grid Scale Factor: 0.99996148
Version / Patch: 2.10.811.0

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 179.710 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: RKB
TVD Reference Elevation: 3798.000 ft above MSL
Seabed / Ground Elevation: 3767.000 ft above MSL
Magnetic Declination: 6.535 °
Total Gravity Field Strength: 998.5110mgm (9.80665 Based)
Gravity Model: GARM
Total Magnetic Field Strength: 48094.532 nT
Magnetic Dip Angle: 60.625 °
Declination Date: May 06, 2020
Magnetic Declination Model: HDGM 2020
North Reference: Grid North
Grid Convergence Used: 0.3756 °
Total Corr Mag North->Grid North: 6.1592 °
Local Coord Referenced To: Well Head

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
Nudge 1.5° DLS	1600.00	0.00	283.80	1600.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
Hold	2000.00	6.00	283.80	1999.27	-5.09	4.99	-20.32	1.50	617712.79	755200.28	N 32 41 46.35	W 103 38 17.27
KOP, Build 10° DLS	8942.99	6.00	283.80	8904.23	-181.77	178.10	-725.11	0.00	617885.90	754495.52	N 32 41 48.11	W 103 38 25.50
Build & Turn 10° DLS	9278.69	35.00	211.82	9217.67	-102.20	98.18	-794.92	10.00	617805.98	754425.72	N 32 41 47.32	W 103 38 26.32
Landing Point	9877.72	88.90	179.71	9494.45	388.29	-392.82	-893.06	10.00	617315.00	754327.58	N 32 41 42.47	W 103 38 27.51
Chisholm Buffalo West 2-11 2BS Fed Com 7H - BHL	19842.19	88.90	179.71	9685.75	10350.93	-10355.32	-841.83	0.00	607352.90	754378.80	N 32 40 3.90	W 103 38 27.67

Survey Type: Non-Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Type	Borehole / Survey
	1	0.000	31.000	1/100.000	30.000	30.000		NAL_MWD_1.0_DEG-Depth Only	Buffalo West 2-11 2BS Fed Com 7H / Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20
	1	31.000	19842.195	1/100.000	30.000	30.000		NAL_MWD_1.0_DEG	Buffalo West 2-11 2BS Fed Com 7H / Chisholm Buffalo West 2-11



Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20 Proposal Geodetic Report (Non-Def Plan)



Report Date: May 06, 2020 - 02:11 PM Client: Chisholm Field: NM Lea County (NAD 83) Structure / Slot: Chisholm Buffalo West 2-11 2BS Fed Com 7H / New Slot Well: Buffalo West 2-11 2BS Fed Com 7H Borehole: Buffalo West 2-11 2BS Fed Com 7H UWI / API#: Unknown / Unknown Survey Name: Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20 Survey Date: May 06, 2020 Tort / AHD / DDI / ERD Ratio: 99.473 ° / 11324.097 ft / 6.363 / 1.169 Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet Location Lat / Long: N 32° 41' 46.29970", W 103° 38' 17.02908" Location Grid N/E Y/X: N 617707.800 ftUS, E 755220.600 ftUS CRS Grid Convergence Angle: 0.3756 ° Grid Scale Factor: 0.99996148 Version / Patch: 2.10.811.0	Survey / DLS Computation: Minimum Curvature / Lubinski Vertical Section Azimuth: 179.710 ° (Grid North) Vertical Section Origin: 0.000 ft, 0.000 ft TVD Reference Datum: RKB TVD Reference Elevation: 3798.000 ft above MSL Seabed / Ground Elevation: 3767.000 ft above MSL Magnetic Declination: 6.535 ° Total Gravity Field Strength: 998.5110mgn (9.80665 Based) Gravity Model: GARM Total Magnetic Field Strength: 48094.532 nT Magnetic Dip Angle: 60.625 ° Declination Date: May 06, 2020 Magnetic Declination Model: HDGM 2020 North Reference: Grid North Grid Convergence Used: 0.3756 ° Total Corr Mag North->Grid North: 6.1592 ° Local Coord Referenced To: Well Head
---	--

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
SHL	0.00	0.00	0.00	0.00	0.00	0.00	0.00	N/A	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	100.00	0.00	283.80	100.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	200.00	0.00	283.80	200.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	300.00	0.00	283.80	300.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	400.00	0.00	283.80	400.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	500.00	0.00	283.80	500.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	600.00	0.00	283.80	600.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	700.00	0.00	283.80	700.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	800.00	0.00	283.80	800.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	900.00	0.00	283.80	900.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1000.00	0.00	283.80	1000.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1100.00	0.00	283.80	1100.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1200.00	0.00	283.80	1200.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1300.00	0.00	283.80	1300.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1400.00	0.00	283.80	1400.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
Rustler	1463.00	0.00	283.80	1463.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
Nudge 1.5° DLS	1500.00	0.00	283.80	1500.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
	1600.00	0.00	283.80	1600.00	0.00	0.00	0.00	0.00	617707.80	755220.60	N 32 41 46.30	W 103 38 17.03
Salado	1700.00	1.50	283.80	1699.99	-0.32	0.31	-1.27	1.50	617708.11	755219.33	N 32 41 46.30	W 103 38 17.04
	1746.04	2.19	283.80	1746.00	-0.68	0.67	-2.71	1.50	617708.47	755217.89	N 32 41 46.31	W 103 38 17.06
	1800.00	3.00	283.80	1799.91	-1.27	1.25	-5.08	1.50	617709.05	755215.52	N 32 41 46.31	W 103 38 17.09
	1900.00	4.50	283.80	1899.69	-2.87	2.81	-11.44	1.50	617710.61	755209.17	N 32 41 46.33	W 103 38 17.16
Hold	2000.00	6.00	283.80	1999.27	-5.09	4.99	-20.32	1.50	617712.79	755200.28	N 32 41 46.35	W 103 38 17.27
	2100.00	6.00	283.80	2098.72	-7.64	7.48	-30.47	0.00	617715.28	755190.13	N 32 41 46.38	W 103 38 17.39
	2200.00	6.00	283.80	2198.17	-10.18	9.98	-40.62	0.00	617717.78	755179.98	N 32 41 46.40	W 103 38 17.50
	2300.00	6.00	283.80	2297.63	-12.73	12.47	-50.77	0.00	617720.27	755169.83	N 32 41 46.43	W 103 38 17.62
13-3/8" Casing	2400.00	6.00	283.80	2397.08	-15.27	14.96	-60.93	0.00	617722.76	755159.68	N 32 41 46.45	W 103 38 17.74
	2466.00	6.00	283.80	2462.72	-16.95	16.61	-67.63	0.00	617724.41	755152.98	N 32 41 46.47	W 103 38 17.82
	2500.00	6.00	283.80	2496.53	-17.82	17.46	-71.08	0.00	617725.26	755149.53	N 32 41 46.48	W 103 38 17.86
	2600.00	6.00	283.80	2595.98	-20.36	19.95	-81.23	0.00	617727.75	755139.38	N 32 41 46.50	W 103 38 17.98
	2700.00	6.00	283.80	2695.43	-22.91	22.44	-91.38	0.00	617730.24	755129.23	N 32 41 46.53	W 103 38 18.10
	2800.00	6.00	283.80	2794.89	-25.45	24.94	-101.53	0.00	617732.74	755119.07	N 32 41 46.55	W 103 38 18.22
	2900.00	6.00	283.80	2894.34	-28.00	27.43	-111.68	0.00	617735.23	755108.92	N 32 41 46.58	W 103 38 18.33
	3000.00	6.00	283.80	2993.79	-30.54	29.92	-121.83	0.00	617737.72	755098.77	N 32 41 46.60	W 103 38 18.45
	3100.00	6.00	283.80	3093.24	-33.09	32.42	-131.98	0.00	617740.22	755088.62	N 32 41 46.63	W 103 38 18.57
	3200.00	6.00	283.80	3192.70	-35.63	34.91	-142.13	0.00	617742.71	755078.47	N 32 41 46.65	W 103 38 18.69
	3300.00	6.00	283.80	3292.15	-38.18	37.40	-152.29	0.00	617745.20	755068.32	N 32 41 46.68	W 103 38 18.81
	3400.00	6.00	283.80	3391.60	-40.72	39.90	-162.44	0.00	617747.70	755058.17	N 32 41 46.70	W 103 38 18.93
	3500.00	6.00	283.80	3491.05	-43.26	42.39	-172.59	0.00	617750.19	755048.02	N 32 41 46.73	W 103 38 19.05
	3600.00	6.00	283.80	3590.50	-45.81	44.88	-182.74	0.00	617752.68	755037.87	N 32 41 46.76	W 103 38 19.16
7 Rivers	3650.77	6.00	283.80	3641.00	-47.10	46.15	-187.89	0.00	617753.95	755032.71	N 32 41 46.77	W 103 38 19.22
	3700.00	6.00	283.80	3689.96	-48.35	47.38	-192.89	0.00	617755.18	755027.72	N 32 41 46.78	W 103 38 19.28
	3800.00	6.00	283.80	3789.41	-50.90	49.87	-203.04	0.00	617757.67	755017.57	N 32 41 46.81	W 103 38 19.40
	3900.00	6.00	283.80	3888.86	-53.44	52.36	-213.19	0.00	617760.16	755007.42	N 32 41 46.83	W 103 38 19.52
	4000.00	6.00	283.80	3988.31	-55.99	54.86	-223.34	0.00	617762.66	754997.27	N 32 41 46.86	W 103 38 19.64
	4100.00	6.00	283.80	4087.77	-58.53	57.35	-233.49	0.00	617765.15	754987.12	N 32 41 46.88	W 103 38 19.76
	4200.00	6.00	283.80	4187.22	-61.08	59.85	-243.65	0.00	617767.64	754976.96	N 32 41 46.91	W 103 38 19.88
	4277.21	6.00	283.80	4264.00	-63.04	61.77	-251.48	0.00	617769.57	754969.13	N 32 41 46.93	W 103 38 19.97
Queen	4300.00	6.00	283.80	4286.67	-63.62	62.34	-253.80	0.00	617770.14	754966.81	N 32 41 46.93	W 103 38 19.99
	4400.00	6.00	283.80	4386.12	-66.17	64.83	-263.95	0.00	617772.63	754956.66	N 32 41 46.96	W 103 38 20.11
	4500.00	6.00	283.80	4485.57	-68.71	67.33	-274.10	0.00	617775.12	754946.51	N 32 41 46.98	W 103 38 20.23
	4600.00	6.00	283.80	4585.03	-71.26	69.82	-284.25	0.00	617777.62	754936.36	N 32 41 47.01	W 103 38 20.35
	4700.00	6.00	283.80	4684.48	-73.80	72.31	-294.40	0.00	617780.11	754926.21	N 32 41 47.03	W 103 38 20.47
	4800.00	6.00	283.80	4783.93	-76.35	74.81	-304.55	0.00	617782.60	754916.06	N 32 41 47.06	W 103 38 20.59
	4900.00	6.00	283.80	4883.38	-78.89	77.30	-314.70	0.00	617785.10	754905.91	N 32 41 47.08	W 103 38 20.71
	5000.00	6.00	283.80	4982.84	-81.44	79.79	-324.85	0.00	617787.59	754895.76	N 32 41 47.11	W 103 38 20.82
	5100.00	6.00	283.80	5082.29	-83.98	82.29	-335.01	0.00	617790.08	754885.61	N 32 41 47.14	W 103 38 20.94
	5200.00	6.00	283.80	5181.74	-86.52	84.78	-345.16	0.00	617792.58	754875.46	N 32 41 47.16	W 103 38 21.06
	5300.00	6.00	283.80	5281.19	-89.07	87.27	-355.31	0.00	617795.07	754865.31	N 32 41 47.19	W 103 38 21.18
	5400.00	6.00	283.80	5380.64	-91.61	89.77	-365.46	0.00	617797.56	754855.16	N 32 41 47.21	W 103 38 21.30
	5500.00	6.00	283.80	5480.10	-94.16	92.26	-375.61	0.00	617800.05	754845.01	N 32 41 47.24	W 103 38 21.42
	5600.00	6.00	283.80	5579.55	-96.70	94.75	-385.76	0.00	617802.55	754834.85	N 32 41 47.26	W 103 38 21.54
	5700.00	6.00	283.80	5679.00	-99.25	97.25	-395.91	0.00	617805.04	754824.70	N 32 41 47.29	W 103 38 21.65
	5800.00	6.00	283.80	5778.45	-101.79	99.74	-406.06	0.00	617807.53	754814.55	N 32 41 47.31	W 103 38 21.77
	5900.00	6.00	283.80	5877.90	-104.34	102.23	-416.21	0.00	617810.03	754804.40	N 32 41 47.34	W 103 38 21.89
	6000.00	6.00	283.80	5977.36	-106.88	104.73	-426.37	0.00	617812.52	754794.25	N 32 41 47.36	W 103 38 22.01
	6100.00	6.00	283.80	6076.81	-109.43	107.22	-436.52	0.00	617815.01	754784.10	N 32 41 47.39	W 103 38 22.13
	6200.00	6.00	283.80	6176.26	-111.97	109.71	-446.67	0.00	617817.51	754773.95	N 32 41 47.41	W 103 38 22.25
	6300.00	6.00	283.80	6275.71	-114.52	112.21	-456.82	0.00	617820.00	754763.80	N 32 41 47.44	W 103 38 22.37
	6400.00	6.00	283.80	6375.17	-117.06	114.70	-466.97	0.00	617822.49	754753.65	N 32 41 47.46	W 103 38 22.48
Delaware Mtn Gr	6500.00	6.00	283.80	6474.62	-119.61	117.19	-477.12	0.00	617824.99	754743.50	N 32 41 47.49	W 103 38 22.60
	6547.64	6.00	283.80	6522.00	-120.82	118.38	-481.96	0.00	617826.18	754738.66	N 32 41 47.50	W 103 38 22.66
	6600.00	6.00	283.80	6574.07	-122.15	119.69	-487.27	0.00	617827.48	754733.35	N 32 41 47.52	W 103 38 22.72
	6700.00	6.00	283.80	6673.52	-124.69	122.18	-497.42	0.00	617829.97	754723.20	N 32 41 47.54	W 103 38 22.84
	6800.00	6.00	283.80	6772.97	-127.24	124.67	-507.57	0.00	617832.47	754713.05	N 32 41 47.57	W 103 38 22.96

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N S ° ' ")	Longitude (E W ° ' ")
	6900.00	6.00	283.80	6872.43	-129.78	127.17	-517.73	0.00	617834.96	754702.90	N 32 41 47.59	W 103 38 23.08
	7000.00	6.00	283.80	6971.88	-132.33	129.66	-527.88	0.00	617837.45	754692.74	N 32 41 47.62	W 103 38 23.20
	7100.00	6.00	283.80	7071.33	-134.87	132.15	-538.03	0.00	617839.95	754682.59	N 32 41 47.64	W 103 38 23.31
	7200.00	6.00	283.80	7170.78	-137.42	134.65	-548.18	0.00	617842.44	754672.44	N 32 41 47.67	W 103 38 23.43
	7300.00	6.00	283.80	7270.24	-139.96	137.14	-558.33	0.00	617844.93	754662.29	N 32 41 47.69	W 103 38 23.55
	7400.00	6.00	283.80	7369.69	-142.51	139.63	-568.48	0.00	617847.43	754652.14	N 32 41 47.72	W 103 38 23.67
	7500.00	6.00	283.80	7469.14	-145.05	142.13	-578.63	0.00	617849.92	754641.99	N 32 41 47.74	W 103 38 23.79
	7600.00	6.00	283.80	7568.59	-147.60	144.62	-588.78	0.00	617852.41	754631.84	N 32 41 47.77	W 103 38 23.91
Bone Spring	7645.66	6.00	283.80	7614.00	-148.76	145.76	-593.42	0.00	617853.55	754627.21	N 32 41 47.78	W 103 38 23.96
	7700.00	6.00	283.80	7668.04	-150.14	147.11	-598.93	0.00	617854.91	754621.69	N 32 41 47.79	W 103 38 24.03
	7800.00	6.00	283.80	7767.50	-152.69	149.61	-609.09	0.00	617857.40	754611.54	N 32 41 47.82	W 103 38 24.14
	7900.00	6.00	283.80	7866.95	-155.23	152.10	-619.24	0.00	617859.89	754601.39	N 32 41 47.84	W 103 38 24.26
	8000.00	6.00	283.80	7966.40	-157.78	154.59	-629.39	0.00	617862.39	754591.24	N 32 41 47.87	W 103 38 24.38
	8100.00	6.00	283.80	8065.85	-160.32	157.09	-639.54	0.00	617864.88	754581.09	N 32 41 47.90	W 103 38 24.50
	8200.00	6.00	283.80	8165.31	-162.87	159.58	-649.69	0.00	617867.37	754570.94	N 32 41 47.92	W 103 38 24.62
	8300.00	6.00	283.80	8264.76	-165.41	162.07	-659.84	0.00	617869.87	754560.79	N 32 41 47.95	W 103 38 24.74
	8400.00	6.00	283.80	8364.21	-167.95	164.57	-669.99	0.00	617872.36	754550.63	N 32 41 47.97	W 103 38 24.86
	8500.00	6.00	283.80	8463.66	-170.50	167.06	-680.14	0.00	617874.85	754540.48	N 32 41 48.00	W 103 38 24.97
	8600.00	6.00	283.80	8563.11	-173.04	169.55	-690.29	0.00	617877.35	754530.33	N 32 41 48.02	W 103 38 25.09
	8700.00	6.00	283.80	8662.57	-175.59	172.05	-700.45	0.00	617879.84	754520.18	N 32 41 48.05	W 103 38 25.21
	8800.00	6.00	283.80	8762.02	-178.13	174.54	-710.60	0.00	617882.33	754510.03	N 32 41 48.07	W 103 38 25.33
	8900.00	6.00	283.80	8861.47	-180.68	177.03	-720.75	0.00	617884.83	754499.88	N 32 41 48.10	W 103 38 25.45
1st Bone Spring SS	8938.74	6.00	283.80	8900.00	-181.66	178.00	-724.68	0.00	617885.79	754495.95	N 32 41 48.11	W 103 38 25.50
KOP, Build 10° DLS	8942.99	6.00	283.80	8904.23	-181.77	178.10	-725.11	0.00	617885.90	754495.52	N 32 41 48.11	W 103 38 25.50
	9000.00	8.92	244.62	8960.78	-180.62	176.92	-732.01	10.00	617884.71	754488.62	N 32 41 48.10	W 103 38 25.58
	9100.00	17.68	222.28	9058.06	-166.11	162.32	-749.27	10.00	617870.12	754471.36	N 32 41 47.95	W 103 38 25.78
	9200.00	27.29	214.89	9150.37	-136.12	132.21	-772.66	10.00	617840.00	754447.97	N 32 41 47.66	W 103 38 26.06
Build & Turn 10° DLS	9278.69	35.00	211.82	9217.67	-102.20	98.18	-794.92	10.00	617805.98	754425.72	N 32 41 47.32	W 103 38 26.32
	9300.00	36.70	209.63	9234.94	-91.51	87.45	-801.29	10.00	617795.25	754419.35	N 32 41 47.22	W 103 38 26.40
	9400.00	45.11	201.32	9310.51	-32.52	28.33	-829.01	10.00	617736.13	754391.63	N 32 41 46.63	W 103 38 26.73
	9500.00	53.96	195.19	9375.38	39.56	-43.87	-852.54	10.00	617663.93	754368.10	N 32 41 45.92	W 103 38 27.01
9-5/8" Casing	9566.00	59.95	191.87	9411.35	93.26	-97.64	-865.42	10.00	617610.16	754355.22	N 32 41 45.39	W 103 38 27.16
	9600.00	63.07	190.32	9427.57	122.55	-126.96	-871.16	10.00	617580.84	754349.47	N 32 41 45.10	W 103 38 27.23
2nd Bone Spring SS	9631.19	65.94	188.97	9441.00	150.28	-154.71	-875.88	10.00	617553.09	754344.76	N 32 41 44.83	W 103 38 27.29
	9700.00	72.31	186.19	9465.51	213.93	-218.41	-884.32	10.00	617489.40	754336.32	N 32 41 44.20	W 103 38 27.39
	9800.00	81.63	182.47	9488.04	310.91	-315.43	-891.60	10.00	617392.38	754329.04	N 32 41 43.24	W 103 38 27.49
Landing Point	9877.72	88.90	179.71	9494.45	388.29	-392.82	-893.06	10.00	617315.00	754327.58	N 32 41 42.47	W 103 38 27.51
	9900.00	88.90	179.71	9494.88	410.56	-415.09	-892.94	0.00	617292.73	754327.69	N 32 41 42.25	W 103 38 27.51
	10000.00	88.90	179.71	9496.80	510.55	-515.07	-892.43	0.00	617192.75	754328.21	N 32 41 41.26	W 103 38 27.51
	10100.00	88.90	179.71	9498.72	610.53	-615.05	-891.91	0.00	617092.78	754328.72	N 32 41 40.27	W 103 38 27.51
	10200.00	88.90	179.71	9500.64	710.51	-715.03	-891.40	0.00	616992.80	754329.24	N 32 41 39.28	W 103 38 27.51
	10300.00	88.90	179.71	9502.56	810.49	-815.01	-890.89	0.00	616892.82	754329.75	N 32 41 38.29	W 103 38 27.52
	10400.00	88.90	179.71	9504.48	910.47	-914.99	-890.37	0.00	616792.85	754330.26	N 32 41 37.30	W 103 38 27.52
	10500.00	88.90	179.71	9506.40	1010.45	-1014.97	-889.86	0.00	616692.87	754330.78	N 32 41 36.31	W 103 38 27.52
	10600.00	88.90	179.71	9508.32	1110.43	-1114.95	-889.34	0.00	616592.89	754331.29	N 32 41 35.33	W 103 38 27.52
	10700.00	88.90	179.71	9510.24	1210.42	-1214.93	-888.83	0.00	616492.92	754331.81	N 32 41 34.34	W 103 38 27.52
	10800.00	88.90	179.71	9512.16	1310.40	-1314.91	-888.32	0.00	616392.94	754332.32	N 32 41 33.35	W 103 38 27.52
	10900.00	88.90	179.71	9514.08	1410.38	-1414.89	-887.80	0.00	616292.97	754332.83	N 32 41 32.36	W 103 38 27.53
	11000.00	88.90	179.71	9516.00	1510.36	-1514.87	-887.29	0.00	616192.99	754333.35	N 32 41 31.37	W 103 38 27.53
	11100.00	88.90	179.71	9517.92	1610.34	-1614.85	-886.77	0.00	616093.01	754333.86	N 32 41 30.38	W 103 38 27.53
	11200.00	88.90	179.71	9519.84	1710.32	-1714.83	-886.26	0.00	615993.04	754334.38	N 32 41 29.39	W 103 38 27.53
	11300.00	88.90	179.71	9521.76	1810.31	-1814.81	-885.74	0.00	615893.06	754334.89	N 32 41 28.40	W 103 38 27.53
	11400.00	88.90	179.71	9523.68	1910.29	-1914.79	-885.23	0.00	615793.09	754335.41	N 32 41 27.41	W 103 38 27.53
	11500.00	88.90	179.71	9525.60	2010.27	-2014.77	-884.72	0.00	615693.11	754335.92	N 32 41 26.42	W 103 38 27.54
	11600.00	88.90	179.71	9527.52	2110.25	-2114.75	-884.20	0.00	615593.13	754336.43	N 32 41 25.43	W 103 38 27.54
	11700.00	88.90	179.71	9529.44	2210.23	-2214.73	-883.69	0.00	615493.16	754336.95	N 32 41 24.44	W 103 38 27.54
	11800.00	88.90	179.71	9531.36	2310.21	-2314.71	-883.17	0.00	615393.18	754337.46	N 32 41 23.45	W 103 38 27.54
	11900.00	88.90	179.71	9533.28	2410.20	-2414.69	-882.66	0.00	615293.20	754337.98	N 32 41 22.47	W 103 38 27.54
	12000.00	88.90	179.71	9535.20	2510.18	-2514.67	-882.15	0.00	615193.23	754338.49	N 32 41 21.48	W 103 38 27.54
	12100.00	88.90	179.71	9537.12	2610.16	-2614.65	-881.63	0.00	615093.25	754339.00	N 32 41 20.49	W 103 38 27.55
	12200.00	88.90	179.71	9539.04	2710.14	-2714.63	-881.12	0.00	614993.28	754339.52	N 32 41 19.50	W 103 38 27.55
	12300.00	88.90	179.71	9540.96	2810.12	-2814.61	-880.60	0.00	614893.30	754340.03	N 32 41 18.51	W 103 38 27.55
	12400.00	88.90	179.71	9542.88	2910.10	-2914.59	-880.09	0.00	614793.32	754340.55	N 32 41 17.52	W 103 38 27.55
	12500.00	88.90	179.71	9544.80	3010.08	-3014.58	-879.58	0.00	614693.35	754341.06	N 32 41 16.53	W 103 38 27.55
	12600.00	88.90	179.71	9546.71	3110.07	-3114.56	-879.06	0.00	614593.37	754341.57	N 32 41 15.54	W 103 38 27.55
	12700.00	88.90	179.71	9548.63	3210.05	-3214.54	-878.55	0.00	614493.39	754342.09	N 32 41 14.55	W 103 38 27.55
	12800.00	88.90	179.71	9550.55	3310.03	-3314.52	-878.03	0.00	614393.42	754342.60	N 32 41 13.56	W 103 38 27.56
	12900.00	88.90	179.71	9552.47	3410.01	-3414.50	-877.52	0.00	614293.44	754343.12	N 32 41 12.57	W 103 38 27.56
	13000.00	88.90	179.71	9554.39	3509.99	-3514.48	-877.01	0.00	614193.47	754343.63	N 32 41 11.58	W 103 38 27.56
	13100.00	88.90	179.71	9556.31	3609.97	-3614.46	-876.49	0.00	614093.49	754344.14	N 32 41 10.59	W 103 38 27.56
	13200.00	88.90	179.71	9558.23	3709.96	-3714.44	-875.98	0.00	613993.51	754344.66	N 32 41 9.61	W 103 38 27.56
	13300.00	88.90	179.71	9560.15	3809.94	-3814.42	-875.46	0.00	613893.54	754345.17	N 32 41 8.62	W 103 38 27.56
	13400.00	88.90	179.71	9562.07	3909.92	-3914.40	-874.95	0.00	613793.56	754345.69	N 32 41 7.63	W 103 38 27.57
	13500.00	88.90	179.71	9563.99	4009.90	-4014.38	-874.44	0.00	613693.59	754346.20	N 32 41 6.64	W 103 38 27.57
	13600.00	88.90	179.71	9565.91	4109.88	-4114.36	-873.92	0.00	613593.61	754346.71	N 32 41 5.65	W

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	DLS (°/100ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")
	16500.00	88.90	179.71	9621.58	7009.35	-7013.79	-859.01	0.00	610694.30	754361.62	N 32 40 36.96	W 103 38 27.62
	16600.00	88.90	179.71	9623.50	7109.33	-7113.77	-858.50	0.00	610594.32	754362.13	N 32 40 35.97	W 103 38 27.62
	16700.00	88.90	179.71	9625.42	7209.31	-7213.75	-857.99	0.00	610494.35	754362.65	N 32 40 34.98	W 103 38 27.62
	16800.00	88.90	179.71	9627.34	7309.29	-7313.73	-857.47	0.00	610394.37	754363.16	N 32 40 33.99	W 103 38 27.62
	16900.00	88.90	179.71	9629.26	7409.27	-7413.71	-856.96	0.00	610294.39	754363.68	N 32 40 33.00	W 103 38 27.62
	17000.00	88.90	179.71	9631.18	7509.26	-7513.69	-856.44	0.00	610194.42	754364.19	N 32 40 32.01	W 103 38 27.62
	17100.00	88.90	179.71	9633.10	7609.24	-7613.67	-855.93	0.00	610094.44	754364.70	N 32 40 31.02	W 103 38 27.63
	17200.00	88.90	179.71	9635.02	7709.22	-7713.65	-855.42	0.00	609994.47	754365.22	N 32 40 30.03	W 103 38 27.63
	17300.00	88.90	179.71	9636.94	7809.20	-7813.63	-854.90	0.00	609894.49	754365.73	N 32 40 29.05	W 103 38 27.63
	17400.00	88.90	179.71	9638.86	7909.18	-7913.61	-854.39	0.00	609794.51	754366.25	N 32 40 28.06	W 103 38 27.63
	17500.00	88.90	179.71	9640.78	8009.16	-8013.59	-853.87	0.00	609694.54	754366.76	N 32 40 27.07	W 103 38 27.63
	17600.00	88.90	179.71	9642.70	8109.14	-8113.57	-853.36	0.00	609594.56	754367.27	N 32 40 26.08	W 103 38 27.63
	17700.00	88.90	179.71	9644.62	8209.13	-8213.55	-852.85	0.00	609494.58	754367.79	N 32 40 25.09	W 103 38 27.64
	17800.00	88.90	179.71	9646.54	8309.11	-8313.53	-852.33	0.00	609394.61	754368.30	N 32 40 24.10	W 103 38 27.64
	17900.00	88.90	179.71	9648.46	8409.09	-8413.51	-851.82	0.00	609294.63	754368.82	N 32 40 23.11	W 103 38 27.64
	18000.00	88.90	179.71	9650.38	8509.07	-8513.49	-851.30	0.00	609194.66	754369.33	N 32 40 22.12	W 103 38 27.64
	18100.00	88.90	179.71	9652.30	8609.05	-8613.47	-850.79	0.00	609094.68	754369.84	N 32 40 21.13	W 103 38 27.64
	18200.00	88.90	179.71	9654.22	8709.03	-8713.45	-850.28	0.00	608994.70	754370.36	N 32 40 20.14	W 103 38 27.64
	18300.00	88.90	179.71	9656.14	8809.02	-8813.43	-849.76	0.00	608894.73	754370.87	N 32 40 19.15	W 103 38 27.65
	18400.00	88.90	179.71	9658.06	8909.00	-8913.41	-849.25	0.00	608794.75	754371.39	N 32 40 18.16	W 103 38 27.65
	18500.00	88.90	179.71	9659.98	9008.98	-9013.39	-848.73	0.00	608694.78	754371.90	N 32 40 17.17	W 103 38 27.65
	18600.00	88.90	179.71	9661.90	9108.96	-9113.37	-848.22	0.00	608594.80	754372.41	N 32 40 16.18	W 103 38 27.65
	18700.00	88.90	179.71	9663.82	9208.94	-9213.35	-847.71	0.00	608494.82	754372.93	N 32 40 15.20	W 103 38 27.65
	18800.00	88.90	179.71	9665.74	9308.92	-9313.33	-847.19	0.00	608394.85	754373.44	N 32 40 14.21	W 103 38 27.65
	18900.00	88.90	179.71	9667.66	9408.91	-9413.31	-846.68	0.00	608294.87	754373.96	N 32 40 13.22	W 103 38 27.66
	19000.00	88.90	179.71	9669.58	9508.89	-9513.29	-846.16	0.00	608194.89	754374.47	N 32 40 12.23	W 103 38 27.66
	19100.00	88.90	179.71	9671.50	9608.87	-9613.27	-845.65	0.00	608094.92	754374.98	N 32 40 11.24	W 103 38 27.66
	19200.00	88.90	179.71	9673.42	9708.85	-9713.25	-845.14	0.00	607994.94	754375.50	N 32 40 10.25	W 103 38 27.66
	19300.00	88.90	179.71	9675.34	9808.83	-9813.23	-844.62	0.00	607894.97	754376.01	N 32 40 9.26	W 103 38 27.66
	19400.00	88.90	179.71	9677.26	9908.81	-9913.21	-844.11	0.00	607794.99	754376.53	N 32 40 8.27	W 103 38 27.66
	19500.00	88.90	179.71	9679.18	10008.79	-10013.19	-843.59	0.00	607695.01	754377.04	N 32 40 7.28	W 103 38 27.66
	19600.00	88.90	179.71	9681.10	10108.78	-10113.17	-843.08	0.00	607595.04	754377.56	N 32 40 6.29	W 103 38 27.67
	19700.00	88.90	179.71	9683.02	10208.76	-10213.15	-842.57	0.00	607495.06	754378.07	N 32 40 5.30	W 103 38 27.67
	19800.00	88.90	179.71	9684.94	10308.74	-10313.13	-842.05	0.00	607395.08	754378.58	N 32 40 4.31	W 103 38 27.67
Chisholm Buffalo West 2-11 2BS Fed Com 7H - BHL	19842.19	88.90	179.71	9685.75	10350.93	-10355.32	-841.83	0.00	607352.90	754378.80	N 32 40 3.90	W 103 38 27.67

Survey Type: Non-Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	Part	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Expected Max Inclination (deg)	Survey Tool Type	Borehole / Survey
	1	0.000	31.000	1/100.000	30.000	30.000		NAL_MWD_1.0_DEG-Depth Only	Buffalo West 2-11 2BS Fed Com 7H / Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20
	1	31.000	19842.195	1/100.000	30.000	30.000		NAL_MWD_1.0_DEG	Buffalo West 2-11 2BS Fed Com 7H / Chisholm Buffalo West 2-11



Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20 Anti-Collision Summary Report

Analysis Date-24hr Time: May 06, 2020 - 14:12

Client:

Chisholm

Field:

NM Lea County (NAD 83)

Structure:

Chisholm Buffalo West 2-11 2BS Fed Com 7H

Slot:

New Slot

Well:

Buffalo West 2-11 2BS Fed Com 7H

Borehole:

Buffalo West 2-11 2BS Fed Com 7H

Scan MD Range:

0.00ft - 19842.19ft

Analysis Method:

3D Least Distance

Reference Trajectory:

Chisholm Buffalo West 2-11 2BS Fed Com 7H R0 IC 04Mar20 (Non-Def Plan)

Depth Interval:

Every 10.00 Measured Depth (ft)

Rule Set:

NAL Procedure: D&M AntiCollision Standard S002

Min Pts:

All local minima indicated.

Version / Patch:

2.10.811.0

Database | Project:

localhost/drilling-project1

Trajectory Error Model: ISWSA0 3-D 95.000% Confidence 2.7955 sigma

Offset Trajectories Summary

Offset Selection Criteria

Wellhead distance scan: Not performed!

Selection filters: Definitive Surveys - Definitive Plans - Definitive surveys exclude definitive plans

- All Non-Def Surveys when no Def-Survey is set in a borehole - All Non-Def Plans when no Def-Plan is set in a borehole

Offset Trajectory	Separation			Allow	Sep.	Controlling	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		

Results highlighted: Sep-Factor separation <= 1.50 ft

Chisholm Buffalo West 2-11 2BS Fed Com 8H R0 IC 04Mar20 (Non-Def Plan)													
												Warning Alert	
30.10	24.58	27.60	5.52	N/A	MAS = 7.49 (m)	0.00	0.00	CtCt<=15m<15.00				Enter Alert	
30.10	24.58	27.60	5.52	N/A	MAS = 7.49 (m)	31.00	31.00					WRP	
30.10	24.58	17.98	5.52	2.86	MAS = 7.49 (m)	1600.00	1600.00					MinPts	
30.13	24.58	17.94	5.55	2.85	MAS = 7.49 (m)	1610.00	1610.00					MINPT-O-EQU	
30.20	24.58	17.98	5.62	2.85	MAS = 7.49 (m)	1620.00	1620.00					MinPt-O-SF	
54.25	24.58	41.26	29.67	4.93	MAS = 7.49 (m)	1910.00	1909.66		OSF>5.00			Exit Alert	
1438.88	77.13	1386.62	1361.74	28.87	OSF1.50	8942.99	8904.23					MinPt-O-SF	
1609.71	485.41	1285.27	1124.30	4.99	OSF1.50	14560.00	9584.34		OSF<5.00			Enter Alert	
1609.70	982.59	953.80	627.11	2.46	OSF1.50	19840.00	9685.70					MinPt-CtCt	
1609.70	982.68	953.73	627.00	2.46	OSF1.50	19842.19	9685.75					MinPts	

30-025-43829 - CHISHOLM BUFFALO WEST 2 STATE 2BS COM #002H MWD 0' to 14900' - A (Def Survey)													
												Warning Alert	
121.59	32.81	119.09	88.78	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
117.58	32.81	114.73	84.77	329.98	MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF	
116.81	32.81	114.16	84.00	759.82	MAS = 10.00 (m)	30.00	30.00					MINPT-O-EQU	
116.78	32.81	114.16	83.97	979.90	MAS = 10.00 (m)	31.00	31.00					WRP	
116.74	32.81	114.22	83.93	4743.23	MAS = 10.00 (m)	40.00	40.00					MinPts	
116.82	32.81	114.17	84.01	763.73	MAS = 10.00 (m)	80.00	80.00					MINPT-O-EQU	
152.28	32.81	142.65	119.48	21.01	MAS = 10.00 (m)	1600.00	1600.00					MinPt-O-SF	
132.17	32.81	119.41	99.38	12.64	MAS = 10.00 (m)	2660.00	2655.65					MinPts	
132.23	32.81	119.33	99.42	12.47	MAS = 10.00 (m)	2690.00	2685.49					MINPT-O-EQU	
131.54	32.81	117.31	98.73	11.00	MAS = 10.00 (m)	2960.00	2954.01					MinPts	
131.70	32.81	117.16	98.89	10.73	MAS = 10.00 (m)	3020.00	3013.68					MINPT-O-EQU	
141.30	32.81	124.64	108.49	9.80	MAS = 10.00 (m)	3470.00	3461.22					MinPt-O-SF	
145.03	32.81	128.01	112.22	9.82	MAS = 10.00 (m)	3570.00	3560.67					MinPt-O-SF	
381.02	41.33	352.63	339.69	14.62	OSF1.50	9590.00	9422.97					MinPt-O-SF	
369.01	39.88	341.58	329.12	14.70	OSF1.50	9720.00	9471.28					MinPts	
369.45	40.08	341.90	329.37	14.65	OSF1.50	9740.00	9476.42					MinPt-O-SF	
399.87	43.35	370.14	356.52	14.59	OSF1.50	10240.00	9501.41					MinPt-CtCt	
384.51	64.41	340.73	320.09	9.26	OSF1.50	11000.00	9516.00					MinPt-CtCt	
384.99	68.52	338.48	316.47	8.69	OSF1.50	11180.00	9519.45					MINPT-O-EQU	
385.34	68.91	338.56	316.42	8.65	OSF1.50	11200.00	9519.84					MinPt-O-EQU	
382.97	97.88	316.89	285.10	5.98	OSF1.50	12080.00	9536.73					MinPt-CtCt	
378.41	115.40	300.65	263.02	4.99	OSF1.50	12660.00	9547.87		OSF<5.00			Enter Alert	
343.88	167.98	231.14	176.02	3.10	OSF1.50	14350.00	9580.31					MinPts	
441.01	135.45	349.87	305.55	4.95	OSF1.50	14630.00	9585.69		OSF>5.00			Exit Alert	
5499.09	95.25	5434.75	5403.84	88.89	OSF1.50	19842.19	9685.75					TD	

30-025-43830 - CHISHOLM BUFFALO WEST 2 STATE 2BS COM #003H MWD 0' to 14575' - A (Def Survey)													
												Warning Alert	
121.33	32.81	118.83	88.52	N/A	MAS = 10.00 (m)	0.00	0.00					Surface	
117.65	32.81	114.85	84.84	385.42	MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF	
117.05	32.81	114.47	84.24	1525.93	MAS = 10.00 (m)	30.00	30.00					MINPT-O-EQU	
117.04	32.81	114.50	84.23	2952.77	MAS = 10.00 (m)	31.00	31.00					WRP	
117.03	32.81	114.51	84.22	4280.09	MAS = 10.00 (m)	40.00	40.00					MinPts	
117.33	32.81	114.37	84.52	250.78	MAS = 10.00 (m)	150.00	150.00					MINPT-O-EQU	
119.03	32.81	114.56	86.22	59.12	MAS = 10.00 (m)	490.00	490.00					MINPT-O-EQU	
120.79	32.81	115.02	87.98	36.11	MAS = 10.00 (m)	770.00	770.00					MINPT-O-EQU	
150.98	32.81	140.85	118.17	19.45	MAS = 10.00 (m)	1690.00	1689.99					MinPt-O-SF	
174.78	32.81	163.58	141.97	19.80	MAS = 10.00 (m)	2160.00	2158.39					MinPt-O-SF	
218.77	32.81	204.48	185.96	18.34	MAS = 10.00 (m)	2910.00	2904.28					MinPt-O-SF	
236.86	32.81	221.73	204.06	18.54	MAS = 10.00 (m)	3160.00	3152.91					MinPt-O-SF	
241.43	32.81	226.05	208.62	18.55	MAS = 10.00 (m)	3220.00	3212.59					MinPt-O-SF	
268.82	32.81	252.05	236.01	18.67	MAS = 10.00 (m)	3570.00	3560.67					MinPt-O-SF	
283.50	32.81	265.94	250.69	18.66	MAS = 10.00 (m)	3750.00	3739.68					MinPt-O-SF	
341.60	32.81	320.88	308.79	18.62	MAS = 10.00 (m)	4500.00	4485.57					MinPt-O-SF	
415.03	36.56	389.82	378.47	18.17	OSF1.50	5610.00	5589.49					MinPt-O-SF	
682.07	52.99	645.91	629.08	20.19	OSF1.50	8300.00	8264.76					MinPt-O-SF	
721.47	56.31	683.09	665.13	20.04	OSF1.50	8770.00	8732.18					MinPt-O-SF	
1104.96	63.51	1061.79	1041.45	27.10	OSF1.50	9950.00	9495.84					MinPts	
1117.80	70.38	1070.04	1047.41	24.64	OSF1.50	10030.00	9497.38					MinPts	
1119.92	84.13	1063.00	1035.79	20.53	OSF1.50	10200.00	9500.64					MinPt-CtCt	
1126.82	152.59	1024.26	974.24	11.24	OSF1.50	11190.00	9519.65					MinPt-CtCt	
1133.07	170.84	1018.34	962.23	10.07	OSF1.50	11480.00	9525.21					MINPT-O-EQU	
1156.29	262.66	980.35	893.63	6.65	OSF1.50	12600.00	9546.71					MinPt-CtCt	

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
	1177.32	349.09	943.75	828.22	5.08	OSF1.50	13700.00	9567.83				MinPt-CtCt	
	1177.45	355.51	939.61	821.95	4.99	OSF1.50	13780.00	9569.37	OSF<5.00			Enter Alert	
	1175.61	381.34	920.55	794.27	4.64	OSF1.50	14090.00	9575.32				MinPt-CtCt	
	1176.60	404.51	906.09	772.09	4.38	OSF1.50	14380.00	9580.89				MinPts	
	1177.01	404.72	906.36	772.29	4.38	OSF1.50	14400.00	9581.27				MinPt-O-SF	
	1268.45	383.45	1011.99	885.00	4.98	OSF1.50	14840.00	9589.72	OSF>5.00			Exit Alert	
	5601.26	121.29	5519.57	5479.98	70.70	OSF1.50	19842.19	9685.75				TD	
30-025-33018 - CHISHOLM BUFFALO 2K STATE COM #001 Inc Only 0' to 13375' - A (Def Survey)													
	3271.39	32.81	3268.89	3238.59	N/A	MAS = 10.00 (m)	0.00	0.00				Warning Alert	
	3271.00	32.81	3268.46	3238.18	86911.50	MAS = 10.00 (m)	30.00	30.00				Surface	
	3270.99	32.81	3268.45	3238.18	87222.56	MAS = 10.00 (m)	31.00	31.00				MinPt-O-SF	
	3270.70	32.81	3255.82	3237.89	264.12	MAS = 10.00 (m)	460.00	460.00				WRP	
	3274.51	84.92	3217.07	3189.59	59.55	OSF1.50	1660.00	1660.00				MinPts	
	3278.92	101.37	3210.50	3177.55	49.71	OSF1.50	1970.00	1969.42				MinPt-CtCt	
	3295.46	121.90	3213.37	3173.57	41.37	OSF1.50	2390.00	2387.13				MINPT-O-EQU	
	3329.45	155.02	3225.27	3174.43	32.72	OSF1.50	2910.00	2904.28				MinPt-O-ADP	
	3329.69	155.31	3225.32	3174.38	32.66	OSF1.50	2930.00	2924.17				MINPT-O-EQU	
	3337.04	163.84	3226.98	3173.20	31.00	OSF1.50	3130.00	3123.08				MinPt-O-ADP	
	3351.15	179.78	3230.47	3171.38	28.33	OSF1.50	3430.00	3421.44				MinPts	
	3354.35	183.62	3231.10	3170.73	27.76	OSF1.50	3540.00	3530.83				MINPT-O-EQU	
	3399.23	220.98	3251.08	3178.25	23.32	OSF1.50	4310.00	4296.61				MinPt-O-ADP	
	3410.47	235.53	3252.61	3174.94	21.94	OSF1.50	4540.00	4525.35				MINPT-O-EQU	
	3422.68	248.90	3255.91	3173.78	20.82	OSF1.50	4820.00	4803.82				MinPt-O-ADP	
	3514.68	329.68	3294.03	3185.00	16.10	OSF1.50	6360.00	6335.38				MinPt-O-ADP	
	3631.08	433.70	3341.12	3197.39	12.62	OSF1.50	8290.00	8254.81				MINPT-O-EQU	
	3634.98	437.89	3342.22	3197.09	12.51	OSF1.50	8390.00	8354.26				MinPt-O-ADP	
	1730.63	521.10	1382.32	1209.53	5.00	OSF1.50	11970.00	9534.62	OSF<5.00			Enter Alert	
	1562.53	536.70	1203.90	1025.83	4.38	OSF1.50	12710.00	9548.83				MinPt-CtCt	
	1562.61	536.96	1203.80	1025.65	4.38	OSF1.50	12730.00	9549.21				MinPts	
	1563.52	537.45	1204.39	1026.07	4.38	OSF1.50	12770.00	9549.98				MinPt-O-SF	
	1781.36	536.54	1422.83	1244.82	5.00	OSF1.50	13570.00	9565.34	OSF>5.00			Exit Alert	
	7295.37	508.91	6955.26	6786.46	21.60	OSF1.50	19842.19	9685.75				TD	
30-025-01658 - PRE-ONGARD WELL #005 Inc Only 0' to 15041' - P (Def Survey)													
	2005.38	32.81	2002.88	1972.57	N/A	MAS = 10.00 (m)	0.00	0.00				Warning Alert	
	2005.26	32.81	2002.75	1972.45	152354.77	MAS = 10.00 (m)	10.00	10.00				Surface	
	2005.18	32.81	2002.63	1972.37	37638.78	MAS = 10.00 (m)	31.00	31.00				MinPt-O-SF	
	2004.98	32.81	1996.24	1972.15	322.86	MAS = 10.00 (m)	320.00	320.00				WRP	
	2004.63	79.96	1950.49	1924.67	38.77	OSF1.50	1620.00	1620.00				MinPts	
	2009.04	93.06	1946.17	1915.98	33.24	OSF1.50	1870.00	1869.78				MinPt-CtCt	
	2014.29	99.37	1947.21	1914.92	31.15	OSF1.50	1990.00	1989.32				MINPT-O-EQU	
	2025.88	110.99	1951.05	1914.89	27.98	OSF1.50	2210.00	2208.12				MinPt-O-ADP	
	2120.31	181.16	1998.70	1939.14	17.78	OSF1.50	3480.00	3471.16				MINPT-O-EQU	
	2127.23	189.27	2000.21	1937.96	17.06	OSF1.50	3680.00	3670.07				MinPt-O-ADP	
	1663.93	500.93	1329.14	1163.00	5.00	OSF1.50	10840.00	9512.93	OSF<5.00			Enter Alert	
	1569.27	506.80	1230.57	1062.47	4.66	OSF1.50	11390.00	9523.49				MinPt-CtCt	
	1569.28	506.89	1230.53	1062.40	4.66	OSF1.50	11400.00	9523.68				MINPT-O-EQU	
	1569.36	506.97	1230.54	1062.38	4.66	OSF1.50	11410.00	9523.87				MinPt-O-ADP	
	1569.70	507.14	1230.77	1062.55	4.66	OSF1.50	11430.00	9524.25				MinPt-O-SF	
	1693.39	509.87	1352.64	1183.52	5.00	OSF1.50	12030.00	9535.77	OSF>5.00			Exit Alert	
	8591.06	505.03	8253.54	8086.03	25.64	OSF1.50	19842.19	9685.75				TD	
30-025-43831 - CHISHOLM BUFFALO WEST 2 STATE 2BS COM #004H MWD 0' to 15180' - A (Def Survey)													
	148.23	32.81	145.73	115.43	N/A	MAS = 10.00 (m)	0.00	0.00				Pass	
	145.24	32.81	142.49	112.43	589.82	MAS = 10.00 (m)	20.00	20.00				Surface	
	144.75	32.81	142.19	111.94	2343.50	MAS = 10.00 (m)	30.00	30.00				MinPt-O-SF	
	144.74	32.81	142.21	111.93	4535.15	MAS = 10.00 (m)	31.00	31.00				MINPT-O-EQU	
	95.95	32.81	85.79	63.14	12.23	MAS = 10.00 (m)	1830.00	1829.86				WRP	
	95.95	32.81	85.79	63.14	12.20	MAS = 10.00 (m)	1840.00	1839.84				MinPts	
	98.44	32.81	87.95	65.63	12.02	MAS = 10.00 (m)	2030.00	2029.10				MINPT-O-EQU	
	699.04	50.72	664.39	648.31	21.67	OSF1.50	7770.00	7737.66				MinPt-O-SF	
	706.59	51.24	671.60	655.35	21.67	OSF1.50	7850.00	7817.22				MinPt-O-SF	
	820.36	58.31	780.66	762.05	21.98	OSF1.50	8940.00	8901.25				MinPt-O-SF	
	2134.11	216.39	1989.01	1917.72	14.95	OSF1.50	11640.00	9528.29				MinPt-CtCt	
	2138.90	306.74	1933.58	1832.16	10.53	OSF1.50	12660.00	9547.87				MINPT-O-EQU	
	2173.11	458.09	1866.89	1715.03	7.15	OSF1.50	14350.00	9580.31				MinPt-O-ADP	
	2174.31	461.88	1865.57	1712.45	7.09	OSF1.50	14420.00	9581.65				MINPT-O-EQU	
	2175.51	463.34	1865.79	1712.18	7.07	OSF1.50	14450.00	9582.23				MinPt-O-ADP	
	2192.67	470.66	1878.06	1722.00	7.02	OSF1.50	14640.00	9585.88				MinPt-O-SF	
	5908.52	297.07	5709.64	5611.45	30.07	OSF1.50	19842.19	9685.75				TD	
30-025-27737 - NEARBURG BUFFALO 2 EAST #001 Inc Only 0' to 13480' - P (Def Survey)													
	2033.04	32.81	2030.54	2000.23	N/A	MAS = 10.00 (m)	0.00	0.00				Pass	
	2032.82	32.81	2030.31	2000.02	117430.68	MAS = 10.00 (m)	20.00	20.00				Surface	
	2032.79	32.81	2030.29	1999.98	469706.81	MAS = 10.00 (m)	30.00	30.00				MinPt-O-SF	
	2032.79	32.81	2030.29	1999.98	909109.29	MAS = 10.00 (m)	31.00	31.00				MINPT-O-EQU	
	2031.48	32.81	2023.04	1998.68	341.37	MAS = 10.00 (m)	240.00	240.00				WRP	
	2028.72	50.60	1994.16	1978.13	63.20	OSF1.50	990.00	990.00				MinPts	
	2034.98	89.99	1974.16	1945.00	34.85	OSF1.50	1750.00	1749.96				MinPt-CtCt	
	2039.11	94.93	1974.99	1944.18	33.05	OSF1.50	1840.00	1839.84				MINPT-O-EQU	
	2135.56	142.51	2039.72	1993.05	22.85	OSF1.50	2770.00	2765.05				MinPt-O-ADP	
	2382.92	265.80	2204.88	2117.12	13.56	OSF1.50	5140.00	5122.07				MinPt-O-SF	
	2641.32	393.83	2377.93	2247.48	10.11	OSF1.50	7600.00	7568.59				MinPts	
	2877.23	496.44	2545.44	2380.79	8.73	OSF1.50	9930.00	9495.46				MinPt-O-SF	
	2877.27	496.48	2545.44	2380.78	8.73	OSF1.50	9940.00	9495.65				MinPt-O-ADP	
	2877.94	496.69	2545.99	2381.26	8.73	OSF1.50	9990.00	9496.61				MINPT-O-EQU	
	10319.62	532.32	9963.91	9787.31	29.21	OSF1.50	19842.19	9685.75				TD	

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
30-025-43832 - CHISHOLM BUFFALO WEST 2 STATE 2BS COM #005H MWD 0' to 14340' - A (Def Survey)													
Pass													
	2661.92	32.81	2659.42	2629.11	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	2661.86	32.81	2659.35	2629.05	439436.68	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
	2661.83	32.81	2659.31	2629.03	117829.65	MAS = 10.00 (m)	31.00	31.00					WRP
	2660.69	32.81	2655.70	2627.88	1069.85	MAS = 10.00 (m)	610.00	610.00					MinPts
	2660.92	32.81	2655.43	2628.11	890.05	MAS = 10.00 (m)	730.00	730.00					MINPT-O-EQU
	2657.29	32.81	2647.77	2624.48	378.22	MAS = 10.00 (m)	1620.00	1620.00					MinPts
	2657.29	32.81	2647.75	2624.49	376.77	MAS = 10.00 (m)	1630.00	1630.00					MINPT-O-EQU
	3309.64	50.40	3275.21	3259.24	103.57	OSF1.50	7900.00	7866.95					MinPt-O-SF
	3101.55	60.17	3060.61	3041.35	80.61	OSF1.50	9000.00	8960.78					MinPts
	3102.67	60.21	3061.70	3042.46	80.57	OSF1.50	9050.00	9009.86					MinPt-O-SF
	3238.10	75.63	3186.85	3162.47	66.37	OSF1.50	10090.00	9498.53					MINPT-O-EQU
	3238.68	76.48	3186.86	3162.20	65.62	OSF1.50	10110.00	9498.91					MINPT-O-EQU
	3241.03	79.96	3186.89	3161.07	62.71	OSF1.50	10180.00	9500.26					MINPT-O-EQU
	3247.35	88.44	3187.56	3158.91	56.64	OSF1.50	10330.00	9503.14					MINPT-O-EQU
	3252.41	95.32	3188.03	3157.09	52.52	OSF1.50	10440.00	9505.25					MinPt-O-ADP
	3258.94	102.78	3189.59	3156.17	48.71	OSF1.50	10560.00	9507.55					MinPt-O-ADP
	3274.43	116.89	3195.67	3157.54	42.90	OSF1.50	10790.00	9511.97					MinPt-O-ADP
	3286.89	157.53	3181.03	3129.36	31.78	OSF1.50	11180.00	9519.45					MinPt-CtCt
	3254.75	312.66	3045.47	2942.09	15.73	OSF1.50	13090.00	9556.12					MinPt-CtCt
	3226.15	415.82	2948.11	2810.34	11.70	OSF1.50	14330.00	9579.93					MinPt-CtCt
	3227.03	418.54	2947.17	2808.49	11.63	OSF1.50	14410.00	9581.46					MINPT-O-EQU
	3227.87	419.50	2947.37	2808.37	11.60	OSF1.50	14440.00	9582.04					MinPt-O-ADP
	3258.12	428.21	2971.82	2829.91	11.47	OSF1.50	14790.00	9588.76					MinPt-O-SF
	6382.85	328.58	6162.97	6054.27	29.35	OSF1.50	19842.19	9685.75					TD
30-025-43833 - CHISHOLM BUFFALO WEST 2 STATE 1BS COM #006H OH MWD 0' to 9122' - A (Def Survey)													
Pass													
	2661.93	32.81	2659.43	2629.12	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	2661.86	32.81	2659.35	2629.05	402818.27	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
	2661.83	32.81	2659.31	2629.02	116676.33	MAS = 10.00 (m)	31.00	31.00					WRP
	2659.88	32.81	2655.71	2627.07	1586.74	MAS = 10.00 (m)	430.00	430.00					MinPts
	2660.06	32.81	2655.56	2627.26	1325.58	MAS = 10.00 (m)	510.00	510.00					MINPT-O-EQU
	2662.70	32.81	2655.21	2629.89	533.00	MAS = 10.00 (m)	1180.00	1180.00					MINPT-O-EQU
	2664.61	32.81	2655.27	2631.80	389.18	MAS = 10.00 (m)	1600.00	1600.00					MINPT-O-EQU
	3473.49	57.10	3434.59	3416.39	95.35	OSF1.50	8942.99	8904.23					MinPt-O-SF
	5256.98	136.16	5165.37	5120.82	58.97	OSF1.50	13070.00	9555.74					MinPt-O-SF
	11115.68	183.60	10992.44	10932.07	92.05	OSF1.50	19842.19	9685.75					TD
30-025-43833 - CHISHOLM BUFFALO WEST 2 STATE 1BS COM #006H ST01 MWD 0' to 14230' - A (Def Survey)													
Pass													
	2661.93	32.81	2659.43	2629.12	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	2661.86	32.81	2659.35	2629.05	402818.27	MAS = 10.00 (m)	10.00	10.00					MinPt-O-SF
	2661.83	32.81	2659.31	2629.02	116676.33	MAS = 10.00 (m)	31.00	31.00					WRP
	2659.88	32.81	2655.71	2627.07	1586.74	MAS = 10.00 (m)	430.00	430.00					MinPts
	2660.06	32.81	2655.56	2627.26	1325.58	MAS = 10.00 (m)	510.00	510.00					MINPT-O-EQU
	2662.70	32.81	2655.21	2629.89	533.00	MAS = 10.00 (m)	1180.00	1180.00					MINPT-O-EQU
	2664.61	32.81	2655.27	2631.80	389.18	MAS = 10.00 (m)	1600.00	1600.00					MINPT-O-EQU
	3473.49	57.10	3434.59	3416.39	95.35	OSF1.50	8942.99	8904.23					MinPt-O-SF
	4289.81	285.86	4098.40	4003.94	22.70	OSF1.50	12760.00	9549.79					MinPt-CtCt
	4294.78	301.08	4093.23	3993.71	21.56	OSF1.50	13020.00	9554.78					MINPT-O-EQU
	4295.02	401.09	4026.79	3893.93	16.15	OSF1.50	14150.00	9576.47					MinPt-CtCt
	4299.12	421.14	4017.52	3877.98	15.39	OSF1.50	14450.00	9582.23					MINPT-O-EQU
	4301.36	423.79	4018.04	3877.57	15.31	OSF1.50	14510.00	9583.38					MinPt-O-ADP
	4421.28	452.56	4118.75	3968.73	14.73	OSF1.50	15360.00	9599.70					MinPt-O-SF
	6997.42	429.41	6710.31	6568.00	24.58	OSF1.50	19842.19	9685.75					TD
Chisholm Buffalo West 2-11 2BS Fed Com 9H R0 IC 04Mar20 (Non-Def Plan)													
Pass													
	2739.42	32.81	2736.92	2706.62	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	2739.42	32.81	2736.90	2706.62	136871.13	MAS = 10.00 (m)	31.00	31.00					WRP
	2739.42	32.81	2727.31	2706.62	284.84	MAS = 10.00 (m)	1590.00	1590.00					MinPts
	2739.46	32.81	2727.27	2706.65	282.50	MAS = 10.00 (m)	1610.00	1610.00					MINPT-O-EQU
	3824.83	65.19	3780.54	3759.64	91.45	OSF1.50	7390.00	7359.74					MinPt-O-SF
	3988.35	76.52	3936.50	3911.83	80.77	OSF1.50	8990.00	8950.89					MinPt-O-SF
	4155.56	980.75	3500.89	3174.80	6.37	OSF1.50	19842.19	9685.75					MinPts
30-025-30118 - POGO BUFFALO FEDERAL #001 Inc Only 0' to 13450' - P (Def Survey)													
Pass													
	6173.63	32.81	6171.13	6140.82	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	6173.37	32.81	6170.84	6140.56	223770.44	MAS = 10.00 (m)	31.00	31.00					WRP
	6171.68	32.81	6151.12	6138.87	341.59	MAS = 10.00 (m)	620.00	620.00					MinPts
	6172.09	83.08	6115.88	6089.02	114.85	OSF1.50	1650.00	1650.00					MinPt-CtCt
	6176.32	95.70	6111.69	6080.62	99.36	OSF1.50	1890.00	1889.72					MINPT-O-EQU
	6177.45	97.19	6111.82	6080.26	97.81	OSF1.50	1920.00	1919.63					MinPt-O-ADP
	6219.13	137.37	6126.72	6081.77	69.14	OSF1.50	2650.00	2645.71					MinPts
	6262.17	175.73	6144.18	6086.44	54.20	OSF1.50	3390.00	3381.65					MINPT-O-EQU
	6264.33	177.93	6144.83	6086.40	53.54	OSF1.50	3440.00	3431.38					MinPt-O-ADP
	6316.37	216.41	6171.26	6099.96	44.28	OSF1.50	4300.00	4286.67					MINPT-O-EQU
	6328.38	234.63	6171.12	6093.75	40.88	OSF1.50	4520.00	4505.46					MINPT-O-EQU
	6335.20	241.67	6173.25	6093.53	39.72	OSF1.50	4670.00	4654.64					MinPt-O-ADP
	6410.20	306.01	6205.36	6104.19	31.67	OSF1.50	5910.00	5887.85					MINPT-O-EQU
	6410.70	306.68	6205.41	6104.02	31.60	OSF1.50	5920.00	5897.80					MinPt-O-ADP
	6529.00	408.76	6255.66	6120.25	24.10	OSF1.50	7830.00	7797.33					MINPT-O-EQU
	6533.51	413.38	6257.09	6120.13	23.84	OSF1.50	7930.00	7896.78					MinPt-O-ADP
	2880.71	629.70	2460.08	2251.01	6.88	OSF1.50	15330.00	9599.12					MinPt-CtCt
	2881.20	631.17	2459.59	2250.04	6.87	OSF1.50	15380.00	9600.08					MINPT-O-EQU
	2881.92	632.01	2459.74	2249.90	6.86	OSF1.50	15410.00	9600.66					MinPt-O-ADP
	2894.61	637.00	2469.11	2257.61	6.84	OSF1.50	15610.00	9604.50					MinPt-O-SF
	5354.69	597.14	4955.77	4757.55	13.50	OSF1.50	19842.19	9685.75					TD

Offset Trajectory	Separation			Allow Dev. (ft)	Sep. Fact.	Controlling Rule	Reference Trajectory		Risk Level			Alert	Status
	Ct-Ct (ft)	MAS (ft)	EOU (ft)				MD (ft)	TVD (ft)	Alert	Minor	Major		
30-025-33560 - OXY LONE RANGER 11 FEDERAL #001 Inc Only 0' to 8325' - A (Def Survey)													
Pass													
	8708.44	32.81	8705.94	8675.63	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	8708.19	32.81	8705.67	8675.39	315080.46	MAS = 10.00 (m)	31.00	31.00					WRP
	8707.58	32.81	8698.05	8674.77	1238.22	MAS = 10.00 (m)	380.00	380.00					MinPts
	8705.85	86.89	8647.09	8618.96	154.70	OSF1.50	1700.00	1699.99					MinPt-CtCt
	8709.37	97.46	8643.57	8611.91	137.53	OSF1.50	1930.00	1929.59					MINPT-O-EQU
	8714.79	104.06	8644.52	8610.73	128.68	OSF1.50	2070.00	2068.89					MinPt-O-ADP
	8737.59	137.72	8644.95	8599.87	96.90	OSF1.50	2510.00	2506.48					MINPT-O-EQU
	8739.56	139.98	8645.41	8599.58	95.33	OSF1.50	2600.00	2595.98					MinPt-O-ADP
	8776.67	179.67	8656.06	8597.01	74.29	OSF1.50	3350.00	3341.87					MINPT-O-EQU
	8779.09	182.34	8656.70	8596.76	73.20	OSF1.50	3440.00	3431.38					MinPt-O-ADP
	8801.94	205.57	8664.06	8596.37	65.00	OSF1.50	3920.00	3908.75					MinPts
	8824.61	229.88	8670.53	8594.73	58.20	OSF1.50	4380.00	4366.23					MINPT-O-EQU
	8827.06	232.43	8671.27	8594.63	57.57	OSF1.50	4450.00	4435.85					MinPt-O-ADP
	8881.63	284.81	8690.92	8596.82	47.18	OSF1.50	5520.00	5499.99					MINPT-O-EQU
	8902.35	308.15	8696.02	8594.20	43.68	OSF1.50	5980.00	5957.47					MinPt-O-ADP
	8944.36	353.05	8708.16	8591.31	38.26	OSF1.50	6750.00	6723.25					MINPT-O-EQU
	8948.92	357.84	8709.52	8591.07	37.77	OSF1.50	6870.00	6842.59					MinPt-O-ADP
	9008.08	408.20	8735.11	8599.88	33.30	OSF1.50	7960.00	7926.62					MINPT-O-EQU
	9023.30	433.75	8733.30	8589.55	31.38	OSF1.50	8290.00	8254.81					MinPts
	9023.67	433.97	8733.53	8589.71	31.36	OSF1.50	8300.00	8264.76					MinPt-O-SF
	3125.89	653.78	2689.20	2472.11	7.19	OSF1.50	17930.00	9649.04					MinPt-CtCt
	3126.64	656.11	2688.40	2470.53	7.17	OSF1.50	18000.00	9650.38					MINPT-O-EQU
	3127.44	657.05	2688.58	2470.39	7.16	OSF1.50	18030.00	9650.96					MinPt-O-ADP
	3143.10	663.11	2700.19	2479.99	7.13	OSF1.50	18260.00	9655.37					MinPt-O-SF
	3663.56	655.84	3225.50	3007.72	8.41	OSF1.50	19842.19	9685.75					TD
30-025-30712 - PRE-ONGARD WELL #001 Blind 0' to 103' - P (Def Survey)													
Pass													
	3275.67	32.81	3273.17	3242.86	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	3275.28	32.81	3272.75	3242.47	88402.22	MAS = 10.00 (m)	30.00	30.00					MinPt-O-SF
	3275.27	32.81	3272.74	3242.47	88766.27	MAS = 10.00 (m)	31.00	31.00					WRP
	3275.17	32.81	3261.93	3242.36	304.83	MAS = 10.00 (m)	160.00	160.00					MinPts
	3275.18	32.81	3261.88	3242.37	303.00	MAS = 10.00 (m)	170.00	170.00					MINPT-O-EQU
	3481.05	32.81	3466.87	3448.24	297.86	MAS = 10.00 (m)	1340.00	1340.00					MinPt-O-SF
	9862.67	32.81	9841.46	9829.87	526.97	MAS = 10.00 (m)	9500.00	9375.38					MinPt-O-SF
	9517.24	77.48	9464.76	9439.77	190.36	OSF1.50	12510.00	9544.99					MinPt-CtCt
	9518.22	80.47	9463.73	9437.74	183.06	OSF1.50	12650.00	9547.67					MINPT-O-EQU
	9519.47	81.97	9463.95	9437.50	179.63	OSF1.50	12720.00	9549.02					MinPt-O-ADP
	11758.96	190.07	11631.41	11568.89	94.02	OSF1.50	19420.00	9677.64					MinPt-O-SF
	12011.78	193.87	11881.70	11817.91	94.13	OSF1.50	19842.19	9685.75					TD
30-025-30684 - CHISHOLM BUFFALO 21 STATE COM #001 Inc Only 0' to 13410' - A (Def Survey)													
Pass													
	4606.18	32.81	4603.68	4573.37	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	4606.03	32.81	4603.52	4573.23	301650.97	MAS = 10.00 (m)	20.00	20.00					MinPt-O-SF
	4605.99	32.81	4603.48	4573.18	359279.62	MAS = 10.00 (m)	31.00	31.00					WRP
	4597.85	46.65	4565.92	4551.20	156.13	OSF1.50	780.00	780.00					MinPt-CtCt
	4601.94	86.89	4543.18	4515.05	81.75	OSF1.50	1640.00	1640.00					MinPt-CtCt
	4604.80	95.21	4540.50	4509.59	74.47	OSF1.50	1800.00	1799.91					MINPT-O-EQU
	4608.37	99.47	4541.22	4508.91	71.25	OSF1.50	1880.00	1879.75					MinPt-O-ADP
	4767.67	192.52	4638.43	4575.15	37.62	OSF1.50	3660.00	3650.18					MinPt-O-ADP
	4906.92	271.56	4725.04	4635.36	27.34	OSF1.50	5160.00	5141.96					MinPt-O-ADP
	5046.34	352.21	4810.70	4694.13	21.63	OSF1.50	6740.00	6713.30					MinPts
	4185.39	545.50	3820.89	3639.89	11.55	OSF1.50	12690.00	9548.44					MinPt-CtCt
	4185.88	546.80	3820.51	3639.08	11.53	OSF1.50	12750.00	9549.59					MINPT-O-EQU
	4186.45	547.46	3820.65	3639.00	11.52	OSF1.50	12780.00	9550.17					MinPt-O-ADP
	4236.26	559.28	3862.57	3676.97	11.41	OSF1.50	13340.00	9560.92					MinPt-O-SF
	8288.86	594.41	7891.75	7694.45	21.00	OSF1.50	19842.19	9685.75					TD
30-025-25183 - PRE-ONGARD WELL #001 Blind 0' to 360' - P (Def Survey)													
Pass													
	8507.57	32.81	8505.07	8474.76	N/A	MAS = 10.00 (m)	0.00	0.00					Surface
	8507.40	32.81	8504.89	8474.59	514127.08	MAS = 10.00 (m)	31.00	31.00					WRP
	8507.35	99.58	8440.13	8407.77	131.41	OSF1.50	420.00	420.00					MinPt-CtCt
	8507.35	100.21	8439.71	8407.14	130.56	OSF1.50	430.00	430.00					MinPts
	8507.62	100.22	8439.97	8407.40	130.58	OSF1.50	490.00	490.00					MinPt-O-SF
	12208.07	86.70	12149.44	12121.37	217.45	OSF1.50	9800.00	9488.04					MinPt-O-SF
	9229.57	188.69	9102.95	9040.88	74.34	OSF1.50	17800.00	9646.54					MinPt-CtCt
	9230.54	191.48	9102.04	9039.04	73.24	OSF1.50	17930.00	9649.04					MINPT-O-EQU
	9231.60	192.78	9102.25	9038.82	72.76	OSF1.50	17990.00	9650.19					MinPt-O-ADP
	9453.52	229.10	9299.95	9224.42	62.56	OSF1.50	19842.19	9685.75					MinPt-O-SF

PECOS DISTRICT DRILLING CONDITIONS OF APPROVAL

OPERATOR'S NAME:	CHISHOLM ENERGY OPERATING LLC
LEASE NO.:	NMNM032860
WELL NAME & NO.:	RAM 2-11 FED 2BS COM 7H
SURFACE HOLE FOOTAGE:	238'/N & 1295'/W
BOTTOM HOLE FOOTAGE:	100'/S & 400'/W
LOCATION:	Section 02, T.19 S., R.33 E., NMPPM
COUNTY:	LEA County, New Mexico

COA

H2S	☐ Yes	☒ No	
Potash	☒ None	☐ Secretary	☐ R-111-P
Cave/Karst Potential	☒ Low	☐ Medium	☐ High
Cave/Karst Potential	☐ Critical		
Variance	☐ None	☒ Flex Hose	☐ Other
Wellhead	☐ Conventional	☒ Multibowl	☐ Both
Other	☐ 4 String Area	☐ Capitan Reef	☐ WIPP
Other	☒ Fluid Filled	☐ Cement Squeeze	☐ Pilot Hole
Special Requirements	☐ Water Disposal	☒ COM	☐ Unit

A. HYDROGEN SULFIDE

Hydrogen Sulfide (H2S) monitors shall be installed prior to drilling out the surface shoe. If H2S is detected in concentrations greater than 100 ppm, the Hydrogen Sulfide area shall meet Onshore Order 6 requirements, which includes equipment and personnel/public protection items. If Hydrogen Sulfide is encountered, provide measured values and formations to the BLM.

B. CASING

1. The **13-3/8** inch surface casing shall be set at approximately **1600 feet** (a minimum of 25 feet (Lea County) into the Rustler Anhydrite and above the salt) and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with surface log readout will be used or a cement bond log shall be run to verify the top of the cement. Temperature survey will be run a minimum of six hours after pumping cement and ideally between 8-10 hours after completing the cement job.
 - b. Wait on cement (WOC) time for a primary cement job will be a minimum of **8**

- hours** or 500 pounds compressive strength, whichever is greater. (This is to include the lead cement)
- c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The **9-5/8** inch Intermediate casing shall be set at **5300 feet**. The minimum required fill of cement behind the **9-5/8** inch intermediate casing is:

Option 1 (Single Stage):

- Cement to surface. If cement does not circulate see B.1.a, c-d above.
Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to cave/karst or potash.
 - ❖ **Intermediate casing must be kept fluid filled to meet BLM minimum collapse requirement.**
3. The minimum required fill of cement behind the **5-1/2** inch production casing is:

Option 1 (Single Stage):

- Cement should tie-back at least **200 feet** into previous casing string. Operator shall provide method of verification.

C. PRESSURE CONTROL

1. Variance approved to use flex line from BOP to choke manifold. Manufacturer's specification to be readily available. No external damage to flex line. Flex line to be installed as straight as possible (no hard bends).'
2. **BOP REQUIREMENTS.**

Option 1

- a. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.

- b. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the intermediate casing shoe shall be **5000 (5M)** psi.

Option 2

Operator has proposed a multi-bowl wellhead assembly. This assembly will only be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M)** psi.

- a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
- b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
- c. Manufacturer representative shall install the test plug for the initial BOP test.
- d. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
- e. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.

D. SPECIAL REQUIREMENT (S)

Communitization Agreement

- The operator will submit a Communitization Agreement to the Santa Fe Office, 301 Dinosaur Trail Santa Fe, New Mexico 87508, at least 90 days before the anticipated date of first production from a well subject to a spacing order issued by the New Mexico Oil Conservation Division. The Communitization Agreement will include the signatures of all working interest owners in all Federal and Indian leases subject to the Communitization Agreement (i.e., operating rights owners and lessees of record), or certification that the operator has obtained the written signatures of all such owners and will make those signatures available to the BLM immediately upon request.
- If the operator does not comply with this condition of approval, the BLM may take enforcement actions that include, but are not limited to, those specified in 43 CFR 3163.1.
- In addition, the well sign shall include the surface and bottom hole lease numbers. When the Communitization Agreement number is known, it shall also be on the sign.

GENERAL REQUIREMENTS

The BLM is to be notified in advance for a representative to witness:

- a. Spudding well (minimum of 24 hours)
- b. Setting and/or Cementing of all casing strings (minimum of 4 hours)
- c. BOPE tests (minimum of 4 hours)

☒ Eddy County

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

☒ Lea County

Call the Hobbs Field Station, 414 West Taylor, Hobbs NM 88240, (575)
393-3612

1. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
 - a. In the event the operator has proposed to drill multiple wells utilizing a skid/walking rig. Operator shall secure the wellbore on the current well, after installing and testing the wellhead, by installing a blind flange of like pressure rating to the wellhead and a pressure gauge that can be monitored while drilling is performed on the other well(s).
 - b. When the operator proposes to set surface casing with Spudder Rig
 - Notify the BLM when moving in and removing the Spudder Rig.
 - Notify the BLM when moving in the 2nd Rig. Rig to be moved in within 90 days of notification that Spudder Rig has left the location.
 - BOP/BOPE test to be conducted per Onshore Oil and Gas Order No. 2 as soon as 2nd Rig is rigged up on well.
2. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
3. The record of the drilling rate along with the GR/N well log run from TD to surface (horizontal well – vertical portion of hole) shall be submitted to the BLM office as well as all other logs run on the borehole 30 days from completion. If available, a digital copy of the logs is to be submitted in addition to the paper copies. The Rustler top and top and bottom of Salt are to be recorded on the Completion Report.

A. CASING

1. Changes to the approved APD casing program need prior approval if the items substituted are of lesser grade or different casing size or are Non-API. The Operator can exchange the components of the proposal with that of superior strength (i.e. changing from J-55 to N-80, or from 36# to 40#). Changes to the approved cement program need prior approval if the altered cement plan has less volume or strength or if the changes are substantial (i.e. Multistage tool, ECP, etc.). The initial wellhead installed on the well will remain on the well with spools used as needed.
2. Wait on cement (WOC) for Potash Areas: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi for all cement blends, 2) until cement has been in place at least 24 hours. WOC time will be recorded in the driller's log. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
3. Wait on cement (WOC) for Water Basin: After cementing but before commencing any tests, the casing string shall stand cemented under pressure until both of the following conditions have been met: 1) cement reaches a minimum compressive strength of 500 psi at the shoe, 2) until cement has been in place at least 8 hours. WOC time will be recorded in the driller's log. See individual casing strings for details regarding lead cement slurry requirements. The casing integrity test can be done (prior to the cement setting up) immediately after bumping the plug.
4. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. Have well specific cement details onsite prior to pumping the cement for each casing string.
5. No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.
6. On that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Formation at the shoe shall be tested to a minimum of the mud weight equivalent anticipated to control the formation pressure to the next casing depth or at total depth of the well. This test shall be performed before drilling more than 20 feet of new hole.
7. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.
8. Whenever a casing string is cemented in the R-111-P potash area, the NMOCD requirements shall be followed.

B. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. If a variance is approved for a flexible hose to be installed from the BOP to the choke manifold, the following requirements apply: The flex line must meet the requirements of API 16C. Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor.
3. 5M or higher system requires an HCR valve, remote kill line and annular to match. The remote kill line is to be installed prior to testing the system and tested to stack pressure.
4. If the operator has proposed a multi-bowl wellhead assembly in the APD. The following requirements must be met:
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - c. Manufacturer representative shall install the test plug for the initial BOP test.
 - d. Whenever any seal subject to test pressure is broken, all the tests in OOGO2.III.A.2.i must be followed.
 - e. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.
5. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. In a water basin, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. The casing cut-off and BOP installation can be initiated four hours after installing the slips, which will be approximately six hours after bumping the plug. For those casing strings not using slips, the minimum wait time before cut-off is eight hours after bumping the plug. BOP/BOPE testing can begin after cut-off or once cement reaches 500 psi compressive strength (including

lead when specified), whichever is greater. However, if the float does not hold, cut-off cannot be initiated until cement reaches 500 psi compressive strength (including lead when specified).

- b. In potash areas, for all casing strings utilizing slips, these are to be set as soon as the crew and rig are ready and any fallback cement remediation has been done. For all casing strings, casing cut-off and BOP installation can be initiated at twelve hours after bumping the plug. However, **no tests** shall commence until the cement has had a minimum of 24 hours setup time, except the casing pressure test can be initiated immediately after bumping the plug (only applies to single stage cement jobs).
- c. The tests shall be done by an independent service company utilizing a test plug not a cup or J-packer. The operator also has the option of utilizing an independent tester to test without a plug (i.e. against the casing) pursuant to Onshore Order 2 with the pressure not to exceed 70% of the burst rating for the casing. Any test against the casing must meet the WOC time for water basin (8 hours) or potash (24 hours) or 500 pounds compressive strength, whichever is greater, prior to initiating the test (see casing segment as lead cement may be critical item).
- d. The test shall be run on a 5000 psi chart for a 2-3M BOP/BOP, on a 10000 psi chart for a 5M BOP/BOPE and on a 15000 psi chart for a 10M BOP/BOPE. If a linear chart is used, it shall be a one hour chart. A circular chart shall have a maximum 2 hour clock. If a twelve hour or twenty-four hour chart is used, tester shall make a notation that it is run with a two hour clock.
- e. The results of the test shall be reported to the appropriate BLM office.
- f. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
- g. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug. This test shall be performed prior to the test at full stack pressure.
- h. BOP/BOPE must be tested by an independent service company within 500 feet of the top of the Wolfcamp formation if the time between the setting of the intermediate casing and reaching this depth exceeds 20 days. This test does not exclude the test prior to drilling out the casing shoe as per Onshore Order No. 2.

C. DRILLING MUD

Mud system monitoring equipment, with derrick floor indicators and visual and audio alarms, shall be operating before drilling into the Wolfcamp formation, and shall be used until production casing is run and cemented.

D. WASTE MATERIAL AND FLUIDS

All waste (i.e. drilling fluids, trash, salts, chemicals, sewage, gray water, etc.) created as a result of drilling operations and completion operations shall be safely contained and disposed of properly at a waste disposal facility. No waste material or fluid shall be disposed of on the well location or surrounding area.

Porto-johns and trash containers will be on-location during fracturing operations or any other crew-intensive operations.

RI11202021

Chisholm Energy Operating, LLC

801 Cherry St., Suite 1200-Unit 20

Fort Worth, TX 76102

H2S Contingency Plan

Lea County, NM

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated from the location entrance road. Crew should then block entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are NO homes or buildings in or near the ROE.

Assumed 100 ppm ROE = 3000'
100 ppm H₂S concentration shall trigger activation of this plan

Emergency Procedures

In the event of a release of gas containing H₂S, the first responder(s) must:

- « Isolate the area and prevent entry by other persons into the 100 ppm ROE.
- « Evacuate any public places encompassed by the 100 ppm ROE.
- « Be equipped with H₂S monitors and air packs in order to control the release.
- « Use the "buddy system" to ensure no injuries occur during the response.
- « Take precautions to avoid personal injury during this operation.
- « Contact operator and/or local officials to aid in operation. See list of phone numbers attached.
- « Have received training
 - in the: Detection of
 - H₂S, and
 - Measures for protection against the gas,
 - Equipment used for protection and emergency response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally, the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas.

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air=1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air=1	2 ppm	N/A	1000 ppm

Contacting Authorities

Chisholm Energy Operating personnel must liaise with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available including directions to site. The following call list of essential and potential responders has been prepared for use during a release. Chisholm Energy Operating, LLC response must be in coordination with the State of New Mexico's "Hazardous Materials Emergency Response Plan" (HMERP).

Hydrogen Sulfide Drilling Operations Plan

1. All Company and Contract personnel admitted on location must be trained by a qualified H2S safety instructor to the following:
 - A. Characteristics of H2S
 - B. Physical effects and hazards
 - C. Principal and operation of H2S detectors, warning system and briefing areas.
 - D. Evacuation procedure, routes and first aid.
 - E. Proper use of safety equipment & life support systems
 - F. Essential personnel meeting Medical Evaluation criteria will receive additional training on the proper use of 30-minute pressure demand air packs.
2. H2S Detection and Alarm Systems:
 - a. H2S sensors/detectors to be located on the drilling rig floor, in the base of the sub structure/cellar area, on the mud pits in the shale shaker area. Additional H2S detectors may be placed as deemed necessary.
 - b. An audio alarm system will be installed on the derrick floor and in the top doghouse.
3. Windsock and/or wind streamers:
 - a. Windsock at mudpit area should be high enough to be visible.
 - b. Windsock on the rig floor and/ or top doghouse should be high enough to be visible.
4. Condition Flags and Signs
 - a. Warning sign on access road to location.
 - b. Flags to be displayed on sign at entrance to location. Green flag indicates normal safe condition. Yellow flag indicates potential pressure and danger. Red flag indicates danger (H2S present in dangerous concentration). Only H2S trained and certified personnel

admitted to location.

5. Well control equipment:

- a. See exhibit BOP and Choke Diagrams

6. Communication:

- a. While working under masks chalkboards will be used for communication.
- b. Hand signals will be used where chalk board is inappropriate.
- c. Two-way radio will be used to communicate off location in case of emergency help is required. In most cases, cellular telephones will be available at most drilling foreman's trailer or living quarters.

7. Drill stem Testing:

No DSTs are planned at this time.

- 8. Drilling contractor supervisor will be required to be familiar with the effects H₂S has on tubular goods and other mechanical equipment.
- 9. If H₂S is encountered, mud system will be altered if necessary to maintain control of formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary.

Emergency Assistance Telephone List

Chisholm Energy Holdings, LLC

Chisholm Energy Operating, LLC

Vice President of Operations-Brad Grandstaff

Office: (817)953-6063

Office: (817)953-3150

Cell: (972)977-9221

Drilling Superintendent-Russell Simons

Cell: (830)285-7501

Production Superintendent-Paul Martinez

Cell: (325)206-1722

Public Safety:		911 or	
Lea County Sheriff's Department	Number:	(575)396-3611	
Lea County Emergency Management-Lorenzo Velasquez	Number:	(575)391-2983	
Lea County Fire Marshal			
Lorenzo Velasquez, Director	Number:	(575)391-2983	
Jeff Broom, Deputy Fire Marshal	Number:	(575)391-2988	
Fire Department:			
Knowles Fire Department	Number:	(505)392-2810	
City of Hobbs Fire Department	Number:	(505)397-9308	
Jal Volunteer Fire Department	Number:	(505)395-2221	
Lovington Fire Department	Number:	(575)396-2359	
Maljamar Fire Department	Number:	(505)676-4100	
Tatum Volunteer Fire Department	Number:	(505)398-3473	
Eunice Fire Department	Number:	(575)394-3258	
Hospital: Lea Regional Medical Center	Number:	(575)492-5000	
AirMed: Medevac	Number:	(888)303-9112	
Dept. of Public Safety	Number:	(505)827-9000	
New Mexico OCD-Dist. 1-Hobbs-	Office	Number:	(575)393-6161
	Emergency	Number:	(575)370-3186
Lea County Road Department	Number:	(575)391-2940	
NMDOT	Number:	(505)827-5100	

Chisholm Energy Operating, LLC plans to operate a Closed Loop System.

Additional Operator Remarks

Location of Well

0. SHL: NWNW / 238 FNL / 1295 FWL / TWSP: 19S / RANGE: 33E / SECTION: 2 / LAT: 32.696194 / LONG: -103.638064 (TVD: 0 feet, MD: 0 feet)

PPP: NWNW / 100 FNL / 400 FWL / TWSP: 19S / RANGE: 33E / SECTION: 2 / LAT: 32.696564 / LONG: -103.640972 (TVD: 9494 feet, MD: 9878 feet)

BHL: SWSW / 100 FSL / 400 FWL / TWSP: 19S / RANGE: 33E / SECTION: 11 / LAT: 32.667749 / LONG: -103.641019 (TVD: 9686 feet, MD: 19842 feet)

BLM Point of Contact

Name: Gavin Mickwee

Title: Land Law Examiner

Phone: (575) 234-5972

Email: gmickwee@blm.gov



U.S. Department of the Interior
BUREAU OF LAND MANAGEMENT

Drilling Plan Data Report

12/02/2021

APD ID: 10400077227

Submission Date: 07/09/2021

Highlighted data
reflects the most
recent changes

Operator Name: CHISHOLM ENERGY OPERATING LLC

Well Name: RAM 2-11 FED 2BS COM

Well Number: 7H

[Show Final Text](#)

Well Type: OIL WELL

Well Work Type: Drill

Section 1 - Geologic Formations

Formation ID	Formation Name	Elevation	True Vertical Depth	Measured Depth	Lithologies	Mineral Resources	Producing Formation
6608731	RUSTLER	3766	1459	1459	ANHYDRITE	USEABLE WATER	N
6608732	SALADO	2024	1742	1742	SALT	NONE	N
6608734	SEVEN RIVERS	129	3637	3637	ANHYDRITE, DOLOMITE	NATURAL GAS, OIL	N
6608733	QUEEN	-494	4260	4260	DOLOMITE, LIMESTONE, SANDSTONE	NATURAL GAS, OIL	N
6608735	DELAWARE	-2752	6518	6518	SANDSTONE, SHALE, SILTSTONE	NATURAL GAS, OIL	N
6608736	BONE SPRING	-3844	7610	7610	LIMESTONE, SHALE	NATURAL GAS, OIL	N
6608737	BONE SPRING 1ST	-5130	8896	8896	SANDSTONE, SHALE, SILTSTONE	NATURAL GAS, OIL	N
6608741	BONE SPRING 2ND	-5671	9437	9437	SANDSTONE, SHALE, SILTSTONE	NATURAL GAS, OIL	Y

Section 2 - Blowout Prevention

Pressure Rating (PSI): 5M

Rating Depth: 12000

Equipment: Rotating Head, remote kill line, mud-gas separator

Requesting Variance? YES

Variance request: We propose utilizing a cactus speed head for this well. Please see attached diagram and pressure testing statement. Also we request to use a co flex hose. Please find attached information regarding co flex hose.

Testing Procedure: BOP will be tested by an independent service company to 250 psi low and 5000 psi high, per onshore order 2. Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked each trip out of the hole.

Choke Diagram Attachment:

5M_Choke_Manifold_Diagram_20210709112121.pdf

BOP Diagram Attachment:

5m_BOP_Diagram_2_20210709112135.pdf

Patriot Drilling, LLC

RIG NO. 5

Annular Preventer

13-3/8 5,000 PSI WP

Ram Preventers

13-3/8" 5,000 PSI WP Double Ram

13-3/8" 5,000 PSI WP Single Ram

Test the pipe rams, blind rams, floor valves (IBOP and/or upper Kelly valve), choke lines and manifold to 250 psi/5,000 psi with a test plug and a test pump.

Test the annular to 250 psi/2,500 psi with same as above.

District I

1625 N. French Dr., Hobbs, NM 88240
 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210
 Phone:(575) 748-1283 Fax:(575) 748-9720

District III

1000 Rio Brazos Rd., Aztec, NM 87410
 Phone:(505) 334-6178 Fax:(505) 334-6170

District IV

1220 S. St Francis Dr., Santa Fe, NM 87505
 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico
Energy, Minerals and Natural Resources
Oil Conservation Division
1220 S. St Francis Dr.
Santa Fe, NM 87505

CONDITIONS

Action 68238

CONDITIONS

Operator: CHISHOLM ENERGY OPERATING, LLC 801 Cherry Street Fort Worth, TX 76102	OGRID: 372137
	Action Number: 68238
	Action Type: [C-101] BLM - Federal/Indian Land Lease (Form 3160-3)

CONDITIONS

Created By	Condition	Condition Date
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104	12/29/2021
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh water zone or zones and shall immediately set in cement the water protection string	12/29/2021
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud, drilling fluids and solids must be contained in a steel closed loop system	12/29/2021
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing	12/29/2021