<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720

District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720 District III
1000 Rio Brazos Rd., Aztec, NM 87410

Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

Form C-101 August 1, 2011

Permit 324758

	me and Address nklin Mountain Ene	eray LLC									2. OGRII	D Number 373910		
	Cook Street	ngy LLO									3. API N			
Der	over, CO 80206											30-025-50548	3	
4. Property Coo 333	de 3246		5. Property Name NEW	YELLER ST	ATE						6. Well N	√o. 802H		
					7. S	Surfa	ce Location							
UL - Lot	Section	Township	Range		Lot Idn		Feet From		N/S Line	Feet F	rom	E/W Line	County	
N	32	24	1 S	36E	N		280		S		1820	W		Lea
					8. Propose	d Bo	ottom Hole Loc	ation						
UL - Lot	Section	Township	Range		Lot Idn		Feet From		N/S Line	Feet F	rom	E/W Line	County	
С	32	24	IS	36E	С		150		N		1805	W		Lea
					9. F	Pool	Information							
JAL;WOLFCA	AMP, WEST										3381	3		
					Additio	nal \	Nell Information	n						
11. Work Type		12. Well Ty	ре	13. 0	Cable/Rotary			14. Le	ease Type		15. Ground Lev	el Elevation		
Nev	w Well	(OIL						State		3242	2		
16. Multiple		17. Propose	ed Depth	18. F	ormation			19. Contractor 20		20. Spud Date	20. Spud Date			
N		1	16435		Wolfca	mp					11/1	11/1/2022		
Depth to Grour	nd water			Dista	Distance from nearest fresh water well Dista						Distance to near	est surface water		
We will be	using a closed-loo	p system in lie	eu of lined pits	<u> </u>										
				24	Drangad C	`aair	a and Caman	Dron						
Туре	Hole Size	Casino	a Size		g Weight/ft	asii	ng and Cement Settir	g Dep		Sac	ks of Cement		Estimated T	OC.
Surf	17.5	13.3			54.5			300			1130		0	

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surf	17.5	13.375	54.5	1300	1130	0
Int1	12.25	9.625	40	5200	2034	0
Int2	8.75	7.625	29.7	11000	284	4200
Prod	6.75	5.5	23	16435	459	10000

Casing/Cement Program: Additional Comments

22. Proposed Blowout Prevention Program

Туре	Working Pressure	Test Pressure	Manufacturer		
Double Ram	10000	5000	Cactus		

knowledge and b	pelief.	is true and complete to the best of my) NMAC ⊠ and/or 19.15.14.9 (B) NMAC		OIL CONSERVA	TION DIVISION	
Printed Name:	Electronically filed by Rachael A	A Overbey	Approved By:	Paul F Kautz		
Title:	Project Manager		Title:	Geologist		
Email Address:	roverbey@fmellc.com		Approved Date:	9/13/2022	Expiration Date: 9/13/2024	
Date:	9/7/2022	Phone: 303-570-4057	Conditions of Approval Attached			

1625 N. French Dr., Hobbs, NM 88240 Phone: (575) 393-6161 Fax: (575) 393-0720

811 S. First St., Artesia, NM 88210 Phone: (575) 748-1283 Fax: (575) 748-9720 District III

1000 Rio Brazos Road, Aztec, NM 87410 Phone: (505) 334-6178 Fax: (505) 334-6170 <u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505

Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico Energy, Minerals & Natural Resources Department OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-102 Revised August 1, 2011 Submit one copy to appropriate District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-50548		² Pool Code 33813	ſР, WEST	
⁴ Property Code 333246			roperty Name ELLER STATE	⁶ Well Number 802H
⁷ OGRID No. 373910			perator Name PUNTAIN ENERGY LLC	⁹ Elevation 3242.5'


¹⁰ Surface Location

UL or lot no. N	Section 32	Township 24S	Range 36E	Lot Idn	Feet from the 280	North/South line SOUTH	Feet from the 1820	East/West line WEST	County LEA
--------------------	---------------	-----------------	--------------	---------	-------------------	---------------------------	-----------------------	------------------------	---------------

¹¹ Bottom Hole Location If Different From Surface

UL or lot no. C	Section 32	Township 24S	Range 36E	Lot Idn	Feet from the 150	North/South line NORTH	Feet from the 1805	East/West line WEST	County LEA
12 Dedicated Acro	es 13	³ Joint or Infill	14 Conse	olidation Code	15 Order No.				

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

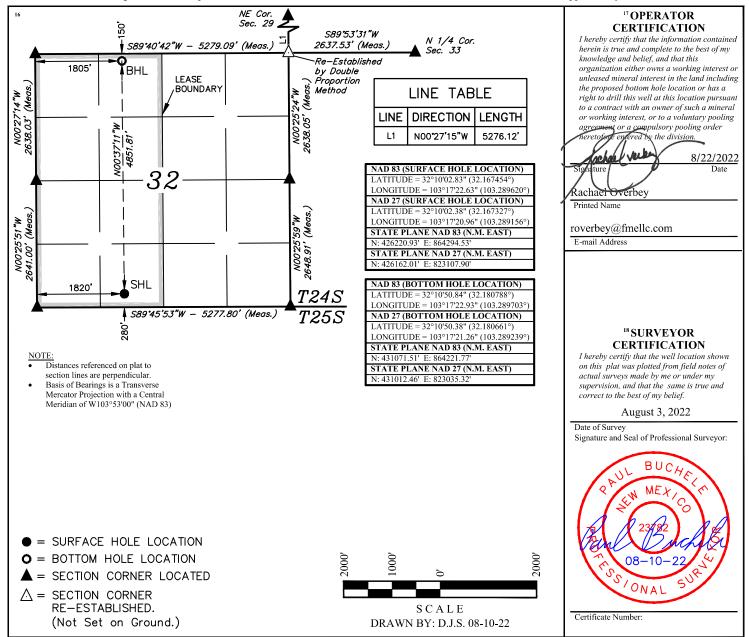

Form APD Conditions

Permit 324758

<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240 Phone:(575) 393-6161 Fax:(575) 393-0720 District II

811 S. First St., Artesia, NM 88210 Phone:(575) 748-1283 Fax:(575) 748-9720

District III 1000 Rio Brazos Rd., Aztec, NM 87410 Phone:(505) 334-6178 Fax:(505) 334-6170

1220 S. St Francis Dr., Santa Fe, NM 87505 Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico Energy, Minerals and Natural Resources Oil Conservation Division 1220 S. St Francis Dr. **Santa Fe, NM 87505**

PERMIT CONDITIONS OF APPROVAL

Operator Name and Address:	API Number:		
Franklin Mountain Energy LLC [373910]	30-025-50548		
44 Cook Street	Well:		
Denver, CO 80206	NEW YELLER STATE #802H		

OCD	Condition
Reviewer	
pkautz	Notify OCD 24 hours prior to casing & cement
pkautz	Will require a File As Drilled C-102 and a Directional Survey with the C-104
pkautz	Once the well is spud, to prevent ground water contamination through whole or partial conduits from the surface, the operator shall drill without interruption through the fresh
	water zone or zones and shall immediately set in cement the water protection string
pkautz	Oil base muds are not to be used until fresh water zones are cased and cemented providing isolation from the oil or diesel. This includes synthetic oils. Oil based mud,
	drilling fluids and solids must be contained in a steel closed loop system
pkautz	Cement is required to circulate on both surface and intermediate1 strings of casing
pkautz	The Operator is to notify NMOCD by sundry (Form C-103) within ten (10) days of the well being spud



Franklin Mountain Energy

Lea County, NM (NAD83) NEW YELLER STATE PAD 2 NEW YELLER STATE 802H

Wellbore #1

Plan: Design #1

Standard Planning Report - Geographic

01 September, 2022



EDM 5000.15 Single User Db Database: Company: Franklin Mountain Energy Project: Lea County, NM (NAD83) Site: NEW YELLER STATE PAD 2 Well: **NEW YELLER STATE 802H**

Wellbore: Wellbore #1 Design #1 Design:

Local Co-ordinate Reference: TVD Reference: MD Reference:

Survey Calculation Method:

North Reference:

Well NEW YELLER STATE 802H

WELL @ 3272.0000usft (Original Well Elev) WELL @ 3272.0000usft (Original Well Elev)

Minimum Curvature

Project Lea County, NM (NAD83)

Map System: US State Plane 1983 Geo Datum: Map Zone:

North American Datum 1983 New Mexico Eastern Zone

System Datum:

Mean Sea Level

NEW YELLER STATE PAD 2 Site

426,221.77 ft Northing: Site Position: Latitude: 32.167454 864,296.31 ft -103.289620 Easting: From: Lat/Long Longitude: 0.56 **Position Uncertainty:** 0.0000 usft Slot Radius: 13-3/16 " **Grid Convergence:**

NEW YELLER STATE 802H Well

Well Position +N/-S 0.0000 usft Northing: 426,221.77 ft Latitude: 32.167454 +E/-W 0.0000 usft Easting: 864,296.31 ft Longitude: -103.289620

0.0000 usft Wellhead Elevation: **Ground Level:** 3,242.0000 usft **Position Uncertainty**

Wellbore #1 Wellbore Magnetics **Model Name** Sample Date Declination Dip Angle Field Strength (°) (°) (nT) IGRF2020 9/1/2022 6.27 59.85 47,362.78560426

Design #1 Design Audit Notes: Version: **PLAN** Tie On Depth: 0.0000 Phase: Vertical Section: Depth From (TVD) +N/-S +F/-W Direction (usft) (usft) (usft) (°) 0.0000 0.0000 0.0000 359.14

Plan Survey Tool Program 9/1/2022 Date

Depth From Depth To

(usft) **Tool Name** (usft) Survey (Wellbore) Remarks

0.0000 16,434.2639 Design #1 (Wellbore #1) MWD

OWSG MWD - Standard

Plan Sections Measured Vertical Dogleg Ruild Turn Depth Inclination Azimuth Depth +N/-S +E/-W Rate Rate Rate TFO (usft) (usft) (°) (°) (usft) (usft) (°/100usft) (°/100usft) (°/100usft) Target (°) 0.0000 0.00 0.00 0.0000 0.0000 0.0000 0.00 0.00 0.00 0.00 1,500.0000 0.00 0.00 1,500.0000 0.0000 0.0000 0.00 0.00 0.00 0.00 1.634.0897 2.01 184 74 1 634 0621 -2.3453 -0.1946 1.50 1.50 0.00 184.74 6,669.0675 2.01 184.74 6,665.9379 -178.4547 -14.8054 0.00 0.00 0.00 0.00 6,803.1571 0.00 0.00 6,800.0000 -180.8000 -15.0000 1.50 -1.50 0.00 180.00 11,076.1993 0.00 0.00 11,073.0422 -180.8000 -15.0000 0.00 0.00 0.00 0.00 11,976.1993 90.00 359.34 11,646.0000 392.1201 -21.5746 10.00 10.00 0.00 359.34 0.00 BHL (NEW YELLER § 16,435.0918 90.00 359.34 11,646.0000 4,850.7189 -72.7401 0.00 0.00 0.00



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83)
Site: NEW YELLER STATE PAD 2
Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

Design:	Desig	,							
Planned Survey									
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (ft)	Map Easting (ft)	Latitude	Longitude
0.0000	0.00	0.00	0.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
	W YELLER S		0.0000	0.0000	0.0000	420,221.77	004,290.31	32.107434	-103.209020
30.0000	0.00	0.00	30.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
	c Alluvium (sı		00.000	0.000	0.000	.20,22	00.,200.0.	02.101.101	100.200020
100.0000	0.00	0.00	100.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
200.0000	0.00	0.00	200.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
300.0000	0.00	0.00	300.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
400.0000	0.00	0.00	400.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
500.0000	0.00	0.00	500.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
600.0000	0.00	0.00	600.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
700.0000	0.00	0.00	700.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
800.0000	0.00	0.00 0.00	800.0000 900.0000	0.0000 0.0000	0.0000 0.0000	426,221.77	864,296.31	32.167454 32.167454	-103.289620 -103.289620
900.0000	0.00	0.00	1,000.0000	0.0000	0.0000	426,221.77 426,221.77	864,296.31 864,296.31	32.167454 32.167454	-103.289620
1,100.0000	0.00	0.00	1,100.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
1,200.0000	0.00	0.00	1,200.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
1,300.0000	0.00	0.00	1,300.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
1,364.0000	0.00	0.00	1,364.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
Rustler									
1,400.0000	0.00	0.00	1,400.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
1,500.0000	0.00	0.00	1,500.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
Start Bui	ild 1.50								
1,600.0000	1.50	184.74	1,599.9886	-1.3044	-0.1082	426,220.47	864,296.20	32.167450	-103.289621
1,634.0897	2.01	184.74	1,634.0621	-2.3453	-0.1946	426,219.43	864,296.11	32.167448	-103.289621
	1 Inc, 184.74 A								
1,700.0000	2.01	184.74	1,699.9319	-4.6506	-0.3858	426,217.12	864,295.92	32.167441	-103.289622
1,800.0000 1,900.0000	2.01 2.01	184.74 184.74	1,799.8703 1,899.8087	-8.1484 -11.6461	-0.6760 -0.9662	426,213.62 426,210.13	864,295.63 864,295.34	32.167432 32.167422	-103.289623 -103.289624
1,916.2014	2.01	184.74	1,916.0000	-12.2128	-1.0132	426,209.56	864,295.29	32.167421	-103.289624
Salado	2.01	104.74	1,510.0000	-12.2120	-1.0102	420,200.00	004,200.20	02.107 4 21	-100.203024
2,000.0000	2.01	184.74	1,999.7470	-15.1438	-1.2564	426,206.63	864,295.05	32.167412	-103.289625
2,100.0000	2.01	184.74	2,099.6854	-18.6415	-1.5466	426,203.13	864,294.76	32.167403	-103.289626
2,200.0000	2.01	184.74	2,199.6238	-22.1392	-1.8368	426,199.63	864,294.47	32.167393	-103.289627
2,300.0000	2.01	184.74	2,299.5622	-25.6370	-2.1270	426,196.13	864,294.18	32.167384	-103.289628
2,400.0000	2.01	184.74	2,399.5005	-29.1347	-2.4171	426,192.64	864,293.89	32.167374	-103.289629
2,500.0000	2.01	184.74	2,499.4389	-32.6324	-2.7073	426,189.14	864,293.60	32.167364	-103.289630
2,600.0000	2.01	184.74	2,599.3773	-36.1301	-2.9975	426,185.64	864,293.31	32.167355	-103.289631
2,700.0000	2.01	184.74	2,699.3157	-39.6278	-3.2877	426,182.14	864,293.02	32.167345	-103.289632
2,800.0000	2.01	184.74		-43.1256	-3.5779	426,178.65	864,292.73	32.167336	-103.289633
2,900.0000 3,000.0000	2.01 2.01	184.74 184.74	2,899.1925	-46.6233 50.1310	-3.8681 -4.1583	426,175.15	864,292.44 864,292.15	32.167326	-103.289634 -103.289635
3,100.0000	2.01	184.74	2,999.1309 3,099.0693	-50.1210 -53.6187	-4.1363 -4.4485	426,171.65 426,168.15	864,291.86	32.167316 32.167307	-103.289636
3,200.0000	2.01	184.74	3,199.0077	-57.1164	-4.7386	426,164.65	864,291.57	32.167297	-103.289637
3,300.0000	2.01	184.74	3,298.9461	-60.6142	-5.0288	426,161.16	864,291.28	32.167288	-103.289638
3,376.1008	2.01	184.74	3,375.0000	-63.2760	-5.2497	426,158.50	864,291.06	32.167280	-103.289639
Base Sal	lt								
3,400.0000	2.01	184.74	3,398.8845	-64.1119	-5.3190	426,157.66	864,290.99	32.167278	-103.289639
3,500.0000	2.01	184.74	3,498.8229	-67.6096	-5.6092	426,154.16	864,290.70	32.167268	-103.289641
3,600.0000	2.01	184.74	3,598.7612	-71.1073	-5.8994	426,150.66	864,290.41	32.167259	-103.289642
3,700.0000	2.01	184.74	3,698.6996	-74.6050	-6.1896	426,147.17	864,290.12	32.167249	-103.289643
3,800.0000	2.01	184.74	3,798.6380	-78.1028	-6.4798	426,143.67	864,289.83	32.167240	-103.289644
3,900.0000	2.01	184.74	3,898.5764	-81.6005	-6.7700 7.0601	426,140.17	864,289.54	32.167230	-103.289645
4,000.0000 4,100.0000	2.01 2.01	184.74 184.74	3,998.5148 4,098.4532	-85.0982 -88.5959	-7.0601 -7.3503	426,136.67 426,133.18	864,289.25 864,288.96	32.167220 32.167211	-103.289646 -103.289647
7,100.0000	2.01	104.74	+,∪∂∪.+∪∂ ∠	-00.0308	-1.0000	720,100.10	004,200.90	J2. 10/211	-103.209047



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83)
Site: NEW YELLER STATE PAD 2
Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1

Design: Design #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

Design:	Desig	ın #1							
Planned Survey	,								
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (ft)	Map Easting (ft)	Latitude	Longitude
4,161.5847	2.01	184.74	4,160.0000	-90.7500	-7.5290	426,131.02	864,288.78	32.167205	-103.289647
Capitan									
4,200.0000	2.01	184.74	4,198.3916	-92.0936	-7.6405	426,129.68	864,288.67	32.167201	-103.289648
4,300.0000	2.01	184.74	4,298.3300	-95.5914	-7.9307	426,126.18	864,288.38	32.167192	-103.289649
4,400.0000	2.01	184.74	4,398.2684	-99.0891	-8.2209	426,122.68	864,288.08	32.167182	-103.289650
4,500.0000	2.01	184.74	4,498.2068	-102.5868	-8.5111	426,119.18	864,287.79	32.167172	-103.289651
4,600.0000	2.01	184.74 184.74	4,598.1452	-106.0845	-8.8013	426,115.69	864,287.50	32.167163 32.167153	-103.289652
4,700.0000 4,800.0000	2.01 2.01	184.74	4,698.0836 4,798.0220	-109.5822 -113.0800	-9.0914 -9.3816	426,112.19 426,108.69	864,287.21 864,286.92	32.167144	-103.289653 -103.289654
4,900.0000	2.01	184.74	4,897.9603	-116.5777	-9.6718	426,105.19	864,286.63	32.167134	-103.289655
4,920.0521	2.01	184.74	4,918.0000	-117.2791	-9.7300	426,104.49	864,286.58	32.167132	-103.289655
Lamar			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,			-, -	, , , , , , , , , , , , , , , , , , , ,		
5,000.0000	2.01	184.74	4,997.8987	-120.0754	-9.9620	426,101.70	864,286.34	32.167124	-103.289656
5,100.0000	2.01	184.74	5,097.8371	-123.5731	-10.2522	426,098.20	864,286.05	32.167115	-103.289657
5,200.0000	2.01	184.74	5,197.7755	-127.0709	-10.5424	426,094.70	864,285.76	32.167105	-103.289658
5,300.0000	2.01	184.74	5,297.7139	-130.5686	-10.8326	426,091.20	864,285.47	32.167096	-103.289659
5,342.3122	2.01	184.74	5,340.0000	-132.0485	-10.9554	426,089.72	864,285.35	32.167091	-103.289660
Bell Can	yon 2.01	184.74	5,397.6523	-134.0663	-11.1228	426,087.70	864,285.18	32.167086	-103.289660
5,400.0000 5,500.0000	2.01	184.74	5,397.6523	-134.0663	-11.1226 -11.4129	426,084.21	864,284.89	32.167076	-103.289661
5,600.0000	2.01	184.74	5,597.5291	-141.0617	-11.7031	426,080.71	864,284.60	32.167067	-103.289662
5,700.0000	2.01	184.74	5,697.4675	-144.5595	-11.9933	426,077.21	864,284.31	32.167057	-103.289664
5,752.5650	2.01	184.74	5,750.0000	-146.3980	-12.1459	426,075.37	864,284.16	32.167052	-103.289664
Cherry C	anyon								
5,800.0000	2.01	184.74	5,797.4059	-148.0572	-12.2835	426,073.71	864,284.02	32.167047	-103.289665
5,900.0000	2.01	184.74	5,897.3443	-151.5549	-12.5737	426,070.22	864,283.73	32.167038	-103.289666
6,000.0000	2.01	184.74	5,997.2826	-155.0526	-12.8639	426,066.72	864,283.44	32.167028	-103.289667
6,100.0000	2.01	184.74	6,097.2210	-158.5503	-13.1541	426,063.22	864,283.15	32.167019	-103.289668
6,200.0000	2.01	184.74	6,197.1593	-162.0481	-13.4443	426,059.72	864,282.86	32.167009	-103.289669
6,300.0000 6,400.0000	2.01 2.01	184.74 184.74	6,297.0977 6,397.0361	-165.5458 -169.0435	-13.7344 -14.0246	426,056.23 426,052.73	864,282.57 864,282.28	32.166999 32.166990	-103.289670 -103.289671
6,500.0000	2.01	184.74	6,496.9745	-172.5412	-14.0240	426,049.23	864,281.99	32.166980	-103.289672
6,600.0000	2.01	184.74	6,596.9129	-176.0389	-14.6050	426,045.73	864,281.70	32.166971	-103.289673
6,669.0675	2.01	184.74	6,665.9379	-178.4547	-14.8054	426,043.32	864,281.50	32.166964	-103.289674
Start Dro	p -1.50								
6,700.0000	1.55	184.74	6,696.8554	-179.4119	-14.8848	426,042.36	864,281.42	32.166961	-103.289674
6,800.0000	0.05	184.74	6,796.8428	-180.7987	-14.9999	426,040.97	864,281.31	32.166958	-103.289674
6,803.1571	0.00	0.00	6,800.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
Vertical	0.00	0.00	0.000.0400	400 0000	45,0000	400 040 07	004 004 04	20.400050	402.000074
6,900.0000 6,941.1571	0.00	0.00 0.00	6,896.8428 6,938.0000	-180.8000 -180.8000	-15.0000 -15.0000	426,040.97 426,040.97	864,281.31 864,281.31	32.166958 32.166958	-103.289674 -103.289674
Brushy C		0.00	0,930.0000	-100.0000	-13.0000	420,040.97	004,201.01	32.100330	-100.209014
7,000.0000	0.00	0.00	6,996.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,100.0000	0.00	0.00	7,096.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,200.0000	0.00	0.00	7,196.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,300.0000	0.00	0.00	7,296.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,400.0000	0.00	0.00	7,396.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,500.0000	0.00	0.00	7,496.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,600.0000	0.00	0.00	7,596.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
7,700.0000	0.00	0.00 0.00	7,696.8429	-180.8000 180.8000	-15.0000 15.0000	426,040.97 426,040.97	864,281.31	32.166958	-103.289674
7,800.0000 7,900.0000	0.00	0.00	7,796.8429 7,896.8429	-180.8000 -180.8000	-15.0000 -15.0000	426,040.97 426,040.97	864,281.31 864,281.31	32.166958 32.166958	-103.289674 -103.289674
8,000.0000	0.00	0.00	7,090.0429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,100.0000	0.00	0.00	8,096.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83) Site: NEW YELLER STATE PAD 2 Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

Planned Survey	1								
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Map Northing	Map Easting		
(usft)	(°)	(°)	(usft)	(usft)	(usft)	(ft)	(ft)	Latitude	Longitude
8,116.1571	0.00	0.00	8,113.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
Bone Sp	ring Lime								
8,200.0000	0.00	0.00	8,196.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,201.1571	0.00	0.00	8,198.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
Avalon 8,300.0000	0.00	0.00	8,296.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,400.0000	0.00	0.00	8,396.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,452.1572		0.00	8,449.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
Chert Z	one								
8,500.0000	0.00	0.00	8,496.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,600.0000	0.00	0.00	8,596.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,700.0000	0.00	0.00	8,696.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
8,800.0000 8,900.0000	0.00	0.00	8,796.8429 8,896.8429	-180.8000 -180.8000	-15.0000 -15.0000	426,040.97 426,040.97	864,281.31 864,281.31	32.166958 32.166958	-103.289674 -103.289674
9,000.0000	0.00	0.00	8,996.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,100.0000	0.00	0.00	9,096.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,200.0000	0.00	0.00	9,196.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,300.0000	0.00	0.00	9,296.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,400.0000	0.00	0.00	9,396.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,479.1572		0.00	9,476.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,500.0000	ne Spring Sar 0.00	0.00	9,496.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,587.1572		0.00	9,584.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
	Bone Spring		-,			,,	,=		
9,600.0000	0.00	0.00	9,596.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,700.0000	0.00	0.00	9,696.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,800.0000	0.00	0.00	9,796.8429	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,900.0000	0.00	0.00	9,896.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
9,924.1571		0.00	9,921.0000	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,000.0000	Bone Spring 0.00	0.00	9,996.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,100.0000	0.00	0.00		-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,200.0000	0.00	0.00	10,196.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,300.0000	0.00		10,296.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,400.0000	0.00	0.00	10,396.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,500.0000 10,511.1571	0.00		10,496.8428 10,508.0000	-180.8000 -180.8000	-15.0000 -15.0000	426,040.97 426,040.97	864,281.31 864,281.31	32.166958 32.166958	-103.289674 -103.289674
	o.oo one Spring Ca		10,506.0000	-100.0000	-15.0000	420,040.97	004,201.31	32.100936	-103.209074
10,600.0000	one Spring Ca 0.00		10,596.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,700.0000			10,696.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,800.0000	0.00	0.00	10,796.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
10,900.0000			10,896.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
11,000.0000	0.00		10,996.8428	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
11,076.1993		0.00	11,073.0422	-180.8000	-15.0000	426,040.97	864,281.31	32.166958	-103.289674
KOP 10° 11,100.0000	2.38	359 34	11,096.8360	-180.3058	-15.0057	426,041.47	864,281.30	32.166959	-103.289674
11,109.1753			11,106.0000	-179.8514	-15.0007	426,041.92	864,281.29	32.166960	-103.289674
,	ne Spring Sa					, -	,		
11,200.0000	12.38		11,195.8818	-167.4779	-15.1529	426,054.29	864,281.15	32.166994	-103.289674
11,300.0000			11,291.1951	-137.6468	-15.4952	426,084.12	864,280.81	32.167076	-103.289675
11,328.2040		359.34	11,317.0000	-126.2715	-15.6258	426,095.50	864,280.68	32.167107	-103.289675
Wolfcam	•	250.04	44 270 0000	04 7404	16.0000	406 400 05	964 999 99	20 407000	400 000075
11,400.0000	32.38	ა59.34	11,379.8800	-91.7191	-16.0223	426,130.05	864,280.28	32.167202	-103.289675



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83)
Site: NEW YELLER STATE PAD 2
Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference:
TVD Reference:
MD Reference:
North Reference:
Survey Calculation Method:

anned Survey									
Measured			Vertical		.=/.14/	Map	Map		
Depth (usft)	Inclination (°)	Azimuth (°)	Depth (usft)	+N/-S (usft)	+E/-W (usft)	Northing (ft)	Easting (ft)	Latitude	Longitude
11,412.0646	33.59	359.34	11,390.0000	-85.1518	-16.0976	426,136.62	864,280.21	32.167220	-103.28967
Wolfcam	ıр А								
11,500.0000	42.38	359.34	11,459.2418	-31.0902	-16.7180	426,190.68	864,279.59	32.167369	-103.28967
11,600.0000	52.38	359.34	11,526.8691	42.3978	-17.5613	426,264.17	864,278.74	32.167571	-103.28967
11,630.7904	55.46	359.34	11,545.0000	67.2777	-17.8469	426,289.05	864,278.46	32.167639	-103.28967
Wolfcam	пр В								
11,700.0000	62.38	359.34	11,580.7071	126.5118	-18.5266	426,348.28	864,277.78	32.167802	-103.28967
11,800.0000	72.38	359.34	11,619.1199	218.6963	-19.5845	426,440.47	864,276.72	32.168056	-103.2896
11,900.0000	82.38	359.34	11,640.9405	316.1502	-20.7028	426,537.92	864,275.60	32.168324	-103.28967
11,976.1974	90.00	359.34	11,646.0000	392.1182	-21.5746	426,613.89	864,274.73	32.168532	-103.28967
HZ Targe	et								
11,976.1994	90.00	359.34	11,646.0000	392.1201	-21.5746	426,613.89	864,274.73	32.168532	-103.2896
LP 90.00	Inc, 359.34 Az	z - LP (NEW	YELLER STAT	TE 802H)					
12,000.0000	90.00	359.34	11,646.0000	415.9192	-21.8478	426,637.69	864,274.46	32.168598	-103.2896
12,100.0000	90.00	359.34	11,646.0000	515.9126	-22.9952	426,737.69	864,273.31	32.168873	-103.2896
12,200.0000	90.00	359.34	11,646.0000	615.9060	-24.1427	426,837.68	864,272.16	32.169148	-103.2896
12,300.0000	90.00	359.34	11,646.0000	715.8994	-25.2902	426,937.67	864,271.02	32.169422	-103.2896
12,400.0000	90.00	359.34	11,646.0000	815.8928	-26.4377	427,037.67	864,269.87	32.169697	-103.2896
12,500.0000	90.00	359.34	11,646.0000	915.8863	-27.5852	427,137.66	864,268.72	32.169972	-103.2896
12,600.0000	90.00	359.34	11,646.0000	1,015.8797	-28.7327	427,237.65	864,267.57	32.170247	-103.2896
12,700.0000	90.00	359.34	11,646.0000	1,115.8731	-29.8802	427,337.65	864,266.43	32.170522	-103.2896
12,800.0000	90.00	359.34	11,646.0000	1,215.8665	-31.0277	427,437.64	864,265.28	32.170797	-103.2896
12,900.0000	90.00	359.34	11,646.0000	1,315.8599	-32.1752	427,537.63	864,264.13	32.171072	-103.2896
13,000.0000	90.00	359.34	11,646.0000	1,415.8534	-33.3227	427,637.63	864,262.98	32.171346	-103.2896
13,100.0000	90.00	359.34	11,646.0000	1,515.8468	-34.4702	427,737.62	864,261.84	32.171621	-103.2896
13,200.0000	90.00	359.34	11,646.0000	1,615.8402	-35.6177	427,837.61	864,260.69	32.171896	-103.2896
13,300.0000	90.00	359.34	11,646.0000	1,715.8336	-36.7652	427,937.61	864,259.54	32.172171	-103.2896
13,400.0000	90.00	359.34	11,646.0000	1,815.8270	-37.9126	428,037.60	864,258.39	32.172446	-103.2896
13,500.0000	90.00	359.34	11,646.0000	1,915.8205	-39.0601	428,137.60	864,257.25	32.172721	-103.2896
13,600.0000	90.00	359.34	11,646.0000	2,015.8138	-40.2076	428,237.59	864,256.10	32.172996	-103.2896
13,700.0000	90.00	359.34	11,646.0000	2,115.8072	-41.3551	428,337.58	864,254.95	32.173270	-103.2896
13,800.0000	90.00	359.34	11,646.0000	2,215.8006	-42.5026	428,437.58	864,253.80	32.173545	-103.2896
13,900.0000	90.00	359.34	11,646.0000	2,315.7940	-43.6501	428,537.57	864,252.66	32.173820	-103.2896
14,000.0000	90.00	359.34	11,646.0000	2,415.7874	-44.7976	428,637.56	864,251.51	32.174095	-103.2896
14,100.0000	90.00	359.34	11,646.0000	2,515.7809	-45.9451	428,737.56	864,250.36	32.174370	-103.289
14,200.0000	90.00	359.34	11,646.0000	2,615.7743	-47.0926	428,837.55	864,249.21	32.174645	-103.289
14,300.0000	90.00	359.34	11,646.0000	2,715.7677	-48.2401	428,937.54	864,248.07	32.174920	-103.289
14,400.0000	90.00	359.34	11,646.0000	2,815.7611	-49.3876	429,037.54	864,246.92	32.175194	-103.289
14,500.0000	90.00	359.34	11,646.0000	2,915.7545	-50.5351	429,137.53	864,245.77	32.175469	-103.289
14,600.0000	90.00	359.34	11,646.0000	3,015.7480	-51.6825	429,237.53	864,244.62	32.175744	-103.289
14,700.0000	90.00	359.34	11,646.0000	3,115.7414	-52.8300	429,337.52	864,243.48	32.176019	-103.289
14,800.0000	90.00	359.34	11,646.0000	3,215.7348	-53.9775	429,437.51	864,242.33	32.176294	-103.289
14,900.0000	90.00	359.34	11,646.0000	3,315.7282	-55.1250	429,537.51	864,241.18	32.176569	-103.289
15,000.0000	90.00	359.34	11,646.0000	3,415.7216	-56.2725	429,637.50	864,240.03	32.176844	-103.289
15,100.0000	90.00	359.34	11,646.0000	3,515.7150	-57.4200	429,737.49	864,238.89	32.177118	-103.289
15,200.0000	90.00	359.34	11,646.0000	3,615.7085	-58.5675	429,837.49	864,237.74	32.177393	-103.2896
15,300.0000	90.00	359.34	11,646.0000	3,715.7019	-59.7150	429,937.48	864,236.59	32.177668	-103.2896
15,400.0000	90.00	359.34	11,646.0000	3,815.6953	-60.8625	430,037.47	864,235.44	32.177943	-103.2896
15,500.0000	90.00	359.34	11,646.0000	3,915.6887	-62.0100	430,137.47	864,234.30	32.178218	-103.2896
15,600.0000	90.00	359.34	11,646.0000	4,015.6821	-63.1575	430,237.46	864,233.15	32.178493	-103.2896
15,700.0000	90.00	359.34	11,646.0000	4,115.6756	-64.3050	430,337.46	864,232.00	32.178768	-103.2896
15,800.0000	90.00	359.34	11,646.0000	4,215.6690	-65.4525	430,437.45	864,230.85	32.179042	-103.2897
15,900.0000	90.00	359.34	11,646.0000	4,315.6624	-66.5999	430,537.44	864,229.71	32.179317	-103.2897
16,000.0000	90.00	359.34	11,646.0000	4,415.6558	-67.7474	430,637.44	864,228.56	32.179592	-103.2897



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83)
Site: NEW YELLER STATE PAD 2
Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: TVD Reference: MD Reference: North Reference:

Survey Calculation Method:

lanned Survey Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Map Northing (ft)	Map Easting (ft)	Latitude	Longitude
16,100.0000	90.00	359.34	11,646.0000	4,515.6492	-68.8949	430,737.43	864,227.41	32.179867	-103.289701
16,200.0000	90.00	359.34	11,646.0000	4,615.6427	-70.0424	430,837.42	864,226.26	32.180142	-103.289702
16,300.0000	90.00	359.34	11,646.0000	4,715.6361	-71.1899	430,937.42	864,225.12	32.180417	-103.289702
16,400.0000	90.00	359.34	11,646.0000	4,815.6295	-72.3374	431,037.41	864,223.97	32.180692	-103.289703
16,435.0918	90.00	359.34	11,646.0000	4,850.7189	-72.7401	431,072.50	864,223.57	32.180788	-103.289703
TD at 164	135.09 - BHL (NEW YELLE	R STATE 802F	l)					

Design Targets									
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (ft)	Easting (ft)	Latitude	Longitude
SHL (NEW YELLER ST - plan hits target ce - Point		0.00	0.0000	0.0000	0.0000	426,221.77	864,296.31	32.167454	-103.289620
BHL (NEW YELLER ST - plan hits target ce - Point		0.00 1	1,646.0000	4,850.7189	-72.7401	431,072.50	864,223.57	32.180788	-103.289703
LP (NEW YELLER STA - plan hits target ce - Point		0.00 1	1,646.0000	392.1201	-21.5746	426,613.89	864,274.73	32.168532	-103.289678

Formations						
	Measured Depth (usft)	Vertical Depth (usft)	Name	Lithology	Dip (°)	Dip Direction (°)
	30.0000	30.0000	Cenozoic Alluvium (surface)			
	1,364.0000	1,364.0000	Rustler			
	1,916.2014	1,916.0000	Salado			
	3,376.1008	3,375.0000	Base Salt			
	4,161.5847	4,160.0000	Capitan			
	4,920.0521	4,918.0000	Lamar			
	5,342.3122	5,340.0000	Bell Canyon			
	5,752.5650	5,750.0000	Cherry Canyon			
	6,941.1571	6,938.0000	Brushy Canyon			
	8,116.1571	8,113.0000	Bone Spring Lime			
	8,201.1571	8,198.0000	Avalon			
	8,452.1572	8,449.0000	*Chert Zone*			
	9,479.1572	9,476.0000	First Bone Spring Sand			
	9,587.1572	9,584.0000	Second Bone Spring Carbonates			
	9,924.1571	9,921.0000	Second Bone Spring Sand			
	10,511.1571	10,508.0000	Third Bone Spring Carbonates			
	11,109.1753	11,106.0000	Third Bone Spring Sand			
	11,328.2040	11,317.0000	Wolfcamp			
	11,412.0646	11,390.0000	Wolfcamp A			
	11,630.7904	11,545.0000	Wolfcamp B			
	11,976.1974	11,646.0000	HZ Target			



Database: EDM 5000.15 Single User Db Company: Franklin Mountain Energy Project: Lea County, NM (NAD83) Site: NEW YELLER STATE PAD 2 Well: NEW YELLER STATE 802H

Wellbore: Wellbore #1
Design: Design #1

Local Co-ordinate Reference: TVD Reference: MD Reference:

Survey Calculation Method:

North Reference:

Well NEW YELLER STATE 802H

WELL @ 3272.0000usft (Original Well Elev) WELL @ 3272.0000usft (Original Well Elev)

Grid

Minimum Curvature

Plan Annotations				
Measured	Vertical	Local Coor	dinates	
Depth	Depth	+N/-S	+E/-W	•
(usft)	(usft)	(usft)	(usft)	Comment
1,500.0000	1,500.0000	0.0000	0.0000	Start Build 1.50
1,634.0897	1,634.0621	-2.3453	-0.1946	Hold 2.01 Inc, 184.74 Az
6,669.0675	6,665.9379	-178.4547	-14.8054	Start Drop -1.50
6,803.1571	6,800.0000	-180.8000	-15.0000	Vertical
11,076.1993	11,073.0422	-180.8000	-15.0000	KOP 10°/100
11,976.1993	11,646.0000	392.1201	-21.5746	LP 90.00 Inc, 359.34 Az
16,435.0918	11,646.0000	4,850.7189	-72.7401	TD at 16435.09

State of New Mexico Energy, Minerals and Natural Resources Department

Submit Electronically Via E-permitting

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

NATURAL GAS MANAGEMENT PLAN

This Natural Gas Management Plan must be submitted with each Application for Permit to Drill (APD) for a new or recompleted well.

Section 1 – Plan Description Effective May 25, 2021

I. Operator:Franklin	Mountain l	Energy, LLC	OGR	ID: 373910_		_ Date:	08/_31_/_2022
II. Type: ⊠ Original [☐ Amendme	ent due to □ 19.15	.27.9.D(6)(a) NN	MAC □ 19.15.27.9	.D(6)(b) NMA0	C □ Oth	er.
If Other, please describe: _							
III. Well(s): Provide the to be recompleted from a s					f wells propose	d to be d	lrilled or proposed
Well Name	API	ULSTR	Footages	Anticipated Oil BBL/D	Anticipated Gas MCF/D	P	Anticipated roduced Water BBL/D
See Attached Well List							
IV. Central Delivery Poir V. Anticipated Schedule or proposed to be recomple Well Name	: Provide the	e following inform	ation for each ne	w or recompleted	well or set of wet.		
See Attached Well List							
VI. Separation Equipment VII. Operational Practice Subsection A through F of VIII. Best Management I during active and planned	es: ⊠ Attac 19.15.27.8 I Practices: □	h a complete desc NMAC.	ription of the ac	tions Operator wil	l take to compl	y with t	he requirements of

Section 2 – Enhanced Plan EFFECTIVE APRIL 1, 2022

Beginning April 1, 2022, an operator that is not in compliance with its statewide natural gas capture requirement for the applicable reporting area must complete this section.

☑ Operator certifies that it is not required to complete this section because Operator is in compliance with its statewide natural gas capture requirement for the applicable reporting area.

IX. Anticipated Natural Gas Production:

Well	API	Anticipated Average Natural Gas Rate MCF/D	Anticipated Volume of Natural Gas for the First Year MCF

X. Natural Gas Gathering System (NGGS):

Operator	System	ULSTR of Tie-in	Anticipated Gathering Start Date	Available Maximum Daily Capacity of System Segment Tie-in
				, ,

- **XI. Map.** \boxtimes Attach an accurate and legible map depicting the location of the well(s), the anticipated pipeline route(s) connecting the production operations to the existing or planned interconnect of the natural gas gathering system(s), and the maximum daily capacity of the segment or portion of the natural gas gathering system(s) to which the well(s) will be connected.
- XII. Line Capacity. The natural gas gathering system \square will \square will not have capacity to gather 100% of the anticipated natural gas production volume from the well prior to the date of first production.
- **XIII.** Line Pressure. Operator \square does \square does not anticipate that its existing well(s) connected to the same segment, or portion, of the natural gas gathering system(s) described above will continue to meet anticipated increases in line pressure caused by the new well(s).
- ☐ Attach Operator's plan to manage production in response to the increased line pressure.
- **XIV.** Confidentiality:
 Operator asserts confidentiality pursuant to Section 71-2-8 NMSA 1978 for the information provided in Section 2 as provided in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and attaches a full description of the specific information for which confidentiality is asserted and the basis for such assertion.

(i)

Section 3 - Certifications Effective May 25, 2021

Operator certifies that, after reasonable inquiry and based on the available information at the time of submittal: 🖂 Operator will be able to connect the well(s) to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system: or ☐ Operator will not be able to connect to a natural gas gathering system in the general area with sufficient capacity to transport one hundred percent of the anticipated volume of natural gas produced from the well(s) commencing on the date of first production, taking into account the current and anticipated volumes of produced natural gas from other wells connected to the pipeline gathering system. If Operator checks this box, Operator will select one of the following: Well Shut-In. ☐ Operator will shut-in and not produce the well until it submits the certification required by Paragraph (4) of Subsection D of 19.15.27.9 NMAC; or Venting and Flaring Plan.

Operator has attached a venting and flaring plan that evaluates and selects one or more of the potential alternative beneficial uses for the natural gas until a natural gas gathering system is available, including: power generation on lease; (a) **(b)** power generation for grid; compression on lease; (c) (d) liquids removal on lease; reinjection for underground storage; (e) **(f)** reinjection for temporary storage; **(g)** reinjection for enhanced oil recovery; fuel cell production; and (h)

Section 4 - Notices

1. If, at any time after Operator submits this Natural Gas Management Plan and before the well is spud:

other alternative beneficial uses approved by the division.

- (a) Operator becomes aware that the natural gas gathering system it planned to connect the well(s) to has become unavailable or will not have capacity to transport one hundred percent of the production from the well(s), no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised venting and flaring plan containing the information specified in Paragraph (5) of Subsection D of 19.15.27.9 NMAC; or
- (b) Operator becomes aware that it has, cumulatively for the year, become out of compliance with its baseline natural gas capture rate or natural gas capture requirement, no later than 20 days after becoming aware of such information, Operator shall submit for OCD's approval a new or revised Natural Gas Management Plan for each well it plans to spud during the next 90 days containing the information specified in Paragraph (2) of Subsection D of 19.15.27.9 NMAC, and shall file an update for each Natural Gas Management Plan until Operator is back in compliance with its baseline natural gas capture rate or natural gas capture requirement.
- 2. OCD may deny or conditionally approve an APD if Operator does not make a certification, fails to submit an adequate venting and flaring plan which includes alternative beneficial uses for the anticipated volume of natural gas produced, or if OCD determines that Operator will not have adequate natural gas takeaway capacity at the time a well will be spud.

I certify that, after reasonable inquiry, the statements in and attached to this Natural Gas Management Plan are true and correct to the best of my knowledge and acknowledge that a false statement may be subject to civil and criminal penalties under the Oil and Gas Act.

Signature: Jackgal Verlag
Printed Name: Rachael Overbey
Title: Director Operations Planning & Regulatory
E-mail Address: roverbey@fmellc.com
Date: 08/31/2022
Phone: 720-414-7868
OIL CONSERVATION DIVISION (Only applicable when submitted as a standalone form)
Approved By:
Title:
Approval Date:
Conditions of Approval:

NATURAL GAS MANAGEMENT PLAN

III. Well(s): Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

				Anticipated Oil	Anticipated	Anticipated Produced
Well Name	API 14 Digit	ULSTR	Surface Location FTG	BBL/D	Gas MCF/D	Water BBL/D
New Yeller State 302H	TBD	N-32-24S-36E	280 FSL 1870 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 602H	TBD	N-32-24S-36E	280 FSL 1795 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 703H	TBD	N-32-24S-36E	280 FSL 1845 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 802H	TBD	N-32-24S-36E	280 FSL 1820 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 301H	TBD	M-32-24S-36E	280 FSL 770 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 601H	TBD	M-32-24S-36E	280 FSL 795 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 701H	TBD	M-32-24S-36E	280 FSL 820 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 702H	TBD	M-32-24S-36E	280 FSL 845 FWL	800 +/-	1100 +/-	500 +/-
New Yeller State 801H	TBD	M-32-24S-36E	280 FSL 870 FWL	800 +/-	1100 +/-	500 +/-

V. Anticipated Schedule: Provide the following information for each new or recompleted well or set of wells proposed to be drilled or proposed to be recompleted from a single well pad or connected to a central delivery point.

				Completion	Initial	
		Spud Date		Commencement	Flowback	
Well Name	API 14 Digit	(Batch Drilling)	TD Reached Date	Date	Date	First Production Date
New Yeller State 302H	TBD	11/24/2022	1/28/2023	2/12/2023	2/22/2023	2/24/2023
New Yeller State 602H	TBD	11/24/2022	1/28/2023	2/12/2023	2/22/2023	2/24/2023
New Yeller State 703H	TBD	11/24/2022	1/28/2023	2/12/2023	2/22/2023	2/24/2023
New Yeller State 802H	TBD	11/24/2022	1/28/2023	2/12/2023	2/22/2023	2/24/2023
New Yeller State 301H	TBD	12/1/2022	2/17/2023	3/4/2023	3/14/2023	3/16/2023
New Yeller State 601H	TBD	12/1/2022	2/17/2023	3/4/2023	3/14/2023	3/16/2023
New Yeller State 701H	TBD	12/1/2022	2/17/2023	3/4/2023	3/14/2023	3/16/2023
New Yeller State 702H	TBD	12/1/2022	2/17/2023	3/4/2023	3/14/2023	3/16/2023
New Yeller State 801H	TBD	12/1/2022	2/17/2023	3/4/2023	3/14/2023	3/16/2023



Natural Gas Management Plan

Items VI-VIII

VI. Separation Equipment: Attach a complete description of how Operator will size separation equipment to optimize gas capture.

- Data from surrounding wells is used to generate type curves which provides the basis for expected gas rates during initial production, peak production and then the natural decline.
- Separation equipment will be sized to provide adequate separation for peak production.
- Facility design includes multiple stages of separation to minimize gas waste. Wells flow through a high pressure 2-phase separator to remove bulk gas, liquid from the 2-phase separator is sent to a 3-phase separator where additional gas is separated. Gas from the 2 Phase and 3 Phase separators are then sent through a gas scrubber before being route to treatment and/or sales. As production declines the 2-phase separator may be removed.
- Industry standard sizing calculations are used for gas-liquid separation and liquid-liquid separation.

VII. Operational Practices: Attach a complete description of the actions Operator will take to comply with the requirements of Subsection A through F 19.15.27.8 NMAC.

- Drilling, completion and production setup is designed to minimize the waste of natural gas and to flare instead of vent.
- Drilling Operations:
 - Natural gas encountered will be flared instead of vented unless there is an equipment malfunction and/or to avoid risking safety or the environment.
 - Flares will be properly sized and placed at least 100' from the nearest surface hole on the pad.
- Completions/Recompletions Operations:
 - Flowback operations will not commence until connected to a properly sized gas gathering system.
 - During initial flowback wells are routed to the separation equipment as soon as technically feasible to minimize gas waste.
 - During separation flowback wells are routed to the separation equipment to minimize gas waste.
 - Gas sales is maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - Flares are properly sized with a continuous pilot.
- Production Operations:
 - Gas sales will be maximized. Gas will be flared instead of vented during an emergency or malfunction to avoid posing a risk to operations or personnel safety.
 - After a well is stabilized from liquid unloading, the well will be turned back into the collection system.
- Performance Standards:
 - The facility will be designed to handle peak production rates and pressures.
 - o All tanks will have automatic gauging equipment.
 - Flares will be designed to ensure proper combustion and will have continuous pilots. Flares will be located 100' from nearest surface hole on the pad and storage tanks.
 - Weekly AVOs will be performed, and any leaking thief hatches will be cleaned and properly re-sealed.




- Measurement and Calibration:
 - o All volume that is flared and vented that is not measured will be estimated.
 - When metering is not practical due to low pressure/rate, all vented or flared volumes will be estimated.
 - Measurement will conform to industry standards. Measurement will not be bypassed except for purposes of inspection or calibration.

VIII. Best Management Practices: Attach a complete description of Operator's best management practices to minimize venting during active and planned maintenance.

- Venting will be minimized during active and planned maintenance.
- Systems and equipment requiring maintenance will be isolated and blown down to sales and then flare before any remaining gas is vented in an effort to minimize waste and venting.
- Downhole maintenance will use best management practices to minimize vent.

New Yeller NGMP Map

. Aug 2022 - Capacities reflected are FME's understanding of 3rd party midstream system capacities

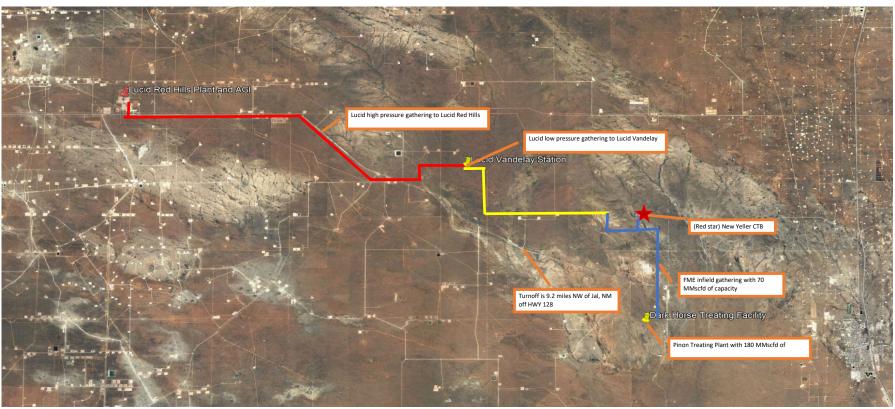



New Yeller State 802H

1. Geologic name of surface location: Permian

2. Estimated tops of important geological markers:

Formations	PROG SS	PROG TVD	Picked TVD	delta	Potential/Issues
Cenozoic Alluvium (surface)	3,242'	30'	30'	0	Sand/Gravels/unconsolidated
Rustler	1907.91	1,364'			Carbonates
Salado	1356.3	1,916'			Salt, Carbonate & Clastics
Base Salt	-102.83	3,375'			Shaley Carbonate & Shale
Capitan	-888'	4,160'			Carbonates
Lamar	-1,646'	4,918'			Carbonate & Clastics
Bell Canyon	-2,068'	5,340'			Sandstone - oil/gas/water
Cherry Canyon	-2,478'	5,750'			Sandstone - oil/gas/water
Brushy Canyon	-3,666'	6,938'			Sand/carb/shales - oil/gas/water
Bone Spring Lime	-4,841'	8,113'			Shale/Carbonates - oil/gas
Avalon	-4,926'	8,198'			Shale/Carbonates - oil/gas
Chert Zone	-5,177'	8,449'			Carbonate/Chert
First Bone Spring Sand	-6,204'	9,476'			Sandstone - oil/gas/water
Second Bone Spring Carbonates	-6,312'	9,584'			Shale/Carbonates - oil/gas
Second Bone Spring Sand	-6,649'	9,921'			Sandstone - oil/gas/water
Third Bone Spring Carbonates	-7,236'	10,508'			Shale/Carbonates - oil/gas
Third Bone Spring Sand	-7,834'	11,106'			Sandstone - oil/gas/water
Wolfcamp	-8,045'	11,317'		I	Overpressure shale/sand- Oil/Gas
Wolfcamp A	-8,118'	11,390'			Overpressure Shale - Oil/Gas
Wolfcamp B	-8,273'	11,545'		Ī	Overpressure Shale - Oil/Gas
HZ Target	-8,374'	11,646'			Overpressure Shale - Oil/Gas
Wolfcamp C	-8,424'	11,696'			Overpressure Shale - Oil/Gas

3. Estimated depth of anticipated fresh water, oil or gas:

Upper Permian Sands	0-400'	Fresh Water
Delaware Sands	5,340'	Oil
Avalon	8,198'	Oil
Bone Spring	9,476'	Oil
Wolfcamp	11,317'	Oil

No other formations are expected to give up oil, gas or fresh water in measurable quantities. Surface freshwater sands will be protected by setting 13-3/8" casing at 1,300' and circulating cement back to surface.

4. Casing Program:

All casing strings will be run new. Safety factors calculated assuming the well is vertical.

Casing string	Weight	Grade	Burst	Collance	Tension	Conn	Length	API design factor			
casing string	weigiit	Grade	Duist	Collapse	Tension	Collii	Length	Burst	Collapse	Tension	Coupling
						BTC					
Surface 13 3/8"	54.5	J-55	2730	1130	853	909	1,300	1.18	1.67	4.99	5.32
						ВТС					
Intermediate 9 5/8"	40	HCL-80	7430	4230	916	1042	5,200	1.77	1.74	2.97	3.38
,											
						Liberty					
Intermediate 7 5/8"	29.7	HCP-110	8280	7150	827	558	11,000	1.21	1.39	1.94	1.31
						Eagle					
Long string 5 1/2"	23	P-110	14520	14520	729	606	16,435	1.32	1.89	1.53	1.27
							11,646				1.65

7-5/8" casing will be set at 11,000' MD / 10,996' TVD at 0° inclination. Stress calculations on 5-1/2" casing performed assuming 16,435' depth. Actual max vertical depth is 11,646'.



Cementing Program:

Cementing Stage tool can be placed in the 1st Intermediate string as a contingency to ensure required TOC to surface.

String	Hole	_		Lead				Tail						
Туре	Size	Size	Setting Depth	Sacks	Type of cmt	Yield ft3/sk	Water gal/sk	TOC ft	Sacks	Type of cmt	Yield ft3/sk	Water gal/sk	TOC	Excess
Surf	17.5	13.375	1,300	795	Extenda Cem,	1.747	9.06	0	335	Tail, 14.8	1.349	6.51	1,000	100%
					13.5 ppg Class					ppg, Class				
					C, 3lb/sk Kol-					C,				
					Seal									
					0.125pps Poly-					1% Ca Cl 2,				
					E-Flake					0.125pps				
										Celo-Flake				
Int1	12.25	9.625	5,200	1880	Lead, 12.8	1.45	6.9	0	154	Tail, 14.8	1.33	6.3	4,900	100%
					ppg, Class C,					ppg, Class				
					5% Salt					С,				
					0.125 pps Poly-					0.1% HR 800				
					E-Flake,					.125 pps				
					3lb/sk Kol-					Poly-E-				
					Seal					Flake				
Int2	8.75	7.625	11,000	163	Lite Fill, 9.5	5.1	27.2	4,200	121	Integra Ce m	1.33	6.31	10,000	50%
					ppg, Class C					14.8 ppg,				
					3lb/sk					Class P				
					Bridgemaker									
					Gel, 5%					0.25 pps				
					Salt, 5pps					Cello-				
					LCM, 0.25pps IntegraSeal					Flake, 2%				
					iiitegiaseai					CalCl2				
Prod	6.75	5.5	16,435	459	Tail, 14.5 ppg,	1.4	6.8	10,000		Carciz				20%
1100	0.75	3.3	10, 100	133	Gas Migration		0.0	10,000						2070
					Control									

5. Minimum Specifications for Pressure Control:

The minimum blowout preventer equipment (BOPE) shown in Exhibit #1 will consist of a single ram, mud cross and double ram-type (10,000 psi WP) preventer and an annular preventer (5,000-psi WP). Both units will be hydraulically operated, and the ram-type will be equipped with blind rams on bottom and $4 \frac{1}{2}$ " x 7" variable pipe rams on top.

All BOPE will be tested in accordance with Onshore Oil & Gas order No. 2.

Before drilling out of the surface casing, the ram-type BOP and accessory equipment will be tested to 5,000/250 psig and the annular preventer to 5,000/250 psig. The surface casing will be tested for 30 minutes to 0.22 psi/ft or 1500 psi, whichever is greater, but not to exceed 70% of Internal yield.

Before drilling out of the intermediate casing, the ram-type BOP and accessory equipment will be tested to 10,000/250 psig and the annular preventer to 5,000/250 psig. The intermediate casing will be for 30 minutes to 0.22 psi/ft or 1500 psi, whichever is greater, but not to exceed 70% of Internal yield prior to drill-out.

Pipe rams will be operationally checked each 24-hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets.

A hydraulically operated choke will be installed prior to drilling out of the intermediate casing shoe.



6. Types and characteristics of the proposed mud system:

During this procedure we plan to use a Closed-Loop System and haul contents to the required disposal. The applicable depths and properties of the drilling fluid systems are as follows.

Depth	Туре	Weight (ppg)	Viscosity	Water Loss
0 – 1,300′	Fresh - Gel	8.6-8.8	28-34	N/c
1,300' -11,000'	Brine	8.8-10.2	28-34	N/c
11,000' –16,435' Lateral	Oil Base	10.0-12.5	58-68	3 – 6

The highest mud weight needed to balance formation is expected to be 10-12.5 ppg. In order to maintain hole stability, mud weights up to 13 ppg may be utilized.

An electronic pit volume totalizer (PVT) will be utilized on the circulating system, to monitor pit volume, flow rate, pump pressure and stroke rate.

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept at the wellsite at all times.

7. Auxiliary well control and monitoring equipment:

- (A) A kelly cock will be kept in the drill string at all times.
- (B) A full opening drill pipe-stabbing valve (inside BOP) with proper drill pipe connections will be on the rig floor at all times.
- (C) H2S monitoring and detection equipment will be utilized from surface casing point to TD.
- (D) A wear bushing will be installed in the wellhead prior to drilling out of the surface casing.

8. Logging, testing and coring program:

GR-CCL-CNL will be run in cased hole during completions phase of operations.

Open-hole logs are not planned for this well.

9. Abnormal conditions, pressures, temperatures and potential hazards:

The estimated bottom-hole temperature at 11,646' TVD (deepest point of the well) is 185°F with an estimated maximum bottom-hole pressure (BHP) at the same point of 7,873 psig (based on 13 ppg MW).

Hydrogen sulfide may be present in the area. All necessary precautions will be taken before drilling operations commence. See Hydrogen Sulfide Plan below:

10. Hydrogen Sulfide Plan:

- A. All personnel shall receive proper awareness H2S training.
- B. Briefing Area: Two perpendicular areas will be designated by signs and readily accessible.
- C. Required Emergency Equipment
 - a. Well Control Equipment
 - i. Flare line 100' from wellhead to be ignited by auto ignition sparking system.
 - ii. Choke manifold with a remotely operated hydraulic choke.
 - iii. Mud/gas separator.
 - b. Protective equipment for essential personnel
 - i. Breathing Apparatus
 - 1. Rescue packs (SCBA) 1 unit shall be placed at each briefing area, 2 shall be stored in a safety trailer on site.
 - 2. Work / Escape packs 4 packs shall be stored on the rig floor with sufficient air hose not to restrict work activity.



- 3. Emergency Escape Packs 4 packs shall be stored in the doghouse for emergency evacuation.
- ii. Auxiliary Rescue Equipment
 - 1. Stretcher
 - 2. Two OSHA full body harnesses
 - 3. 100 feet of 5/8 inches OSHA approved rope
 - 4. 1-20# class ABC fire extinguisher
- c. H2S Detection and Monitoring Equipment
 - i. A stationary detector with three sensors will be placed in the doghouse if equipped, set to visually alarm at 10 ppm and audible at 14 ppm. The detector will be calibrated a minimum of every 30 days or as needed. The sensors will be placed in the following places:
 - 1. Rig Floor
 - 2. Below Rig Floor / Near BOPs
 - 3. End of flow line or where well bore fluid is being discharged (near shakers)
 - ii. If H2S is encountered, measured values and formations will be provided to the BLM.
- d. Visual Warning Systems
 - i. One color code condition sign will be placed at the entrance to the site reflecting the possible conditions at the site.
 - ii. A colored condition flag will be on display, reflecting the current condition at the site at the time.
 - iii. Two windsocks will be placed in strategic locations, visible from all angles.
- e. Mud Program
 - i. The Mud program will be designed to minimize the volume of H2S circulated to surface.
 - ii. The operator will have the necessary mud products to minimize hazards while drilling in H2S bearing zones.
- f. Metallurgy
 - i. All drill strings, casings, tubing, wellhead, blowout preventer, drilling spool, kill lines, choke manifold and lines, and valves shall be suitable for H2S service at the anticipated operating pressures to prevent sour sulfide stress cracking.
- g. Communication
 - i. Communication will be via cell phones and walkie talkies on location.

Franklin Mountain Energy has conducted a review of offset operated wells to determine if an H2S contingency plan is required for the proposed well. Based on concentrations of offset wells, proximity to main roads, and distance to populated areas, the radius of exposure created by a potential release was determined to be minimal and low enough to not necessitate an H2S contingency plan. This will be reevaluated during wellbore construction if H2S is observed and after the well is on production.

11. Anticipated starting date and duration of operations:

The drilling operations on the well should be finished in approximately one month. However, in order to minimize disturbance in the area and to improve efficiency Franklin Mountain is planning to drill all the wells on the pad prior to commence completion operations. To even further reduce the time heavy machinery is used the "batch drilling" method may be used. The drilling rig with walking/skidding capabilities will be used.



12. Disposal/environmental concerns:

- (A) Drilled cuttings will be hauled to and disposed of in a state-certified disposal site.
- (B) Non-hazardous waste mud/cement from the drilling process will be also be hauled to and disposed of in a state-certified disposal site.
- (C) Garbage will be hauled to the Pecos City Landfill.
- (D) Sewage (grey water) will be hauled to the Carlsbad City Landfill.

13. Wellhead:

A multi-bowl wellhead system will be utilized.

After running the 13-3/8" surface casing, a 13-5/8" BOP/BOPE system with a minimum working pressure of 10,000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5,000 psi pressure test. This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 5,000 psi.

After running the 2nd intermediate casing, and before drilling out, the wellhead, BOP, and related equipment will be tested to 10,000/250 psig.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the installation instructions for the Cactus Multi-Bowl WH system has been sent to the BLM office in Carlsbad.

The wellhead will be installed by a third-party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing strings. After installation of the first intermediate string the pack-off and lower flanges will be pressure tested to 5,000 psi. After installation of the second intermediate string, the pack-off and upper flange will be pressure tested to 10,000 psi.

Both the surface and intermediate casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1,500 psi, whichever is greater.

14. Additional variance requests

A. Casing.

In order to minimize potential environmental and technical hazards, this well is planned with two intermediate strings of casing.

- 1. Variance is requested to waive the centralizer requirements for the 7-5/8" casing due to the tight clearance with 9-5/8" string.
- 2. Variance is requested to waive/reduce the centralizer requirements for the 5-1/2" casing due to the tight clearance with 6-3/4" hole and 5-1/2" casing due to tight clearances.