

OCD-ARTESIA

JUL 29 2009

Form 3160-3
(April 2004)UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENTFORM APPROVED
OMB No 1004-0137
Expires March 31, 2007A75-09-236
EA-09-589
Secretary's Potash
RM

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NMNM-77046 NMNM-121955	
1b. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Devon Energy Production Company, LP		7. If Unit or CA Agreement, Name and No	
3a. Address 20 North Broadway Oklahoma City, Oklahoma City 73102-8260		8. Lease Name and Well No. North Pure Gold 10 Fed Com 3H	
3b. Phone No. (include area code) 405-228-8699		9. API Well No. 30-015-37192	
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface SW/4 SE/4 330 FSL & 2265 FEL At proposed prod zone BHL: NW/4 NE/ 330 FNL & 2090 FEL PP: 330 FSL & 2265 FEL		10. Field and Pool, or Exploratory Ingle Wells; Delaware	
11. Sec, T R M. or Blk and Survey or Area SEC 10 T23S R31E		12. County or Parish Eddy County	
13. State NM		14. Distance in miles and direction from nearest town or post office* Approximately 18 miles east of Loving, NM.	
15. Distance from proposed* location to nearest property or lease line, ft (Also to nearest drg. unit line, if any) 330'	16. No of acres in lease 1320	17. Spacing Unit dedicated to this well 160 Acres	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft	19. Proposed Depth 8125' TVD 12,480' MD	20. BLM/BIA Bond No. on file CO-1104	
21. Elevations (Show whether DF, KDB, RT, GL, etc) 3403' GL	22. Approximate date work will start*	23. Estimated duration 45 days	

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor | 4. Bond to cover the operations unless covered by an existing bond on file (see item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office) | 6. Such other site specific information and/or plans as may be required by the authorized officer |

25. Signature <i>Judy A. Barnett</i>	Name (Printed/Typed) Judy A. Barnett	Date 03/26/2009
Title Regulatory Analyst		

Approved by (Signature) <i>Rosemary E. Herrell</i>	Name (Printed/Typed) for STATE DIRECTOR	Date JUL 24 2009
Title NM STATE OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 USC Section 1001 and Title 43 USC Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

Carlsbad Controlled Water Basin

mz

SEE ATTACHED FOR
CONDITIONS OF APPROVALApproval Subject to General Requirements
& Special Stipulations Attached

DISTRICT I
1625 N. French Dr., Hobbs, NM 88240

DISTRICT II
1801 W. Grand Avenue, Artesia, NM 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, NM 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-102
Revised October 12, 2005

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, New Mexico 87505

WELL LOCATION AND ACREAGE DEDICATION PLAT

☐ AMENDED REPORT

API Number 30-015-37192	Pool Code 33745	Pool Name Ingel Wells; Delaware
Property Code 37260	Property Name NORTH PURE GOLD "10" FEDERAL	Well Number 3H
OGRID No. 6137	Operator Name DEVON ENERGY PRODUCTION COMPANY LP	Elevation 3403'

Surface Location

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
0	10	23 S	31 E		330	SOUTH	2265	EAST	EDDY


Bottom Hole Location If Different From Surface

UL or lot No.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
B	10	23 S	31 E		330	NORTH	2090	EAST	EDDY


Dedicated Acres 160	Joint or Infill	Consolidation Code	Order No.
-------------------------------	-----------------	--------------------	-----------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

GRID N: 482884.660 GRID E: 714042.342 LATITUDE: 32°19'34.618" LONGITUDE: -103°45'27.171"	BOTTOM HOLE LOCATION Lat - N32°19'31.25" Long - W103°45'50.04" SPC- N.: 482573.861 E.: 717239.023 (NAD-83)	GRID N: 482916.542 GRID E: 719327.130 LATITUDE: 32°19'34.658" LONGITUDE: -103°45'25.579"
OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature <u>Judy A. Barnett</u> Date <u>3/20/09</u> Printed Name <u>Judy A. Barnett</u> Regulatory Analyst		
SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. FEBRUARY 26, 2009 Date Surveyed <u>GARY L. JONES</u> Signature <u>GARY L. JONES</u> Professional Surveyor Certificate No. <u>GARY L. JONES 7977</u> BASIN SURVEYS		
GRID N: 477603.808 GRID E: 714071.652 LATITUDE: 32°18'42.362" LONGITUDE: -103°45'27.151"	SURFACE LOCATION Lat - N32°18'45.52" Long - W103°45'52.06" SPC- N.: 477951.617 E.: 717090.027 (NAD-83)	GRID N: 477634.876 GRID E: 719358.611 LATITUDE: 32°18'42.393" LONGITUDE: -103°45'25.564"

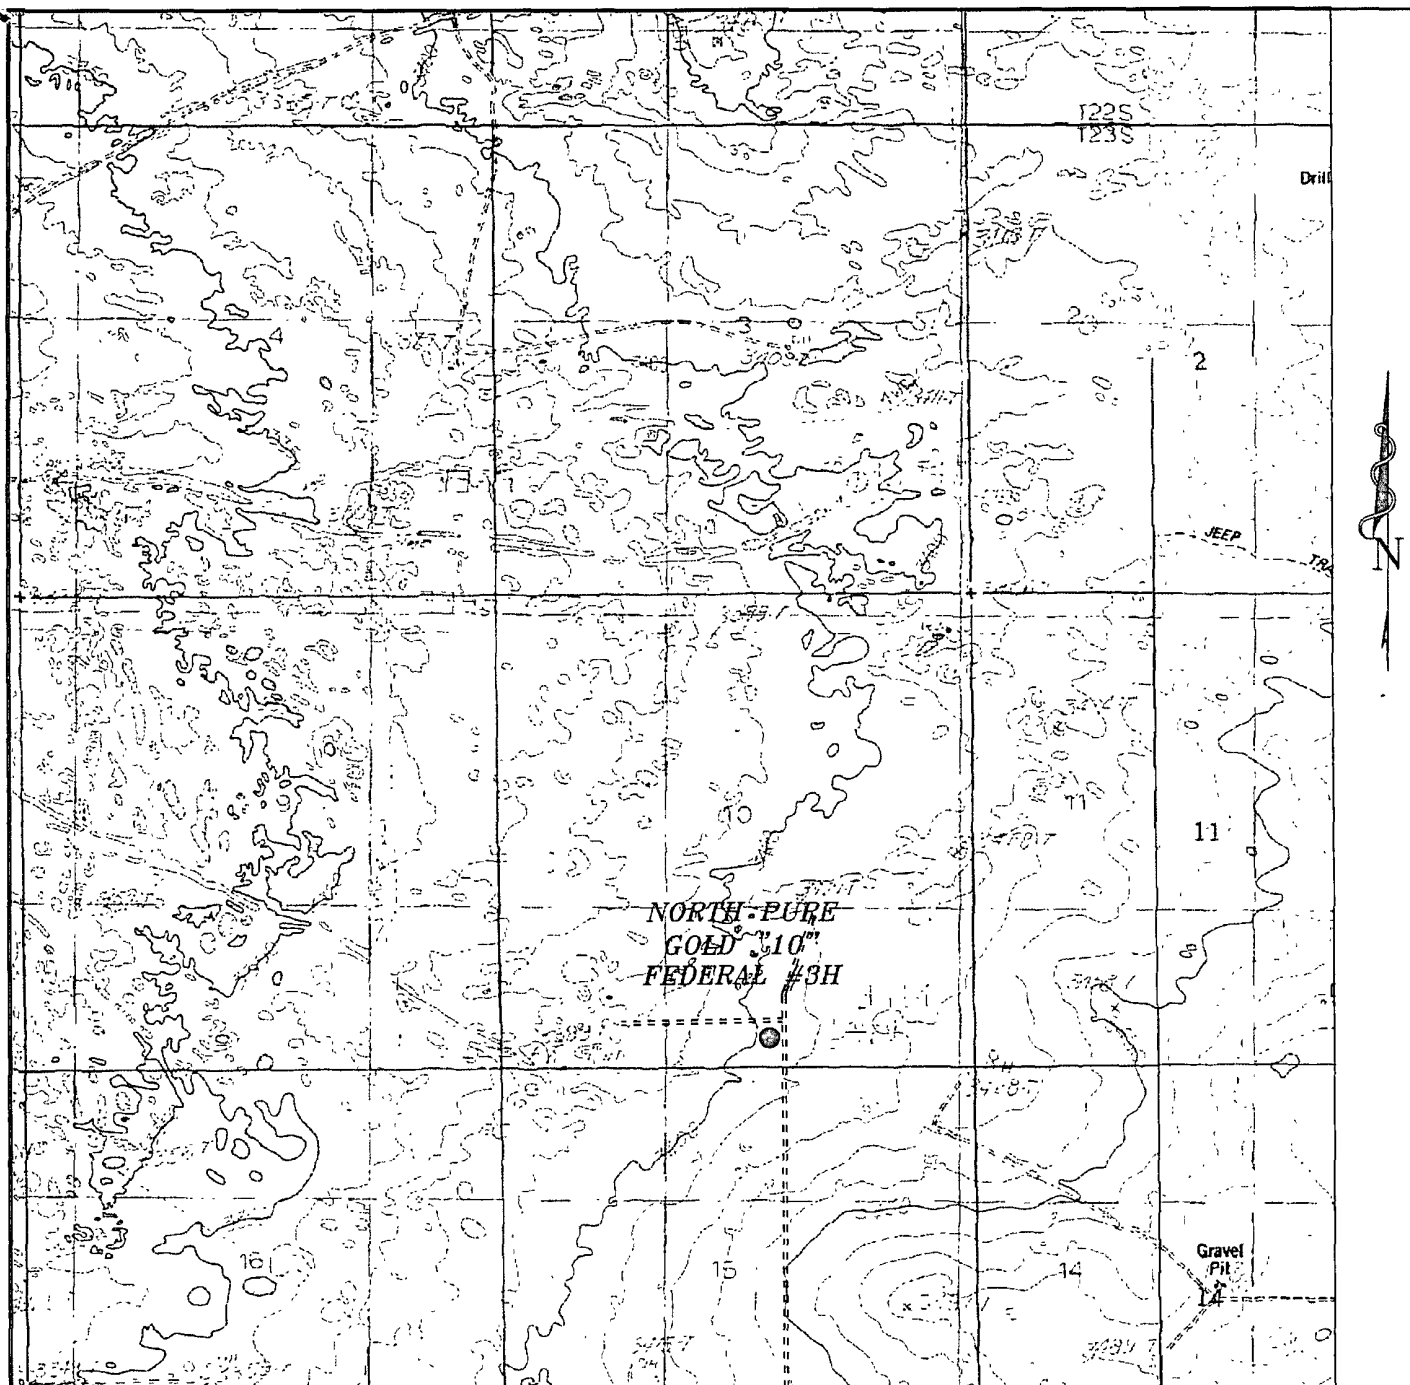

NORTH PURE GOLD "10" FEDERAL #3H
 Located at 330' FSL AND 2265' FEL
 Section 10, Township 23 South, Range 31 East,
 N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com


W.O. Number: JMS 21143

Survey Date: 02-20-2009

Scale: 1" = 2000'

Date: 02-23-2009

**DEVON ENERGY
 PROD. CO., L.P.**

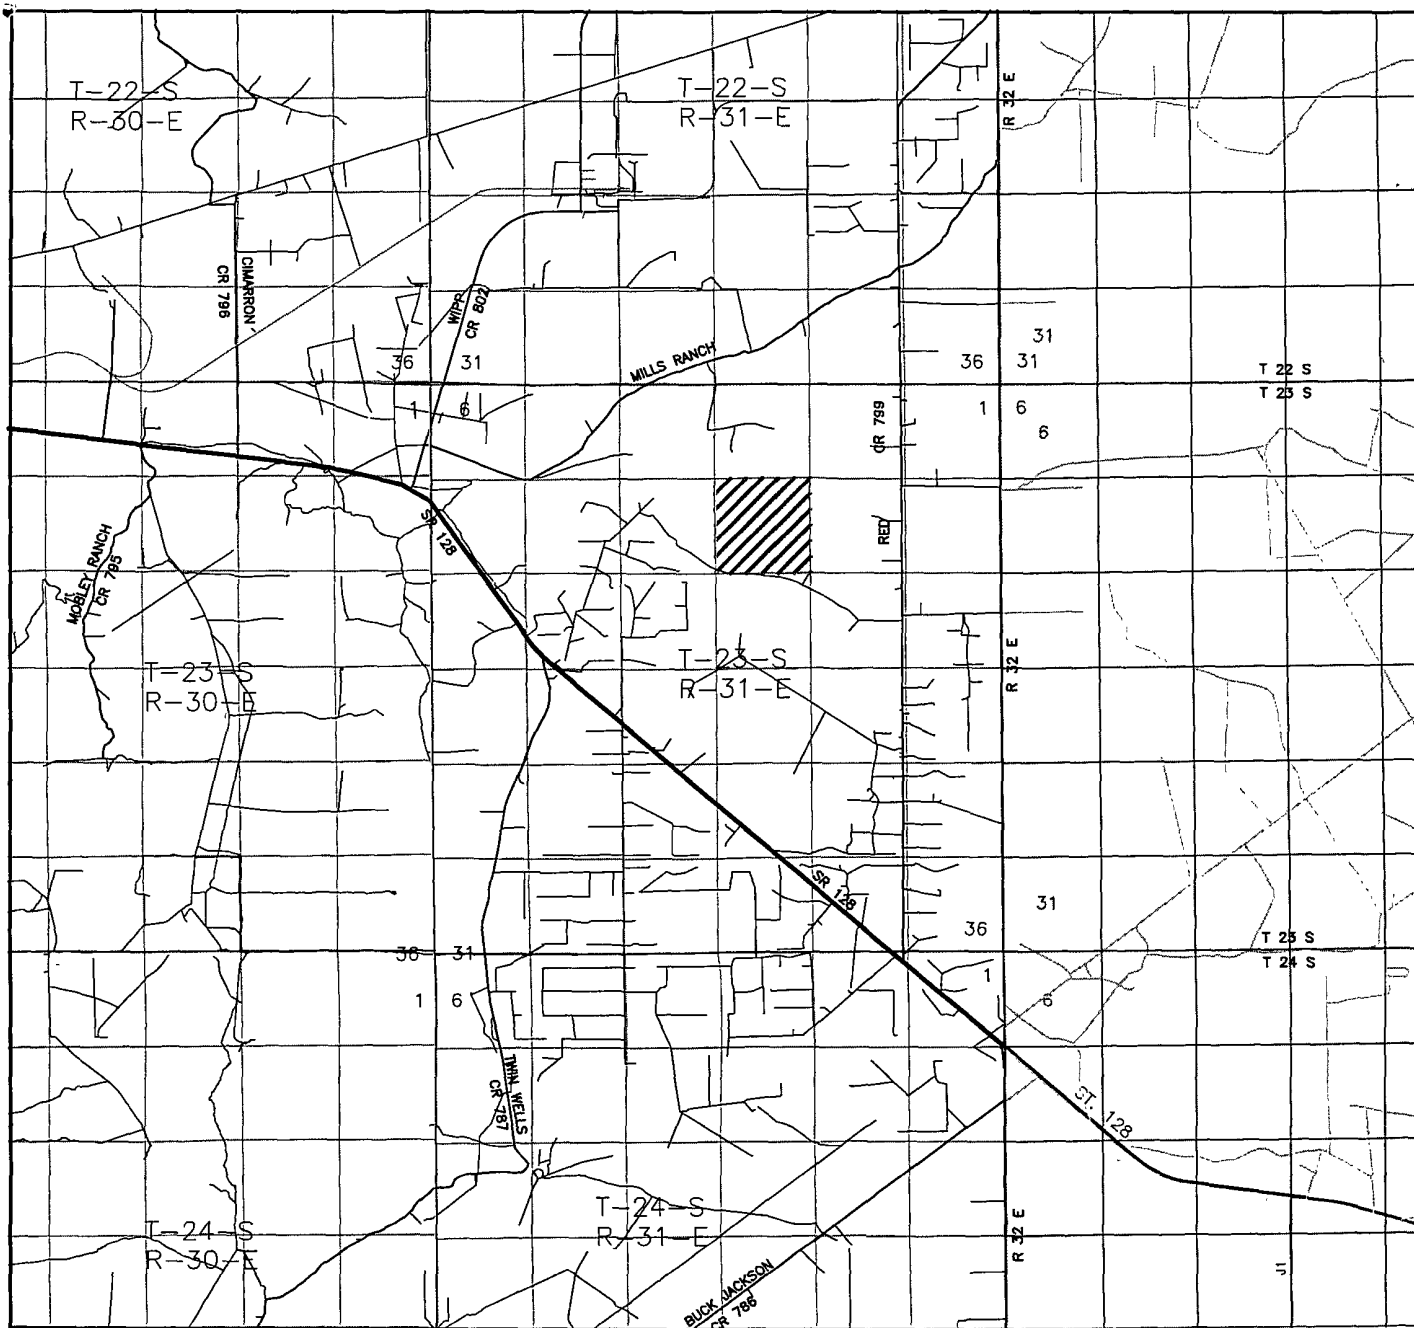

NORTH PURE GOLD "10" FEDERAL #3H
 Located at 330' FSL AND 2265' FEL
 Section 10, Township 23 South, Range 31 East,
 N.M.P.M., Eddy County, New Mexico.



P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com

W.O. Number: JMS 21143



Survey Date: 02-20-2009

Scale: 1" = 2000'

Date: 02-23-2009

DEVON ENERGY
 PROD. CO., L.P.

SECTION 10, TOWNSHIP 23 SOUTH, RANGE 31 EAST, N.M.P.M.,
EDDY COUNTY, NEW MEXICO.

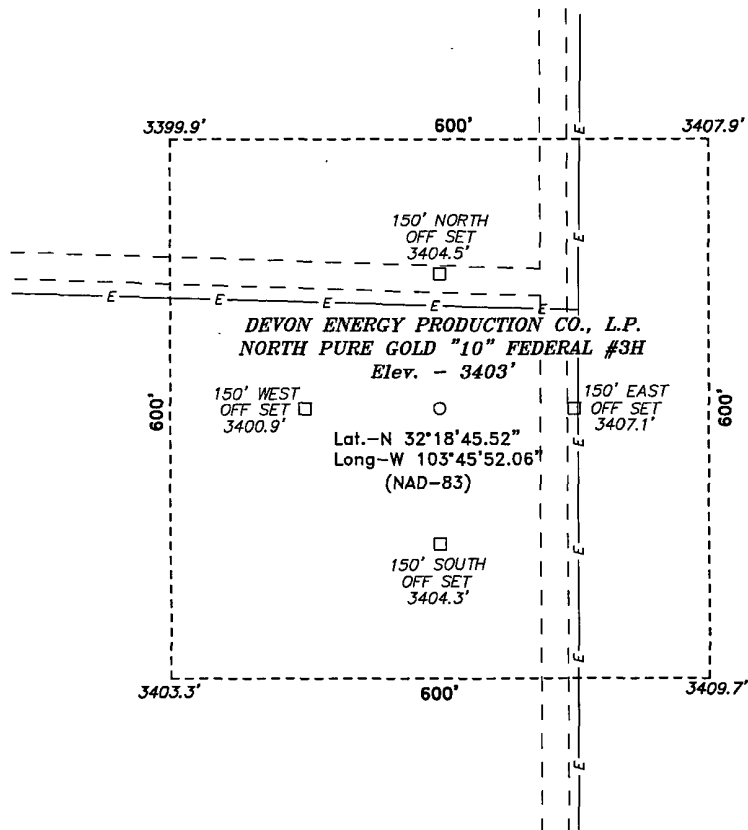

Directions to Location:

FROM THE MILE MARKER 17 OF HWY 128, GO EAST 0.5 MILES TO CO. RD. 798; GO NORTH ON CO. RD. 798 FOR 2.2 MILES TO LEASE ROAD, ON LEASE ROAD GO WEST 1.6 MILES TO A "T", GO NORTH WINDING NORTHWEST 1.2 MILES TO PROPOSED LOCATION.

DEVON ENERGY PROD. CO., L.P.


REF: NORTH PURE GOLD "10" FEDERAL #3H / WELL PAD TOPO
THE NORTH PURE GOLD "10" FEDERAL #3H LOCATED 330' FROM
THE SOUTH LINE AND 2265' FROM THE EAST LINE OF
SECTION 10, TOWNSHIP 23 SOUTH, RANGE 31 EAST,
N.M.P.M., EDDY COUNTY, NEW MEXICO.

BASIN SURVEYS P.O. BOX 1786—HOBBS, NEW MEXICO

W.O. Number: 21143 Drawn By: J. M. SMALL

Date: 02-23-2009 Disk: 21143 JMS

Survey Date: 02-20-2009 Sheet 1 of 1 Sheets

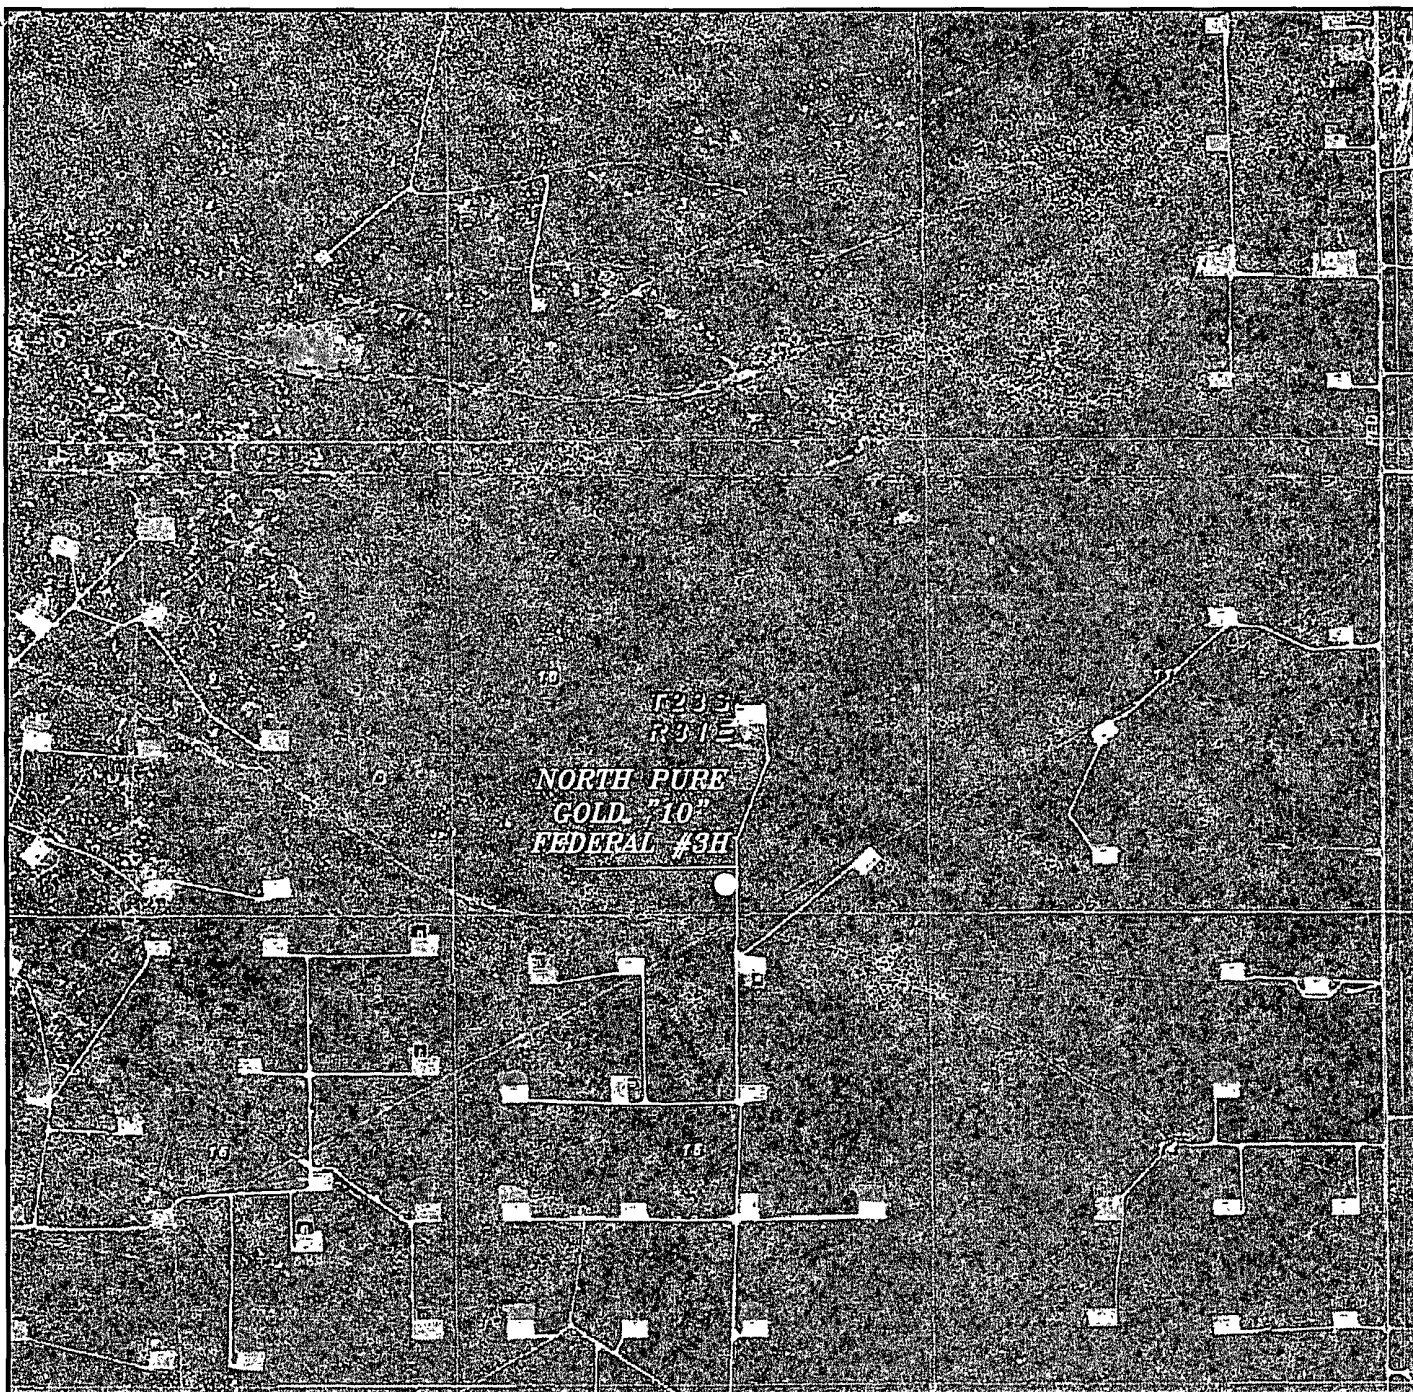

NORTH PURE GOLD "10" FEDERAL #3H
 Located at 330' FSL AND 2265' FEL
 Section 10, Township 23 South, Range 31 East,
 N.M.P.M., Eddy County, New Mexico.

basin
surveys
 focused on excellence
 in the oilfield

P.O. Box 1786
 1120 N. West County Rd.
 Hobbs, New Mexico 88241
 (575) 393-7316 - Office
 (575) 392-2206 - Fax
 basinsurveys.com

W.O. Number: JMS 21143


Scale: 1" = 2000'

YELLOW TINT - USA LAND
 BLUE TINT - STATE LAND
 NATURAL COLOR - FEE LAND

DEVON ENERGY
PROD. CO., L.P.

Devon Energy Production Company LP

North Pure Gold 10 Federal #3H

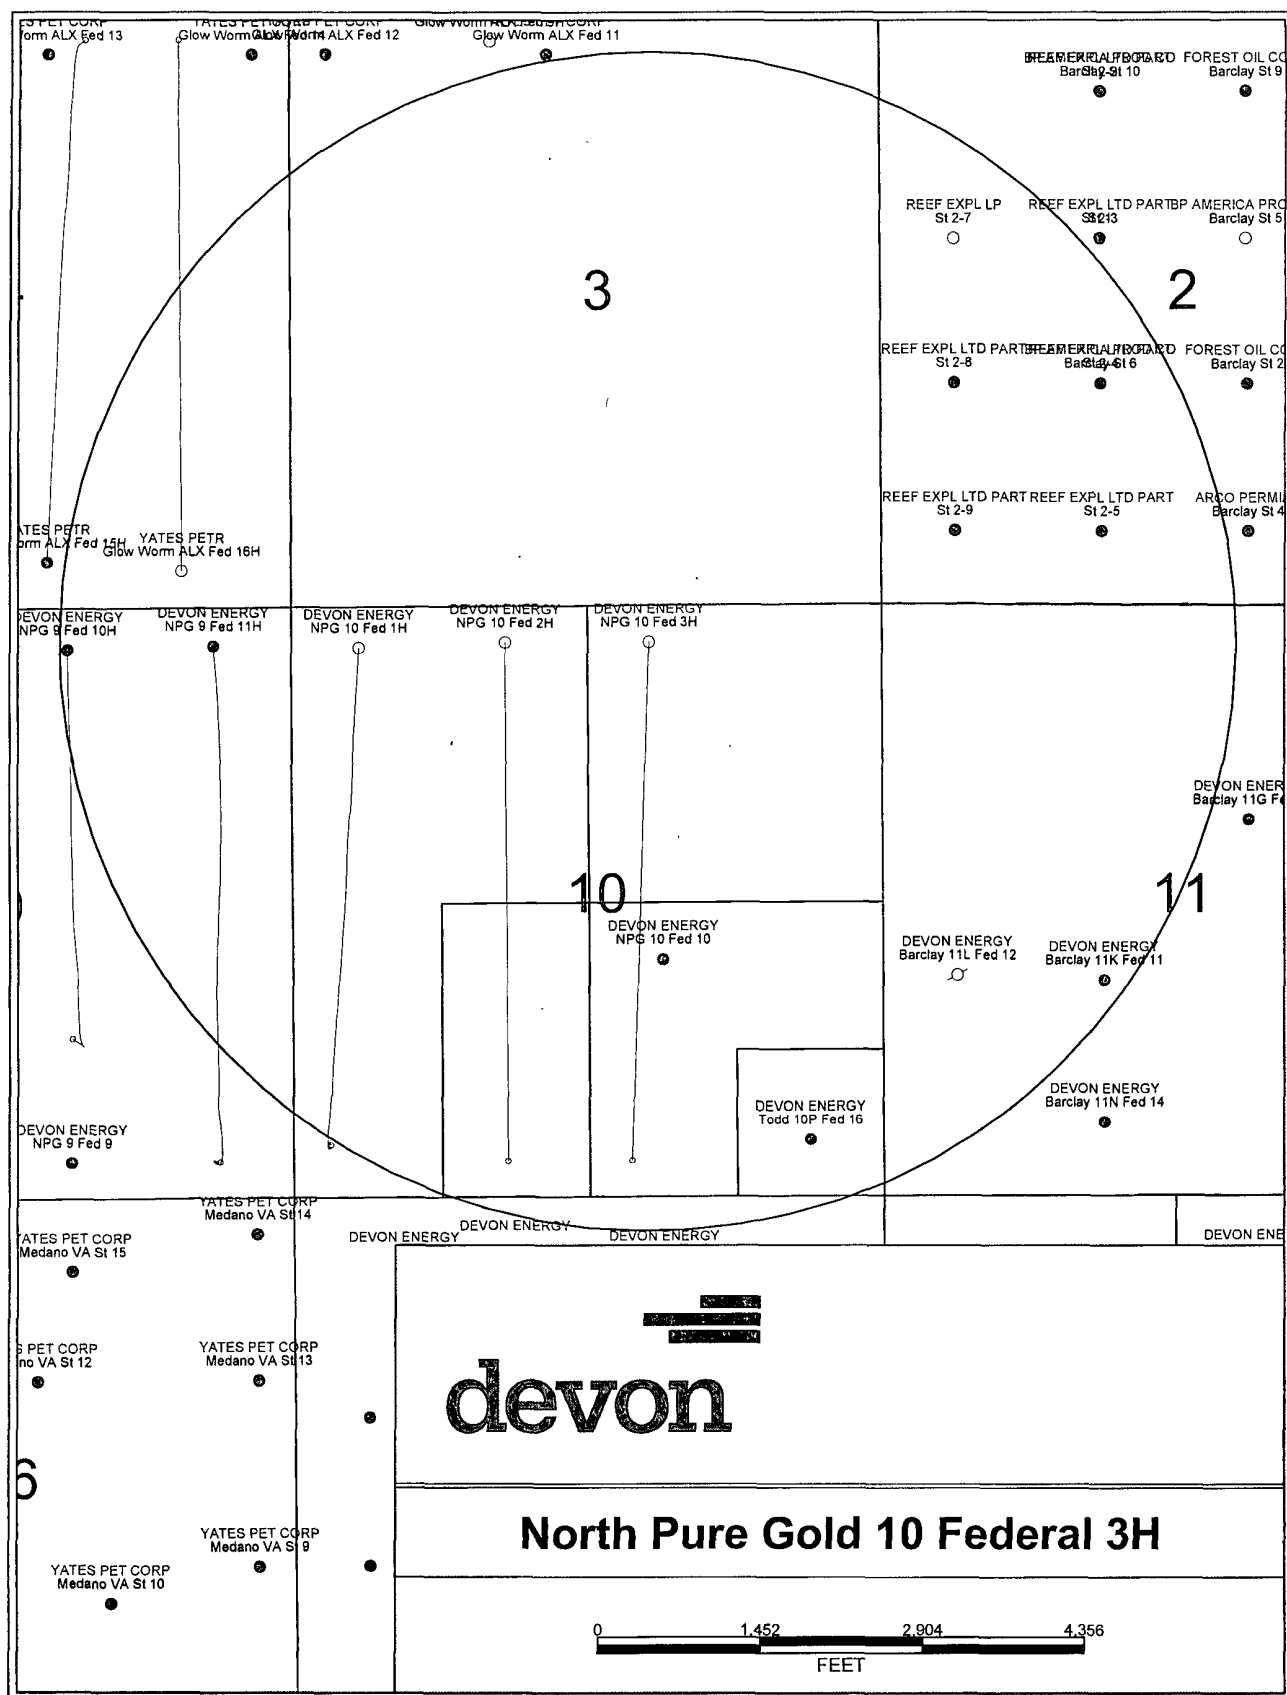

Wells Posted at TD Locations

DRILLING PROGRAM

Devon Energy Production Company, LP

North Pure Gold 10 Federal Com 3H

Surface Location: 330 FSL & 2265 FEL, Unit O, Sec 10 T23S R31E, Eddy, NM

Bottom hole Location: 330 FNL & 2090 FEL, Unit B, Sec 10 T23S R31E, Eddy, NM

1. Geologic Name of Surface Formation

a. Quaternary

2. Estimated Tops of Geological Markers & Depths of Anticipated Fresh Water, Oil or Gas:

a. Rustler	590'	FW
b. Delaware	4340'	
c. Bell Canyon	4384'	
d. Cherry Canyon	5230'	Oil
e. Brushy Canyon	6490'	Oil
Total Depth	8125'	

No other formations are expected to yield oil, gas or fresh water in measurable volumes. The surface fresh water sands will be protected by setting 13 3/8" casing at 630' and circulating cement back to surface. Fresh water sands will be protected by setting 9 5/8" casing at 4300' and circulating cement to surface. The Delaware intervals will be isolated by setting 5 1/2" casing to total depth and circulating cement above the base of the 9 5/8" casing.

Casing Program:

<u>Hole Size</u>	<u>Hole Interval</u>	<u>OD Csg</u>	<u>Casing Interval</u>	<u>Weight</u>	<u>Collar</u>	<u>Grade</u>
17 1/2"	0'-630'	13 3/8"	0'-630'	48#	ST&C	H-40
12 1/4"	630'-4300'	9 5/8"	0'-4300'	40#	LT&C	K-55
8 1/2"	4300- 12,480'	5 1/2"	0'-7400'	17#	LT&C	N-80
8 1/2"	4300- 12,480'	5 1/2"	7400-12,480'	17#	BT&C	N-80

Design Parameter Factors:

<u>Casing Size</u>	<u>Collapse Design Factor</u>	<u>Burst Design Factor</u>	<u>Tension Design Factor</u>
13 3/8"	2.64	1.67	2.42
9 5/8"	1.17	1.77	2.3
5 1/2"	1.65	1.41	1.59

3. Cement Program:

a. 13 3/8" Surface

Lead w/ 335sx 35:65 POZ (Fly Ash) Premium Plus C + 5% bwow Sodium Chloride + 0.125#/sx CF + 4% bwoc Bentonite + 0.8% bwoc Sodium Metasilicate + 5% bwoc MPA-5 + 101.1% FW. Yld 1.83 cf/sx. **TOC @ surface.** **Tail** w/ 250sx Premium Plus C + 2%

bwoc Calcium Chloride +0.125#/sx CF + 56.3% FW. Yld 1.35 cf/sx.

- b. 9 5/8" Intermediate **Lead** w/ 1210sx 35:65 POZ (Fly Ash) Premium Plus C + 5% bwow Sodium Chloride +0.125#/sx CF + 6% bwoc Bentonite + 107.8% FW. Yld 2.04 cf/sx. **TOC @ surface. Tail** w/ 300sx 60:40 POZ (Fly Ash) Premium Plus C + 5% bwow Sodium Chloride + 0.125#/sx CF + 0.4% bwoc Sodium Metasilicate + 4% bwoc MPA-5 + 64.7% FW. Yield 1.37 cf/sx.
- c. 5 1/2" Production **Stage 1:** Lead w/ 640sx 35:65 POZ + 0.35% bwoc R-3 + 0.4% bwoc FL-62 0.1% bwoc ASA 301 + 0.2% bwoc Sodium Metasilicate + 20#/sx ASCA-1 + 52.9% FW. Yld 1.90 cf/sx. **Tail** w/ 1000 sx 50:50 POZ + 0.1% bwoc ASA-301 + 0.2% bwoc Sodium Metasilicate + 20#/sx ASCA-1 + 52% FW. Yld 1.34 cf/sx.
- Stage 2:** 600 sx 35:65 Poz (Fly Ash) Premium Plus C + 1% bwow Sodium Chloride + 0.4% bwoc R-3 + 0.125#/sx CF + 6% bwoc Bentonite + 0.4% bwoc FL-52A + 103.1% FW. Yld 1.96 cf/sx. **Tail** w/ 340 sx 60:40 POZ Fly Ash Premium Plus C + 1% bwow Sodium Chloride + 0.125#/sx CF + 0.75% bwoc BA-10A + 4% bwoc MPA-5 + 63.1% FW. Yld 1.34 cf/sx. **TOC @ 3800'. DV Tool @ 7400'.**

The above cement volumes could be revised pending the caliper measurement from the open hole logs. The top of cement is designed to reach approximately 500' above the 9 5/8" casing shoe. All casing is new and API approved.

Pressure Control Equipment:

The blowout preventor equipment (BOP) shown in Exhibit #1 will consist of a (5M system) double ram type (5000 psi WP) preventor and a bag-type (Hydril) preventor (3000 psi WP) and rotating head. Both units will be hydraulically operated and the ram type preventor will be equipped with blind rams on top and 4 1/2" drill pipe rams on bottom. An annular and rotating head will be installed on the 13 3/8" surface casing and utilized to setting depth of the 9 5/8" intermediate casing. The annular and associated equipment will be tested to **1000 psi with the rig pump before drilling out the 13 3/8" casing shoe.** The BOPE will be installed on the 9 5/8" intermediate casing and utilized continuously until total depth is reached. Prior to drilling out the 9 5/8" casing shoe, the BOP's and Hydril will be tested as per BLM Drilling Operations Order #2.

Pipe rams will be operated and checked each 24-hour period and each time the drill pipe is out of the hole. These functional tests will be documented on the daily drillers log. A 2" kill line and 3" choke line will be incorporated in the drilling spool below the ram-type BOP. Other accessory BOP equipment will include a Kelly cock, floor safety valve, choke lines and choke manifold having 5000 psi WP rating.

See
COA →

4. **Proposed Mud Circulation System**

<u>Depth</u>	<u>Mud Wt.</u>	<u>Visc</u>	<u>Fluid Loss</u>	<u>Type System</u>
0'– 630'	8.4-9.4	32-34	NC	FW/Gel
630'– 4300'	9.7-10.0	28-30	NC	Brine
4300'–8300'	8.3–8.6	28	NC-40	FW
8300' - 12,480'	8.3– 8.9	32-40	12-8cc	FW

The necessary mud products for weight addition and fluid loss control will be on location at all times.

5. **Auxiliary Well Control and Monitoring Equipment:**

- a. A Kelly cock will be in the drill string at all times.
- b. A full opening drill pipe stabbing valve having the appropriate connections will be on the rig floor at all times.
- c. Hydrogen Sulfide detection equipment will be in operation after drilling out the 13 3/8" casing shoe until the 5 1/2" casing is cemented. Breathing equipment will be on location upon drilling the 13 3/8" shoe until total depth is reached.

6. **Logging, Coring, and Testing Program:**

- a. Drill stem tests will be based on geological sample shows.
- b. If a drill stem test is anticipated; a procedure, equipment to be used and safety measures will be provided via sundry notice to the BLM.
- c. The open hole electrical logging program will be:
 - i. Total Depth to Intermediate Casing Dual Laterolog-Micro Laterolog with SP and Gamma Ray. Compensated Neutron – Z Density log with Gamma Ray and Caliper.
 - ii. Total Depth to Surface Compensated Neutron with Gamma Ray
 - iii. No coring program is planned
 - iv. Additional testing will be initiated subsequent to setting the 5 1/2" production casing. Specific intervals will be targeted based on log evaluation, geological sample shows and drill stem tests.

7. **Potential Hazards:**

- a. No abnormal pressures or temperatures are expected. There is no known presence of H₂S in this area. If H₂S is encountered the operator will comply with the provisions of Onshore Oil and Gas Order No. 6 No lost circulation is expected to occur. All personnel will be familiar with all aspects of safe operation of equipment being used to drill this well. Estimated BHP 2900 psi and Estimated BHT 120°. No H₂S is anticipated to be encountered.

8. **Anticipated Starting Date and Duration of Operations:**

- a. Road and location construction will begin after the BLM has approved the APD. Anticipated spud date will be as soon after BLM approval and as soon as a rig will be available. Move in operations and drilling is expected to take 32 days. If production casing is run then an additional 30 days will be needed to complete well and construct surface facilities and/or lay flow lines in order to place well on production.



Devon Energy

Eddy Co., New Mexico (Nad 83)

North Pure Gold 10 Fed #3H

NPG 10 Fed #3H

Lateral #1

Plan: Design #1

Standard Planning Report

10 March, 2009





Project Eddy Co., New Mexico (Nad 83)
Site North Pure Gold 10 Fed #3H
Well NPG 10 Fed #3H
Wellbore Lateral #1
Design Design #1

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N-S	+E-W	DLeg	TFace	VSec	Target
1	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	0 00	
2	7526 80	0 00	0 00	7526 80	0 00	0 00	0 00	0 00	0 00	
3	8423 65	89 65	1 85	8100 00	569 38	18 35	10 00	1 85	569 68	PBHL - TD (NPG10F#3H) 03-10-09
4	12478 72	89 65	1 85	8125 00	4622 25	149 00	0 00	0 00	4624 65	

ANNOTATIONS

TVD	MD	Annotation
7526 80	7526 80	KOP - Build 10°/100'
8099 99	8423 65	EOC

WELLBORE TARGET DETAILS

Name	TVD	+N-S	+E-W	Shape
PBHL - TD (NPG10F#3H) 03-10-09	8125 00	4622 25	149 00	Point

WELL DETAILS NPG 10 Fed #3H


Ground Level 3403 00					
WELL @ 3423 00R (Original Well Elev)					
+N-S	+E-W	Northing	Easting	Latitude	Longitude
0 00	0 00	477951 62	717090 03	32° 18' 45 647 N	103° 45' 51 958 W

Plan Design #1 (NPG 10 Fed #3H/Lateral #1)


Created By	Mike Starkey	Date	15 27, March 10 2009
Checked		Date	
Reviewed		Date	
Approved		Date	

PROJECT DETAILS Eddy Co., New Mexico (Nad 83)

Geodetic System: US State Plane 1983
Datum: North American Datum 1983
Ellipsoid: GRS 1980
Zone: New Mexico Eastern Zone
System Datum: Mean Sea Level



Azimuths to Grid North
True North -0 30°
Magnetic North 7 64°
Magnetic Field
Strength 46903 1anT
Dip Angle 60 31°
Date 3/10/2009
Model IGRF200510

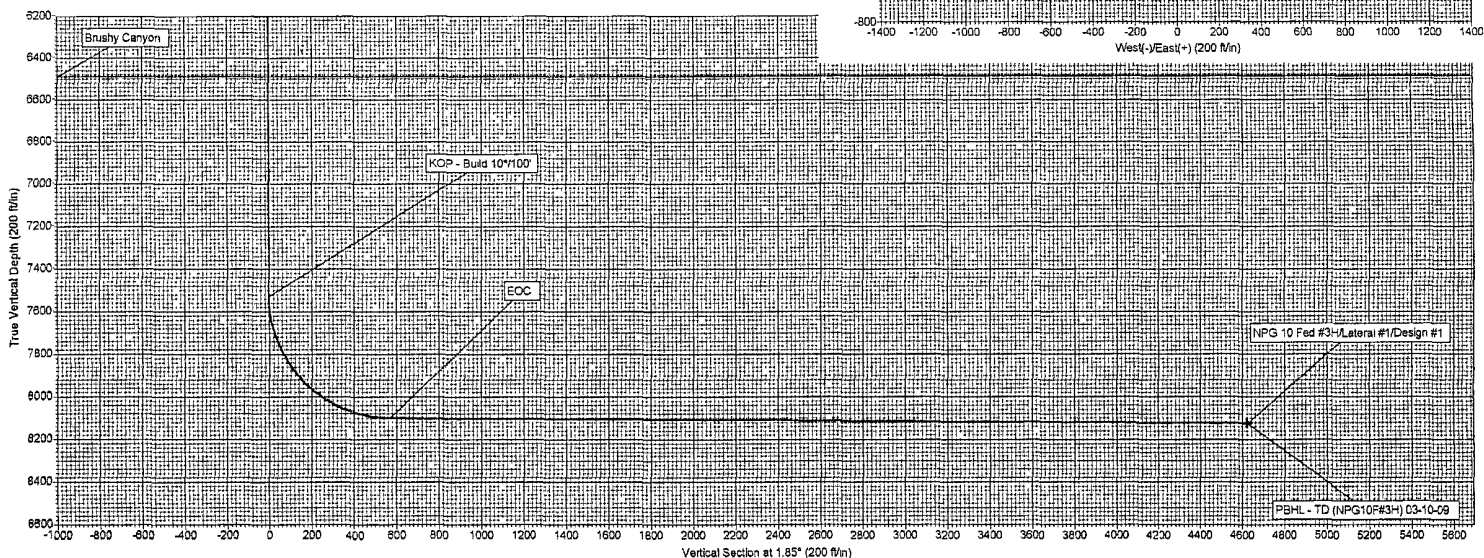

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well NPG 10 Fed #3H
Company:	Devon Energy	TVD Reference:	WELL @ 3423.00ft (Original Well Elev)
Project:	Eddy Co., New Mexico (Nad 83)	MD Reference:	WELL @ 3423.00ft (Original Well Elev)
Site:	North Pure Gold 10 Fed #3H	North Reference:	Grid
Well:	NPG 10 Fed #3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Project	Eddy Co., New Mexico (Nad 83)		
Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Eastern Zone		

Site	North Pure Gold 10 Fed #3H, Sec 10, T-23S, R-31E		
Site Position:		Northing:	477,951.62 ft
From:	Map	Easting:	717,090.03 ft
Position Uncertainty:	0.00 ft	Slot Radius:	"
		Latitude:	32° 18' 45.647 N
		Longitude:	103° 45' 51.958 W
		Grid Convergence:	0.30 °

Well	NPG 10 Fed #3H		
Well Position	+N/-S	0.00 ft	Northing: 477,951.62 ft
	+E/-W	0.00 ft	Easting: 717,090.03 ft
Position Uncertainty	0.00 ft	Wellhead Elevation:	3,423.00 ft
		Latitude:	32° 18' 45.647 N
		Longitude:	103° 45' 51.958 W
		Ground Level:	3,403.00 ft

Wellbore	Lateral #1		
Magnetics	Model Name	Sample Date	Declination
	IGRF200510	3/10/2009	7.94
			60.31
			48,903

Design	Design #1		
Audit Notes:			
Version:	Phase:	PLAN	Tie On Depth: 0.00
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(ft)	(ft)	(ft)
	0.00	0.00	0.00
			1.85

Plan Sections										
Measured Depth	Inclination	Azimuth	Vertical Depth	+N/-S	+E/-W	Dogleg Rate	Build Rate	Turn Rate	TFO	Target
(ft)	(°)	(°)	(ft)	(ft)	(ft)	(°/100ft)	(°/100ft)	(°/100ft)	(°)	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
7,526.80	0.00	0.00	7,526.80	0.00	0.00	0.00	0.00	0.00	0.00	
8,423.66	89.65	1.85	8,100.00	569.38	18.35	10.00	10.00	0.00	1.85	
12,478.72	89.65	1.85	8,125.00	4,622.25	149.00	0.00	0.00	0.00	0.00	PBHL - TD (NPG10F#

Database:	EDM 2003.21 Single User Db	Local Co-ordinate Reference:	Well NPG 10 Fed #3H
Company:	Devon Energy	TVD Reference:	WELL @ 3423.00ft (Original Well Elev)
Project:	Eddy Co., New Mexico (Nad 83)	MD Reference:	WELL @ 3423.00ft (Original Well Elev)
Site:	North Pure Gold 10 Fed #3H	North Reference:	Grid
Well:	NPG 10 Fed #3H	Survey Calculation Method:	Minimum Curvature
Wellbore:	Lateral #1		
Design:	Design #1		

Planned Survey									
Measured Depth (ft)	Inclination (°)	Azimuth (°)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Vertical Section (ft)	Dogleg Rate (°/100ft)	Build Rate (°/100ft)	Turn Rate (°/100ft)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
590.00	0.00	0.00	590.00	0.00	0.00	0.00	0.00	0.00	0.00
Rustler									
690.00	0.00	0.00	690.00	0.00	0.00	0.00	0.00	0.00	0.00
13 3/8" Casing									
4,340.00	0.00	0.00	4,340.00	0.00	0.00	0.00	0.00	0.00	0.00
Delaware									
4,384.00	0.00	0.00	4,384.00	0.00	0.00	0.00	0.00	0.00	0.00
Bell Canyon									
4,440.00	0.00	0.00	4,440.00	0.00	0.00	0.00	0.00	0.00	0.00
9 5/8" Casing									
5,230.00	0.00	0.00	5,230.00	0.00	0.00	0.00	0.00	0.00	0.00
Cherry Canyon									
6,490.00	0.00	0.00	6,490.00	0.00	0.00	0.00	0.00	0.00	0.00
Brushy Canyon									
7,526.80	0.00	0.00	7,526.80	0.00	0.00	0.00	0.00	0.00	0.00
KOP - Build 10°/100'									
8,423.65	89.65	1.85	8,100.00	569.37	18.35	569.66	10.00	10.00	0.00
EOC									
8,423.66	89.65	1.85	8,100.00	569.38	18.35	569.67	10.00	10.00	0.00
12,478.72	89.65	1.85	8,125.00	4,622.25	149.00	4,624.65	0.00	0.00	0.00
PBHL - TD (NPG10F#3H) 03-10-09									

Casing Points				
Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
690.00	690.00	13 3/8" Casing	13-3/8	17-1/2
4,440.00	4,440.00	9 5/8" Casing	9-5/8	12-1/4

Formations					
Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
590.00	590.00	Rustler		0.00	
4,340.00	4,340.00	Delaware		0.00	
4,384.00	4,384.00	Bell Canyon		0.00	
5,230.00	5,230.00	Cherry Canyon		0.00	
6,490.00	6,490.00	Brushy Canyon		0.00	

Plan Annotations				
Measured Depth (ft)	Vertical Depth (ft)	+N/-S (ft)	+E/-W (ft)	Comment
7,526.80	7,526.80	0.00	0.00	KOP - Build 10°/100'
8,423.65	8,099.99	569.37	18.35	EOC

NPG 10 Fed #3H Plan #1 Report 03-10-09.txt

Devon Energy
NPG 10 Fed #3H - Design #1

Eddy Co., New Mexico (Nad 83)
North Pure Gold 10 Fed #3H

Measured Dogleg Depth Rate (ft) (°/100ft)	Incl.	Azim.	Vertical Depth (ft)	Northings (ft)	Eastings (ft)	Vertical Section (ft)
0.00	0.000	0.000	0.00	0.00 N	0.00 E	0.00
0.00						
7526.80	0.000	0.000	7526.80	0.00 N	0.00 E	0.00
0.00						
7600.00	7.317	1.846	7599.80	4.67 N	0.15 E	4.67
10.00						
7700.00	17.312	1.846	7697.38	25.95 N	0.84 E	25.97
10.00						
7800.00	27.308	1.846	7789.77	63.85 N	2.06 E	63.88
10.00						
7900.00	37.304	1.846	7874.19	117.20 N	3.78 E	117.26
10.00						
8000.00	47.299	1.846	7948.05	184.38 N	5.94 E	184.48
10.00						
8100.00	57.295	1.846	8009.13	263.36 N	8.49 E	263.50
10.00						
8200.00	67.291	1.846	8055.57	351.73 N	11.34 E	351.92
10.00						
8300.00	77.286	1.846	8085.95	446.82 N	14.40 E	447.06
10.00						
8400.00	87.282	1.846	8099.36	545.74 N	17.59 E	546.02
10.00						
8423.66	89.647	1.846	8100.00	569.38 N	18.35 E	569.67
10.00						
8500.00	89.647	1.846	8100.47	645.68 N	20.81 E	646.01
0.00						
8600.00	89.647	1.846	8101.08	745.62 N	24.03 E	746.01
0.00						
8700.00	89.647	1.846	8101.70	845.57 N	27.26 E	846.01
0.00						
8800.00	89.647	1.846	8102.32	945.52 N	30.48 E	946.01
0.00						
8900.00	89.647	1.846	8102.93	1045.46 N	33.70 E	1046.01
0.00						
9000.00	89.647	1.846	8103.55	1145.41 N	36.92 E	1146.00
0.00						
9100.00	89.647	1.846	8104.17	1245.35 N	40.14 E	1246.00
0.00						
9200.00	89.647	1.846	8104.78	1345.30 N	43.37 E	1346.00
0.00						
9300.00	89.647	1.846	8105.40	1445.25 N	46.59 E	1446.00
0.00						
9400.00	89.647	1.846	8106.02	1545.19 N	49.81 E	1546.00
0.00						
9500.00	89.647	1.846	8106.63	1645.14 N	53.03 E	1645.99
0.00						
9600.00	89.647	1.846	8107.25	1745.09 N	56.25 E	1745.99
0.00						
9700.00	89.647	1.846	8107.87	1845.03 N	59.47 E	1845.99
0.00						

NPG 10 Fed #3H Plan #1 Report 03-10-09.txt						
9800.00	89.647	1.846	8108.48	1944.98 N	62.70 E	1945.99
0.00						
9900.00	89.647	1.846	8109.10	2044.92 N	65.92 E	2045.99
0.00						
10000.00	89.647	1.846	8109.72	2144.87 N	69.14 E	2145.98
0.00						
10100.00	89.647	1.846	8110.33	2244.82 N	72.36 E	2245.98
0.00						
10200.00	89.647	1.846	8110.95	2344.76 N	75.58 E	2345.98
0.00						
10300.00	89.647	1.846	8111.57	2444.71 N	78.80 E	2445.98
0.00						
10400.00	89.647	1.846	8112.18	2544.65 N	82.03 E	2545.98
0.00						
10500.00	89.647	1.846	8112.80	2644.60 N	85.25 E	2645.97
0.00						
10600.00	89.647	1.846	8113.42	2744.55 N	88.47 E	2745.97
0.00						
10700.00	89.647	1.846	8114.03	2844.49 N	91.69 E	2845.97
0.00						
10800.00	89.647	1.846	8114.65	2944.44 N	94.91 E	2945.97
0.00						
10900.00	89.647	1.846	8115.27	3044.39 N	98.13 E	3045.97
0.00						
11000.00	89.647	1.846	8115.88	3144.33 N	101.36 E	3145.97
0.00						
11100.00	89.647	1.846	8116.50	3244.28 N	104.58 E	3245.96
0.00						
11200.00	89.647	1.846	8117.12	3344.22 N	107.80 E	3345.96
0.00						
11300.00	89.647	1.846	8117.73	3444.17 N	111.02 E	3445.96
0.00						
11400.00	89.647	1.846	8118.35	3544.12 N	114.24 E	3545.96
0.00						
11500.00	89.647	1.846	8118.97	3644.06 N	117.46 E	3645.96
0.00						
11600.00	89.647	1.846	8119.58	3744.01 N	120.69 E	3745.95
0.00						
11700.00	89.647	1.846	8120.20	3843.96 N	123.91 E	3845.95
0.00						
11800.00	89.647	1.846	8120.82	3943.90 N	127.13 E	3945.95
0.00						
11900.00	89.647	1.846	8121.43	4043.85 N	130.35 E	4045.95
0.00						
12000.00	89.647	1.846	8122.05	4143.79 N	133.57 E	4145.95
0.00						
12100.00	89.647	1.846	8122.66	4243.74 N	136.80 E	4245.94
0.00						
12200.00	89.647	1.846	8123.28	4343.69 N	140.02 E	4345.94
0.00						
12300.00	89.647	1.846	8123.90	4443.63 N	143.24 E	4445.94
0.00						
12400.00	89.647	1.846	8124.51	4543.58 N	146.46 E	4545.94
0.00						
12478.72	89.647	1.846	8125.00	4622.25 N	149.00 E	4624.65
0.00						

All data are in feet unless otherwise stated. Directions and coordinates are relative to Grid North.
 Vertical depths are relative to WELL. Northings and Eastings are relative to well.

The Dogleg Severity is in Degrees per 100 feet.

Vertical Section is from Slot and calculated along an Azimuth of 1.846° (Grid).


Coordinate System is North American Datum 1983 US State Plane 1983, New Mexico Eastern Zone.

Central meridian is -104.333° .

Grid Convergence at Surface is 0.304° .


Based upon Minimum Curvature type calculations, at a Measured Depth of 12478.72ft., the Bottom Hole Displacement is 4624.65ft., in the Direction of 1.846° (Grid).

North Pole 6010 Fed. Com. #2H & 3H

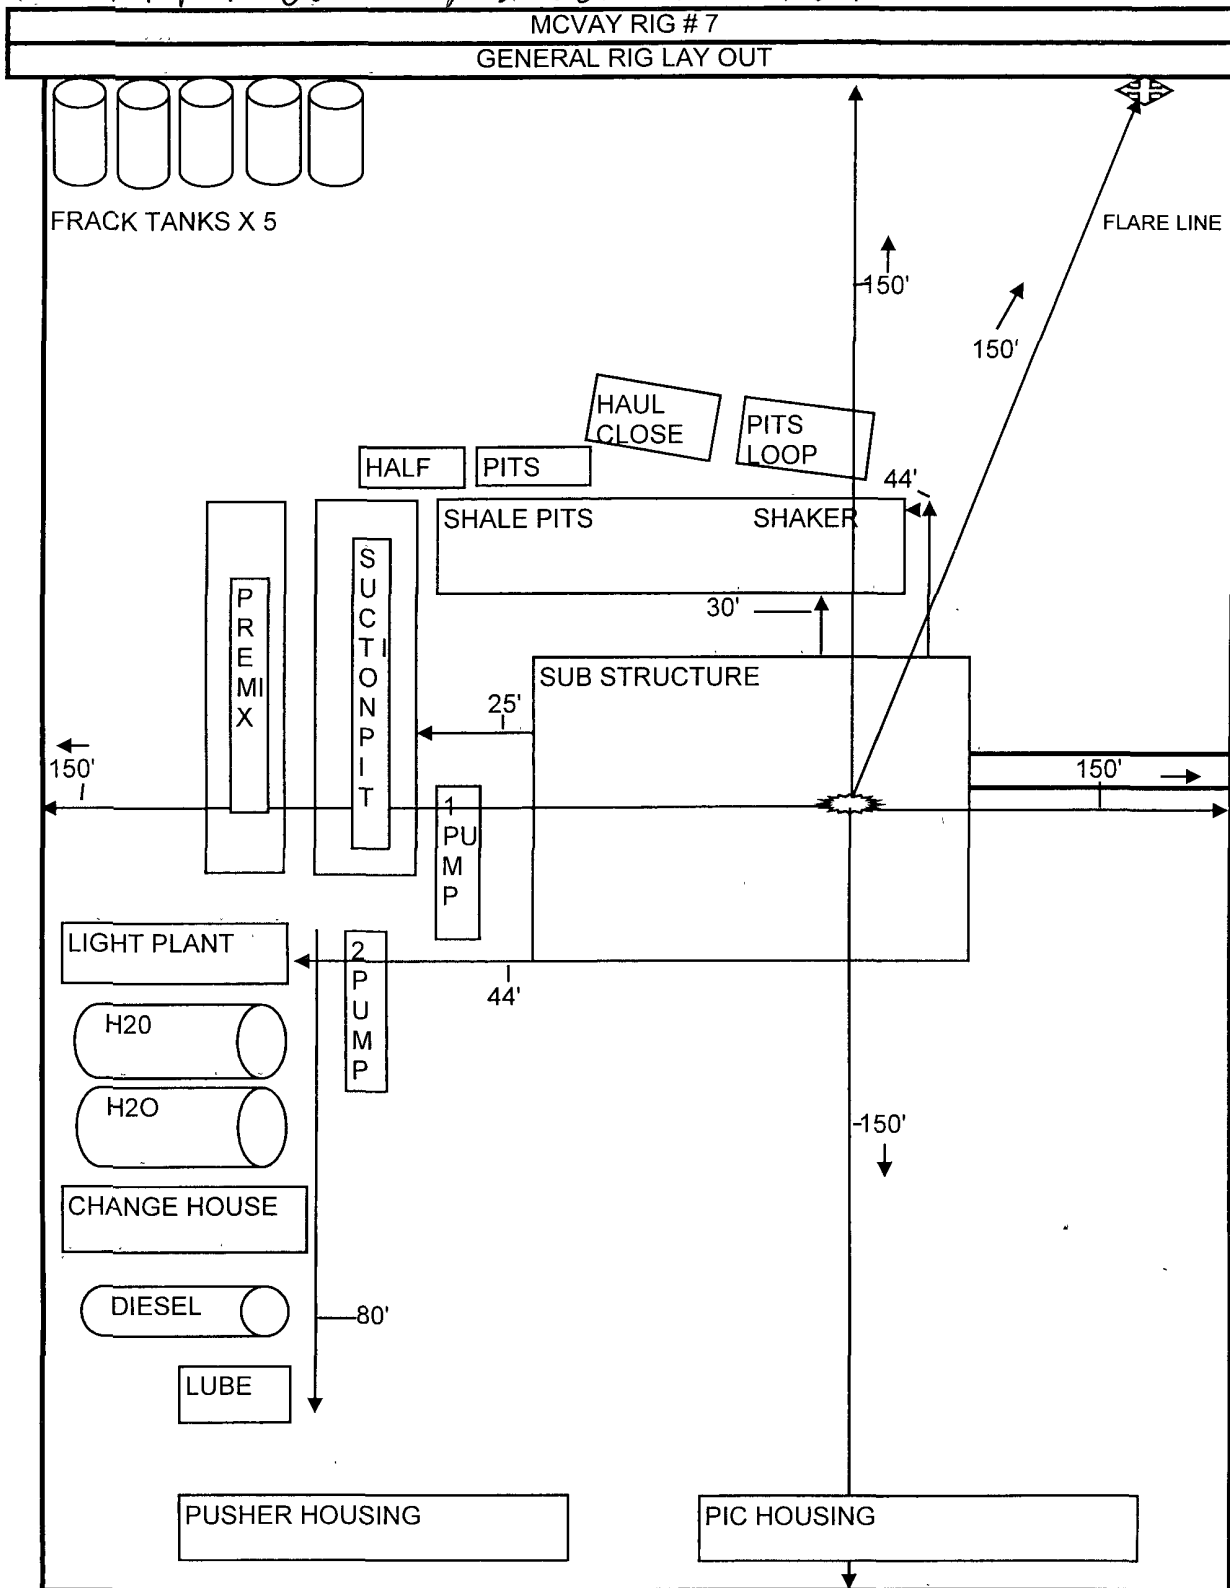

DEVON ENERGY PRODUCTION COMPANY LP

General Production Facilities Diagram

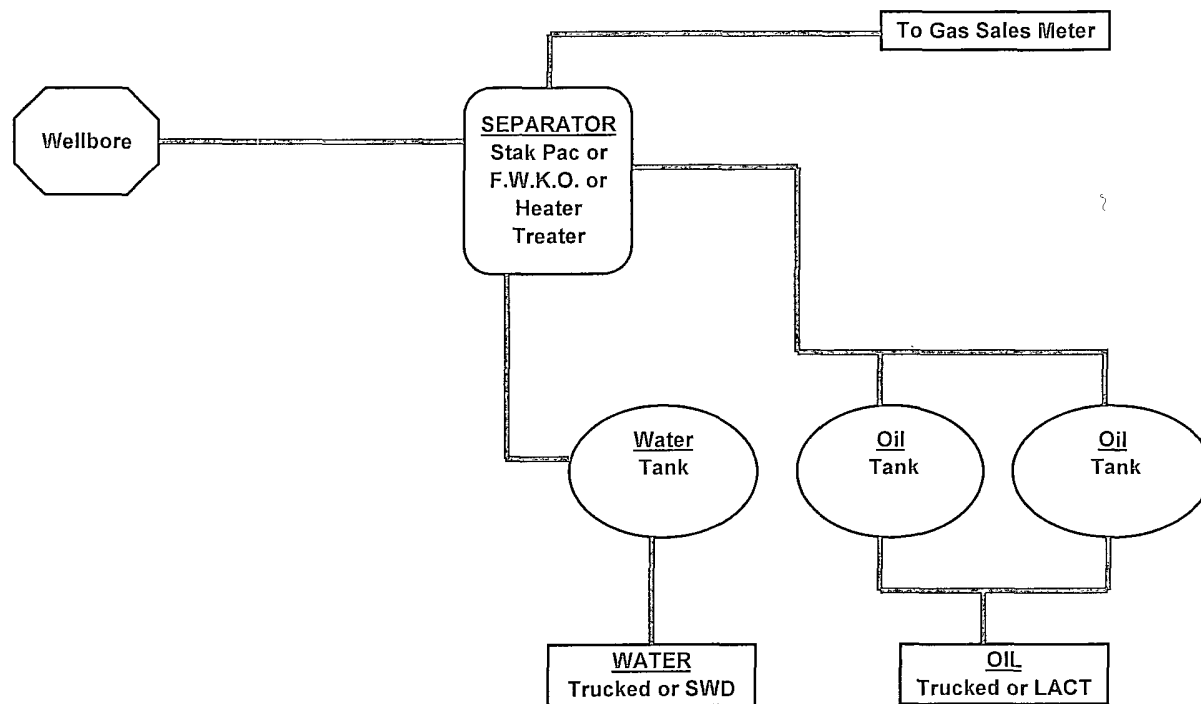

NOTES REGARDING BLOWOUT PREVENTERS

Devon Energy Production Company, LP


North Pure Gold 10 Federal Com 3H

Surface Location: 330 FSL & 2265 FEL, Unit O, Sec 10 T23S R31E, Eddy, NM


Bottom hole Location: 330 FNL & 2090 FEL, Unit B, Sec 10 T23S R31E, Eddy, NM

1. Drilling nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated fittings will be in operable condition to withstand a minimum 5000 psi working pressure.
4. All fittings will be flanged.
5. A full bore safety valve tested to a minimum 5000 psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.


13-5/8" 3K Annular

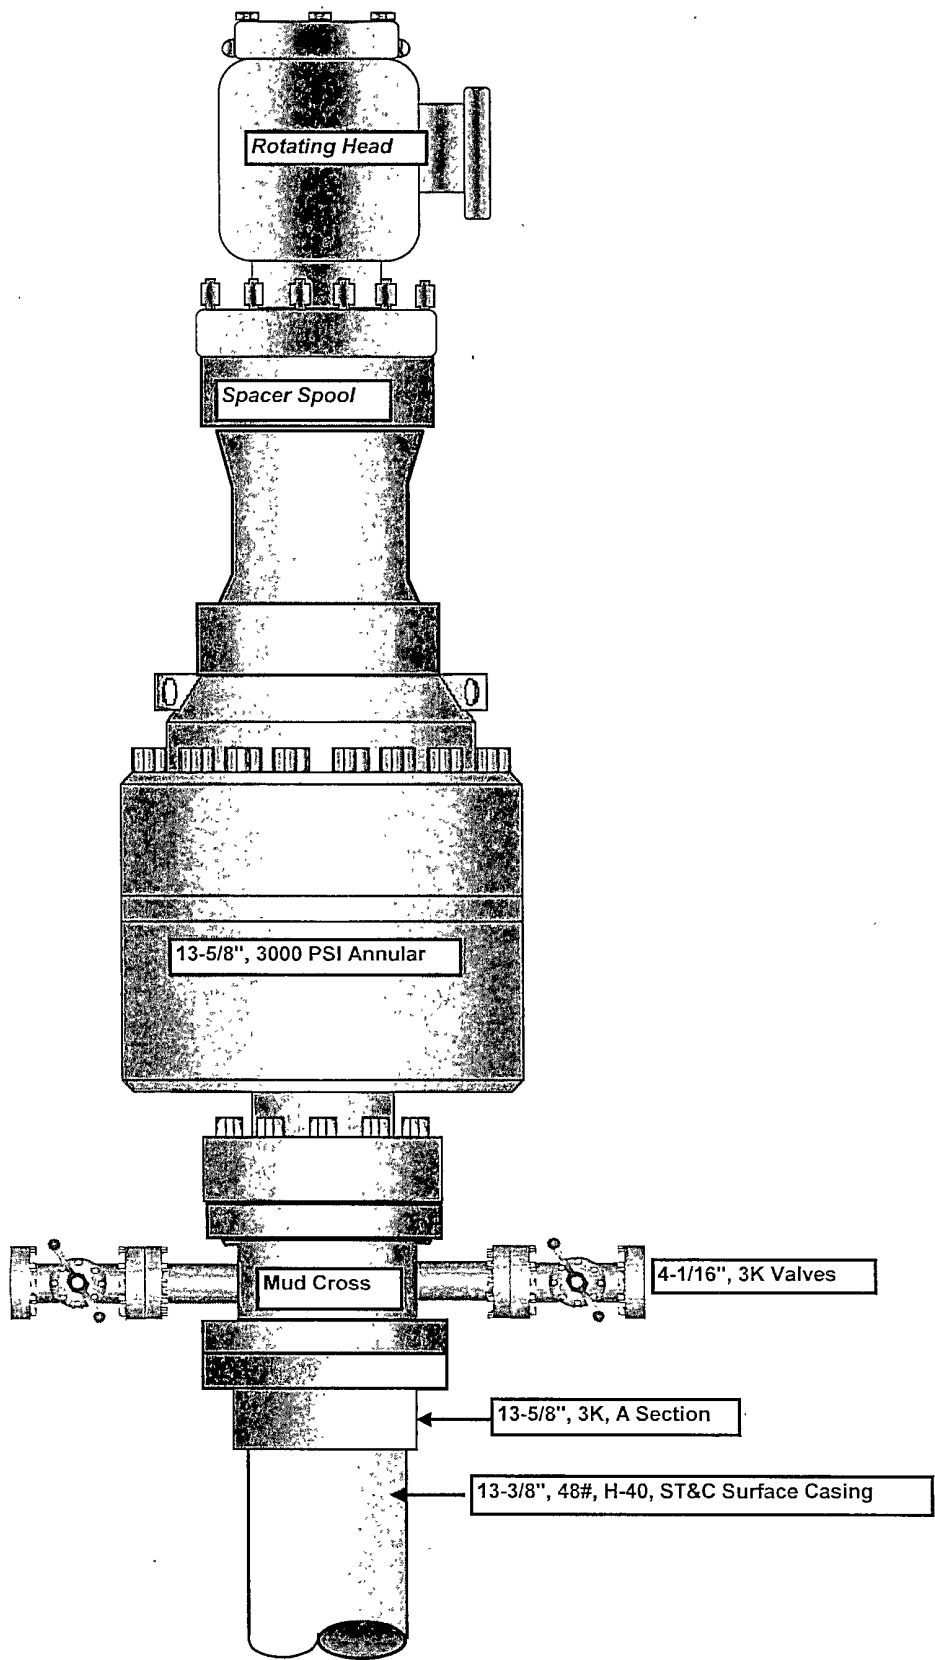

11" x 5,000 psi BOP Stack

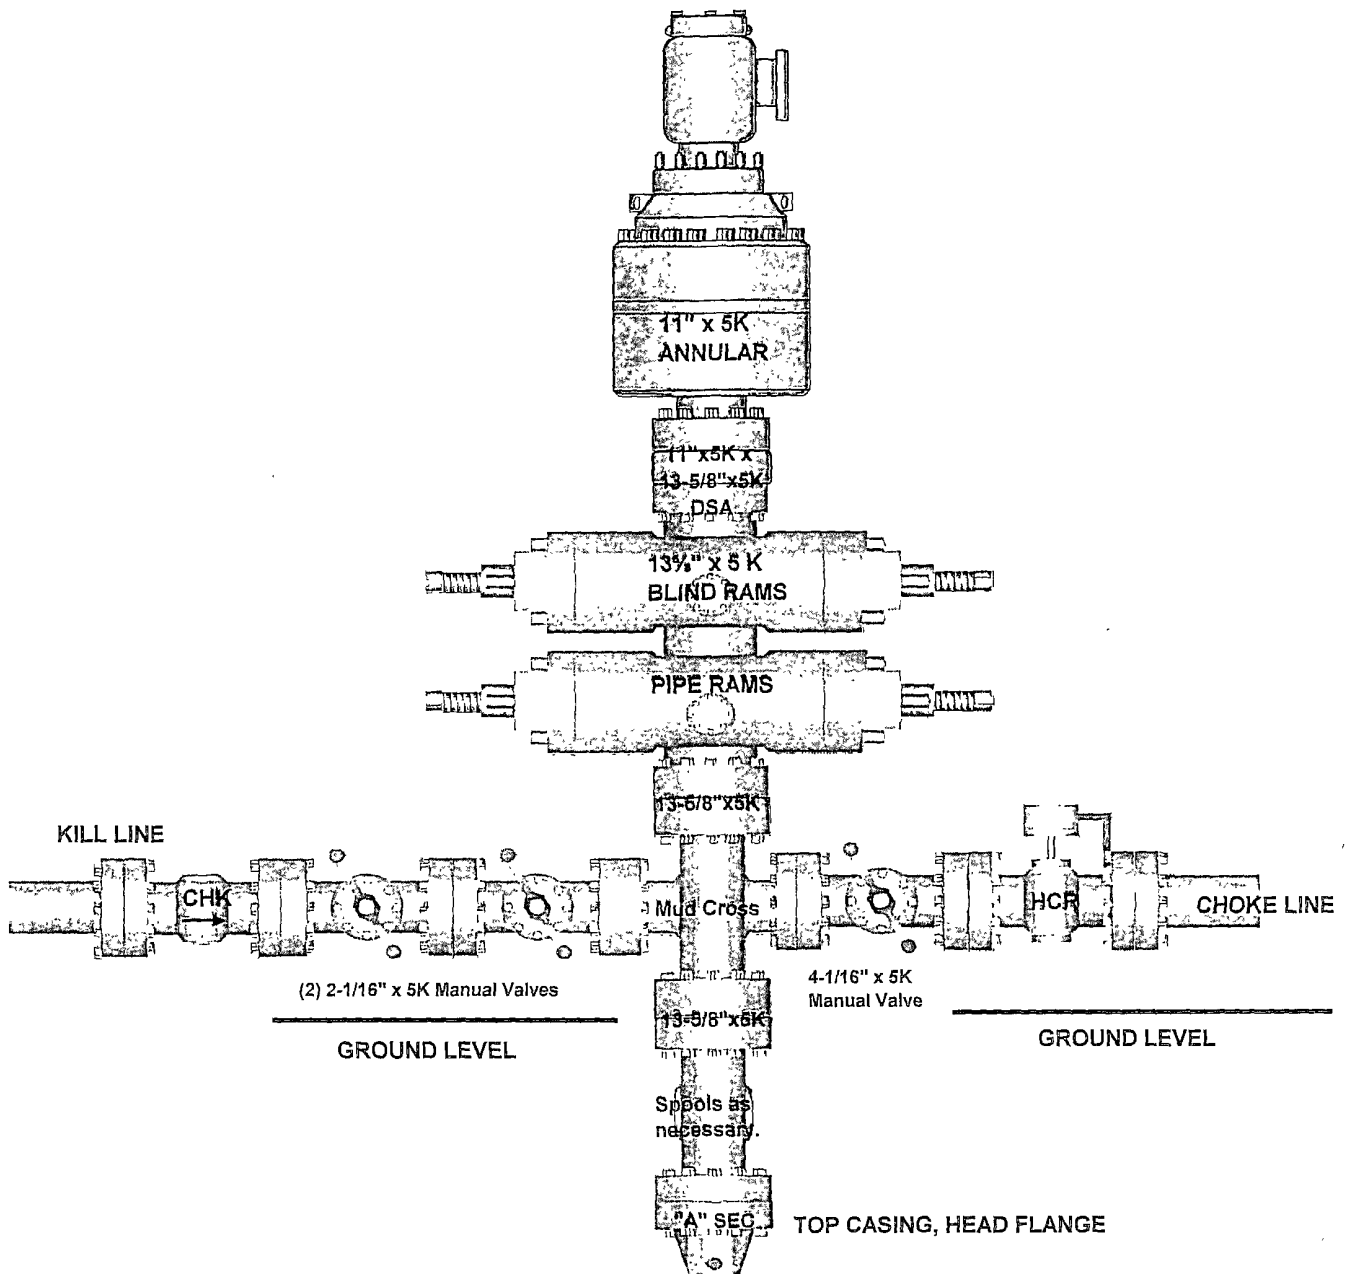

10,000 PSI CHOKE MANIFOLD

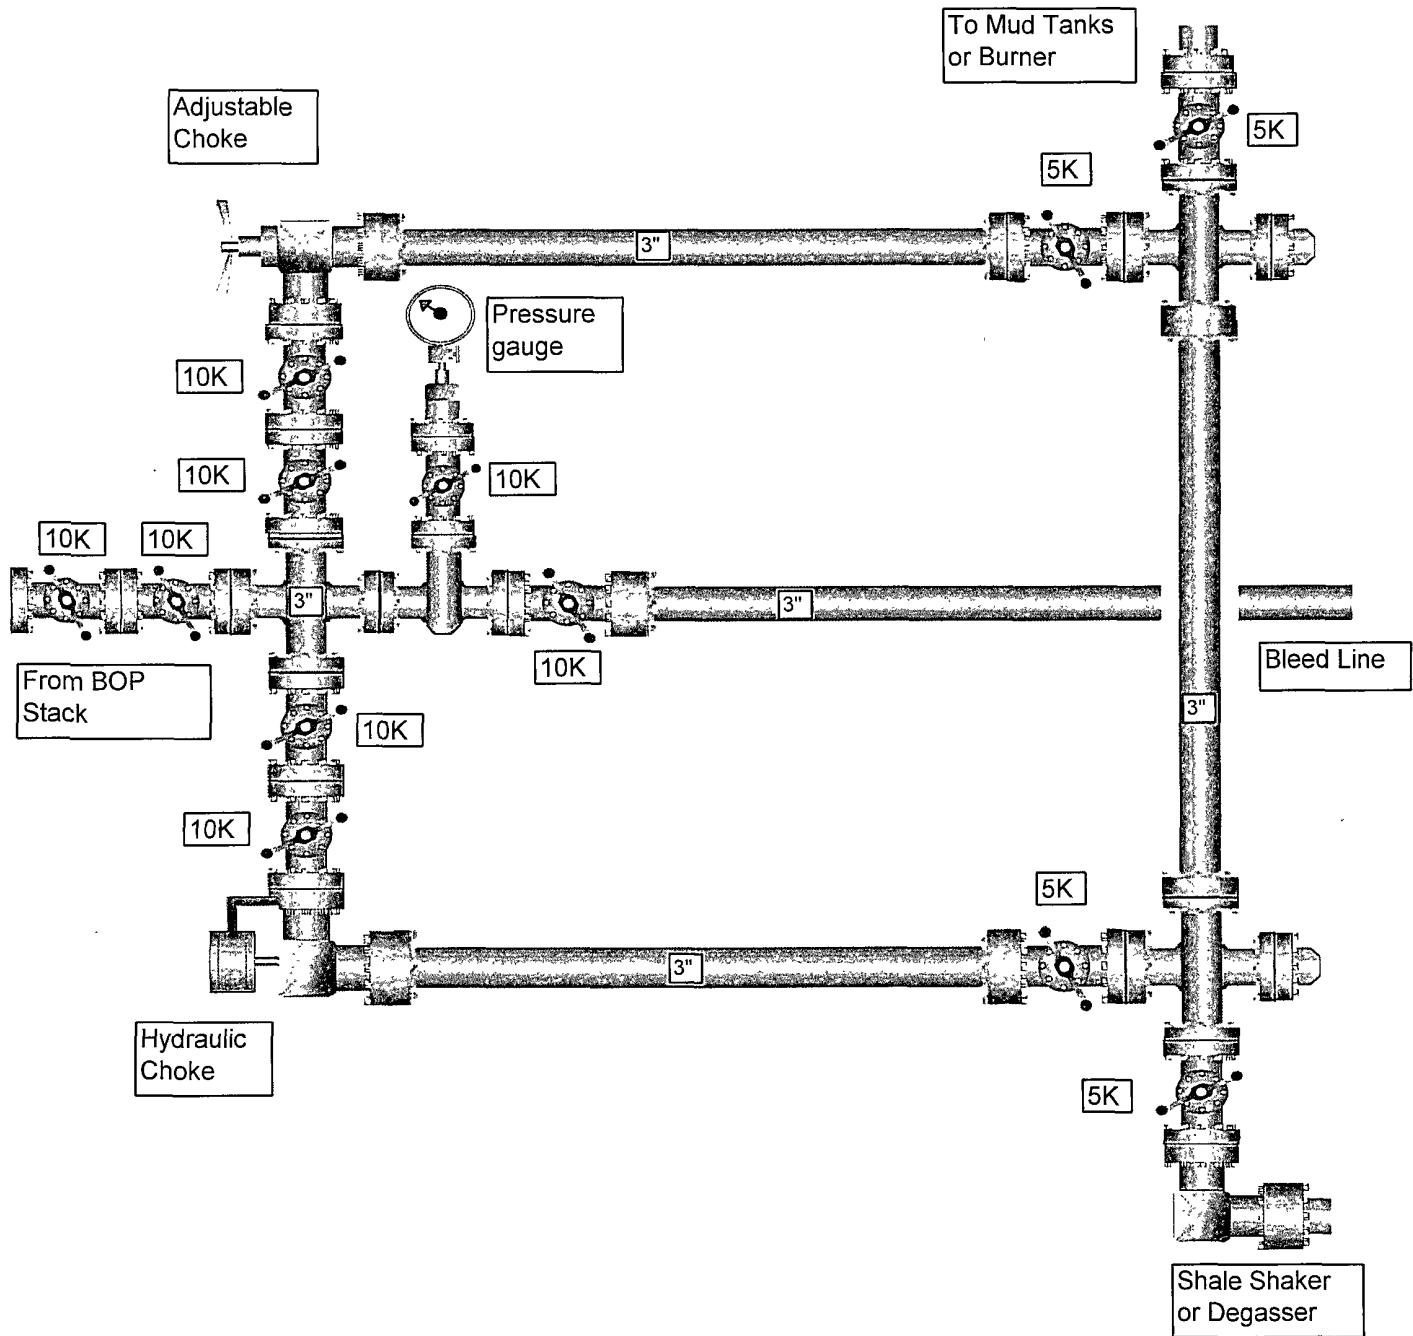

HYDROGEN SULFIDE DRILLING OPERATIONS PLAN

1. All Company and Contract personnel admitted on location must be trained by a qualified H2S safety instructor to the following:
 - a. Characteristics of H2S
 - b. Physical effects and hazards
 - c. Proper use of safety equipment and life support systems.
 - d. Principle and operation of H2S detectors, warning system and briefing areas
 - e. Evacuation procedures, routes and first aid.
 - f. Proper use of 30-minute pressure demand air pack.
2. H2S Detection and Alarm System
 - a. H2S detectors and audio alarm system to be located at bell nipple, end of blooie line (mud pit) and on derrick floor or doghouse.
3. Windsock and/or wind streamers
 - a. Windsock at mud pit area should be high enough to be visible
 - b. Windsock at briefing area should be high enough to be visible
 - c. There should be a windsock at entrance to location
4. Condition Flags and Signs
 - a. Warning Sign on access road to location
 - b. Flags to be displayed on sign at entrance to location. Green flag, normal safe condition. Yellow flag indicates potential pressure and danger. Red flag, danger, H2S present in dangerous concentration. Only emergency personnel admitted to location.
5. Well Control Equipment
 - a. See Exhibit "E" & "E-1"
6. Communication
 - a. While working under masks chalkboards will be used for communication.
 - b. Hand signals will be used where chalk board is inappropriate
 - c. Two way radio will be used to communicate off location in case of emergency help is required. In most cases cellular telephones will be available at most drilling foreman's trailer or living quarters.
7. Drill stem Testing
 - a. Exhausts will be watered
 - b. Flare line will be equipped with an electric igniter or a propane pilot light in case gas reaches the surface.
 - c. If the location is near to a dwelling a closed DST will be performed.
8. Drilling contractor supervisor will be required to be familiar with the effects H2S has on tubular goods and other mechanical equipment.

If H₂S is encountered, mud system will be altered if necessary to maintain control or formation. A mud gas separator will be brought into service along with H₂S scavengers if necessary

Escape

Crews shall escape upwind of escaping gas in the event of an emergency release of gas. Escape can be facilitated South down lease road to US Refinery road. Crews should then block entrance to the location from the lease road so as not to allow anyone traversing into a hazardous area. The blockade should be at a safe distance outside of the ROE. There are no homes or buildings in or near the ROE.

Emergency Procedures

In the case of a release of gas containing H₂S, the first responder(s) must isolate the area and prevent entry by other persons into the 100 ppm ROE. Additionally the first responder(s) must evacuate any public places encompassed by the 100 ppm ROE. First responder(s) must take care not to injure themselves during this operation. Company and/or local officials must be contacted to aid in this operation. Evacuation of the public should be beyond the 100 ppm ROE.

All responders must have training in the detection of H₂S, measures for protection against the gas, equipment used for protection and emergency response. Additionally, responders must be equipped with H₂S monitors and air packs in order to control the release. Use the “buddy system” to ensure no injuries during the response.

Ignition of Gas Source

Should control of the well be considered lost and ignition considered, take care to protect against exposure to Sulfur Dioxide (SO₂). Intentional ignition must be coordinated with the NMOCD and local officials. Additionally the NM State Police may become involved. NM State Police shall be the Incident Command on scene of any major release. Take care to protect downwind whenever there is an ignition of the gas

Characteristics of H₂S and SO₂

Common Name	Chemical Formula	Specific Gravity	Threshold Limit	Hazardous Limit	Lethal Concentration
Hydrogen Sulfide	H ₂ S	1.189 Air = 1	10 ppm	100 ppm/hr	600 ppm
Sulfur Dioxide	SO ₂	2.21 Air = 1	2 ppm	N/A	1000 ppm

Contacting Authorities

Devon Energy Corp. personnel must liaison with local and state agencies to ensure a proper response to a major release. Additionally, the OCD must be notified of the release as soon as possible but no later than 4 hours. Agencies will ask for information such as type and volume of release, wind direction, location of release, etc. Be prepared with all information available. The following call list of essential and potential responders has been prepared for use during a release. Devon Energy Corp. Company response must be in coordination with the State of New Mexico's 'Hazardous Materials Emergency Response Plan' (HMER)

Devon Energy Corp. Company Call List

<u>Artesia (575)</u>	<u>Cellular</u>	<u>Office</u>	<u>Home</u>
Foreman – Tracy Kidd	(575) 513-0628....	748-0189	
Asst. Foreman – Jerry Chaney (575) 748-7446 ..		748-0181	
Don Mayberry	748-7180	748-5235	746-4945
Montral Walker	(575) 390-5182....	(575) 748-0193	
Linda Berryman	(575) 513-0534....	(575) 748-0177 ...	

Agency Call List

<u>Lea</u>	<u>Hobbs</u>	
<u>County</u>		
<u>(575)</u>		
	State Police	392-5588
	City Police	397-9265
	Sheriff's Office	393-2515
	Ambulance	911
	Fire Department	397-9308
	LEPC (Local Emergency Planning Committee)	393-2870
	NMOCD	393-6161
	US Bureau of Land Management.....	393-3612

<u>Eddy</u>	<u>Carlsbad</u>	
<u>County</u>		
<u>(575)</u>		
	State Police.....	885-3137
	City Police.....	885-2111
	Sheriff's Office	887-7551
	Ambulance	911
	Fire Department	885-2111
	LEPC (Local Emergency Planning Committee).....	887-3798
	US Bureau of Land Management.....	887-6544
	New Mexico Emergency Response Commission (Santa Fe) ...	(505) 476-9600
	24 HR	(565) 827-9126
	National Emergency Response Center (Washington, DC)	(800) 424-8802

Emergency Services

Boots & Coots IWC	1-800-256-9688 or (281) 931-8884
Cudd Pressure Control.....	(915) 699-0139 or (915) 563-3356
Halliburton	(575) 746-2757
B. J. Services.....	(575) 746-3569

Give GPS position:

Flight For Life - Lubbock, TX	(806) 743-9911
Aerocare - Lubbock, TX	(806) 747-8923
Med Flight Air Amb - Albuquerque, NM	(505) 842-4433
Lifeguard Air Med Svc. Albuquerque, NM	(505) 272-3115

SURFACE USE PLAN

Devon Energy Production Company, LP

North Pure Gold 10 Federal Com 3H

Surface Location: 330 FSL & 2265 FEL, Unit O, Sec 10 T23S R31E, Eddy, NM

Bottom hole Location: 330 FNL & 2090 FEL, Unit B, Sec 10 T23S R31E, Eddy, NM

1. Existing Roads:

- a. The well site and elevation plat for the proposed well are reflected on the well site layout; Form C-102. The well was staked by Basin Surveys.
- b. All roads into the location are depicted on Exhibit 3.
- c. Directions to Location: From the mile marker 17 of Hwy 128 go east 0.5 miles to Co. Rd 798, go north on Co. Rd 798 for 2.2 miles to lease road, on lease road go west 1.6 miles to a "T", go north winding northwest 1.2 miles to proposed location.

2. New or Reconstructed Access Roads:

- a. The well site layout, Form C-102 shows no new construction of roads.
- b. No cattle guards, grates or fence cuts will be required. No turnouts are planned.

3. Location of Existing Wells:

One Mile Radius Plat shows all existing and proposed wells within a one-mile radius of the proposed location. See attached plat.

4. Location of Existing and/or Proposed Production Facilities:

- a. In the event the well is found productive, the North Pure Gold 10-2 tank battery would be utilized and the necessary production equipment will be installed at the well site. See Production Facilities Layout diagram.
- b. If necessary, the well will be operated by means of an electric prime mover. Electric power poles will be set along side of the access road.
- c. All flow lines will adhere to API standards.
- d. If the well is productive, rehabilitation plans are as follows:
 - i. The original topsoil from the well site will be returned to the location. The drill site will then be contoured as close as possible to the original state.

5. Location and Types of Water Supply:

This location will be drilled using a combination of water mud systems (outlined in the Drilling Program). The water will be obtained from commercial water stations in the area and hauled to location by transport truck using the existing and proposed roads shown in the C-102. On occasion, water will be obtained from a pre-existing water well, running a pump directly to the drill rig. In these cases where a poly pipeline is used to transport water for drilling purposes, proper authorizations will be secured. If a poly pipeline is used, the size, distance, and map showing route will be provided to the BLM via sundry notice.

6. Construction Materials:

All caliche utilized for the drilling pad will be obtained from an existing BLM approved pit or from prevailing deposits found under the location.

7. Methods of Handling Waste Material:

- a. Drill cuttings will be disposed.
- b. All trash, junk and other waste material will be contained in trash cages or trash bins to prevent scattering. When the job is completed all contents will be removed and disposed of in an approved sanitary landfill.
- c. The supplier, including broken sacks, will pick up salts remaining after completion of well.
- d. A Porto-john will be provided for the rig crews. This equipment will be properly maintained during the drilling and completion operations and will be removed when all operations are complete.
- e. Disposal of fluids to be transported by the following companies:
 - i. American Production Service Inc, Odessa TX
 - ii. Gandy Corporation, Lovington NM
 - iii. I & W Inc, Loco Hill NM
 - iv. Jims Water Service of Co Inc, Denver CO

8. Ancillary Facilities: No campsite or other facilities will be constructed as a result of this well.

9. Well Site Layout

- a. Exhibit D shows the proposed well site layout with dimensions of the pad layout.
- b. This exhibit indicated proposed location of sump pits and living facilities.
- c. Mud pits in the active circulating system will be steel pits.
- d. A closed loop system will be utilized.
- e. If a pit or closed loop system is utilized, Devon will comply with the NMOCD requirements 19.15.17 and submit form C-144 to the appropriate NMOCD District Office. A copy to be provided to the BLM.

10. Plans for Surface Reclamation:

- a. After concluding the drilling and/or completion operations, if the well is found non-commercial, the caliche will be removed from the pad and transported to the original caliche pit or used for other drilling locations. The road will be reclaimed as directed by the BLM. The original top soil will again be returned to the pad and contoured, as close as possible, to the original topography.
- b. The location and road will be rehabilitated as recommended by the BLM.
- c. If the well is deemed commercially productive, caliche from areas of the pad site not required for operations will be reclaimed. The original top soil will be returned to the area of the drill pad not necessary to operate the well. These unused areas of the drill pad will be contoured, as close as possible, to match the original topography.

11. Surface Ownership

- a. The surface is owned by the US Government and is administered by the Bureau of Land Management. The surface is multiple use with the primary uses of the region for the grazing of livestock and the production of oil and gas.
- b. The proposed road routes and the surface location will be restored as directed by the BLM.

12. Other Information:

- a. The area surrounding the well site is grassland. The topsoil is very sandy in nature. The vegetation is moderately sparse with native prairie grass, sage bush, yucca and miscellaneous weeds. No wildlife was observed but it is likely that deer, rabbits, coyotes, and rodents traverse the area.
- b. There is no permanent or live water in the general proximity of the location.
- c. There are no dwellings within 2 miles of location.

13. Bond Coverage:

Bond Coverage is Nationwide; Bond # is CO-1104

Operators Representative:

The Devon Energy Production Company, L.P. representatives responsible for ensuring compliance of the surface use plan are listed below.

Jim Cromer - Operations Engineer Advisor
Devon Energy Production Company, L.P.
20 North Broadway
Oklahoma City, OK 73102-8260
(405) 228-4464 (office)
(405) 694-7718 (Cellular)

Don Mayberry - Superintendent
Devon Energy Production Company, L.P.
Post Office Box 250
Artesia, NM 88211-0250
(575) 748-3371 (office)
(575) 746-4945 (home)


Certification

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access road proposed herein; that I am familiar with the conditions that presently exist; that I have full knowledge of State and Federal laws applicable to this operation; that the statements made in this APD package are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed in conformity with this APD package and the terms and conditions under which it is approved. I also certify that I, or Devon Energy Production Company, L.P. am responsible for the operations conducted under this application. These statements are subject to the provisions of 18 U.S.C. 1001 for the filing of false statements.

I hereby also certify that I, or Devon Energy Production Company, L.P. have made a good faith effort to provide the surface owner with a copy of the Surface Use Plan of Operations and any Conditions of Approval that are attached to the APD.

Executed this 26th day of March 2009.

Printed Name: Judy A. Barnett

Signed Name: 

Position Title: Regulatory Analyst

Address: 20 North Broadway, OKC OK 73102

Telephone: (405)-228-8699

Field Representative (if not above signatory):

Address (if different from above):

Telephone (if different from above):

PECOS DISTRICT CONDITIONS OF APPROVAL

OPERATOR'S NAME:	Devon Energy Production Company LP
LEASE NO.:	NM-77046
WELL NAME & NO.:	North Pure Gold 10 Fed Com #3H
SURFACE HOLE FOOTAGE:	330' FSL & 2265' FEL
BOTTOM HOLE FOOTAGE:	330' FNL & 2090' FEL
LOCATION:	Section 10, T. 23 S., R 31 E., NMPM
COUNTY:	Eddy County, New Mexico

TABLE OF CONTENTS

Standard Conditions of Approval (COA) apply to this APD. If any deviations to these standards exist or special COAs are required, the section with the deviation or requirement will be checked below.

- ☐ **General Provisions**
- ☐ **Permit Expiration**
- ☐ **Archaeology, Paleontology, and Historical Sites**
- ☐ **Noxious Weeds**
- ☒ **Special Requirements**
 - Lesser Prairie Chicken
 - Communitization Agreement
- ☒ **Construction**
 - Notification
 - Topsoil
 - Closed Loop System
 - Federal Mineral Material Pits
 - Well Pads
 - Roads
- ☐ **Road Section Diagram**
- ☒ **Drilling**
 - Secretary's potash
- ☒ **Production (Post Drilling)**
 - Well Structures & Facilities
 - Pipelines
- ☒ **Closed Loop System Interim Reclamation**
- ☐ **Final Abandonment/Reclamation**

I. GENERAL PROVISIONS

The approval of the Application For Permit To Drill (APD) is in compliance with all applicable laws and regulations: 43 Code of Federal Regulations 3160, the lease terms, Onshore Oil and Gas Orders, Notices To Lessees, New Mexico Oil Conservation Division (NMOCD) Rules, National Historical Preservation Act As Amended, and instructions and orders of the Authorized Officer. Any request for a variance shall be submitted to the Authorized Officer on Form 3160-5, Sundry Notices and Report on Wells.

II. PERMIT EXPIRATION

If the permit terminates prior to drilling and drilling cannot be commenced within 60 days after expiration, an operator is required to submit Form 3160-5, Sundry Notices and Reports on Wells, requesting surface reclamation requirements for any surface disturbance. However, if the operator will be able to initiate drilling within 60 days after the expiration of the permit, the operator must have set the conductor pipe in order to allow for an extension of 60 days beyond the expiration date of the APD. (Filing of a Sundry Notice is required for this 60 day extension.)

III. ARCHAEOLOGICAL, PALEONTOLOGY & HISTORICAL SITES

Any cultural and/or paleontological resource discovered by the operator or by any person working on the operator's behalf shall immediately report such findings to the Authorized Officer. The operator is fully accountable for the actions of their contractors and subcontractors. The operator shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the Authorized Officer. An evaluation of the discovery shall be made by the Authorized Officer to determine the appropriate actions that shall be required to prevent the loss of significant cultural or scientific values of the discovery. The operator shall be held responsible for the cost of the proper mitigation measures that the Authorized Officer assesses after consultation with the operator on the evaluation and decisions of the discovery. Any unauthorized collection or disturbance of cultural or paleontological resources may result in a shutdown order by the Authorized Officer.

IV. NOXIOUS WEEDS

The operator shall be held responsible if noxious weeds become established within the areas of operations. Weed control shall be required on the disturbed land where noxious weeds exist, which includes the roads, pads, associated pipeline corridor, and adjacent land affected by the establishment of weeds due to this action. The operator shall consult with the Authorized Officer for acceptable weed control methods, which include following EPA and BLM requirements and policies.

V. SPECIAL REQUIREMENT(S)

North Pure Gold 10 Federal Com. # 3H: Closed Loop System- V- Door Any Direction

Timing Limitation Stipulation/Condition of Approval for Lesser Prairie-Chicken: Oil and gas activities including 3-D geophysical exploration, and drilling will not be allowed in lesser prairie-chicken habitat during the period from March 1st through June 15th annually. During that period, other activities that produce noise or involve human activity, such as the maintenance of oil and gas facilities, geophysical exploration other than 3-D operations, and pipeline, road, and well pad construction, will be allowed except between 3:00 am and 9:00 am. The 3:00 am to 9:00 am restriction will not apply to normal, around-the-clock operations, such as venting, flaring, or pumping, which do not require a human presence during this period. Additionally, no new drilling will be allowed within up to 200 meters of leks known at the time of permitting. Normal vehicle use on existing roads will not be restricted. Exhaust noise from pump jack engines must be muffled or otherwise controlled so as not to exceed 75 db measured at 30 ft. from the source of the noise.

Ground-level Abandoned Well Marker to avoid raptor perching: Upon the plugging and subsequent abandonment of the well, the well marker will be installed at ground level on a plate containing the pertinent information for the plugged well. For more installation details, contact the Carlsbad Field Office at 575-234-5972.

Communitization Agreement

A Communitization Agreement covering the acreage dedicated to this well must be filed for approval with the BLM. The effective date of the agreement shall be prior to any sales. Operator to supply NMOCD order or description of pool which details the vertical and horizontal extent of pool to verify that requested communitization is within an approved and established pool.

VI. CONSTRUCTION

A. NOTIFICATION

The BLM shall administer compliance and monitor construction of the access road and well pad. Notify the Carlsbad Field Office at (575) 234-5972 at least 3 working days prior to commencing construction of the access road and/or well pad.

When construction operations are being conducted on this well, the operator shall have the approved APD and Conditions of Approval (COA) on the well site and they shall be made available upon request by the Authorized Officer.

B. TOPSOIL

The operator shall stockpile the topsoil of the well pad. The topsoil shall not be used to backfill the reserve pit and will be used for interim and final reclamation.

C. Closed Loop System

North Pure Gold 10 Federal Com. # 3H: Closed Loop System- V- Door Any Direction

Tanks are required for drilling operations: No Pits.

The operator shall properly dispose of drilling contents at an authorized disposal site.

D. FEDERAL MINERAL MATERIALS PIT

If the operator elects to surface the access road and/or well pad, mineral materials extracted during construction of the reserve pit may be used for surfacing the well pad and access road and other facilities on the lease.

Payment shall be made to the BLM prior to removal of any additional federal mineral materials from any site other than the reserve pit. Call the Carlsbad Field Office at (575) 234-5972.

E. WELL PAD SURFACING

Surfacing of the well pad is not required.

If the operator elects to surface the well pad, the surfacing material may be required to be removed at the time of reclamation.

The well pad shall be constructed in a manner which creates the smallest possible surface disturbance, consistent with safety and operational needs.

F. ON LEASE ACCESS ROADS

Road Width

The access road shall have a driving surface that creates the smallest possible surface disturbance and does not exceed fourteen (14) feet in width. The maximum width of surface disturbance, when constructing the access road, shall not exceed thirty (30) feet.

Surfacing

Surfacing material is not required on the new access road driving surface. If the operator elects to surface the new access road or pad, the surfacing material may be required to be removed at the time of reclamation.

Where possible, no improvements should be made on the unsurfaced access road other than to remove vegetation as necessary, road irregularities, safety issues, or to fill low areas that may sustain standing water.

The Authorized Officer reserves the right to require surfacing of any portion of the access road at any time deemed necessary. Surfacing may be required in the event the road deteriorates, erodes, road traffic increases, or it is determined to be beneficial for future field development. The surfacing depth and type of material will be determined at the time of notification.

Crowning

Crowning shall be done on the access road driving surface. The road crown shall have a grade of approximately 2% (i.e., a 1" crown on a 14' wide road). The road shall conform to Figure 1; cross section and plans for typical road construction.


Ditching

Ditching shall be required on both sides of the road.

Turnouts

Vehicle turnouts shall be constructed on the road. Turnouts shall be intervisible with interval spacing distance less than 1000 feet. Turnouts shall be constructed on all blind curves. Turnouts shall conform to the following diagram:

Standard Turnout – Plan View

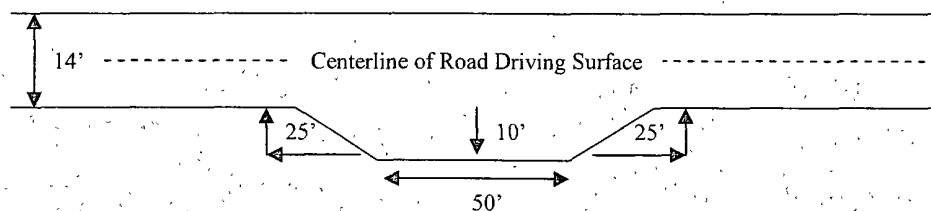


Drainage

Drainage control systems shall be constructed on the entire length of road (e.g. ditches, sidehill outslowing and insloping, lead-off ditches, culvert installation, and low water crossings).

A typical lead-off ditch has a minimum depth of 1 foot below and a berm of 6 inches above natural ground level. The berm shall be on the down-slope side of the lead-off ditch.

Cross Section of a Typical Lead-off Ditch

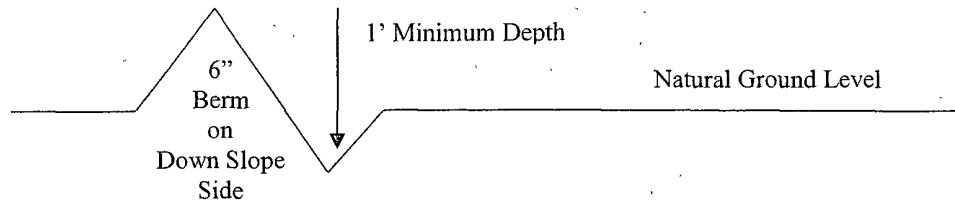

All lead-off ditches shall be graded to drain water with a 1 percent minimum to 3 percent maximum ditch slope. The spacing interval are variable for lead-off ditches and shall be determined according to the formula for spacing intervals of lead-off ditches, but may be amended depending upon existing soil types and centerline road slope (in %);

Formula for Spacing Interval of Lead-off Ditches

Example - On a 4% road slope that is 400 feet long, the water flow shall drain water into a lead-off ditch. Spacing interval shall be determined by the following formula:

$$400 \text{ foot road with } 4\% \text{ road slope: } \frac{400'}{4\%} + 100' = 200' \text{ lead-off ditch interval}$$

Culvert Installations

Appropriately sized culvert(s) shall be installed at the deep waterway channel flow crossing.

Cattleguards

An appropriately sized cattleguard(s) sufficient to carry out the project shall be installed and maintained at fence crossing(s).

Any existing cattleguard(s) on the access road shall be repaired or replaced if they are damaged or have deteriorated beyond practical use. The operator shall be responsible for the condition of the existing cattleguard(s) that are in place and are utilized during lease operations.

A gate shall be constructed and fastened securely to H-braces.

Fence Requirement


Where entry is required across a fence line, the fence shall be braced and tied off on both sides of the passageway prior to cutting.

The operator shall notify the private surface landowner or the grazing allotment holder prior to crossing any fence(s).

Public Access

Public access on this road shall not be restricted by the operator without specific written approval granted by the Authorized Officer.

Figure 1 – Cross Sections and Plans For Typical Road Sections

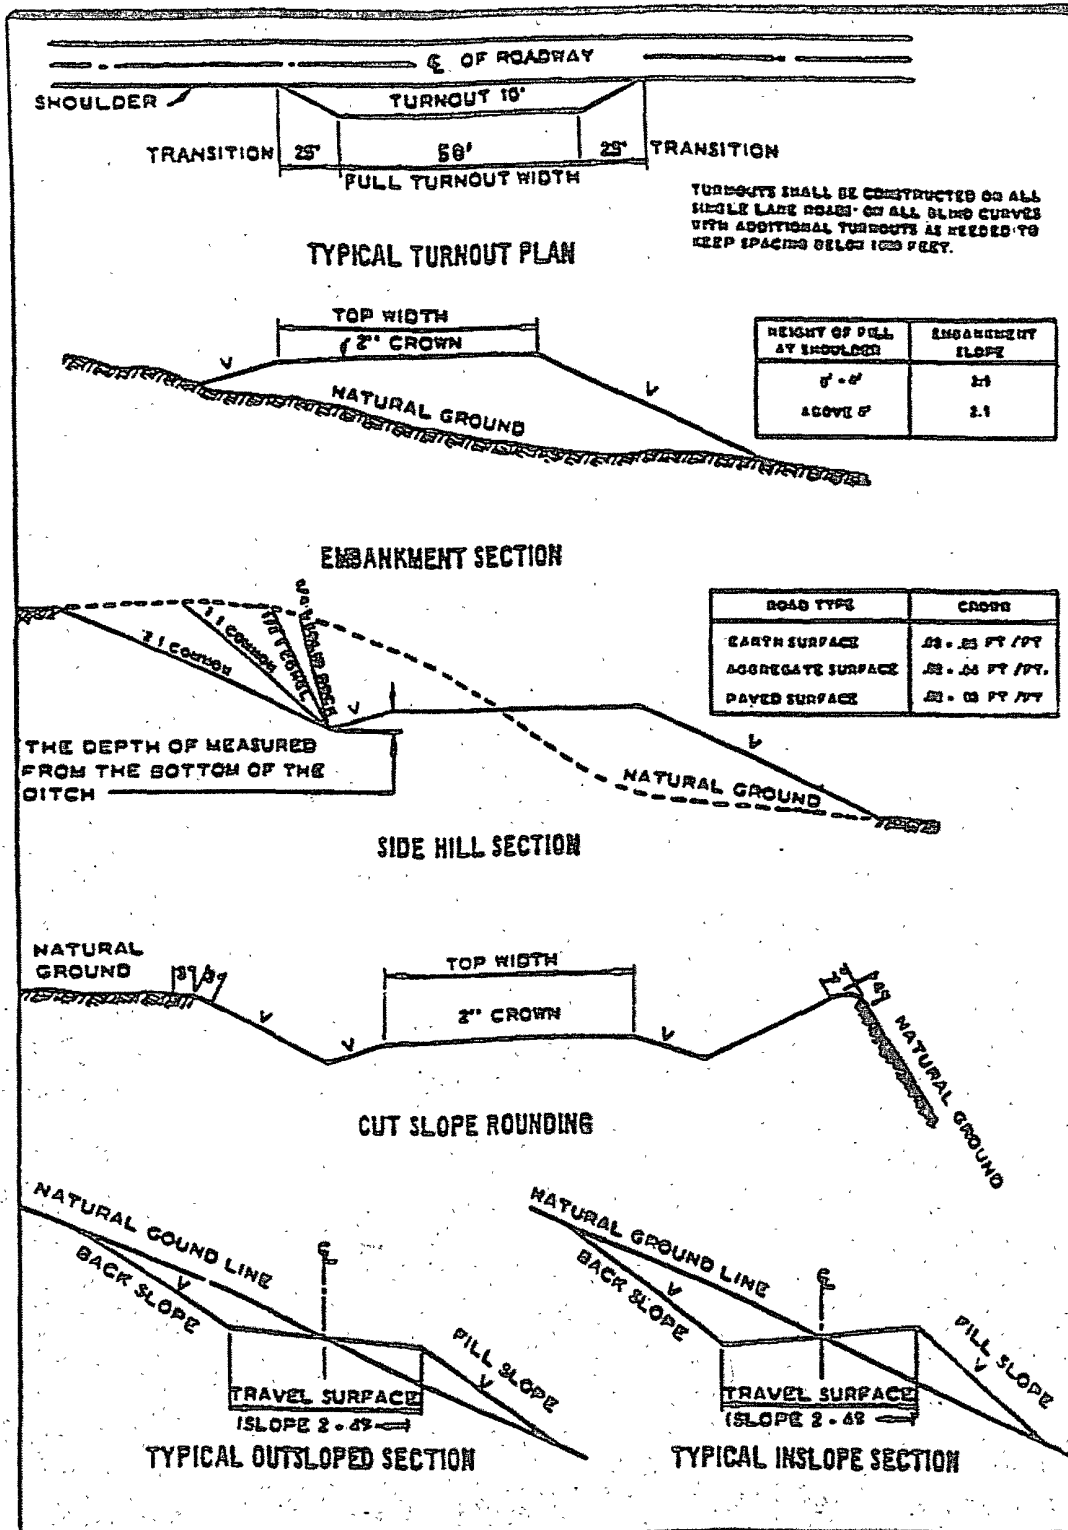

A. DRILLING OPERATIONS REQUIREMENTS

The BLM is to be notified a minimum of 4 hours in advance for a representative to witness:

- a. Spudding well
- b. Setting and/or Cementing of all casing strings
- c. BOPE tests

☒ **Eddy County**

Call the Carlsbad Field Office, 620 East Greene St., Carlsbad, NM 88220,
(575) 361-2822

1. **Although there are no measured amounts of Hydrogen Sulfide reported, it is always a potential hazard. If Hydrogen Sulfide is encountered, please provide measured values and formations to the BLM.**
2. Unless the production casing has been run and cemented or the well has been properly plugged, the drilling rig shall not be removed from over the hole without prior approval.
3. Floor controls are required for 3M or Greater systems. These controls will be on the rig floor, unobstructed, readily accessible to the driller and will be operational at all times during drilling and/or completion activities. Rig floor is defined as the area immediately around the rotary table; the area immediately above the substructure on which the draw works are located, this does not include the dog house or stairway area.
4. Rustler Anhydrite and Salt tops are to be reported on completion report.

B. CASING

Changes to the approved APD casing and cement program require submitting a sundry and receiving approval prior to work. Failure to obtain approval prior to work will result in an Incident of Non-Compliance being issued.

Centralizers required on surface casing per Onshore Order 2.III.B.1.f.

Wait on cement (WOC) time for a primary cement job will be a minimum 18 hours for a water basin, 24 hours in the potash area, or 500 pounds compressive strength, whichever is greater for all casing strings. Provide compressive strengths including hours to reach required 500 pounds compressive strength prior to cementing each casing string. See individual casing strings for details regarding lead cement slurry requirements.

No pea gravel permitted for remedial or fall back remedial without prior authorization from the BLM engineer.

Secretary's potash

Possible lost circulation in the Delaware and Bone Spring formations.

Possible brine and water flows in the Salado, Castile, Delaware, and Bone Spring formations.

1. The 13-3/8 inch surface casing shall be set at **approximately 630 feet (a minimum of 25 feet into the Rustler Anhydrite and above the salt)** and cemented to the surface.
 - a. If cement does not circulate to the surface, the appropriate BLM office shall be notified and a temperature survey utilizing an electronic type temperature survey with a surface log readout will be used or a cement bond log shall be run to verify the top of the cement.
 - b. **Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry.**
 - c. Wait on cement (WOC) time for a remedial job will be a minimum of 4 hours after bringing cement to surface or 500 pounds compressive strength, whichever is greater.
 - d. If cement falls back, remedial cementing will be done prior to drilling out that string.
2. The minimum required fill of cement behind the 9-5/8 inch intermediate casing is:
 - ☒ Cement to surface. If cement does not circulate see B.1.a, c-d above. **Casing to be set in the Lamar Limestone or Fletcher Anhydrite below the salt. Wait on cement (WOC) time for a primary cement job is to include the lead cement slurry due to potash.**

Centralizers required on horizontal leg, must be type for horizontal service and minimum of one every other joint.

3. The minimum required fill of cement behind the **5 1/2** inch production casing is:
 - a. **First stage to DV tool, cement shall:**
 - ☒ Cement to circulate. If cement does not circulate, contact the appropriate BLM office, before proceeding with second stage cement job.
 - b. **Second stage above DV tool, cement shall:**
 - ☒ Cement should tie-back at least 500 feet into previous casing string. Operator shall provide method of verification.
4. If hardband drill pipe is rotated inside casing, returns will be monitored for metal. If metal is found in samples, drill pipe will be pulled and rubber protectors which have a larger diameter than the tool joints of the drill pipe will be installed prior to continuing drilling operations.

C. PRESSURE CONTROL

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API RP 53 Sec. 17.
2. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **2000 (2M)** psi.
3. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the **9-5/8** intermediate casing shoe shall be **3000 (3M)** psi.
4. The appropriate BLM office shall be notified a minimum of 4 hours in advance for a representative to witness the tests.
 - a. The tests shall be done by an independent service company.
 - b. The results of the test shall be reported to the appropriate BLM office.
 - c. All tests are required to be recorded on a calibrated test chart. A copy of the BOP/BOPE test chart and a copy of independent service company test will be submitted to the appropriate BLM office.
 - d. The BOP/BOPE test shall include a low pressure test from 250 to 300 psi. The test will be held for a minimum of 10 minutes if test is done with a test plug and 30 minutes without a test plug.

- e. **Effective November 1, 2008, no variances will be granted on reduced pressure tests on the surface casing and BOP/BOPE. Onshore Order 2 requirements will be in effect.**

D. DRILL STEM TEST

If drill stem tests are performed, Onshore Order 2.III.D shall be followed.

WWI 052209

VII. PRODUCTION (POST DRILLING)

A. WELL STRUCTURES & FACILITIES

Placement of Production Facilities

Production facilities should be placed on the well pad to allow for maximum interim recontouring and revegetation of the well location.

Containment Structures

The containment structure shall be constructed to hold the capacity of the entire contents of the largest tank, plus 24 hour production, unless more stringent protective requirements are deemed necessary by the Authorized Officer.

Painting Requirement

All above-ground structures including meter housing that are not subject to safety requirements shall be painted a flat non-reflective paint color Shale Green, Munsell Soil Color Chart # 5Y 4/2

B. PIPELINES

STANDARD STIPULATIONS FOR SURFACE INSTALLED PIPELINES

A copy of the APD and attachments, including stipulations, survey plat and/or map, will be on location during construction. BLM personnel may request to you a copy of your permit during construction to ensure compliance with all stipulations.

Holder agrees to comply with the following stipulations to the satisfaction of the Authorized Officer:

1. The holder shall indemnify the United States against any liability for damage to life or property arising from the occupancy or use of public lands under this grant.
2. The holder shall comply with all applicable Federal laws and regulations existing or hereafter enacted or promulgated. In any event, the holder shall comply with the Toxic Substances Control Act of 1976 as amended, 15 USC 2601 et seq. (1982) with regards to any toxic substances that are used, generated by or stored on the right-of-way or on facilities authorized under this right-of-way grant. (See 40 CFR, Part 702-799 and especially, provisions on polychlorinated biphenyls, 40 CFR 761.1-761.193.) Additionally, any release of toxic substances (leaks, spills, etc.) in excess of the reportable quantity established by 40 CFR, Part 117 shall be reported as required by the Comprehensive Environmental Response, Compensation, and Liability Act, section 102b. A copy of any report required or requested by any Federal agency or State government as a result of a reportable release or spill of any toxic substances shall be furnished to the authorized officer concurrent with the filing of the reports to the involved Federal agency or State government.

3. The holder agrees to indemnify the United States against any liability arising from the release of any hazardous substance or hazardous waste (as these terms are defined in the Comprehensive Environmental Response, Compensation and Liability Act of 1980, 42 U.S.C. 9601, et seq. or the Resource Conservation and Recovery Act, 42 U.S.C. 6901, et seq.) on the Right-of-Way (unless the release or threatened release is wholly unrelated to activity of the Right-of-Way holder's activity on the Right-of-Way), or resulting from the activity of the Right-of-Way holder on the Right-of-Way. This agreement applies without regard to whether a release is caused by the holder, its agent, or unrelated third parties.

4. The holder shall be liable for damage or injury to the United States to the extent provided by 43 CFR Sec. 2883.1-4. The holder shall be held to a standard of strict liability for damage or injury to the United States resulting from pipe rupture, fire, or spills caused or substantially aggravated by any of the following within the right-of-way or permit area:

- a. Activities of the holder including, but not limited to construction, operation, maintenance, and termination of the facility.
- b. Activities of other parties including, but not limited to:
 - (1) Land clearing.
 - (2) Earth-disturbing and earth-moving work.
 - (3) Blasting.
 - (4) Vandalism and sabotage.
- c. Acts of God.

The maximum limitation for such strict liability damages shall not exceed one million dollars (\$1,000,000) for any one event, and any liability in excess of such amount shall be determined by the ordinary rules of negligence of the jurisdiction in which the damage or injury occurred.

This section shall not impose strict liability for damage or injury resulting primarily from an act of war or from the negligent acts or omissions of the United States.

5. If, during any phase of the construction, operation, maintenance, or termination of the pipeline, any oil, salt water, or other pollutant should be discharged from the pipeline system, impacting Federal lands, the control and total removal, disposal, and cleaning up of such oil, salt water, or other pollutant, wherever found, shall be the responsibility of the holder, regardless of fault. Upon failure of the holder to control, dispose of, or clean up such discharge on or affecting Federal lands, or to repair all damages resulting therefrom, on the Federal lands, the Authorized Officer may take such measures as he deems necessary to control and clean up the discharge and restore the area, including, where appropriate, the aquatic environment and fish and wildlife habitats, at the full

expense of the holder. Such action by the Authorized Officer shall not relieve the holder of any responsibility as provided herein.

6. All construction and maintenance activity will be confined to the authorized right-of-way width of 25 feet.

7. No blading or clearing of any vegetation will be allowed unless approved in writing by the Authorized Officer.

8. The holder shall install the pipeline on the surface in such a manner that will minimize suspension of the pipeline across low areas in the terrain. In hummocky or dune areas, the pipeline will be "snaked" around hummocks and dunes rather than suspended across these features.

9. The pipeline shall be buried with a minimum of 24 inches under all roads, "two-tracks," and trails. Burial of the pipe will continue for 20 feet on each side of each crossing. The condition of the road, upon completion of construction, shall be returned to at least its former state with no bumps or dips remaining in the road surface.

10. The holder shall minimize disturbance to existing fences and other improvements on public lands. The holder is required to promptly repair improvements to at least their former state. Functional use of these improvements will be maintained at all times. The holder will contact the owner of any improvements prior to disturbing them. When necessary to pass through a fence line, the fence shall be braced on both sides of the passageway prior to cutting of the fence. No permanent gates will be allowed unless approved by the Authorized Officer.

11. In those areas where erosion control structures are required to stabilize soil conditions, the holder will install such structures as are suitable for the specific soil conditions being encountered and which are in accordance with sound resource management practices.

12. Excluding the pipe, all above-ground structures not subject to safety requirement shall be painted by the holder to blend with the natural color of the landscape. The paint used shall be a color which simulates "Standard Environmental Colors" – **Shale Green**, Munsell Soil Color No. 5Y 4/2; designated by the Rocky Mountain Five State Interagency Committee.

13. The pipeline will be identified by signs at the point of origin and completion of the right-of-way and at all road crossings. At a minimum, signs will state the holder's name, BLM serial number, and the product being transported. Signs will be maintained in a legible condition for the life of the pipeline.

14. The holder shall not use the pipeline route as a road for purposes other than routine maintenance as determined necessary by the Authorized Officer in consultation with the holder. The holder will take whatever steps are necessary to ensure that the pipeline

route is not used as a roadway.

15. Any cultural and/or paleontological resource (historic or prehistoric site or object) discovered by the holder, or any person working on his behalf, on public or Federal land shall be immediately reported to the authorized officer. Holder shall suspend all operations in the immediate area of such discovery until written authorization to proceed is issued by the authorized officer. An evaluation of the discovery will be made by the authorized officer to determine appropriate cultural or scientific values. The holder will be responsible for the cost of evaluation and any decision as to proper mitigation measures will be made by the authorized officer after consulting with the holder.

(March 1989)

VIII. INTERIM RECLAMATION & RESERVE PIT CLOSURE

A. INTERIM RECLAMATION

If the well is a producer, interim reclamation shall be conducted on the well site in accordance with the orders of the Authorized Officer. The operator shall submit a Sundry Notices and Reports on Wells (Notice of Intent), Form 3160-5, prior to conducting interim reclamation.

During the life of the development, all disturbed areas not needed for active support of production operations should undergo interim reclamation in order to minimize the environmental impacts of development on other resources and uses.

The operators should work with BLM surface management specialists to devise the best strategies to reduce the size of the location. Any reductions should allow for remedial well operations, as well as safe and efficient removal of oil and gas.

During reclamation, the removal of caliche is important to increasing the success of revegetating the site. Removed caliche may be used for road repairs, fire walls or for building other roads and locations. In order to operate the well or complete workover operations, it may be necessary to drive, park and operate on restored interim vegetation within the previously disturbed area. Disturbing revegetated areas for production or workover operations will be allowed. If there is significant disturbance and loss of vegetation, the area will need to be revegetated. Communicate with the appropriate BLM office for any exceptions/exemptions if needed.

BLM SERIAL #:
COMPANY REFERENCE:
WELL # & NAME:

Seed Mixture 2, for Sandy Sites

The holder shall seed all disturbed areas with the seed mixture listed below. The seed mixture shall be planted in the amounts specified in pounds of pure live seed (PLS)* per acre. There shall be no primary or secondary noxious weeds in the seed mixture. Seed will be tested and the viability testing of seed will be done in accordance with State law (s) and within nine (9) months prior to purchase. Commercial seed will be either certified or registered seed. The seed container will be tagged in accordance with State law(s) and available for inspection by the authorized officer.

Seed will be planted using a drill equipped with a depth regulator to ensure proper depth of planting where drilling is possible. The seed mixture will be evenly and uniformly planted over the disturbed area (smaller/heavier seeds have a tendency to drop the bottom of the drill and are planted first). The holder shall take appropriate measures to ensure this does not occur. Where drilling is not possible, seed will be broadcast and the area shall be raked or chained to cover the seed. When broadcasting the seed, the pounds per acre are to be doubled. The seeding will be repeated until a satisfactory stand is established as determined by the authorized officer. Evaluation of growth will not be made before completion of at least one full growing season after seeding.

Species to be planted in pounds of pure live seed* per acre:

<u>Species</u>	<u>lb/acre</u>
Sand dropseed (<i>Sporobolus cryptandrus</i>)	1.0
Sand love grass (<i>Eragrostis trichodes</i>)	1.0
Plains bristlegrass (<i>Setaria macrostachya</i>)	2.0

*Pounds of pure live seed:

Pounds of seed x percent purity x percent germination = pounds pure live seed
(Insert Seed Mixture Here)

X. FINAL ABANDONMENT & REHABILITATION REQUIREMENTS

Upon abandonment of the well and/or when the access road is no longer in service the Authorized Officer shall issue instructions and/or orders for surface reclamation and restoration of all disturbed areas.

On private surface/federal mineral estate land the reclamation procedures on the road and well pad shall be accomplished in accordance with the private surface land owner agreement.