

Form 3160-5  
(June 2019)UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTFORM APPROVED  
OMB No. 1004-0137  
Expires: October 31, 2021**SUNDRY NOTICES AND REPORTS ON WELLS**  
**Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.**5. Lease Serial No. **NMNM43562**

6. If Indian, Allottee or Tribe Name

**SUBMIT IN TRIPLICATE - Other instructions on page 2**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other2. Name of Operator **CIMAREX ENERGY COMPANY**3a. Address **6001 DEAUVILLE BLVD STE 300N, MIDLAND, TX** 3b. Phone No. (include area code)  
**(432) 571-7800**4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
**SEC 29/T25S/R33E/NMP**

7. If Unit of CA/Agreement, Name and/or No.

8. Well Name and No. **CASCADE 29 FEDERAL/15H**9. API Well No. **3002546355**10. Field and Pool or Exploratory Area  
**Purple Sage/WC-025 G-09 S253309P; UPR WOLFCAN**11. Country or Parish, State  
**LEA/NM****12. CHECK THE APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT OR OTHER DATA**

TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off	
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Hydraulic Fracturing	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity	
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other	
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon		
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal		

13. Describe Proposed or Completed Operation: Clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports must be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 must be filed once testing has been completed. Final Abandonment Notices must be filed only after all requirements, including reclamation, have been completed and the operator has detennined that the site is ready for final inspection.)

Cimarex Energy Co. respectfully requests to change the APD as follows:

SHL/KOP Current: Unit M, Sec 29, T25S, R33E, 390 FSL & 370 FWL  
SHL/KOP New: Unit M, Sec 29, T25S, R33E, 210 FSL & 470 FWL

FTP Current: Unit M, Sec 29, T25S, R33E, 390 FSL & 330 FWL  
FTP New: Unit M, Sec 29, T25S, R33E, 100 FSL & 350 FWL

LTP/BHL Current: Unit D, Sec 29, T25S, R33E, 100 FNL & 330 FWL  
LTP/BHL New: Unit D, Sec 29, T25S, R33E, 100 FNL & 350 FWL

TVD/TD Current: 12,430TVD, 17,135MD

Continued on page 3 additional information

14. I hereby certify that the foregoing is true and correct. Name (Printed/Typed)  
**KANICIA SCHLICHTING / Ph: (432) 232-2875**

Title **Regulatory Specialist**

Signature

Date

03/07/2023

**THE SPACE FOR FEDERAL OR STATE OFFICE USE**

Approved by

**CHRISTOPHER WALLS / Ph: (575) 234-2234 / Approved**

Title **Petroleum Engineer**

Date **05/10/2023**

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office **CARLSBAD**

Title 18 U.S.C Section 1001 and Title 43 U.S.C Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on page 2)

## GENERAL INSTRUCTIONS

This form is designed for submitting proposals to perform certain well operations and reports of such operations when completed as indicated on Federal and Indian lands pursuant to applicable Federal law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local area or regional procedures and practices, are either shown below, will be issued by or may be obtained from the local Federal office.

## SPECIFIC INSTRUCTIONS

*Item 4* - Locations on Federal or Indian land should be described in accordance with Federal requirements. Consult the local Federal office for specific instructions.

*Item 13*: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by the local Federal office. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to the top of any tubing left in the hole; method of closing top of well and date well site conditioned for final inspection looking for approval of the abandonment. If the proposal will involve **hydraulic fracturing operations**, you must comply with 43 CFR 3162.3-3, including providing information about the protection of usable water. Operators should provide the best available information about all formations containing water and their depths. This information could include data and interpretation of resistivity logs run on nearby wells. Information may also be obtained from state or tribal regulatory agencies and from local BLM offices.

## NOTICES

The privacy Act of 1974 and the regulation in 43 CFR 2.48(d) provide that you be furnished the following information in connection with information required by this application.

AUTHORITY: 30 U.S.C. 181 et seq., 351 et seq., 25 U.S.C. 396; 43 CFR 3160.

PRINCIPAL PURPOSE: The information is used to: (1) Evaluate, when appropriate, approve applications, and report completion of subsequent well operations, on a Federal or Indian lease; and (2) document for administrative use, information for the management, disposal and use of National Resource lands and resources, such as: (a) evaluating the equipment and procedures to be used during a proposed subsequent well operation and reviewing the completed well operations for compliance with the approved plan; (b) requesting and granting approval to perform those actions covered by 43 CFR 3162.3-2, 3162.3-3, and 3162.3-4; (c) reporting the beginning or resumption of production, as required by 43 CFR 3162.4-1(c) and (d) analyzing future applications to drill or modify operations in light of data obtained and methods used.

ROUTINE USES: Information from the record and/or the record will be transferred to appropriate Federal, State, local or foreign agencies, when relevant to civil, criminal or regulatory investigations or prosecutions in connection with congressional inquiries or to consumer reporting agencies to facilitate collection of debts owed the Government.

EFFECT OF NOT PROVIDING THE INFORMATION: Filing of this notice and report and disclosure of the information is mandatory for those subsequent well operations specified in 43 CFR 3162.3-2, 3162.3-3, 3162.3-4.

The Paperwork Reduction Act of 1995 requires us to inform you that:

The BLM collects this information to evaluate proposed and/or completed subsequent well operations on Federal or Indian oil and gas leases.

Response to this request is mandatory.

The BLM would like you to know that you do not have to respond to this or any other Federal agency-sponsored information collection unless it displays a currently valid OMB control number.

**BURDEN HOURS STATEMENT:** Public reporting burden for this form is estimated to average 8 hours per response, including the time for reviewing instructions, gathering and maintaining data, and completing and reviewing the form. Direct comments regarding the burden estimate or any other aspect of this form to U.S. Department of the Interior, Bureau of Land Management (1004-0137), Bureau Information Collection Clearance Officer (WO-630), 1849 C St., N.W., Mail Stop 401 LS, Washington, D.C. 20240

## Additional Information

### Additional Remarks

TVD/TD New: 12,520TVD, 17,331MD

We are also requesting to omit the DV tool from the 7-5/8 intermediate casing string. In lieu of a DV tool, Coterra will retain the option to pump down the 7-5/8 annulus through casing valves with the appropriate cement slurry in the event returns to surface are not achieved on the primary job.

We will also like to request to skid the rig after surface casing and perform off line cement. Please see the attached drilling plan, BOPs, Chokes, Directional plan, OLC procedure and C102.

### Location of Well

0. SHL: SWSW / 390 FSL / 370 FWL / TWSP: 25S / RANGE: 33E / SECTION: 29 / LAT: 32.095392 / LONG: -103.60166 ( TVD: 0 feet, MD: 0 feet )

PPP: SWSW / 100 FSL / 330 FWL / TWSP: 25S / RANGE: 33E / SECTION: 29 / LAT: 32.0952222 / LONG: -103.6017889 ( TVD: 12189 feet, MD: 12211 feet )

BHL: NWNW / 100 FNL / 330 FWL / TWSP: 25S / RANGE: 33E / SECTION: 29 / LAT: 32.108557 / LONG: -103.601783 ( TVD: 12430 feet, MD: 17135 feet )

District I  
1625 N. French Dr., Hobbs, NM 88240  
Phone: (575) 393-6161 Fax: (575) 393-0720  
District II  
811 S. First St., Artesia, NM 88210  
Phone: (575) 748-1283 Fax: (575) 748-9720  
District III  
1000 Rio Brazos Road, Aztec, NM 87410  
Phone: (505) 334-6178 Fax: (505) 334-6170  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505  
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico  
Energy, Minerals & Natural Resources Department  
OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Form C-102  
Revised August 1, 2011  
Submit one copy to appropriate  
District Office  
☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

<sup>1</sup> API Number 30-025-46355		<sup>2</sup> Pool Code 98180	<sup>3</sup> Pool Name WC-025 G-09 S253309P; UPR Wolfcamp
<sup>4</sup> Property Code 39981	<sup>5</sup> Property Name CASCADE 29 FEDERAL		<sup>6</sup> Well Number 15H
<sup>7</sup> OGRID No. 215099	<sup>8</sup> Operator Name CIMAREX ENERGY CO.		<sup>9</sup> Elevation 3401.2'


<sup>10</sup> Surface Location

UL or lot no. M	Section 29	Township 25S	Range 33E	Lot Idn	Feet from the 210	North/South line SOUTH	Feet from the 470	East/West line WEST	County LEA
--------------------	---------------	-----------------	--------------	---------	----------------------	---------------------------	----------------------	------------------------	---------------

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no. D	Section 29	Township 25S	Range 33E	Lot Idn	Feet from the 100	North/South line NORTH	Feet from the 350	East/West line WEST	County LEA
<sup>12</sup> Dedicated Acres 320		<sup>13</sup> Joint or Infill		<sup>14</sup> Consolidation Code		<sup>15</sup> Order No.			

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

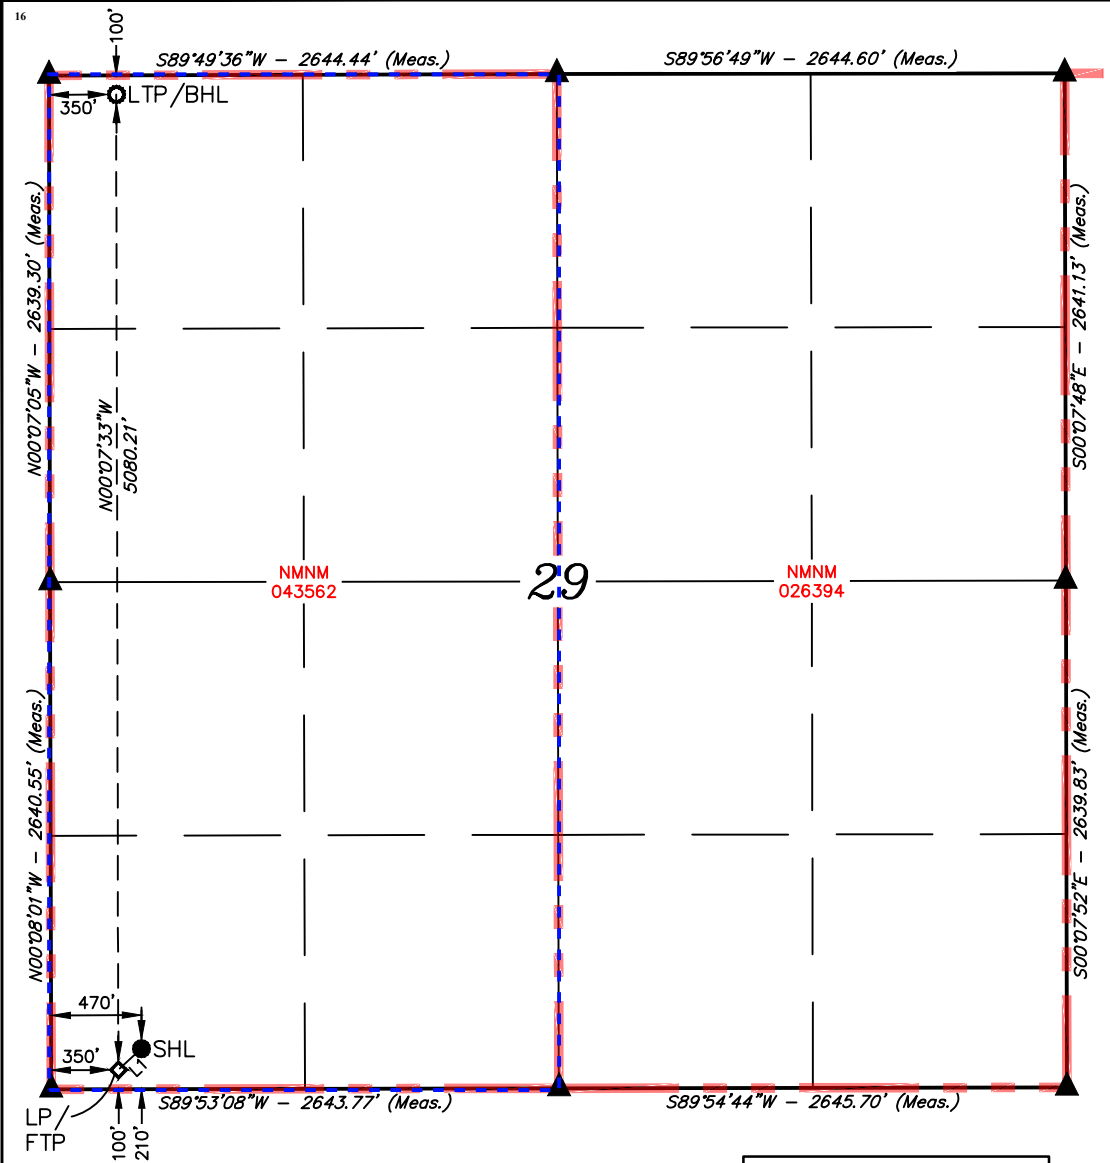

<b>NAD 83 (SURFACE HOLE LOCATION)</b> LATITUDE = 32°05'41.63" (32.094897°) LONGITUDE = 103°36'04.82" (103.601338°)
<b>NAD 27 (SURFACE HOLE LOCATION)</b> LATITUDE = 32°05'41.18" (32.094772°) LONGITUDE = 103°36'03.12" (103.600866°)
<b>STATE PLANE NAD 83 (N.M. EAST)</b> N: 399029.65' E: 768016.12'
<b>STATE PLANE NAD 27 (N.M. EAST)</b> N: 398972.00' E: 726829.72'
<b>NAD 83 (LP/FTP)</b> LATITUDE = 32°05'40.54" (32.094595°) LONGITUDE = 103°36'06.21" (103.601725°)
<b>NAD 27 (LP/FTP)</b> LATITUDE = 32°05'40.09" (32.094470°) LONGITUDE = 103°36'04.51" (103.601254°)
<b>STATE PLANE NAD 83 (N.M. EAST)</b> N: 398918.95' E: 767896.89'
<b>STATE PLANE NAD 27 (N.M. EAST)</b> N: 398861.30' E: 726710.49'
<b>NAD 83 (LTP/BHL)</b> LATITUDE = 32°06'30.81" (32.108557°) LONGITUDE = 103°36'06.19" (103.601718°)
<b>NAD 27 (LTP/BHL)</b> LATITUDE = 32°06'30.36" (32.108432°) LONGITUDE = 103°36'04.49" (103.601246°)
<b>STATE PLANE NAD 83 (N.M. EAST)</b> N: 403998.18' E: 767864.53'
<b>STATE PLANE NAD 27 (N.M. EAST)</b> N: 403940.40' E: 726678.37'

LINE TABLE		
LINE	DIRECTION	LENGTH
L1	S47°21'41"W	162.73'

NOTE:

- Distances referenced on plat to section lines are perpendicular.
- Basis of Bearing is a Transverse Mercator Projection with a Central Meridian of W103°53'00"

- = SURFACE HOLE LOCATION
- ◆ = LANDING POINT/ FIRST TAKE POINT
- = LAST TAKE POINT/ BOTTOM HOLE LOCATION
- ▲ = SECTION CORNER LOCATED



SCALE

DRAWN BY: C.M.T. 08-07-18  
REV: 2 02-07-23 D.M.C.  
(SHL, FTP & BHL MOVE)

<sup>17</sup> OPERATOR  
CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division.

 3/7/23  
Signature Date

Kanicia Schlichting  
Printed Name

kanicia.schlichting@coterra.com  
E-mail Address

<sup>18</sup> SURVEYOR  
CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

July 07, 2018

Date of Survey  
Signature and Seal of Professional Surveyor:



Certificate Number:




Cascade 29 Fed 15H

CACTUS FOR SERVICE  
WEARBUSHING  
IN CASING HEAD &  
CASING SPOOL

LEA CO., NM

2. Casing Program

Hole Size	Casing Depth From	Casing Depth To	Setting Depth TVD	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
14 3/4	0	988	988	10-3/4"	40.50	J-55	BT&C	3.69	7.31	15.72
9 7/8	0	12680	12481	7-5/8"	29.70	L-80	BT&C	2.45	1.18	1.79
6 3/4	0	11930	11930	5-1/2"	20.00	L-80	LT&C	1.14	1.19	1.85
6 3/4	11930	17331	12520	5"	18.00	HCP-110	BT&C	1.65	1.67	54.61
BLM Minimum Safety Factor								1.125	1	1.6 Dry 1.8 Wet

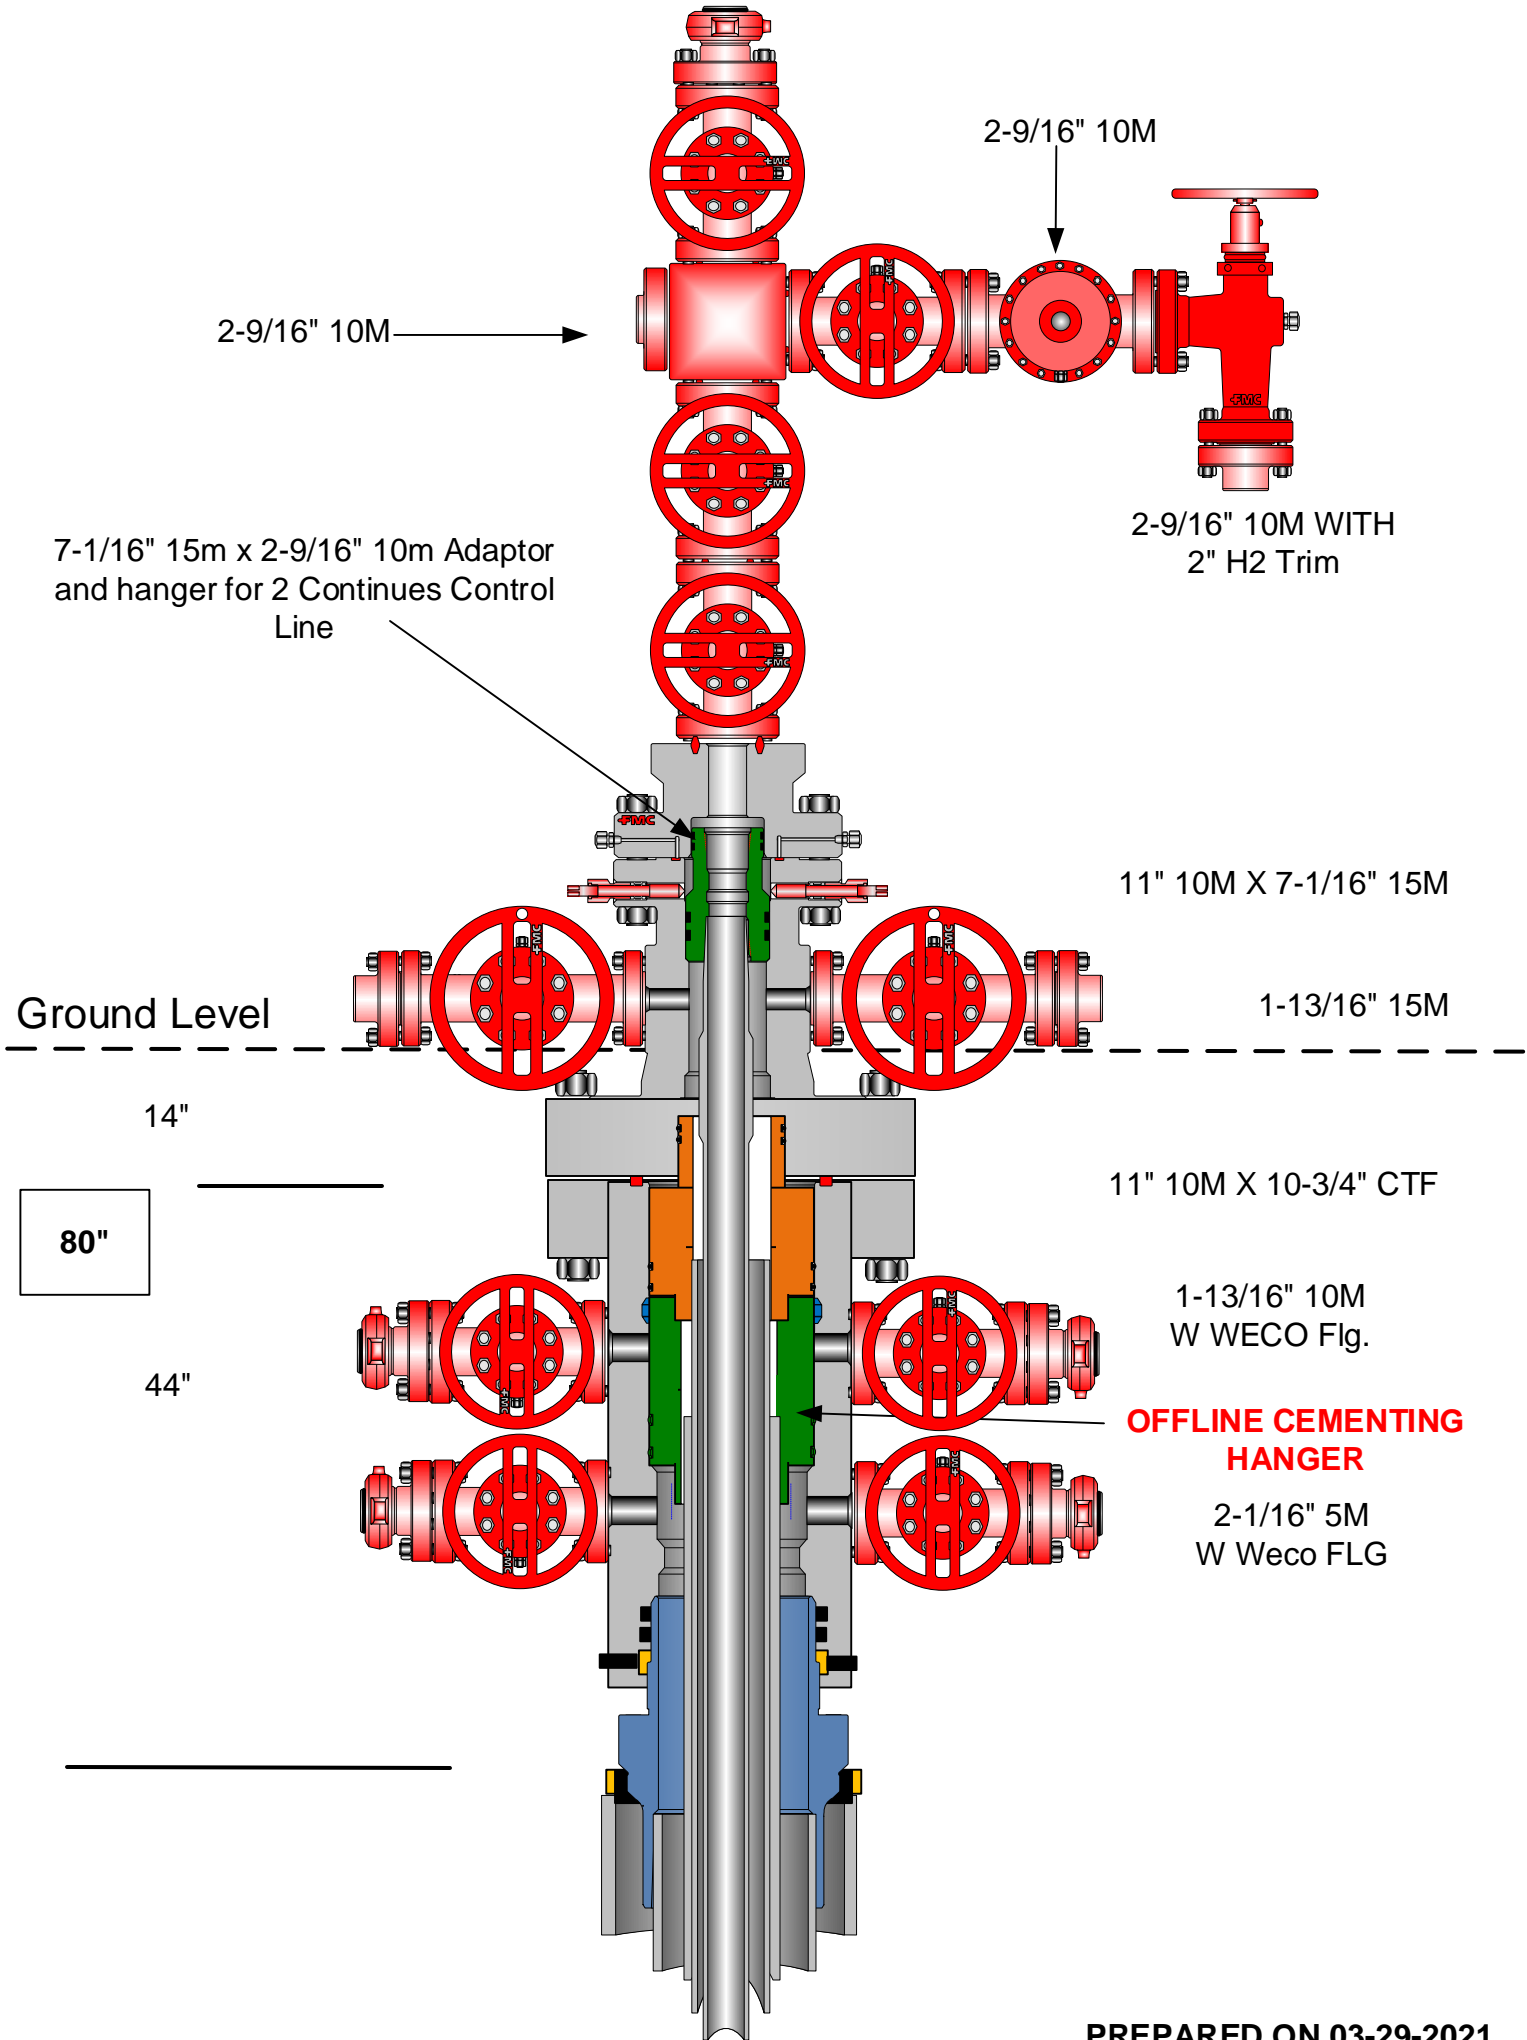

PREPARED ON 03-29-2021

Drilling 6-3/4"  
hole below  
7-5/8" Casing

Fill Line

Flowline

5000# (5M)  
BOP

Annular Preventer

SRR & A

Pipe Rams

Blind Rams

2" Minimum Kill Line

Kill Line

Drilling  
Spool

3" minimum choke line

Choke Line

2 Valves Minimum  
(HCR Required)

2 Valves and a check valve

Wellhead  
Assembly


11" 5000 psi x 7-1/16" 10,000 psi  
Wellhead Assembly

Wellhead  
Assembly


13-5/8" 3000 psi x 11" 5000 psi  
Wellhead Assembly

5000# BOP  
Cimarex Energy Co.

13-5/8" 3000# psi x 13-3/8" SOW Casing Head

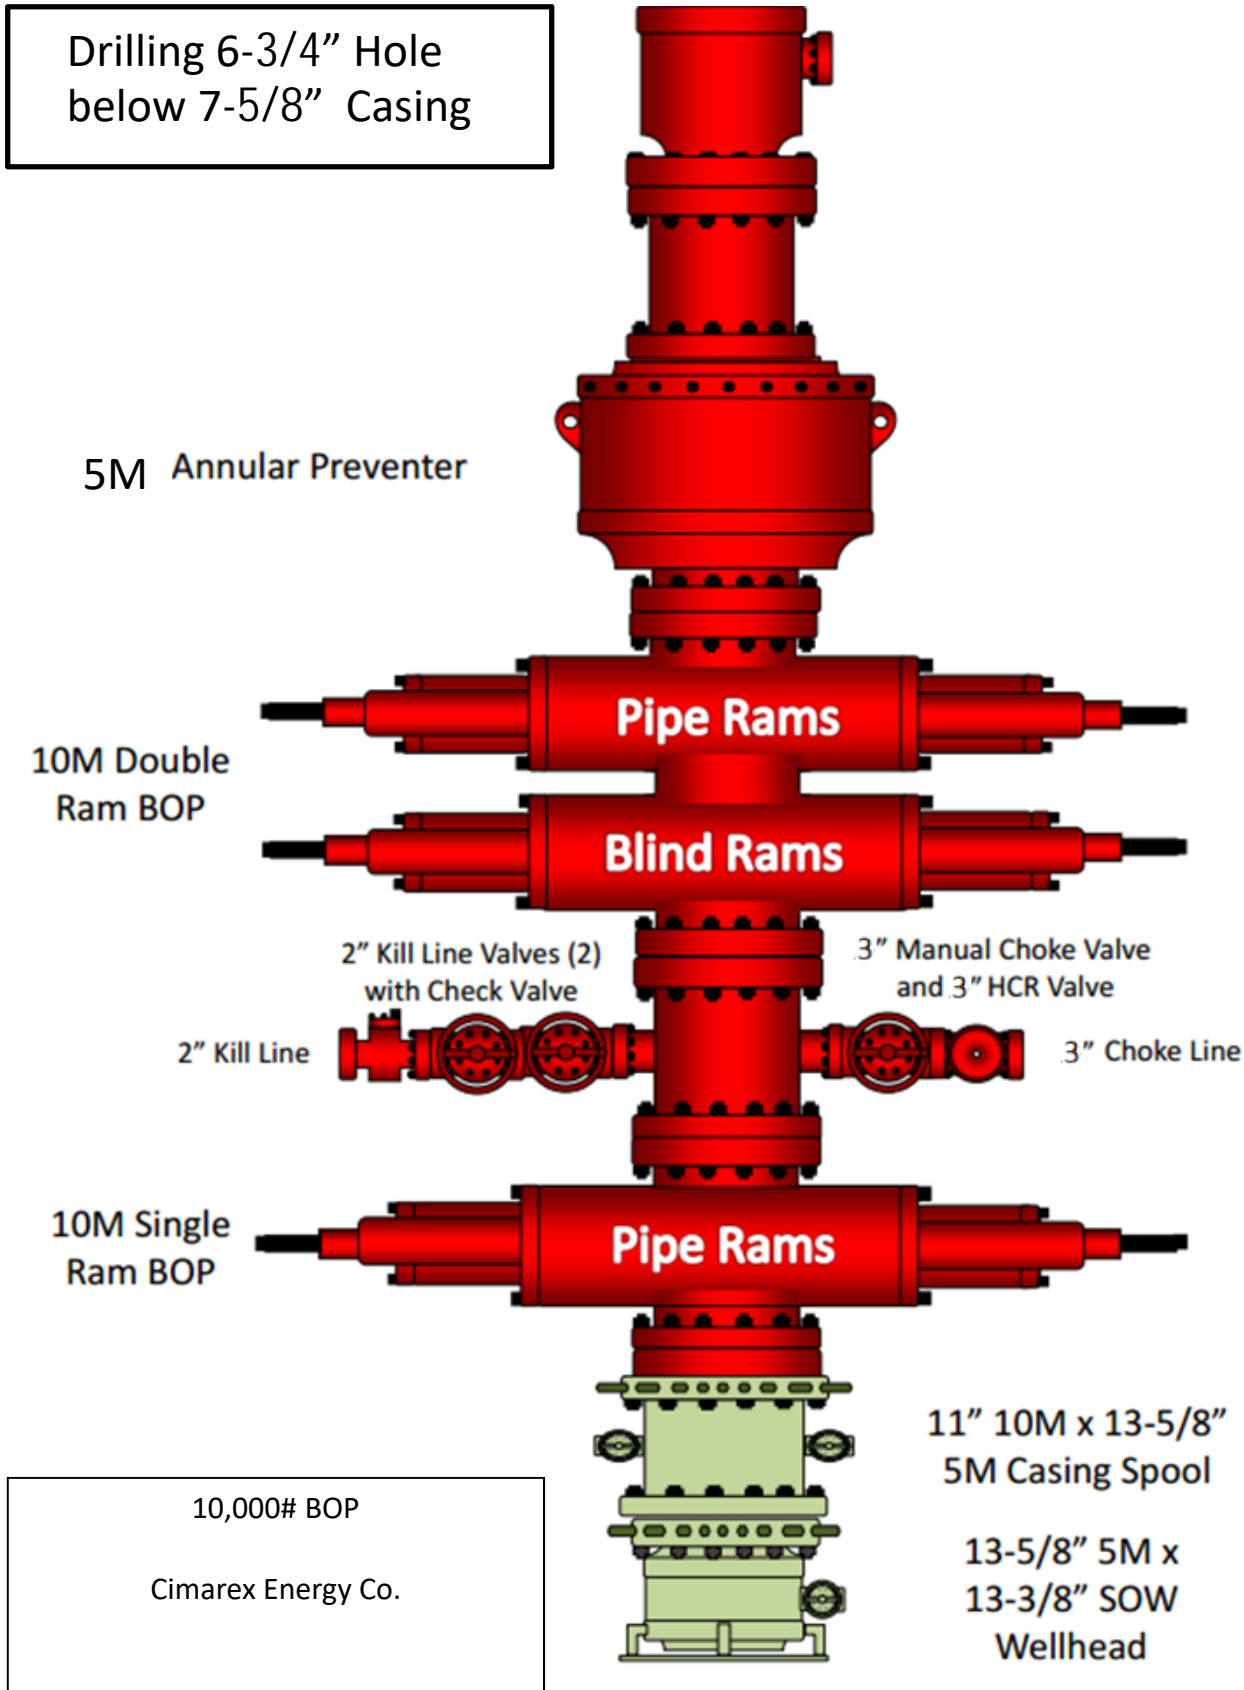



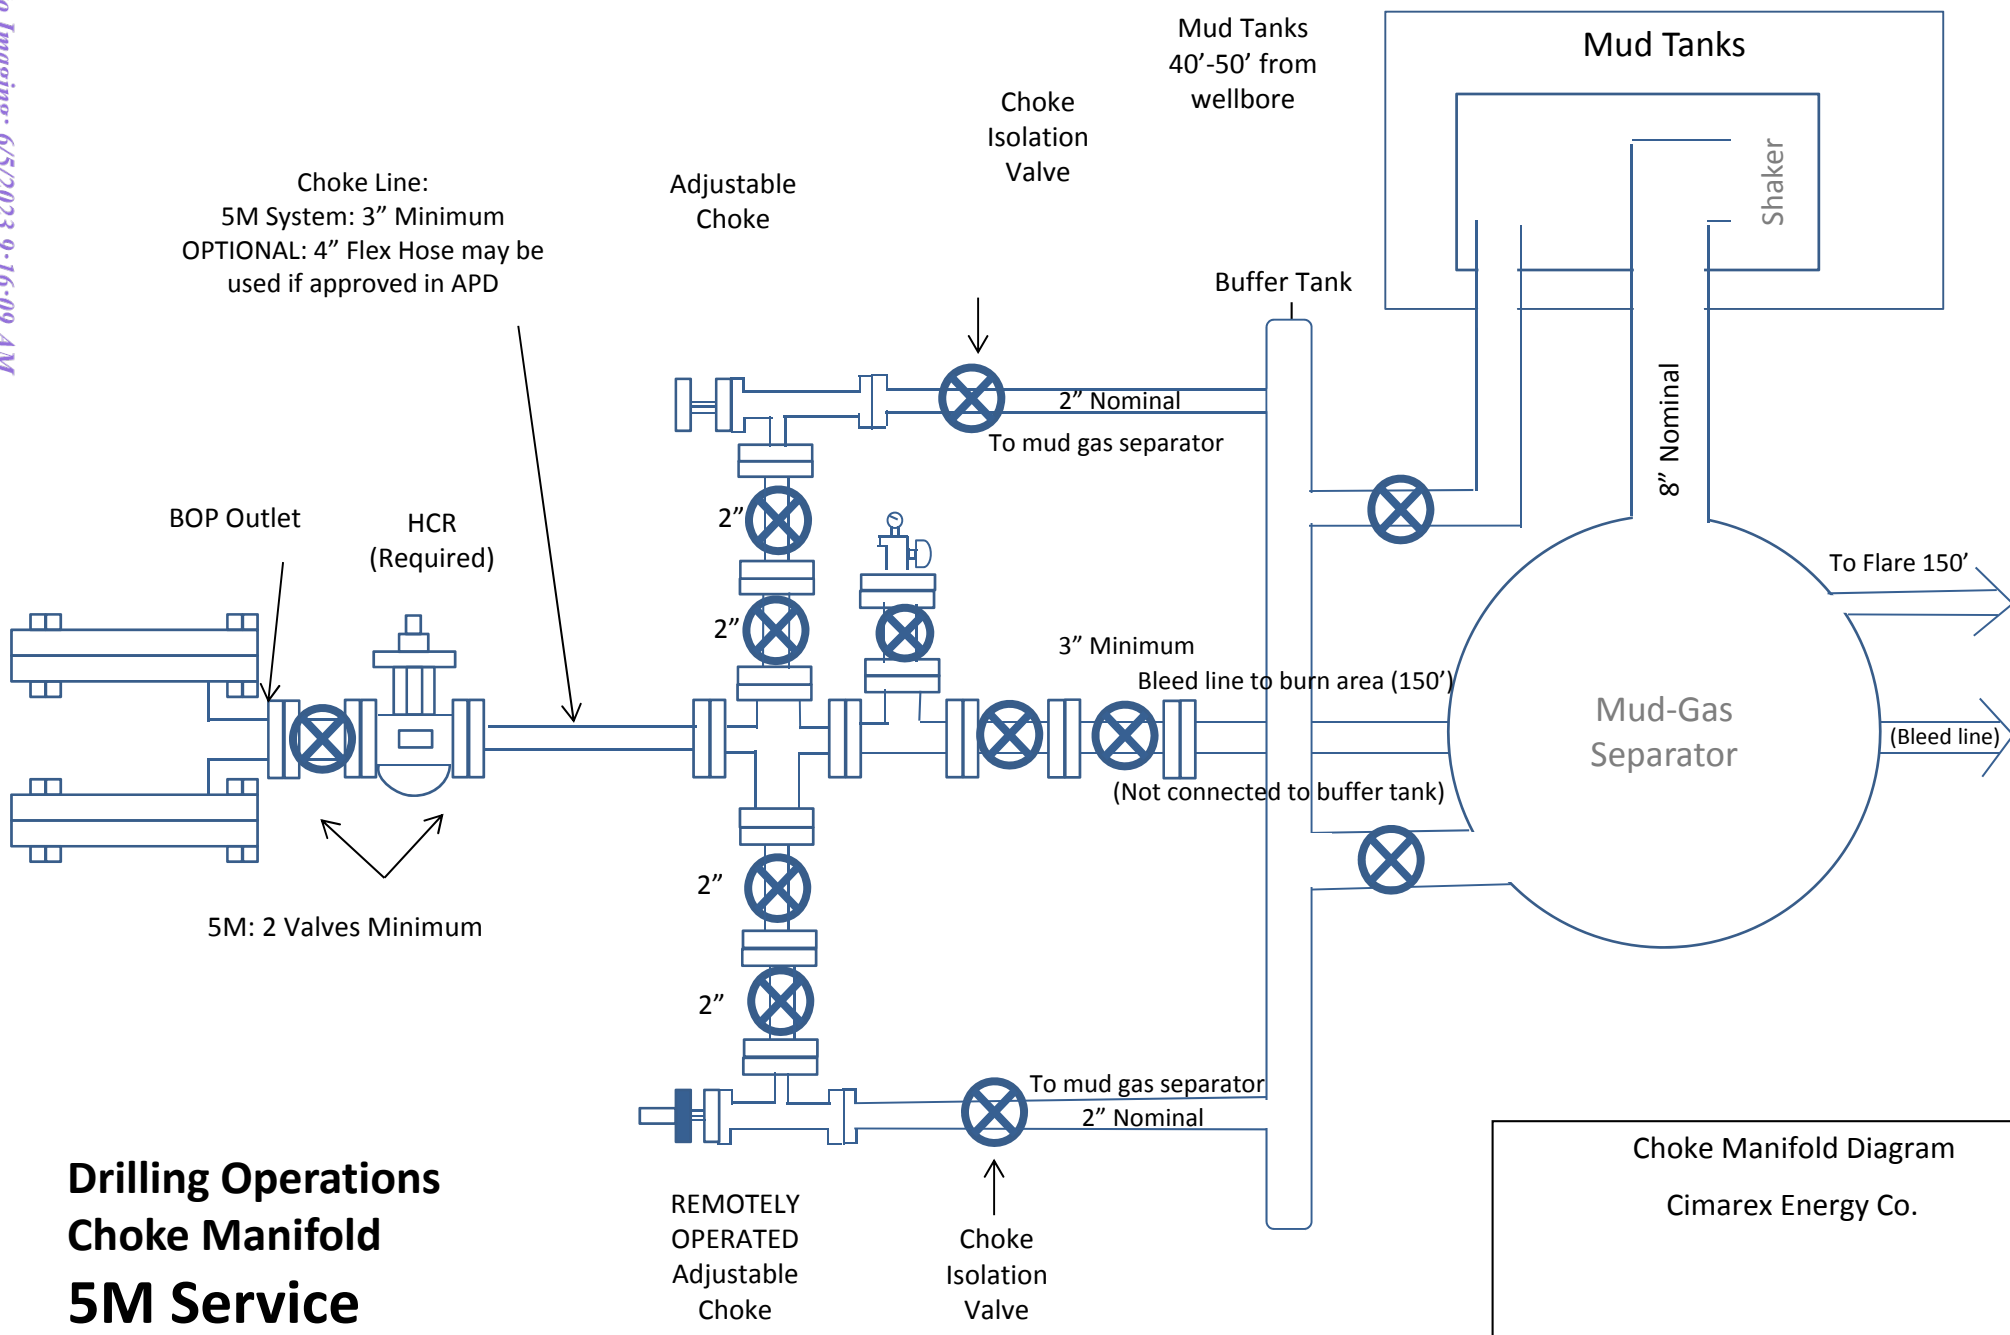


## Drilling Operations Choke Manifold 5M Service



# Drilling Operations Choke Manifold 10M Service

4" Choke Line:  
OPTIONAL: 4" Flex Hose may be  
used if approved in APD

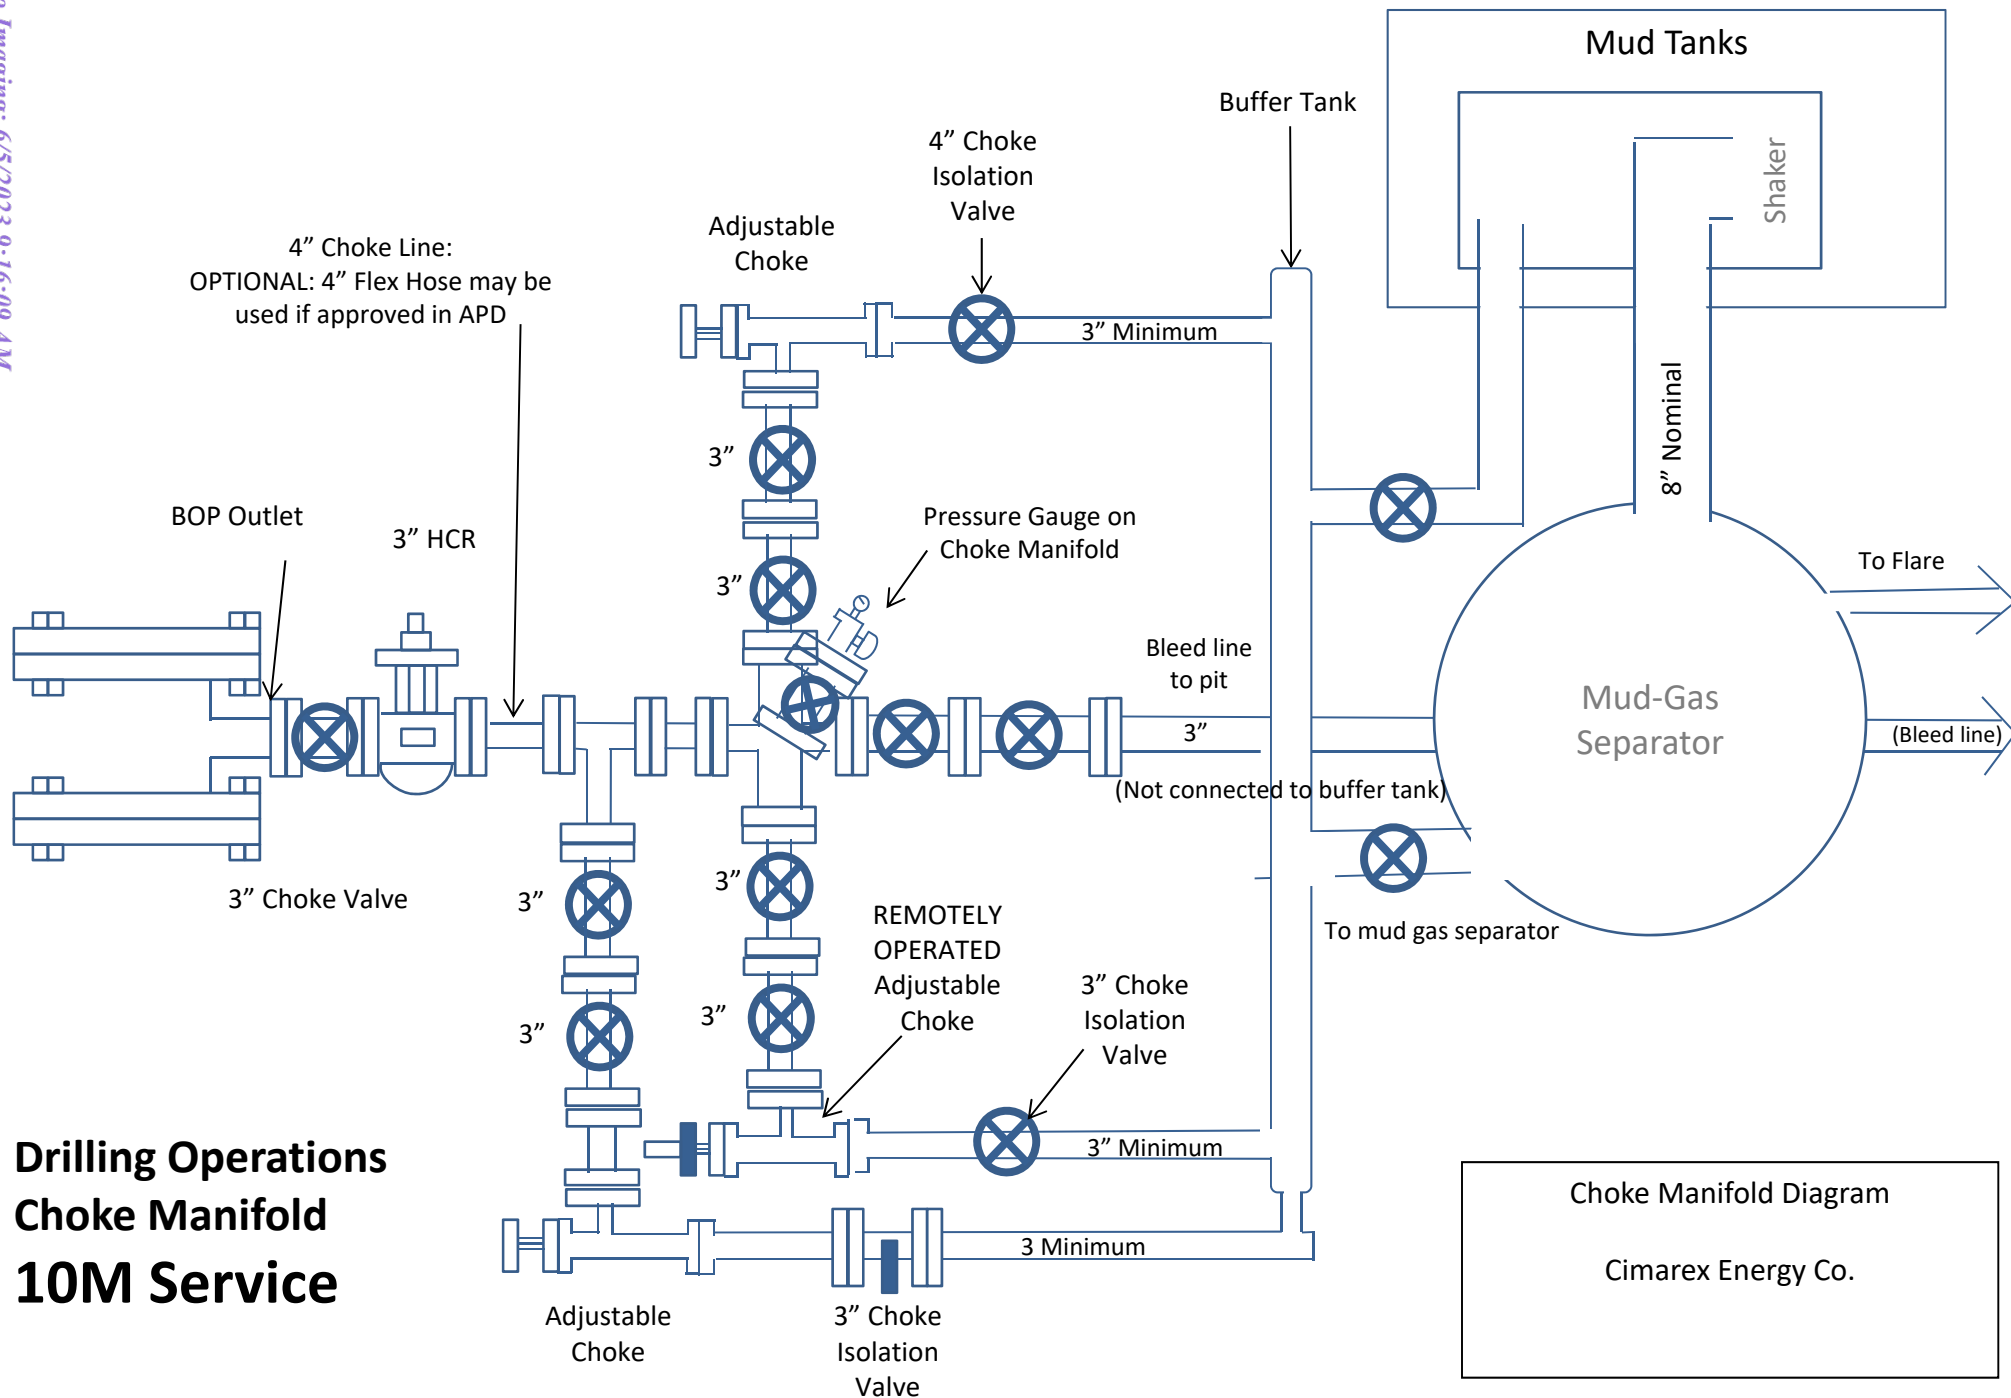

Choke Manifold Diagram  
Cimarex Energy Co.

**1. Geological Formations**

TVD of target 12,520

Pilot Hole TD N/A

MD at TD 17,331

Deepest expected fresh water

Formation	Depth (TVD) from KB	Water/Mineral Bearing/Target Zone	Hazards
Rustler	935	Useable Water	
Top of Salt	1298	N/A	
Base of Salt	4714	N/A	
Lamar	4909	N/A	
Bell Canyon	4937	N/A	
Cherry Canyon	5990	N/A	
Brushy Canyon	7536	Hydrocarbons	
Bone Spring	9032	Hydrocarbons	
Avalon Shale	9312	Hydrocarbons	
Wolfcamp	12189	Hydrocarbons	

**2. Casing Program**

Hole Size	Casing Depth From	Casing Depth To	Setting Depth TVD	Casing Size	Weight (lb/ft)	Grade	Conn.	SF Collapse	SF Burst	SF Tension
14 3/4	0	988	988	10-3/4"	40.50	J-55	BT&C	3.69	7.31	15.72
9 7/8	0	12680	12481	7-5/8"	29.70	L-80	BT&C	2.45	1.18	1.79
6 3/4	0	11930	11930	5-1/2"	20.00	L-80	LT&C	1.14	1.19	1.85
6 3/4	11930	17331	12520	5"	18.00	HCP-110	BT&C	1.65	1.67	54.61
BLM Minimum Safety Factor								1.125	1	1.6 Dry 1.8 Wet

TVD was used on all calculations.

All casing strings will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.h

Request Variance for 5-1/2" x 7-5/8" annular clearance. The portion that does not meet clearance will not be cemented

DV Tool: Coterra is requesting to omit the DV tool from the 7-5/8" intermediate casing string. In lieu of a DV tool, Coterra will retain the option to pump down the 7-5/8" annulus through casing valves with the appropriate cement slurry in the event returns to surface are not achieved on the primary job.

## Cimarex Energy Co., Cascade 29 Federal #15H

	Y or N
Is casing new? If used, attach certification as required in Onshore Order #1	Y
Does casing meet API specifications? If no, attach casing specification sheet.	Y
Is premium or uncommon casing planned? If yes attach casing specification sheet.	Y
Does the above casing design meet or exceed BLM's minimum standards? If not provide justification (loading assumptions, casing design criteria).	Y
Will the intermediate pipe be kept at a minimum 1/3 fluid filled to avoid approaching the collapse pressure rating of the casing?	Y
Is well located within Capitan Reef?	N
If yes, does production casing cement tie back a minimum of 50' above the Reef?	N
Is well within the designated 4 string boundary.	N
Is well located in SOPA but not in R-111-P?	N
If yes, are the first 2 strings cemented to surface and 3rd string cement tied back 500' into previous casing?	N
Is well located in R-111-P and SOPA?	N
If yes, are the first three strings cemented to surface?	N
Is 2nd string set 100' to 600' below the base of salt?	N
Is well located in high Cave/Karst?	N
If yes, are there two strings cemented to surface?	N
(For 2 string wells) If yes, is there a contingency casing if lost circulation occurs?	N
Is well located in critical Cave/Karst?	N
If yes, are there three strings cemented to surface?	N
Is AC Report included?	Y

**3. Cementing Program**

Casing	# Sk	Wt. lb/gal	Yld ft <sup>3</sup> /sack	H <sub>2</sub> O gal/sk	500# Comp. Strength (hours)	Slurry Description
Surface	334	13.50	1.72	9.15	15.5	Lead: Class C + Bentonite
	156	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Intermediate	1010	10.30	3.64	22.18		Lead: Tuned Light + LCM
	200	14.80	1.34	6.32	9.5	Tail: Class C + LCM
Production	700	14.20	1.30	5.86	14:30	Tail: 50:50 (Poz:H) + Salt + Bentonite + Fluid Loss + Dispersant + SMS

Casing String	TOC	% Excess
Surface	0	42
Intermediate	0	49
Production	12480	25

Cimarex request the ability to perform casing integrity tests after plug bump of cement job.

**4. Pressure Control Equipment**

A variance is requested for the use of a diverter on the surface casing. See attached for schematic.					
BOP installed and tested before drilling which hole?	Size	Min Required WP	Type		Tested To
9 7/8	13 5/8	5M	Annular	X	5M
			Blind Ram		
			Pipe Ram	X	
			Double Ram	X	
			Other		
6 3/4	13 5/8	10M	Annular	X	50% of working pressure
			Blind Ram		10M
			Pipe Ram	X	
			Double Ram	X	
			Other		

BOP/BOPE will be tested by an independent service company to 250 psi low and the high pressure indicated above per Onshore Order 2 requirements. The System may be upgraded to a higher pressure but still tested to the working pressure listed in the table above. If the system is upgraded all the components installed will be functional and tested.

Pipe rams will be operationally checked each 24 hour period. Blind rams will be operationally checked on each trip out of the hole. These checks will be noted on the daily tour sheets. Other accessories to the BOP equipment will include a Kelly cock and floor safety valve (inside BOP) and choke lines and choke manifold. See attached schematics.

X	Formation integrity test will be performed per Onshore Order #2. On Exploratory wells or on that portion of any well approved for a 5M BOPE system or greater, a pressure integrity test of each casing shoe shall be performed. Will be tested in accordance with Onshore Oil and Gas Order #2 III.B.1.i.
X	A variance is requested for the use of a flexible choke line from the BOP to Choke Manifold. See attached for specs and hydrostatic test chart.
N	Are anchors required by manufacturer?

**5. Mud Program**

Depth	Type	Weight (ppg)	Viscosity	Water Loss
0' to 988'	FW Spud Mud	7.83 - 8.33	30-32	N/C
988' to 12680'	Brine Diesel Emulsion	8.50 - 9.00	30-35	N/C
12680' to 17331'	Oil Based Mud	12.00 - 12.50	50-70	N/C

Sufficient mud materials to maintain mud properties and meet minimum lost circulation and weight increase requirements will be kept on location at all times.

The Brine Emulsion is completely saturated brine fluid that ties diesel into itself to lower the weight of the fluid. The drilling fluid is completely salt saturated.

What will be used to monitor the loss or gain of fluid?	PVT/Pason/Visual Monitoring
---	-----------------------------

**6. Logging and Testing Procedures**

Logging, Coring and Testing	
	Will run GR/CNL from TD to surface (horizontal well – vertical portion of hole). Stated logs run will be in the Completion Report and submitted to the BLM.
X	No logs are planned based on well control or offset log information.
	Drill stem test?
	Coring?

Additional Logs Planned	Interval
-------------------------	----------

**7. Drilling Conditions**

Condition	
BH Pressure at deepest TVD	8138 psi
Abnormal Temperature	No

Hydrogen Sulfide (H<sub>2</sub>S) monitors will be installed prior to drilling out the surface shoe. If H<sub>2</sub>S is detected in concentrations greater than 100 ppm, the operator will comply with the provisions of Onshore Oil and Gas Order #6. If Hydrogen Sulfide is encountered, measured values and formations will be provided to the BLM.

X	H <sub>2</sub> S is present
X	H <sub>2</sub> S plan is attached

**8. Other Facets of Operation****9. Wellhead**

A multi-bowl wellhead system will be utilized.

After running the 10-3/4" surface casing, a 13 5/8" BOP/BOPE system with a minimum working pressure of 10000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 10000 psi test. Annular will be tested to working pressure, or a maximum test pressure of 5000 psi. The pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The multi-bowl wellhead will be installed by vendor's representative. A copy of the installation instructions has been sent to the BLM field office.

The wellhead will be installed by a third-party welder while being monitored by the wellhead vendor representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 10000 psi.

All casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft or 1,500 whichever is greater and not to exceed 70% of casing burst.

If well conditions dictate conventional slips will be set and BOPE will be tested to appropriate pressures based on permitted pressure requirements.

#### 10. Other Variances

Cimarex requests to perform offline cementing. OLC procedure as follows: 1. Land casing on solid body mandrel hanger. Engage pack off and lock ring 2. Install BPV. 3. Skid rig. 4. Check for pressure and remove BPV. 5. Circulate down casing, taking returns through casing valves. 6. Pump lead and tail cement. 7. Displace cement and bump the plug. 8. Ensure floats are holding pressure. 9. RD cement crew. 10. Install BPV and TA cap.

Cimarex requests permission to skid the rig to the next well on the pad to begin operations instead of waiting 8 hours for surface cement to harden on this 15H well. Surface cement will be pumped and we will ensure floats hold, do a green cement test and then skid to the next well on pad. We will not perform any operations on this 15H well until at least 8 hours and when both tail and lead slurry reach 500 psi. The mandrel hanger is made up on the last joint of 10 3/4" casing and then lowered down with and landing joint. It is then lowered down until the mandrel contacts the landing ring which is pre-welded to the conductor pipe. At this point the 10 3/4" casing is entirely supported by the conductor pipe via the landing ring/mandrel and is independent from the rig. This allows us to walk the rig away from the 15H well and begin work on the next well while the cement is hardening. There is no way for the casing to be moved or knocked off center since it is hanging from the landing ring.



## **Tapered Production Specs**

### **5.5" 23# L80 LT&C**

Burst-14530 psi

Collapse-14540

Tension-729000 lbs/ft

### **5" 18# P110 BT&C**

Burst-13940

Collapse-13470

Tension-580000/ body 388000/ joint

# Cementing Operational Workflow

---

## Conventional Cementing


1. Land casing on fluted mandrel hanger
2. Circulate down casing, taking returns through BOP stack
3. Pump lead and tail cement
4. Displace cement and bump the plug
5. Ensure floats are holding pressure
6. RD cement crew
7. Install packoff to isolate pressure
8. Install BPV and skid rig

## Offline Cementing

1. Land casing on **solid body** mandrel hanger
  - a) Engage packoff and lockring
2. Install BPV
3. Skid rig
4. Check for pressure and remove BPV
5. Circulate down casing, taking returns through casing valves
6. Pump lead and tail cement
7. Displace cement and bump the plug
8. Ensure floats are holding pressure
9. RD cement crew
10. Install BPV and TA cap


# Conventional Cementing Equipment-Fluted Mandrel

- Fluted Hanger allows returns up past the hanger body
- Returns throughout cement job flow up through BOP stack and into flowline
- Packoff is installed **after** cement job to isolate pressure above and below hanger
- Lockring engaged during packoff installation

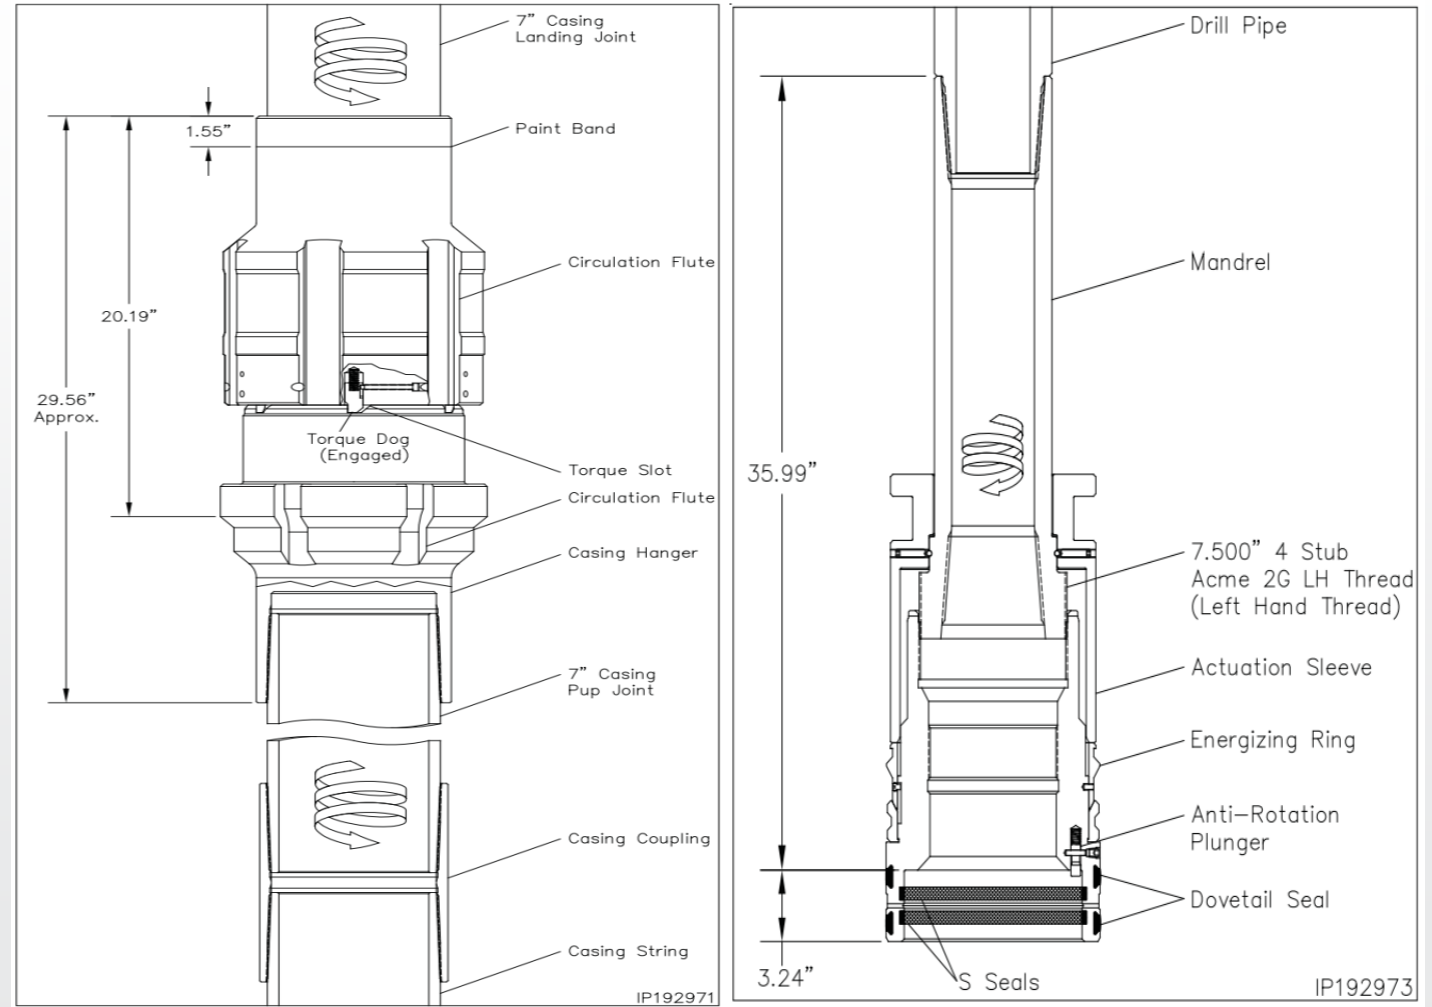


# Offline Cementing Equipment-Solid Body Mandrel Hanger


- Solid Body Mandrel Hanger allows for casing to be landed and pressure isolated in one step, **prior** to cementing
- Lockring is engaged to lock casing in place
- Casing is isolated and returns throughout cement job flow through the casing valves and through flowback iron independent of rig

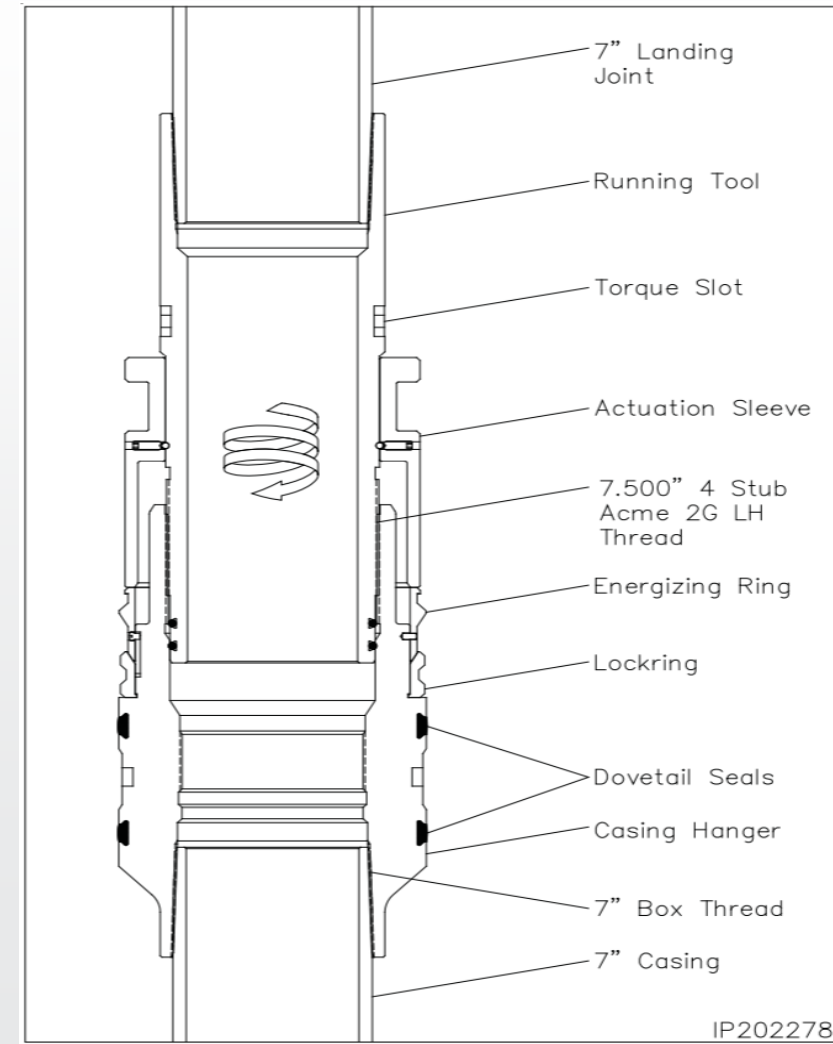


# Conventional Cementing Flow Diagram

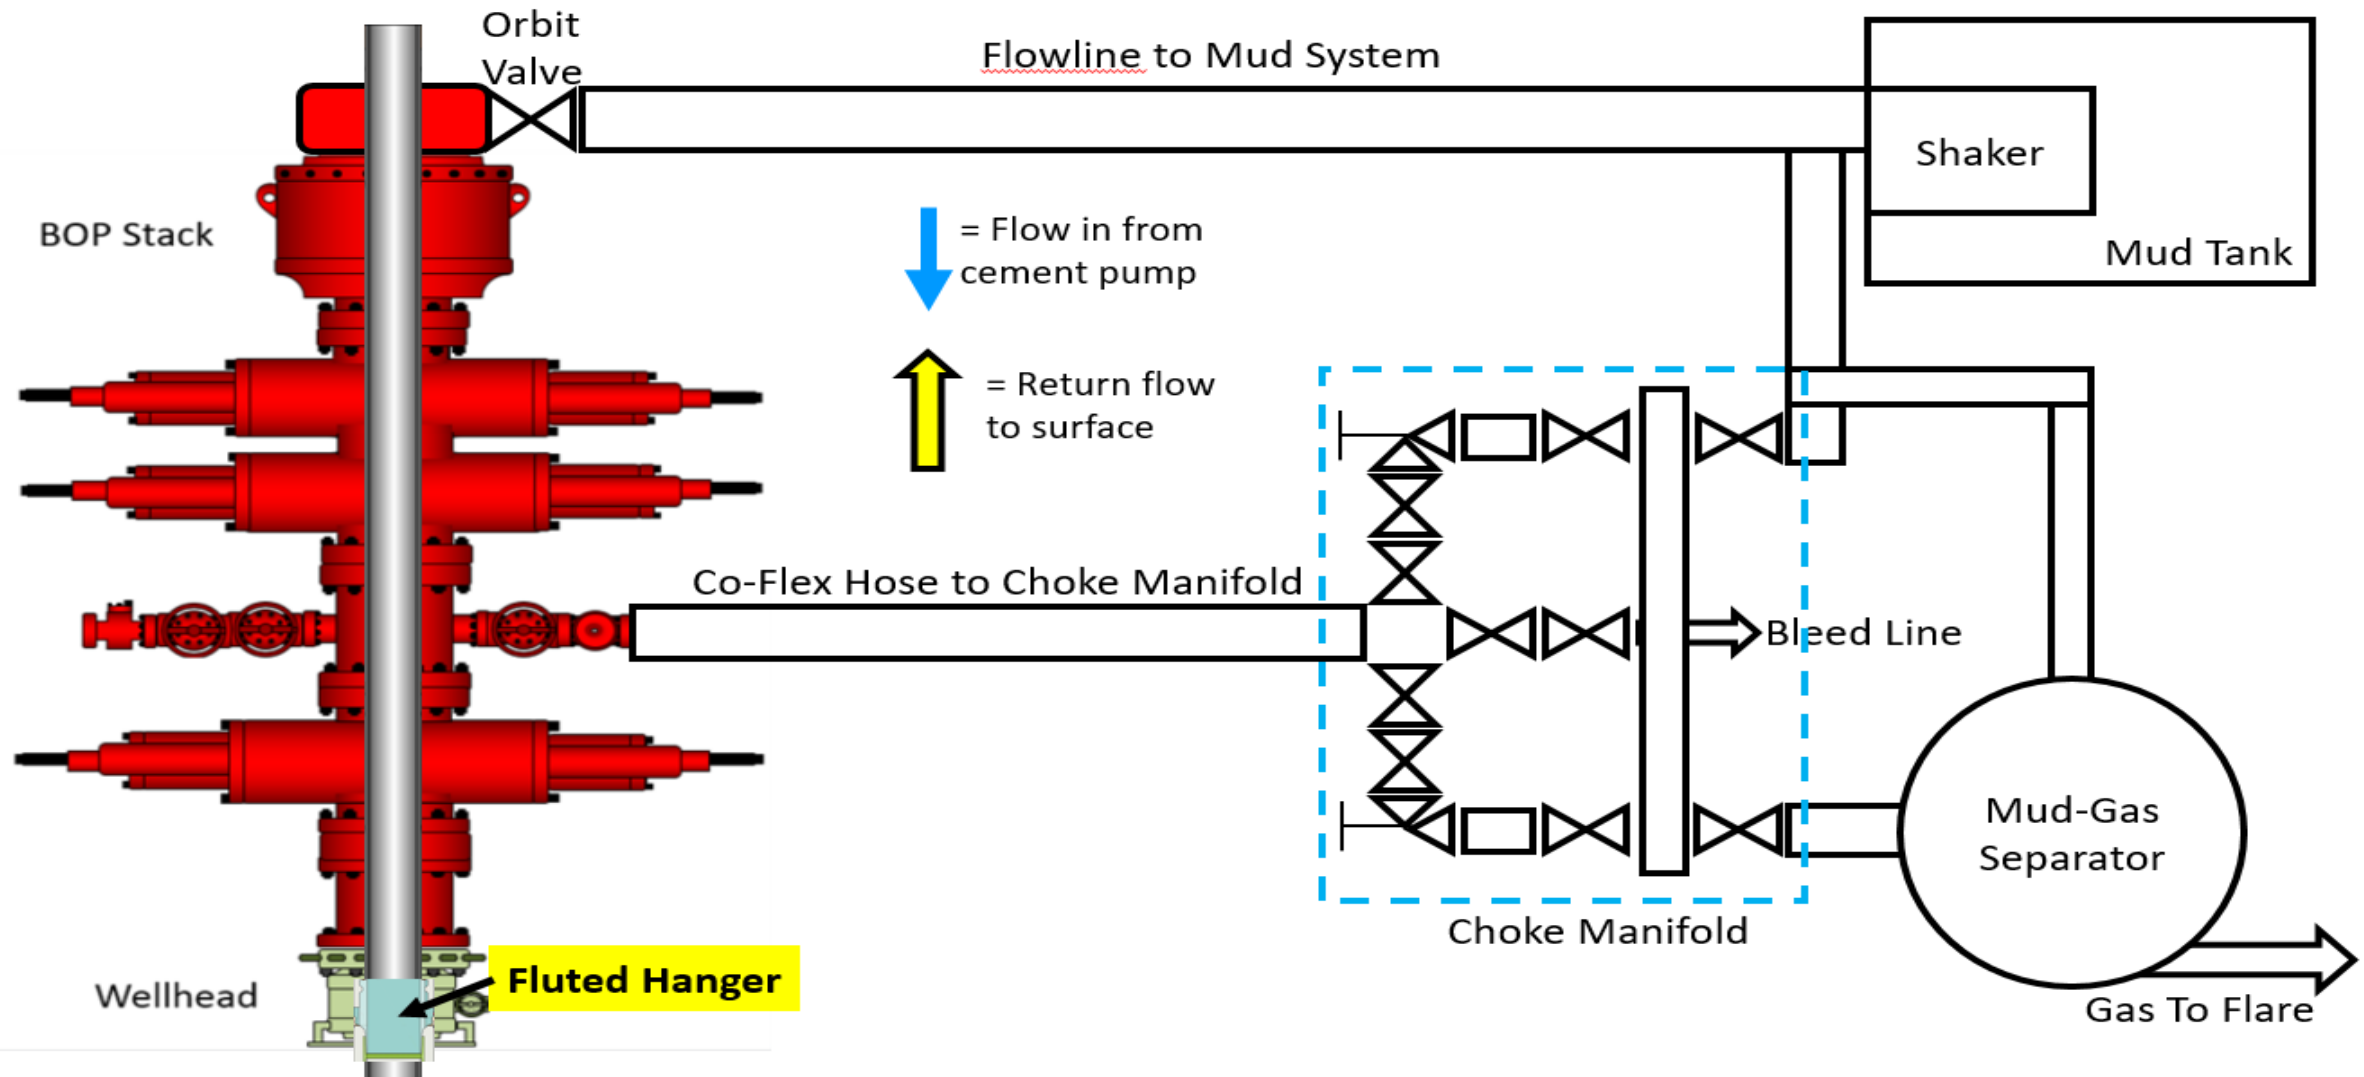

# Conventional Cementing Flow Diagram

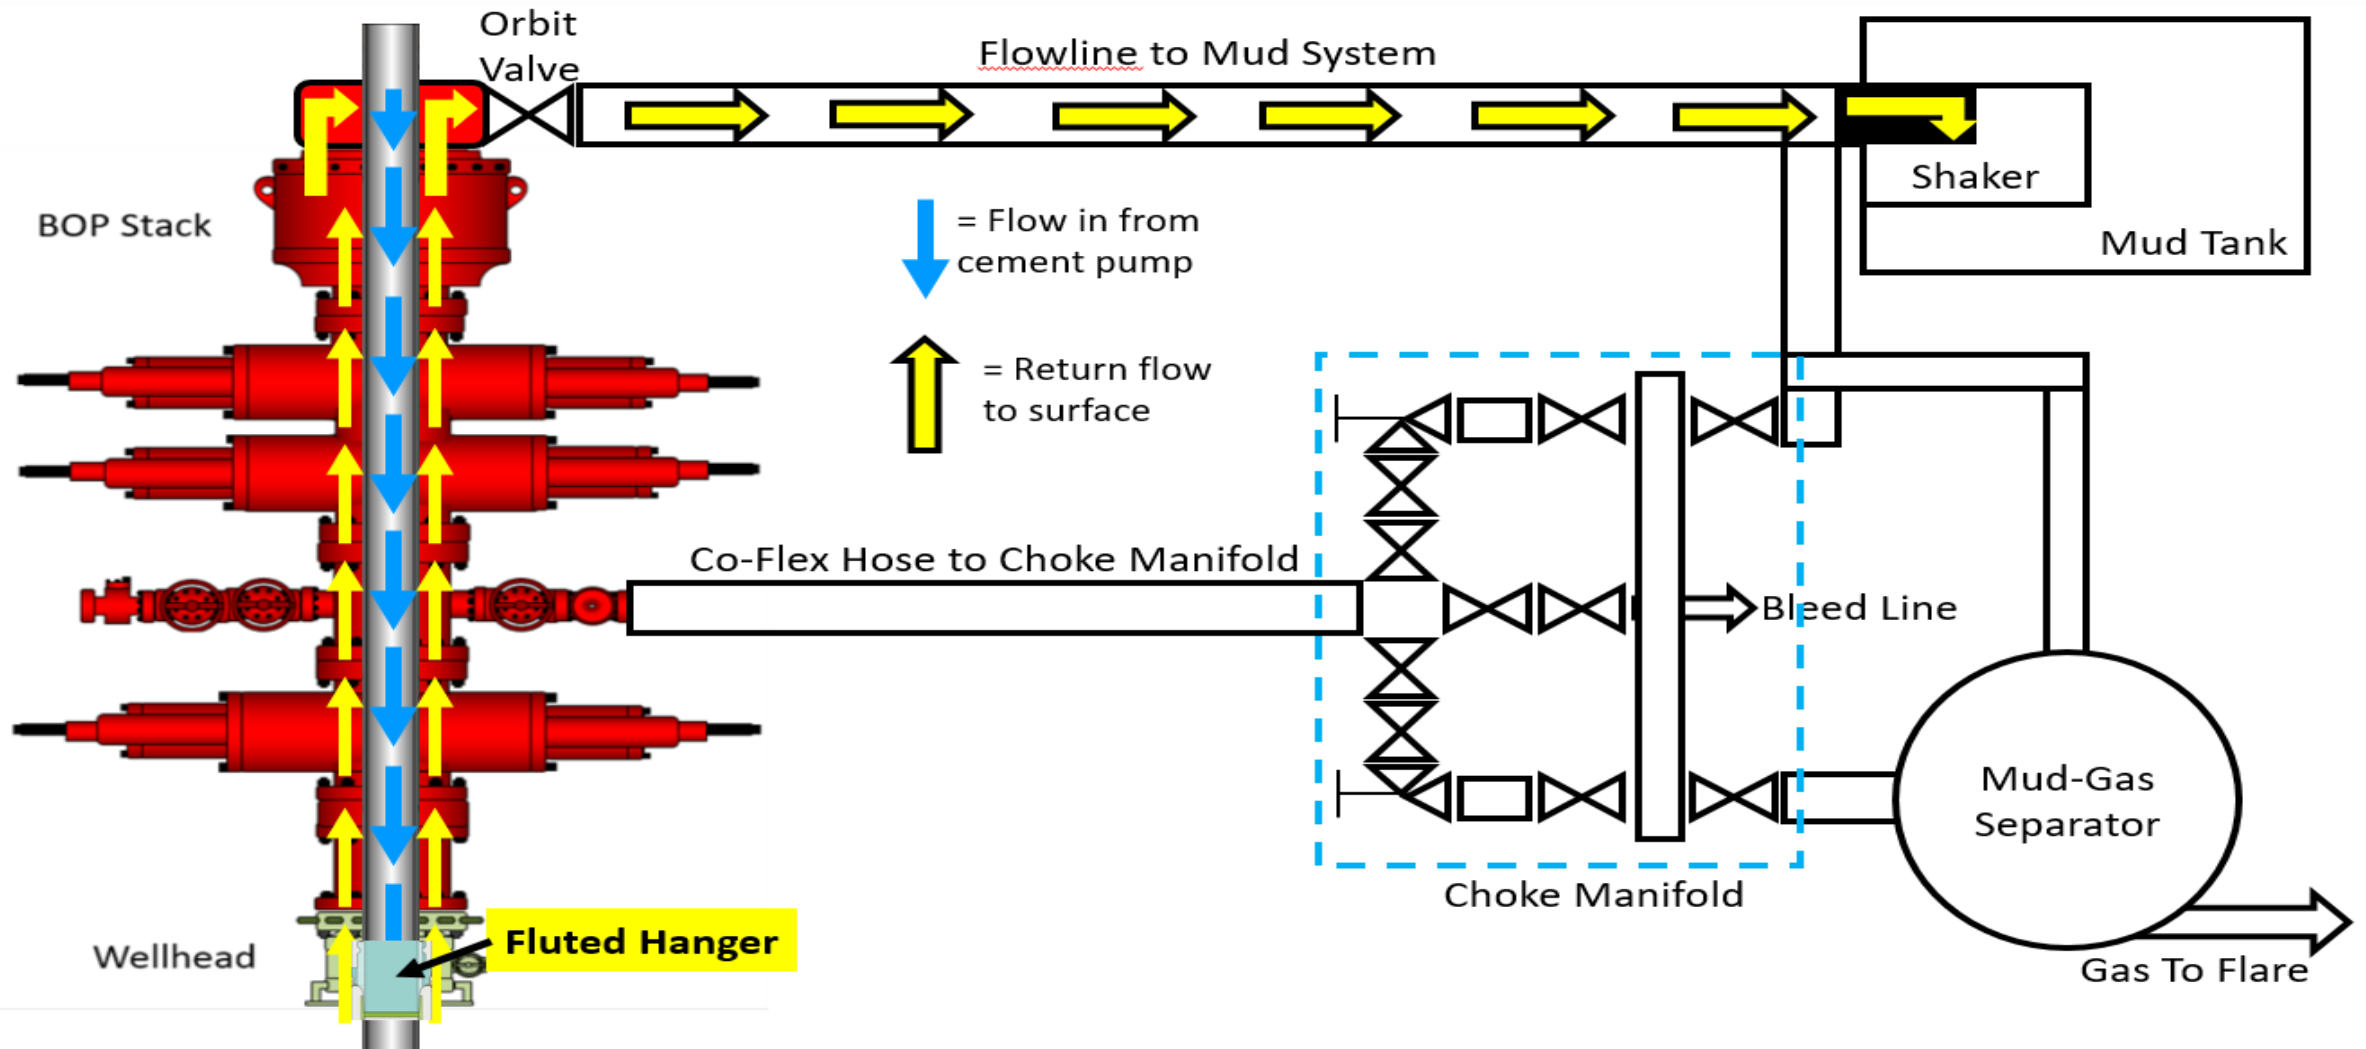


# Offline Cementing -- Intermediate Casing

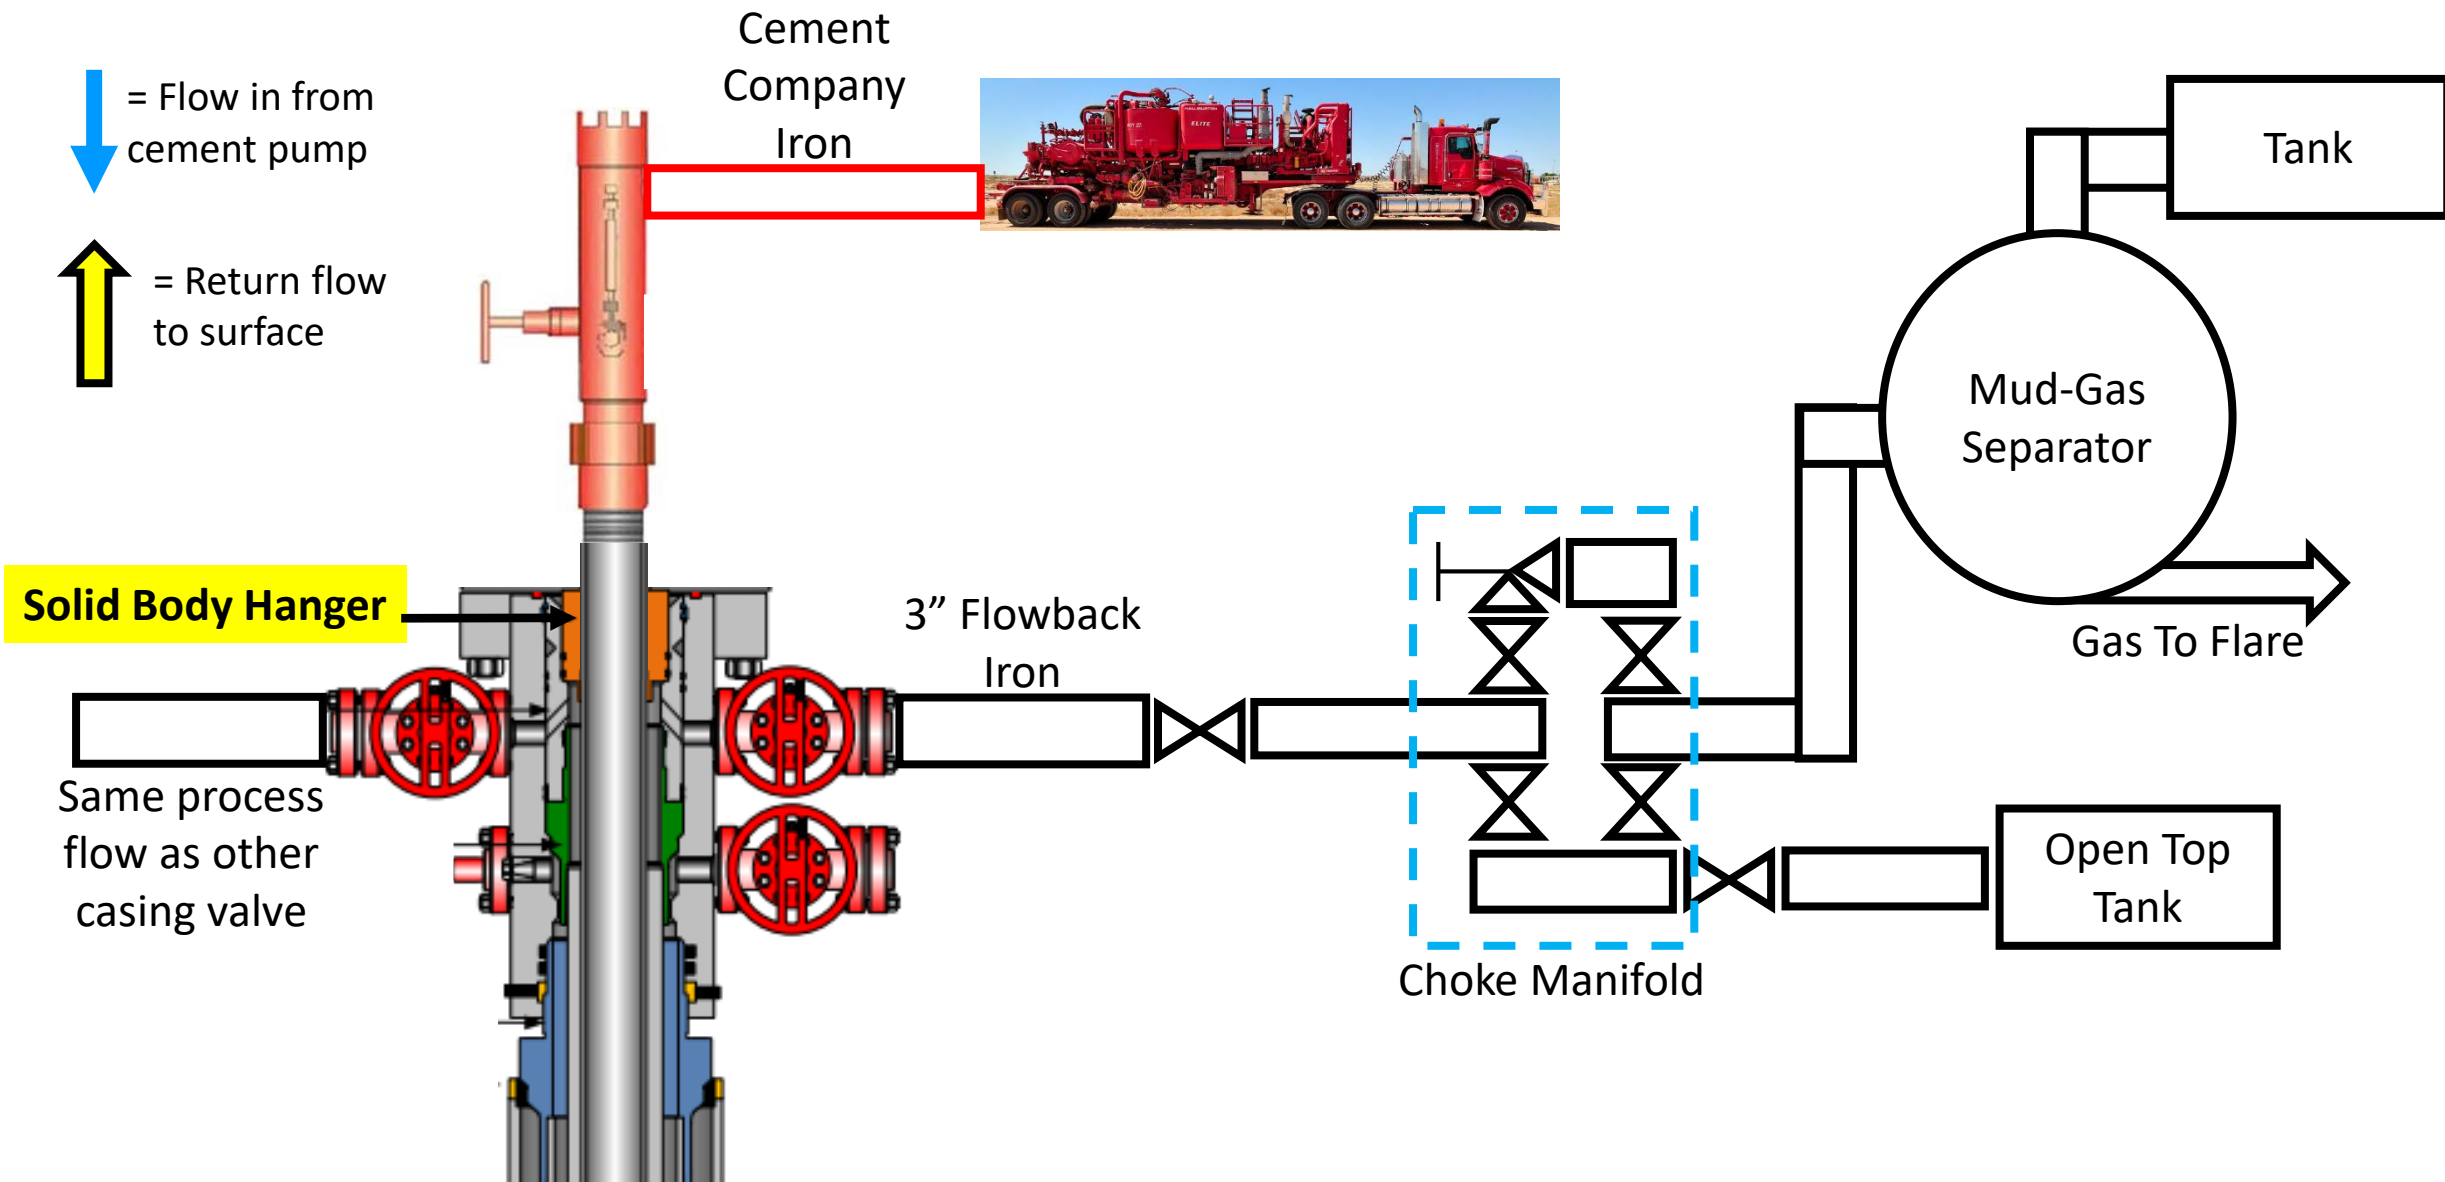




# Offline Cementing -- Intermediate Casing

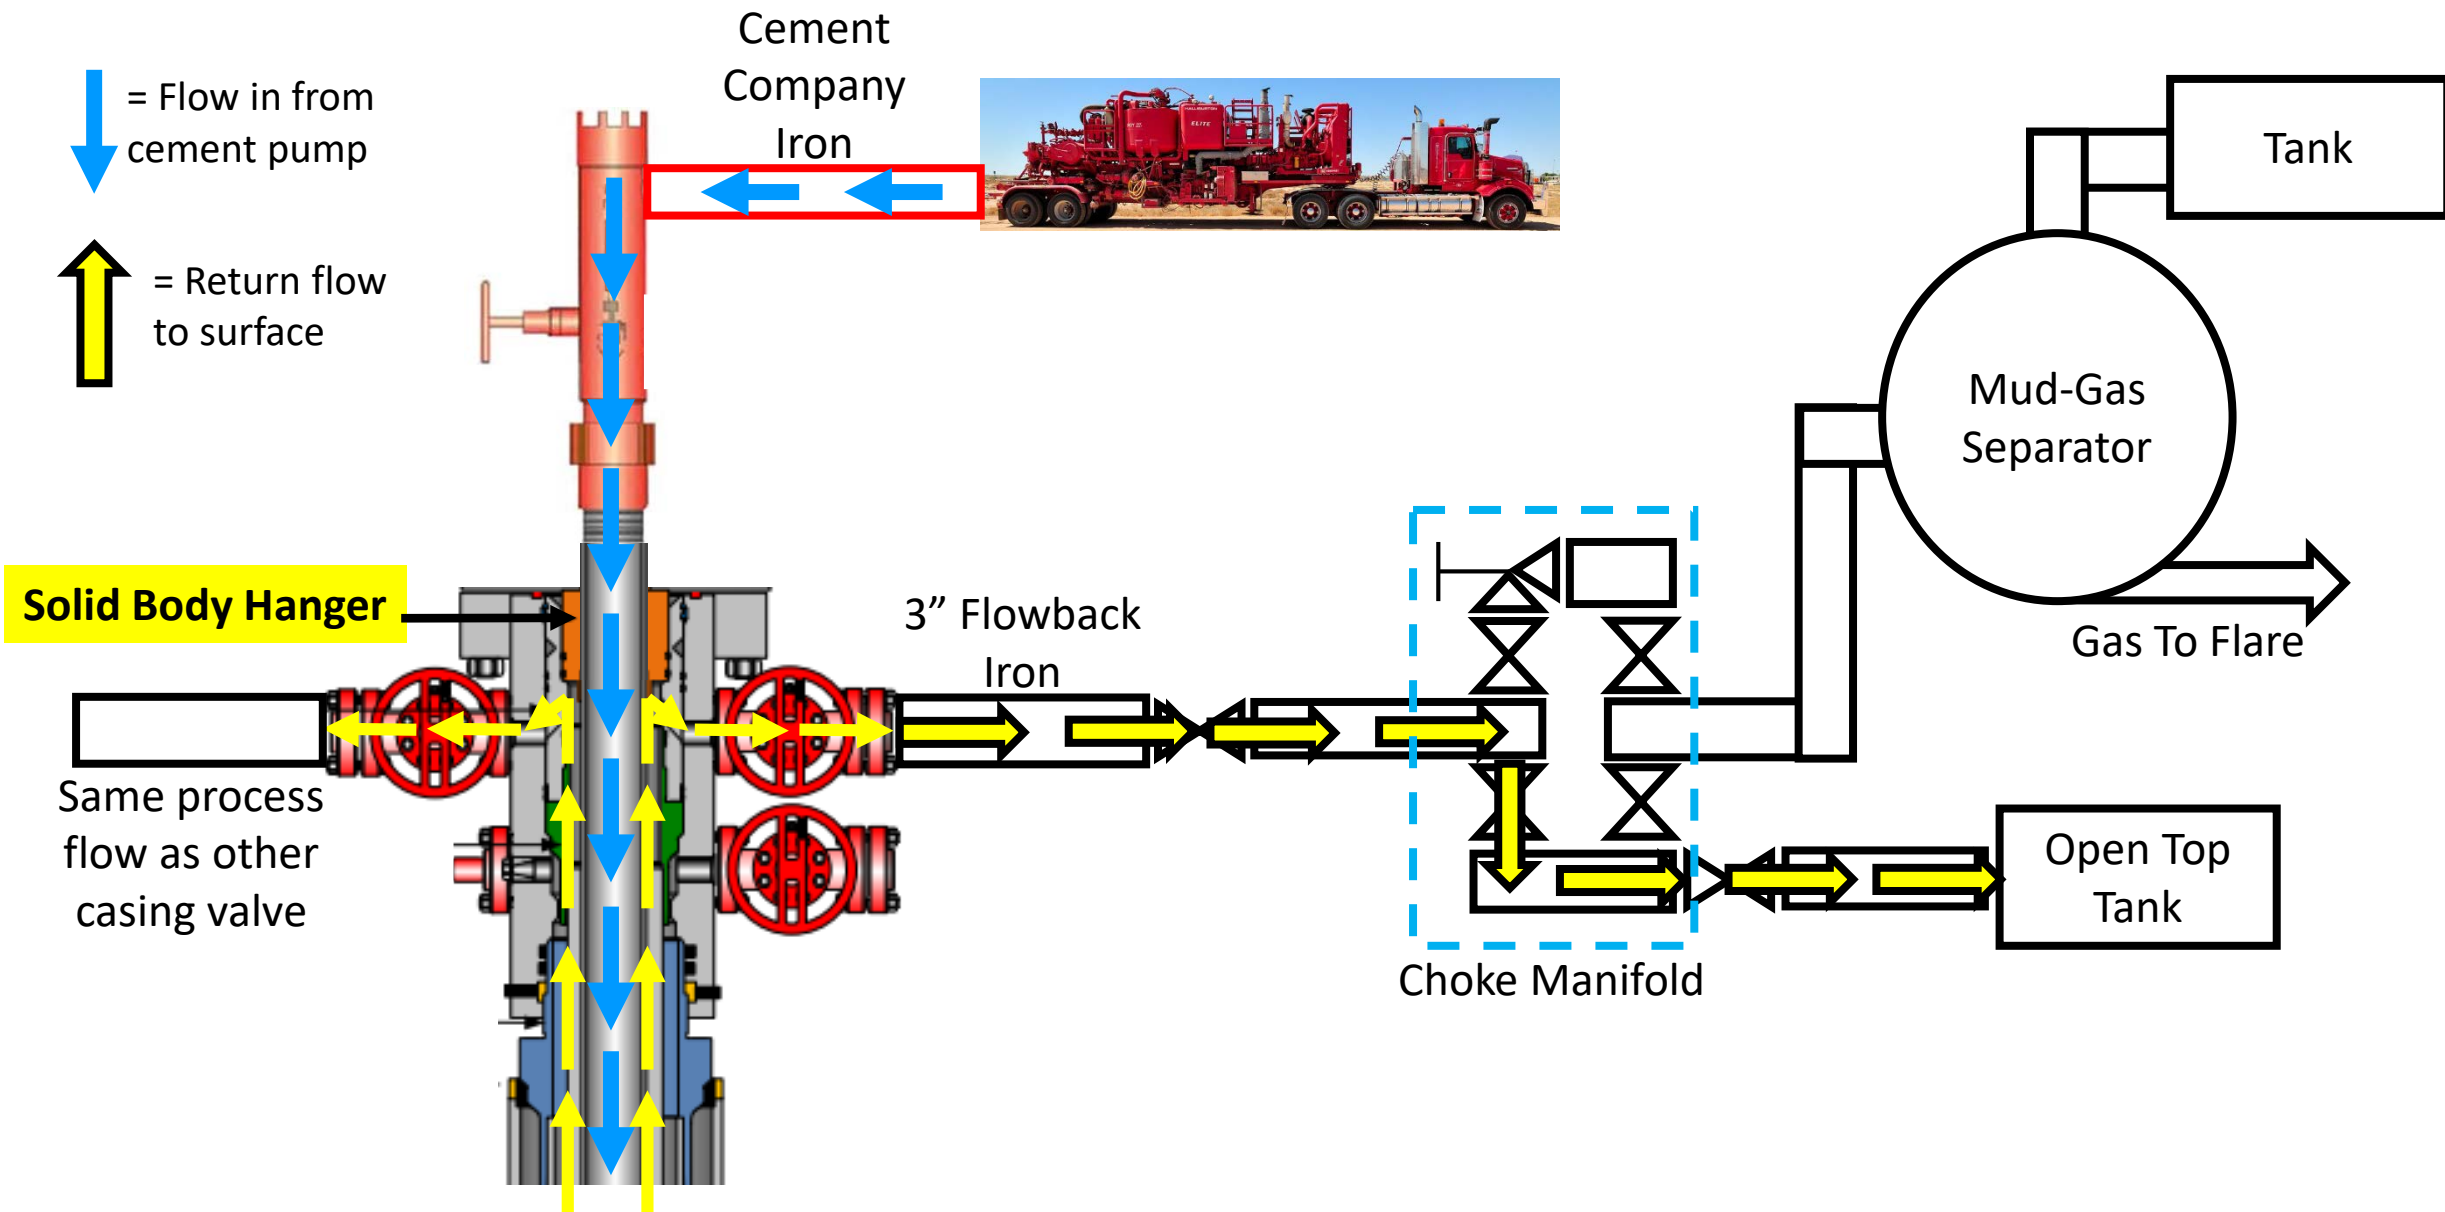


# Offline Cementing Progression

- Run 7" casing
- Land 11" nominal x 7" hanger
- Test casing hanger
- Energize 11" nom x 7" hanger lock ring and pull test
- Re-test casing hanger
- Barriers & Procedures after landing casing before setting packoff
  - 10K BOP & 5K Annular-Internal and Annular barrier
  - Kill Weight Fluid in annulus and casing (ensure well is static before setting solid body packoff) Internal and Annular barrier
    - **If well is not static we WILL NOT set solid body packoff.**
  - 10K float collar-Internal Barrier
  - 10k float Shoe-Internal Barrier
    - **After circulating a 1.5 casing capacities to ensure full column of mud and no entrained gas pumps will be shut off and floats checked for flow**

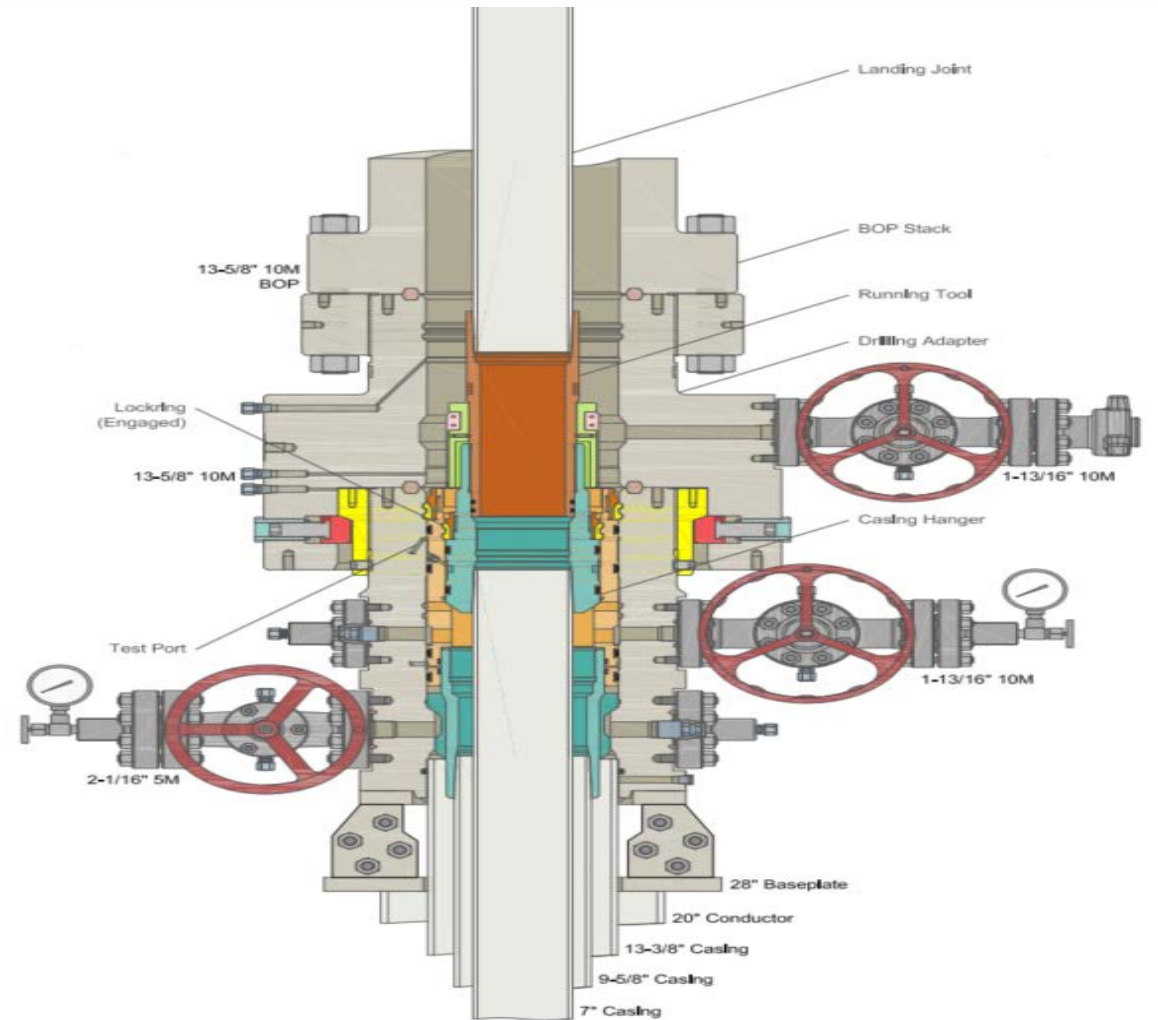


# Offline Cementing Progression

- Pick up running tool with 6-1/2" nominal Back Pressure valve run into well and set
- Barriers and procedures **BEFORE** removing BOP's
  - Kill weight Fluid in annulus-Annular Barrier
  - Solid Body Packoff-Annular Barrier
  - 10K Float Equipment-Internal Barrier
  - 10K Back pressure valve installed with BOP still on well-Internal Barrier
    - BPV will be tested before it arrives on location by Cactus

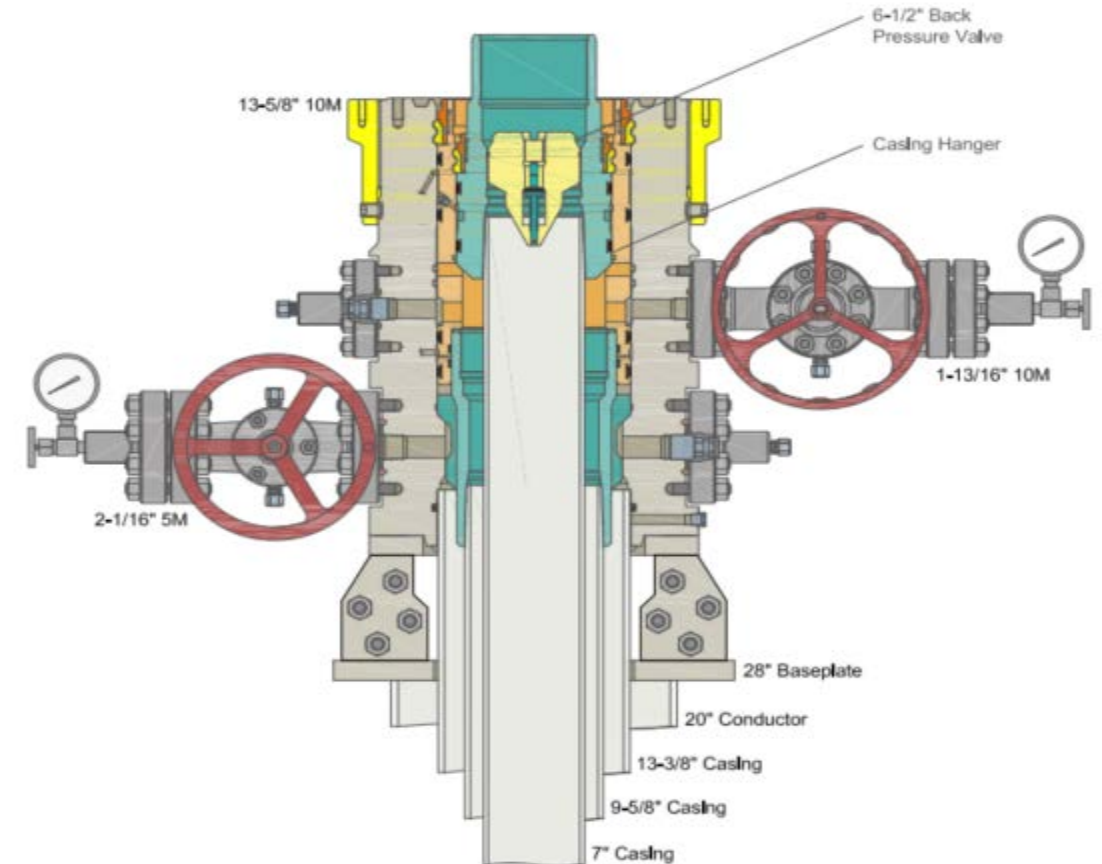

# Offline Cementing Progression


- Nipple down BOP
- Nipple up TA Cap and test
- Skid Drilling Rig
- Barriers and procedures **AFTER** removing BOP's
  - Kill weight Fluid in annulus-Annular Barrier
  - Solid Body Packoff-Annular Barrier
  - 10K Float Equipment-Internal Barrier
  - 10K Back pressure valve-Internal Barrier
  - 10K rated TA cap with Valve-Internal Barrier

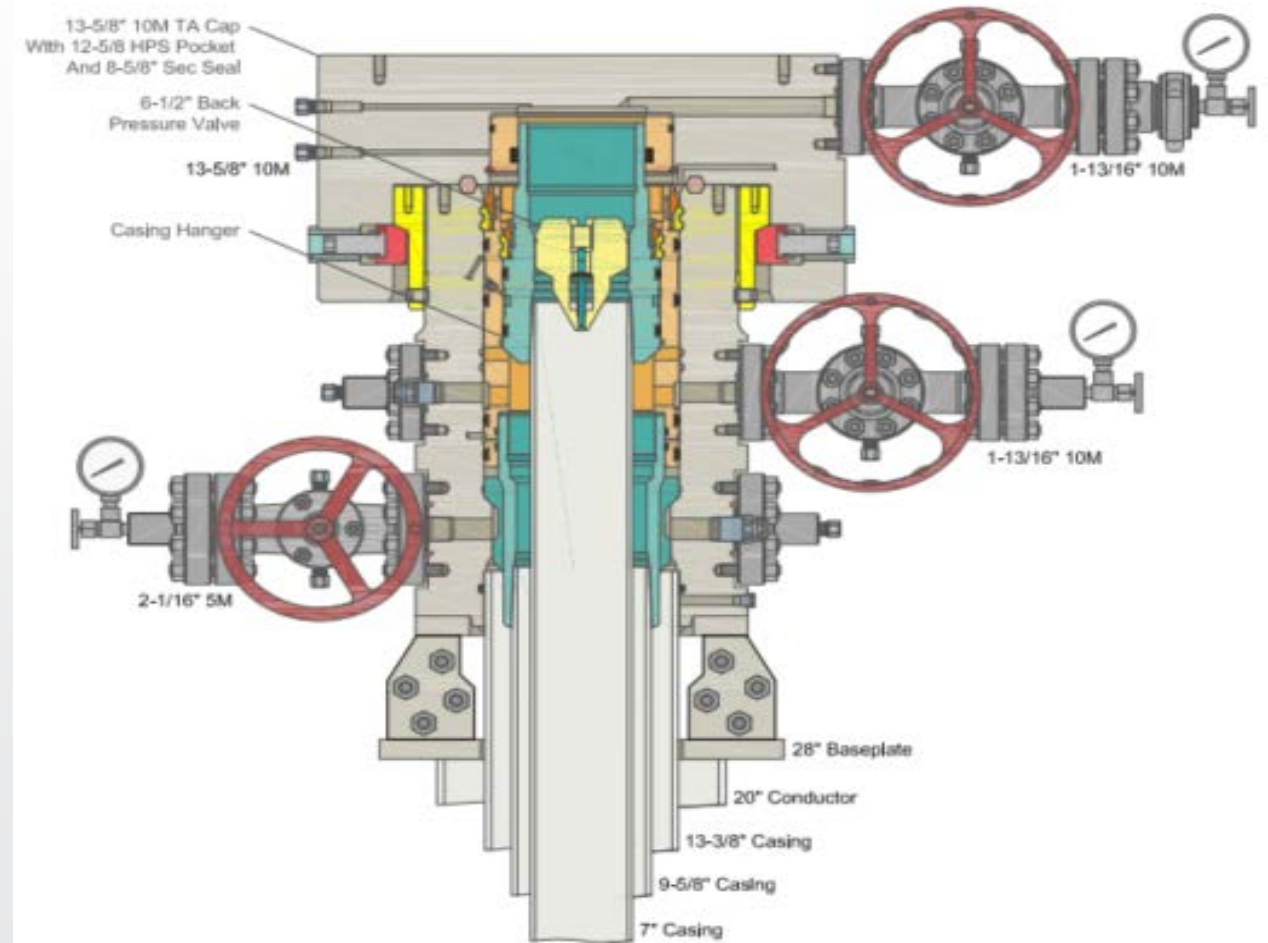



# Offline Cementing Progression

- Check Pressure on TA Cap and remove
- Install adaptor with Gate valve for off line cementing and test
- Rig up flowback iron independent of rig
- Retrieve Back Pressure Valve
- Shut in well
- Rig up to cement and pump job
- NU 10K TA cap after cement job
- Barriers and procedures before rigging up cementing equipment
  - Address well and ensure no pressure on TA cap
    - Ability to pump into well through casing valves on backside to kill if needed
  - Kill weight Fluid in annulus-Annular barrier
  - Solid Body Packoff-Annular barrier
  - 10K Float Equipment-Internal Barrier
  - 10K Back pressure valve-Internal Barrier

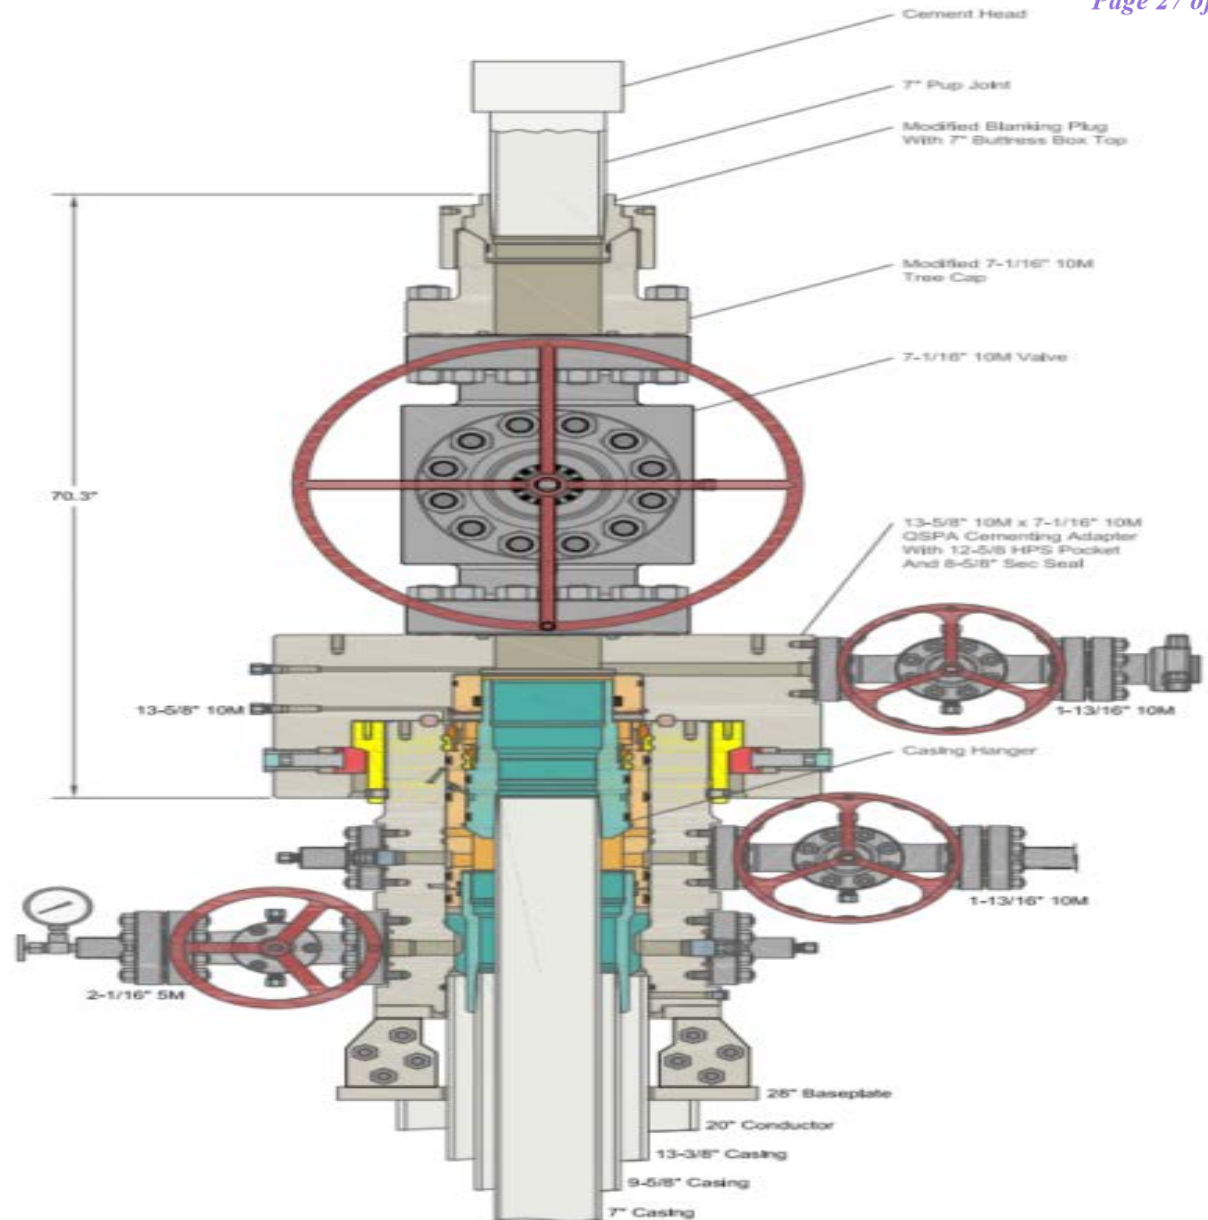

# Offline Cementing Risk and COA Compliance

---

- All testing and breaks tested in accordance with Onshore Order # 2 and COA's
- If no cement to surface, bradenhead squeeze still possible with offline cementing equipment
- Time from skid rig to offline cementing ops typically 24 hours
- **Conditions where we would not Offline Cement**
  - **Well is flowing**
- All wellhead equipment rated to 10K maintaining APD compliant
  - 10K flowback iron independent of rig circulating system
  - 10K Back Pressure Valve
  - 10K Gate Valve & TA combo for second barrier during operations
  - 10K 1-13/16 Valve coming off TA cap
  - 10K TA Cap



Cimarex Cascade 29 Federal 15H Rev0 kFc 20Feb23 Proposal Geodetic Report

Def Plan

Report Date: February 21, 2023 - 02:40 PM ( UTC 0 )  
Client: COTERRA  
Field: NM Lea County (NAD 83)  
Structure / Slot: Coterra Cascade 29 Federal Pad 15-18  
Well: Cascade 29 Federal 15H  
Borehole: Cascade 29 Federal 15H  
UBH / API#: Unknown / Unknown  
Survey Name: Cimarex Cascade 29 Federal 15H Rev0 kFc 20Feb23  
Survey Date: February 21, 2023  
Tort / AHD / DDI / ERD Ratio: 94.002 ' / 5234.509 ft / 5.833 / 0.418  
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet  
Location Lat / Long: 32°54'11.6204"N, 103°36'4.81547"W  
Location Grid NE YX: N 399029 650 RJUS, E 768016 120 RJUS  
CRS Grid Convergence Angle: 0.3889°  
Grid Scale Factor: 0.99996794  
Version / Patch: 2022.5.0.11

Survey / DLS Computation: Minimum Curvature / Lubinski  
Vertical Section Azimuth: 359.630 (°GRID North)  
Vertical Section Origin: 0.000 ft, 0.000 ft  
TVD Reference Datum: RKB  
TVD Reference Elevation: 3424.200 ft above MSL  
Sealed / Ground Elevation: 3401.200 ft above MSL  
Magnetic Declination: 6.276°  
Total Gravity Field Strength: 998.4292mgm (9.80665 Based)  
Gravity Model: GARM  
Total Magnetic Field Strength: 47377.425 nT  
Magnetic Dip Angle: 59.627°  
Declination Date: February 20, 2023  
Magnetic Declination Model: HDGM 2023  
North Reference: Grid North  
Grid Convergence Used: 0.3889°  
Total Corr Mag North->Grid North: 5.8875°  
Local Coord Referenced To: Well Head


Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVDSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (RUS)	Easting (RUS)	Latitude (°)	Longitude (°)	DLS (°/100ft)	BR (°/100ft)	TR (°/100ft)
SHL [210° FSL, 470° FWL]	0.00	0.00	227.12	0.00	-3,424.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763			
	100.00	0.00	227.12	100.00	-3,324.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	200.00	0.00	227.12	200.00	-3,224.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	300.00	0.00	227.12	300.00	-3,124.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	400.00	0.00	227.12	400.00	-3,024.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	500.00	0.00	227.12	500.00	-2,924.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	600.00	0.00	227.12	600.00	-2,824.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	700.00	0.00	227.12	700.00	-2,724.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	800.00	0.00	227.12	800.00	-2,624.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	900.00	0.00	227.12	900.00	-2,524.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
Rustler	938.00	0.00	227.12	938.00	-2,486.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,000.00	0.00	227.12	1,000.00	-2,424.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,100.00	0.00	227.12	1,100.00	-2,324.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,200.00	0.00	227.12	1,200.00	-2,224.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,300.00	0.00	227.12	1,300.00	-2,124.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,353.00	0.00	227.12	1,353.00	-2,071.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,400.00	0.00	227.12	1,400.00	-2,024.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,500.00	0.00	227.12	1,500.00	-1,924.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,600.00	0.00	227.12	1,600.00	-1,824.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,700.00	0.00	227.12	1,700.00	-1,724.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
Top Salt	1,800.00	0.00	227.12	1,800.00	-1,624.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	1,900.00	0.00	227.12	1,900.00	-1,524.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,000.00	0.00	227.12	2,000.00	-1,424.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,100.00	0.00	227.12	2,100.00	-1,324.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,200.00	0.00	227.12	2,200.00	-1,224.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,300.00	0.00	227.12	2,300.00	-1,124.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,400.00	0.00	227.12	2,400.00	-1,024.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,500.00	0.00	227.12	2,500.00	-924.20	0.00	0.00	0.00	399,029.65	768,016.12	32.09489696	-103.60133763	0.00	0.00	0.00
	2,600.00	1.00	227.12	2,599.99	-824.21	-0.59	-0.59	-0.64	399,029.06	768,015.48	32.09489534	-103.60133971	1.00	1.00	0.00
	2,700.00	2.00	227.12	2,699.96	-724.24	-2.36	-2.37	-2.56	399,027.28	768,013.56	32.09489048	-103.60134594	1.00	1.00	0.00
Hoid	2,700.08	2.00	227.12	2,700.04	-724.16	-2.36	-2.38	-2.56	399,027.27	768,013.56	32.09489047	-103.60134595	1.00	1.00	0.00
	2,800.00	2.00	227.12	2,799.90	-624.30	-4.72	-4.75	-5.12	399,024.90	768,011.00	32.09488399	-103.60135425	0.00	0.00	0.00
	2,900.00	2.00	227.12	2,899.84	-524.36	-7.08	-7.13	-7.67	399,022.52	768,008.45	32.09487751	-103.60136257	0.00	0.00	0.00
	3,000.00	2.00	227.12	2,999.78	-424.42	-9.43	-9.50	-10.23	399,020.15	768,005.89	32.09487103	-103.60137088	0.00	0.00	0.00
	3,100.00	2.00	227.12	3,099.72	-324.48	-11.79	-11.88	-12.79	399,017.77	768,003.33	32.09486455	-103.60137919	0.00	0.00	0.00
	3,200.00	2.00	227.12	3,199.65	-224.55	-14.15	-14.25	-15.35	399,015.40	768,000.77	32.09485807	-103.60138751	0.00	0.00	0.00
	3,300.00	2.00	227.12	3,299.59	-124.61	-16.51	-16.63	-17.91	399,013.02	767,998.21	32.09485159	-103.60139582	0.00	0.00	0.00
	3,400.00	2.00	227.12	3,399.53	-24.67	-18.87	-19.00	-20.47	399,010.65	767,995.68	32.09484510	-103.60140413	0.00	0.00	0.00
	3,500.00	2.00	227.12	3,499.47	75.27	-21.23	-21.38	-23.03	399,008.27	767,993.09	32.09483862	-103.60141245	0.00	0.00	0.00
	3,600.00	2.00	227.12	3,599.41	175.21	-23.59	-23.75	-25.58	399,005.90	767,990.54	32.09483214	-103.60142076	0.00	0.00	0.00
Walk, Build 11°100ft	3,700.00	2.00	227.12	3,699.35	275.15	-25.95	-26.13	-28.14	399,003.52	767,987.98	32.09482566	-103.60142907	0.00	0.00	0.00
	3,800.00	2.00	227.12	3,799.29	375.09	-28.31	-28.51	-30.70	399,001.15	767,985.42	32.09481918	-103.60143739	0.00	0.00	0.00
	3,900.00	2.00	227.12	3,899.23	475.03	-30.67	-30.88	-33.26	398,998.77	767,982.86	32.09481270	-103.60144570	0.00	0.00	0.00
	4,000.00	2.00	227.12	3,999.17	574.97	-33.02	-33.26	-35.82	398,996.40	767,980.30	32.09480621	-103.60145401	0.00	0.00	0.00
	4,100.00	2.00	227.12	4,099.10	674.91	-35.63	-35.88	-38.63	398,994.02	767,977.74	32.09479973	-103.60146233	0.00	0.00	0.00
	4,200.00	2.00	227.12	4,199.04	774.84	-37.74	-38.01	-40.94	398,991.64	767,975.19	32.09479325	-103.60147064	0.00	0.00	0.00
	4,300.00	2.00	227.12	4,298.98	874.78	-40.10	-40.38	-43.49	398,989.27	767,972.63	32.09478677	-103.60147895	0.00	0.00	0.00
	4,400.00	2.00	227.12	4,398.92	974.72	-42.46	-42.76	-46.05	398,986.89	767,970.07	32.09478029	-103.60148727	0.00	0.00	0.00
	4,500.00	2.00	227.12	4,498.86	1,074.66	-44.82	-45.13	-48.61	398,984.52	767,967.51	32.09477381	-103.60149558	0.00	0.00	0.00
	4,600.00	2.00	227.12	4,598.80	1,174.60	-47.18	-47.51	-51.17	398,982.14	767,964.95	32.09476732	-103.60150389	0.00	0.00	0.00
Base Salt	4,700.00	2.00	227.12	4,698.74	1,274.54	-49.54	-49.88	-53.73	398,979.77	767,962.39	32.09476084	-103.60151221	0.00	0.00	0.00
	4,800.00	2.00	227.12	4,798.68	1,374.48	-51.90	-52.20	-56.20	398,977.39	767,959.84	32.09475436	-103.60152052	0.00	0.00	0.00
	4,858.36	2.00	227.12	4,857.00	1,432.80	-53.27	-53.65	-57.78	398,975.01	767,958.38	32.09475051	-103.60152537	0.00	0.00	0.00
	4,900.00	2.00	227.12	4,898.62	1,474.42	-54.25	-54.64	-58.85	398,975.02	767,957.28	32.09474788	-103.60152883	0.00	0.00	0.00
	4,945.41	2.00	227.12	4,944.00	1,519.80	-55.33	-55.71	-60.01	398,973.94	767,956.11	32.09474494	-103.60153261	0.00	0.00	0.00
	5,000.00	2.00	227.12	4,998.56	1,574.36	-56.61	-57.01	-61.40	398,972.64	767,954.72	32.09474140	-103.60153715	0.00	0.00	0.00
	5,100.00	2.00	227.12	5,098.50	1,674.30	-58.97	-59.39	-63.96	398,970.27	767,952.16	32.09473492	-103.60154546	0.00	0.00	0.00
	5,200.00	2.00	227.12	5,198.44	1,774.24	-61.33	-61.76	-66.52	398,967.89	767,949.60	32.09472843	-103.60155377	0.00	0.00	0.00
	5,300.00	2.00	227.12	5,298.38	1,874.17	-63.69	-64.14	-69.08	398,965.51	767,947.04	32.09472195	-103.60156208	0.00	0.00	0.00
	5,400.00	2.00	227.12	5,398.31	1,974.11	-66.05	-66.51	-71.64	398,963.14	767,944.40	32.09471546	-103.60157040	0.00	0.00	0.00
Bell Canyon	5,500.00	2.00	227.12	5,498.25	2,074.05	-68.41	-68.89	-74.20	398,960.76	767,941.93	32.09470899	-103.60157871	0.00	0.00	0.00
	5,600.00	2.00	227.12	5,598.19	2,173.99	-70.77	-71.26	-76.76	398,958.39	767,939.37	32.09470251	-103.60158702	0.00	0.00	0.00
	5,700.00	2.00	227.12	5,698.13	2,273.93										



Comments	MD (ft)	Incl (°)	Azim (°)	TVD (ft)	TVSS (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (°)	Longitude (°)	DLS (°/100)	BR (°/100)	TR (°/100)
1St Bone Spring Sand	9,200.00	0.00	227.12	9,197.20	5,773.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,300.00	0.00	227.12	9,297.20	5,873.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,400.00	0.00	227.12	9,397.20	5,973.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,500.00	0.00	227.12	9,497.20	6,073.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,600.00	0.00	227.12	9,597.20	6,173.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,700.00	0.00	227.12	9,697.20	6,273.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,800.00	0.00	227.12	9,797.20	6,373.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	9,900.00	0.00	227.12	9,897.20	6,473.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,000.00	0.00	227.12	9,997.20	6,573.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,001.80	0.00	227.12	9,999.00	6,574.80	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
2Nd Bone Spring Sand	10,100.00	0.00	227.12	10,097.20	6,673.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,200.00	0.00	227.12	10,197.20	6,773.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,300.00	0.00	227.12	10,297.20	6,873.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,400.00	0.00	227.12	10,397.20	6,973.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,500.00	0.00	227.12	10,497.20	7,073.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,580.80	0.00	227.12	10,578.00	7,153.80	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,600.00	0.00	227.12	10,597.20	7,173.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,700.00	0.00	227.12	10,697.20	7,273.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,800.00	0.00	227.12	10,797.20	7,373.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	10,900.00	0.00	227.12	10,897.20	7,473.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
Harkey	11,000.00	0.00	227.12	10,997.20	7,573.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,100.00	0.00	227.12	11,097.20	7,673.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,200.00	0.00	227.12	11,197.20	7,773.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,206.80	0.00	227.12	11,204.00	7,779.80	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,300.00	0.00	227.12	11,297.20	7,873.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,400.00	0.00	227.12	11,397.20	7,973.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,500.00	0.00	227.12	11,497.20	8,073.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,600.00	0.00	227.12	11,597.20	8,173.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,700.00	0.00	227.12	11,697.20	8,273.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,726.80	0.00	227.12	11,724.00	8,299.80	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
3Rd Bone Spring Sand	11,800.00	0.00	227.12	11,797.20	8,373.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,900.00	0.00	227.12	11,897.20	8,473.00	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	11,930.32	0.00	227.12	11,927.52	8,503.32	-109.93	-110.70	-119.23	398,918.95	767,896.89	32.09459489	-103.60172505	0.00	0.00	0.00
	12,000.00	6.97	359.63	11,997.03	8,572.83	-105.70	-106.47	-119.26	398,923.18	767,896.89	32.09460653	-103.60172504	10.00	10.00	0.00
	12,100.00	16.97	359.63	12,094.73	8,670.53	-84.99	-85.76	-119.40	398,943.89	767,896.73	32.09466345	-103.60172505	10.00	10.00	0.00
	12,155.56	22.52	359.63	12,147.00	8,722.80	-66.23	-67.00	-119.52	398,962.65	767,896.61	32.09471502	-103.60172500	10.00	10.00	0.00
	12,200.00	26.97	359.63	12,187.35	8,763.15	-47.63	-48.40	-119.64	398,981.25	767,896.49	32.09476615	-103.60172498	10.00	10.00	0.00
	12,300.00	36.97	359.63	12,272.08	8,847.88	5.25	4.47	-119.98	399,034.12	767,896.15	32.09491149	-103.60172493	10.00	10.00	0.00
	12,303.67	37.33	359.63	12,275.00	8,850.80	7.46	6.69	-119.99	399,036.34	767,896.13	32.09491758	-103.60172492	10.00	10.00	0.00
	12,306.18	37.59	359.63	12,277.00	8,852.80	9.00	8.22	-120.00	399,037.87	767,896.12	32.09492179	-103.60172492	10.00	10.00	0.00
Wolfcamp	12,359.94	42.96	359.63	12,318.00	8,893.80	43.73	42.96	-120.23	399,072.61	767,895.90	32.09501728	-103.60172489	10.00	10.00	0.00
	12,359.94	42.96	359.63	12,318.00	8,893.80	43.73	42.96	-120.23	399,072.61	767,895.90	32.09501728	-103.60172489	10.00	10.00	0.00
	12,392.24	46.19	359.63	12,341.00	8,916.80	66.40	65.62	-120.37	399,095.27	767,895.73	32.09507957	-103.60172486	10.00	10.00	0.00
	12,400.00	46.97	359.63	12,346.34	8,922.14	72.04	71.26	-120.41	399,100.91	767,895.71	32.095090507	-103.60172486	10.00	10.00	0.00
	12,500.00	56.97	359.63	12,407.87	8,983.67	150.70	149.92	-120.92	399,179.57	767,895.21	32.09531130	-103.60172477	10.00	10.00	0.00
	12,600.00	66.97	359.63	12,454.81	9,030.61	238.86	238.08	-121.49	399,267.72	767,894.64	32.09555362	-103.60172468	10.00	10.00	0.00
	12,680.32	75.00	359.63	12,480.95	9,056.75	314.73	313.95	-121.98	399,343.59	767,894.15	32.09576218	-103.60172460	10.00	10.00	0.00
	12,700.00	75.98	359.63	12,485.88	9,061.68	333.79	333.00	-122.10	399,362.64	767,894.02	32.09581454	-103.60172458	5.00	5.00	0.00
	12,800.00	80.98	359.63	12,505.84	9,081.64	431.74	430.96	-122.73	399,460.59	767,893.39	32.09608379	-103.60172447	5.00	5.00	0.00
	12,900.00	85.98	359.63	12,517.19	9,092.95	531.06	530.28	-123.37	399,559.81	767,892.73	32.09636890	-103.60172435	5.00	5.00	0.00
Build 5'100ft	12,980.32	90.00	359.63	12,520.00	9,095.80	611.32	610.53	-123.88	399,640.16	767,892.25	32.09657740	-103.60172424	5.00	5.00	0.00
	13,000.00	90.00	359.63	12,520.00	9,095.80	631.00	630.21	-124.00	399,659.84	767,892.12	32.09663149	-103.60172422	0.00	0.00	0.00
	13,100.00	90.00	359.63	12,520.00	9,095.80	731.00	730.21	-124.64	399,759.83	767,891.48	32.09690636	-103.60172408	0.00	0.00	0.00
	13,200.00	90.00	359.63	12,520.00	9,095.80	831.00	830.21	-125.28	399,859.83	767,890.85	32.09718123	-103.60172395	0.00	0.00	0.00
	13,300.00	90.00	359.63	12,520.00	9,095.80	931.00	930.20	-125.92	399,959.82	767,890.21	32.09745611	-103.60172382	0.00	0.00	0.00
	13,400.00	90.00	359.63	12,520.00	9,095.80	1,031.00	1,030.20	-126.55	400,059.82	767,889.57	32.09773098	-103.60172368	0.00	0.00	0.00
	13,5														




# COTERRA


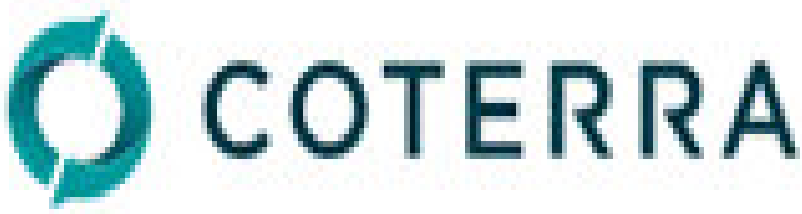


Borehole:	Well:	Field:	Structure:
Cascade 29 Federal 15H	Cascade 29 Federal 15H	NM Lea County (NAD 83)	Coterra Cascade 29 Federal Pad 15-18

Gravity & Magnetic Parameters					Surface Location					NAD83 New Mexico State Plane, Eastern Zone, US Feet					Miscellaneous				
Model:	HDGM 2023	Dip:	59.627°	Date:	20-Feb-2023	Lat:	N 32 5 41.63	Northing:	399029.65ftUS	Grid Conv:	0.3889°	Slot:		TVD Ref:	RKB (3424.200 ft above MSL)				
MagDec:	6.276°	FS:	47377.425nT	Gravity FS:	998.429mgn (9.80665 Based)	Lon:	W 103 36 4.82	Easting:	768016.12ftUS	Scale Fact:	0.99996794	Plan:	Cimarex Cascade 29 Federal 15H Rev0 kFc 20Feb23						

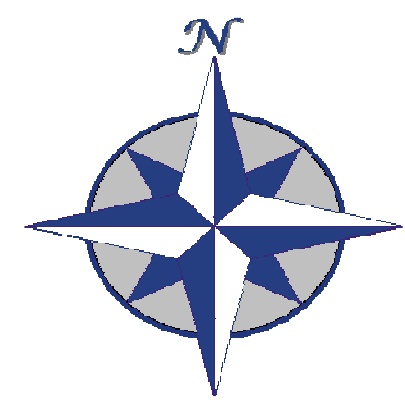

EOU Computation Based On 3-D 95% Confidence 2.79548 sigma

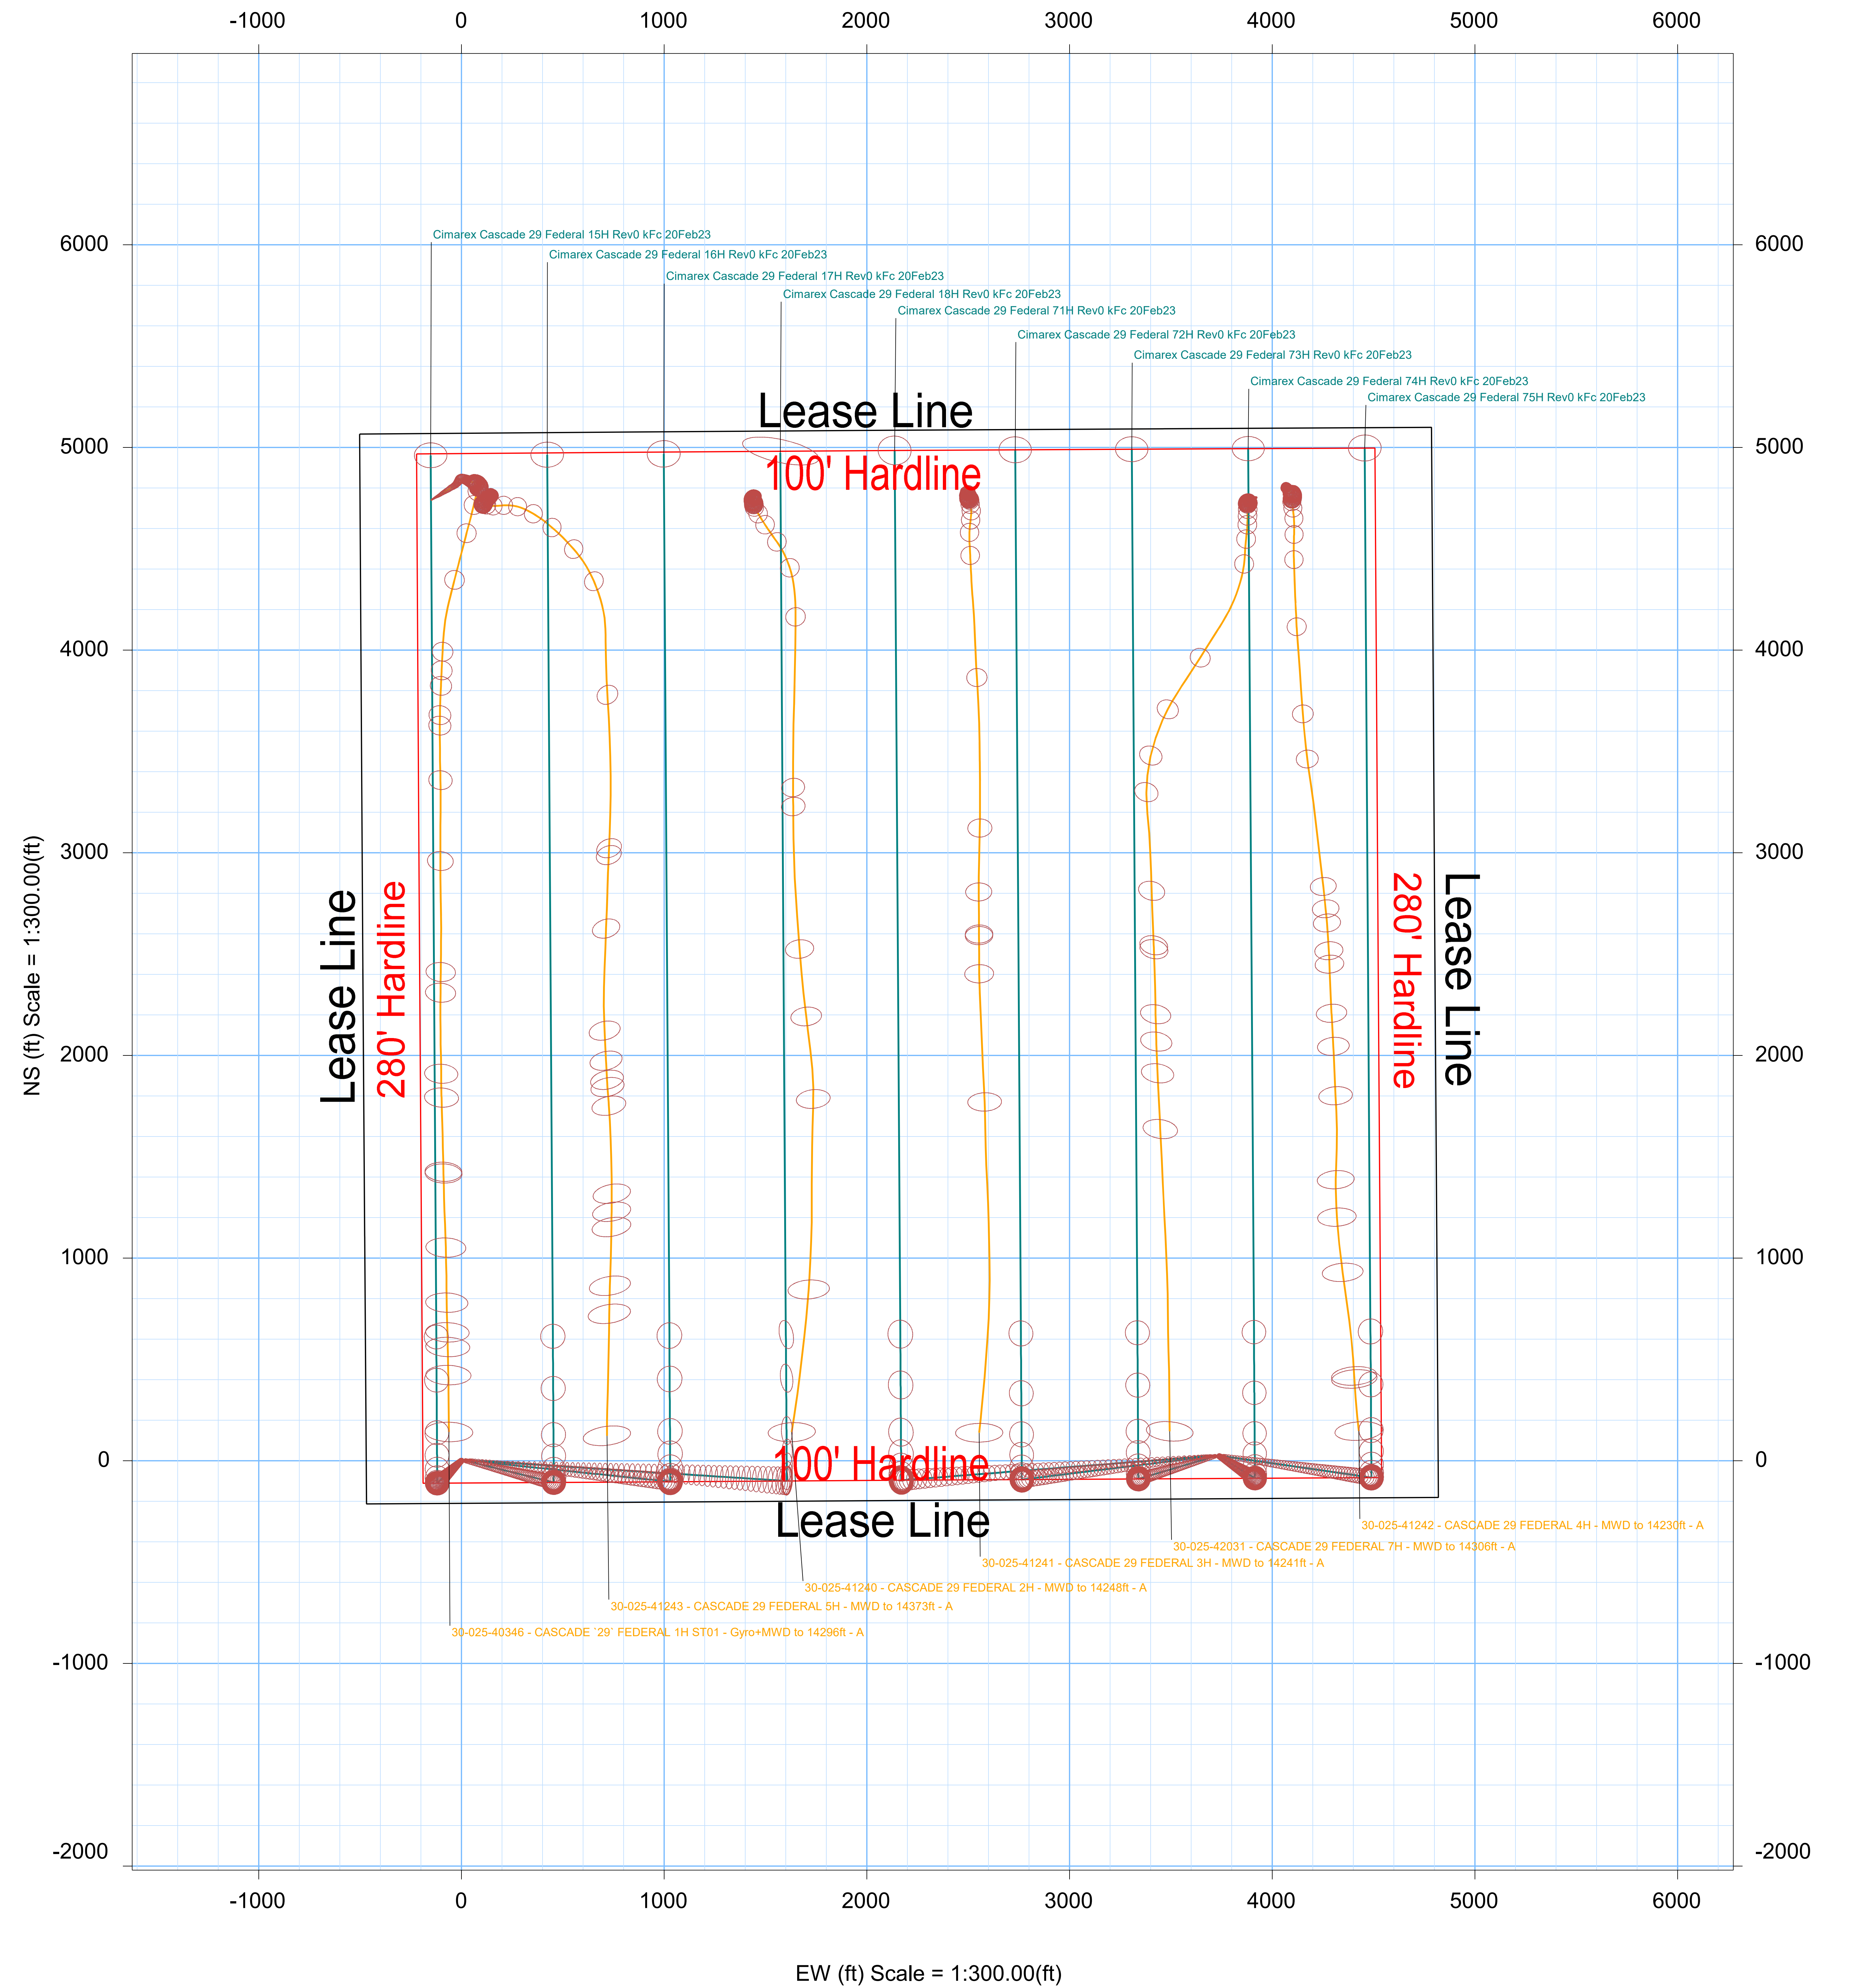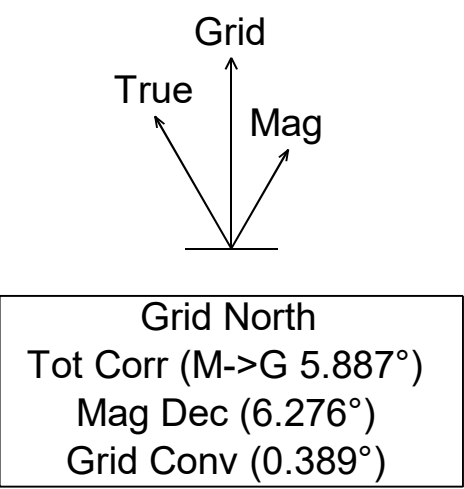



---

# Cimarex 10M Well Control Plan

---

Version 1.0

---

## BOPE Preventer Utilization

The table below displays all BHA components, drill pipe, casing, or open hole that could be present during a required shut in and the associated preventer component that would provide a barrier to flow. It is specific to the hole section that requires a 10M system. The mud system being utilized in the hole will always assumed to be the first barrier to flow. The below table, combined with the mud program, documents that two barriers to flow can be maintained at all times, independent of the rating of the annular preventer.

Drill String Element	OD	Preventer	RWP
4" Drillpipe	4"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
4.5" Drillpipe	4.5"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
4" HWDP Drillpipe	4"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
4.5" HWDP Drillpipe	4.5"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
Drill Collars (including non-magnetic)	4.75-5.25"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
Production Casing	5.5"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
Production Casing	5"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
Production Casing	4.5"	Lower Ram 3 1/2" - 5 1/2" VBR* Upper Ram 3 1/2" - 5 1/2" VBR*	10M
ALL	0-13 5/8"	Annular	5M
Open Hole		Blind Rams	10M

\*VBR – Variable Bore Ram

## Well Control Procedures

Proper well control response is highly specific to current well conditions and must be adapted based on environment as needed. The procedures below are given in “common” operating conditions to cover the basic and most necessary operations required during the wellbore construction. These include drilling ahead, tripping pipe, tripping BHA, running casing, and pipe out of the hole/open hole. In some of the procedures below, there will be a switch of control from the lesser RWP annular to the appropriate 10M RWP ram. The pressure at which this is done is variable based on overall well conditions that must be evaluated situationally. The pressure that control is switched may be equal to or less than the RWP but at no time will the pressure on the annular preventer exceed the RWP of the annular. The annular will be tested to 5,000 psi. This will be the RWP of the annular preventer.

### Shutting In While Drilling

1. Sound alarm to alert crew
2. Space out drill string
3. Shut down pumps
4. Shut in uppermost BOPE preventer (typically the annular preventer) and open HCR.
5. Verify well is shut-in and flow has stopped
6. Notify supervisory personnel
7. Record data (SIDP, SICP, Pit Gain, and Time)
8. Hold pre-job safety meeting and discuss kill procedure



9. If pressure is anticipated to climb to the RWP of the annular preventer during kill procedure, swap control of the well to the upper pipe ram

***Shutting In While Tripping***

1. Sound alarm and alert crew
2. Install open, full open safety valve and close valve
3. Shut in uppermost BOPE preventer (typically the annular preventer) and open HCR.
4. Verify well is shut-in and flow has stopped
5. Notify supervisory personnel
6. Record data (SIDP, SICP, Pit Gain, and Time)
7. Hold pre-job safety meeting and discuss kill procedure
8. If pressure is anticipated to climb to the RWP of the annular preventer during kill procedure, swap control of the well to the upper pipe ram

***Shutting In While Running Casing***

1. Sound alarm and alert crew
2. Install circulating swedge. Close high pressure, low torque valves.
3. Shut in uppermost BOPE preventer (typically the annular preventer) and open HCR.
4. Verify well is shut-in and flow has stopped
5. Notify supervisory personnel
6. Record data (SIDP, SICP, Pit Gain, and Time)
7. Hold Pre-job safety meeting and discuss kill procedure
8. If pressure is anticipated to climb to the RWP of the annular preventer during kill procedure, swap control of the well to the upper pipe ram

***Shutting in while out of hole***

1. Sound alarm
2. Shut-in well: close blind rams
3. Verify well is shut-in and monitor pressures
4. Notify supervisory personnel
5. Record data (SIDP, SICP, Pit Gain, and Time)
6. Hold Pre-job safety meeting and discuss kill procedure

***Shutting in prior to pulling BHA through stack***

1. Prior to pulling last joint of drill pipe thru the stack space out and check flow. If flowing see steps below.
2. Sound alarm and alert crew
3. Install open, full open safety valve and close valve
4. Shut in upper pipe ram and open HCR.

5. Verify well is shut-in and flow has stopped
6. Notify supervisory personnel
7. Record data (SIDP, SICP, Pit Gain, and Time)
8. Hold pre-job safety meeting and discuss kill procedure

***Shutting in while BHA is in the stack and ram preventer and combo immediately available***

1. Sound alarm and alert crew
2. Stab Crossover and install open, full open safety valve and close valve
3. Space out drill string with upset just beneath the compatible pipe ram.
4. Shut in upper compatible pipe ram and open HCR.
5. Verify well is shut-in and flow has stopped
6. Notify supervisory personnel
7. Record data (SIDP, SICP, Pit Gain, and Time)
8. Hold pre-job safety meeting and discuss kill procedure



***Shutting in while BHA is in the stack and no ram preventer or combo immediately available***

1. Sound alarm and alert crew
2. If possible pick up high enough, to pull string clear and follow "Open Hole" scenario
3. If not possible to pick up high enough:
  1. Stab Crossover, make up one joint/stand of drill pipe, and install open, full open safety valve and close valve
4. Space out drill string with upset just beneath the compatible pipe ram.
5. Shut in upper compatible pipe ram and open HCR.
6. Verify well is shut-in and flow has stopped
7. Notify supervisory personnel
8. Record data (SIDP, SICP, Pit Gain, and Time)
9. Hold pre-job safety meeting and discuss kill procedure



Borehole: <b>Cascade 29 Federal 15H</b>			Well: <b>Cascade 29 Federal 15H</b>			Field: <b>NM Lea County (NAD 83)</b>			Structure: <b>Coterra Cascade 29 Federal Pad 15-18</b>		
--	--	--	--	--	--	---	--	--	---	--	--

Gravity & Magnetic Parameters					Surface Location				NAD83 New Mexico State Plane, Eastern Zone, US Feet				Miscellaneous			
Model:	HDGM 2023	Dip:	59.627°	Date:	20-Feb-2023	Lat:	N 32 5 41.63	Northing:	399029.65ftUS	Grid Conv:	0.3889°	Slot:	TVD Ref: RKB (3424.200 ft above MSL)			
MagDec:	6.276°	FS:	47377.425nT	Gravity FS:	998.429mgn (9.80665 Based)	Lon:	W 103 36 4.82	Easting:	768016.12ftUS	Scale Fact:	0.99996794	Plan:	Cimarex Cascade 29 Federal 15H Rev0 kFc 20Feb23			

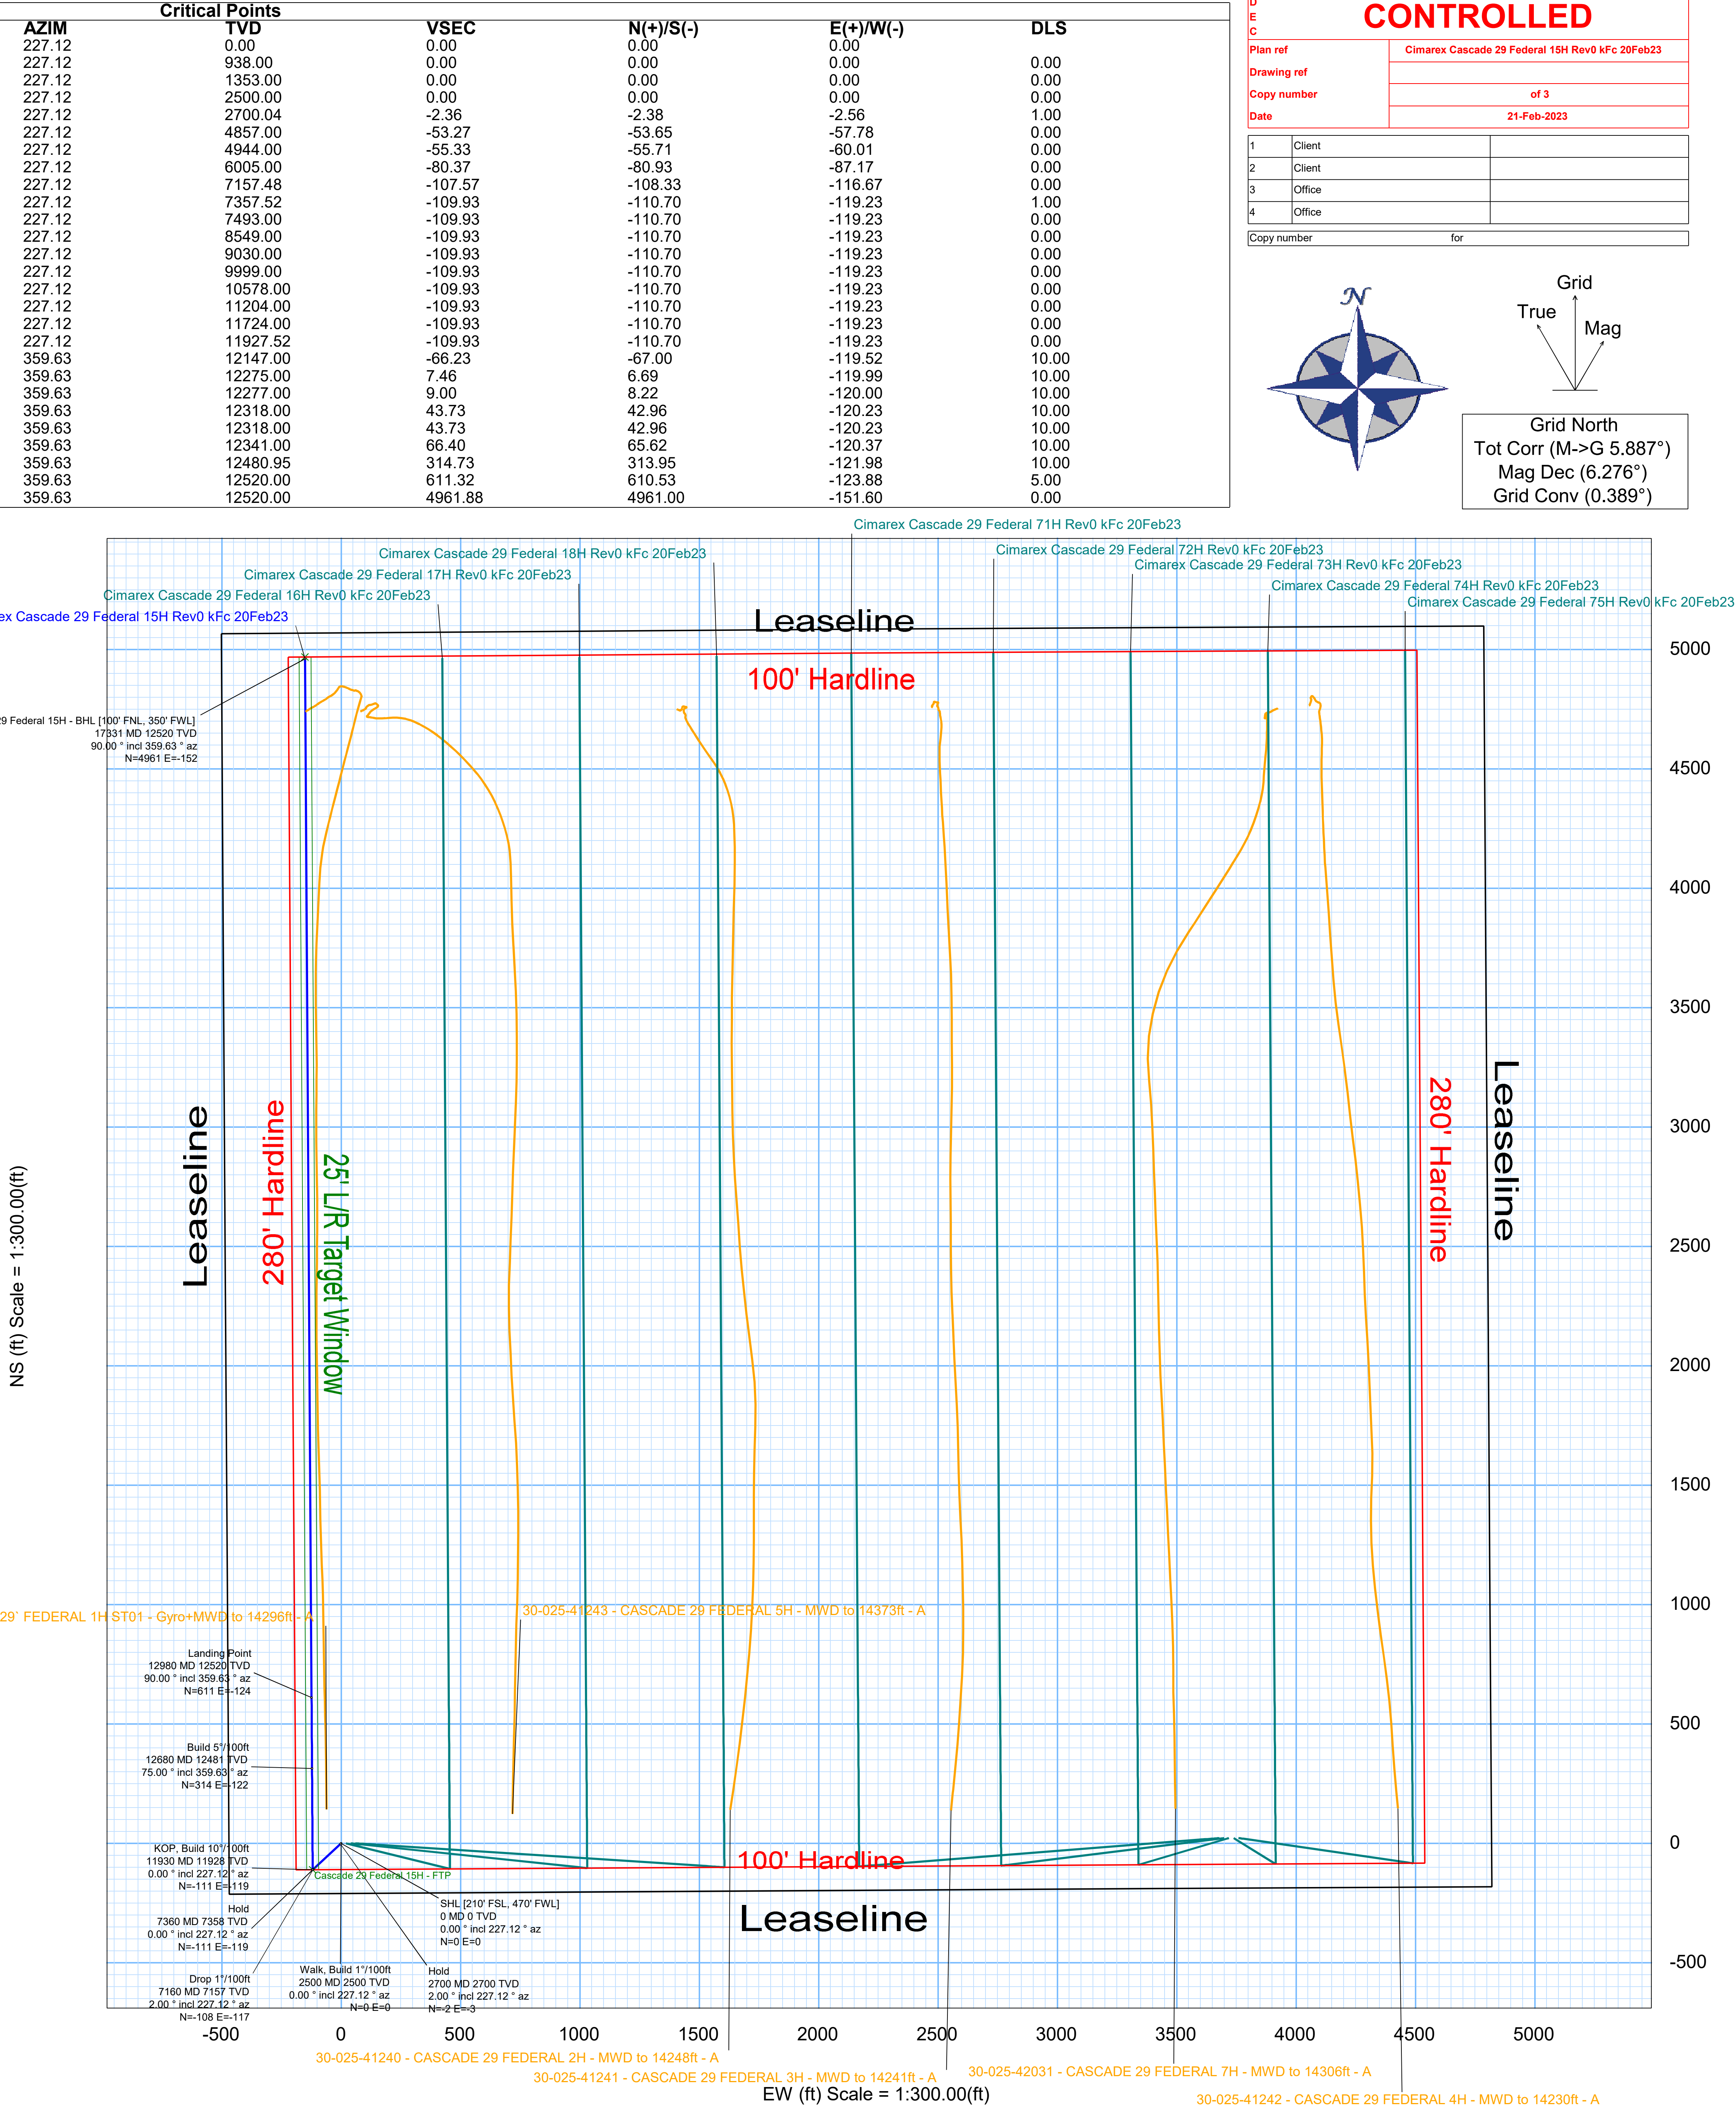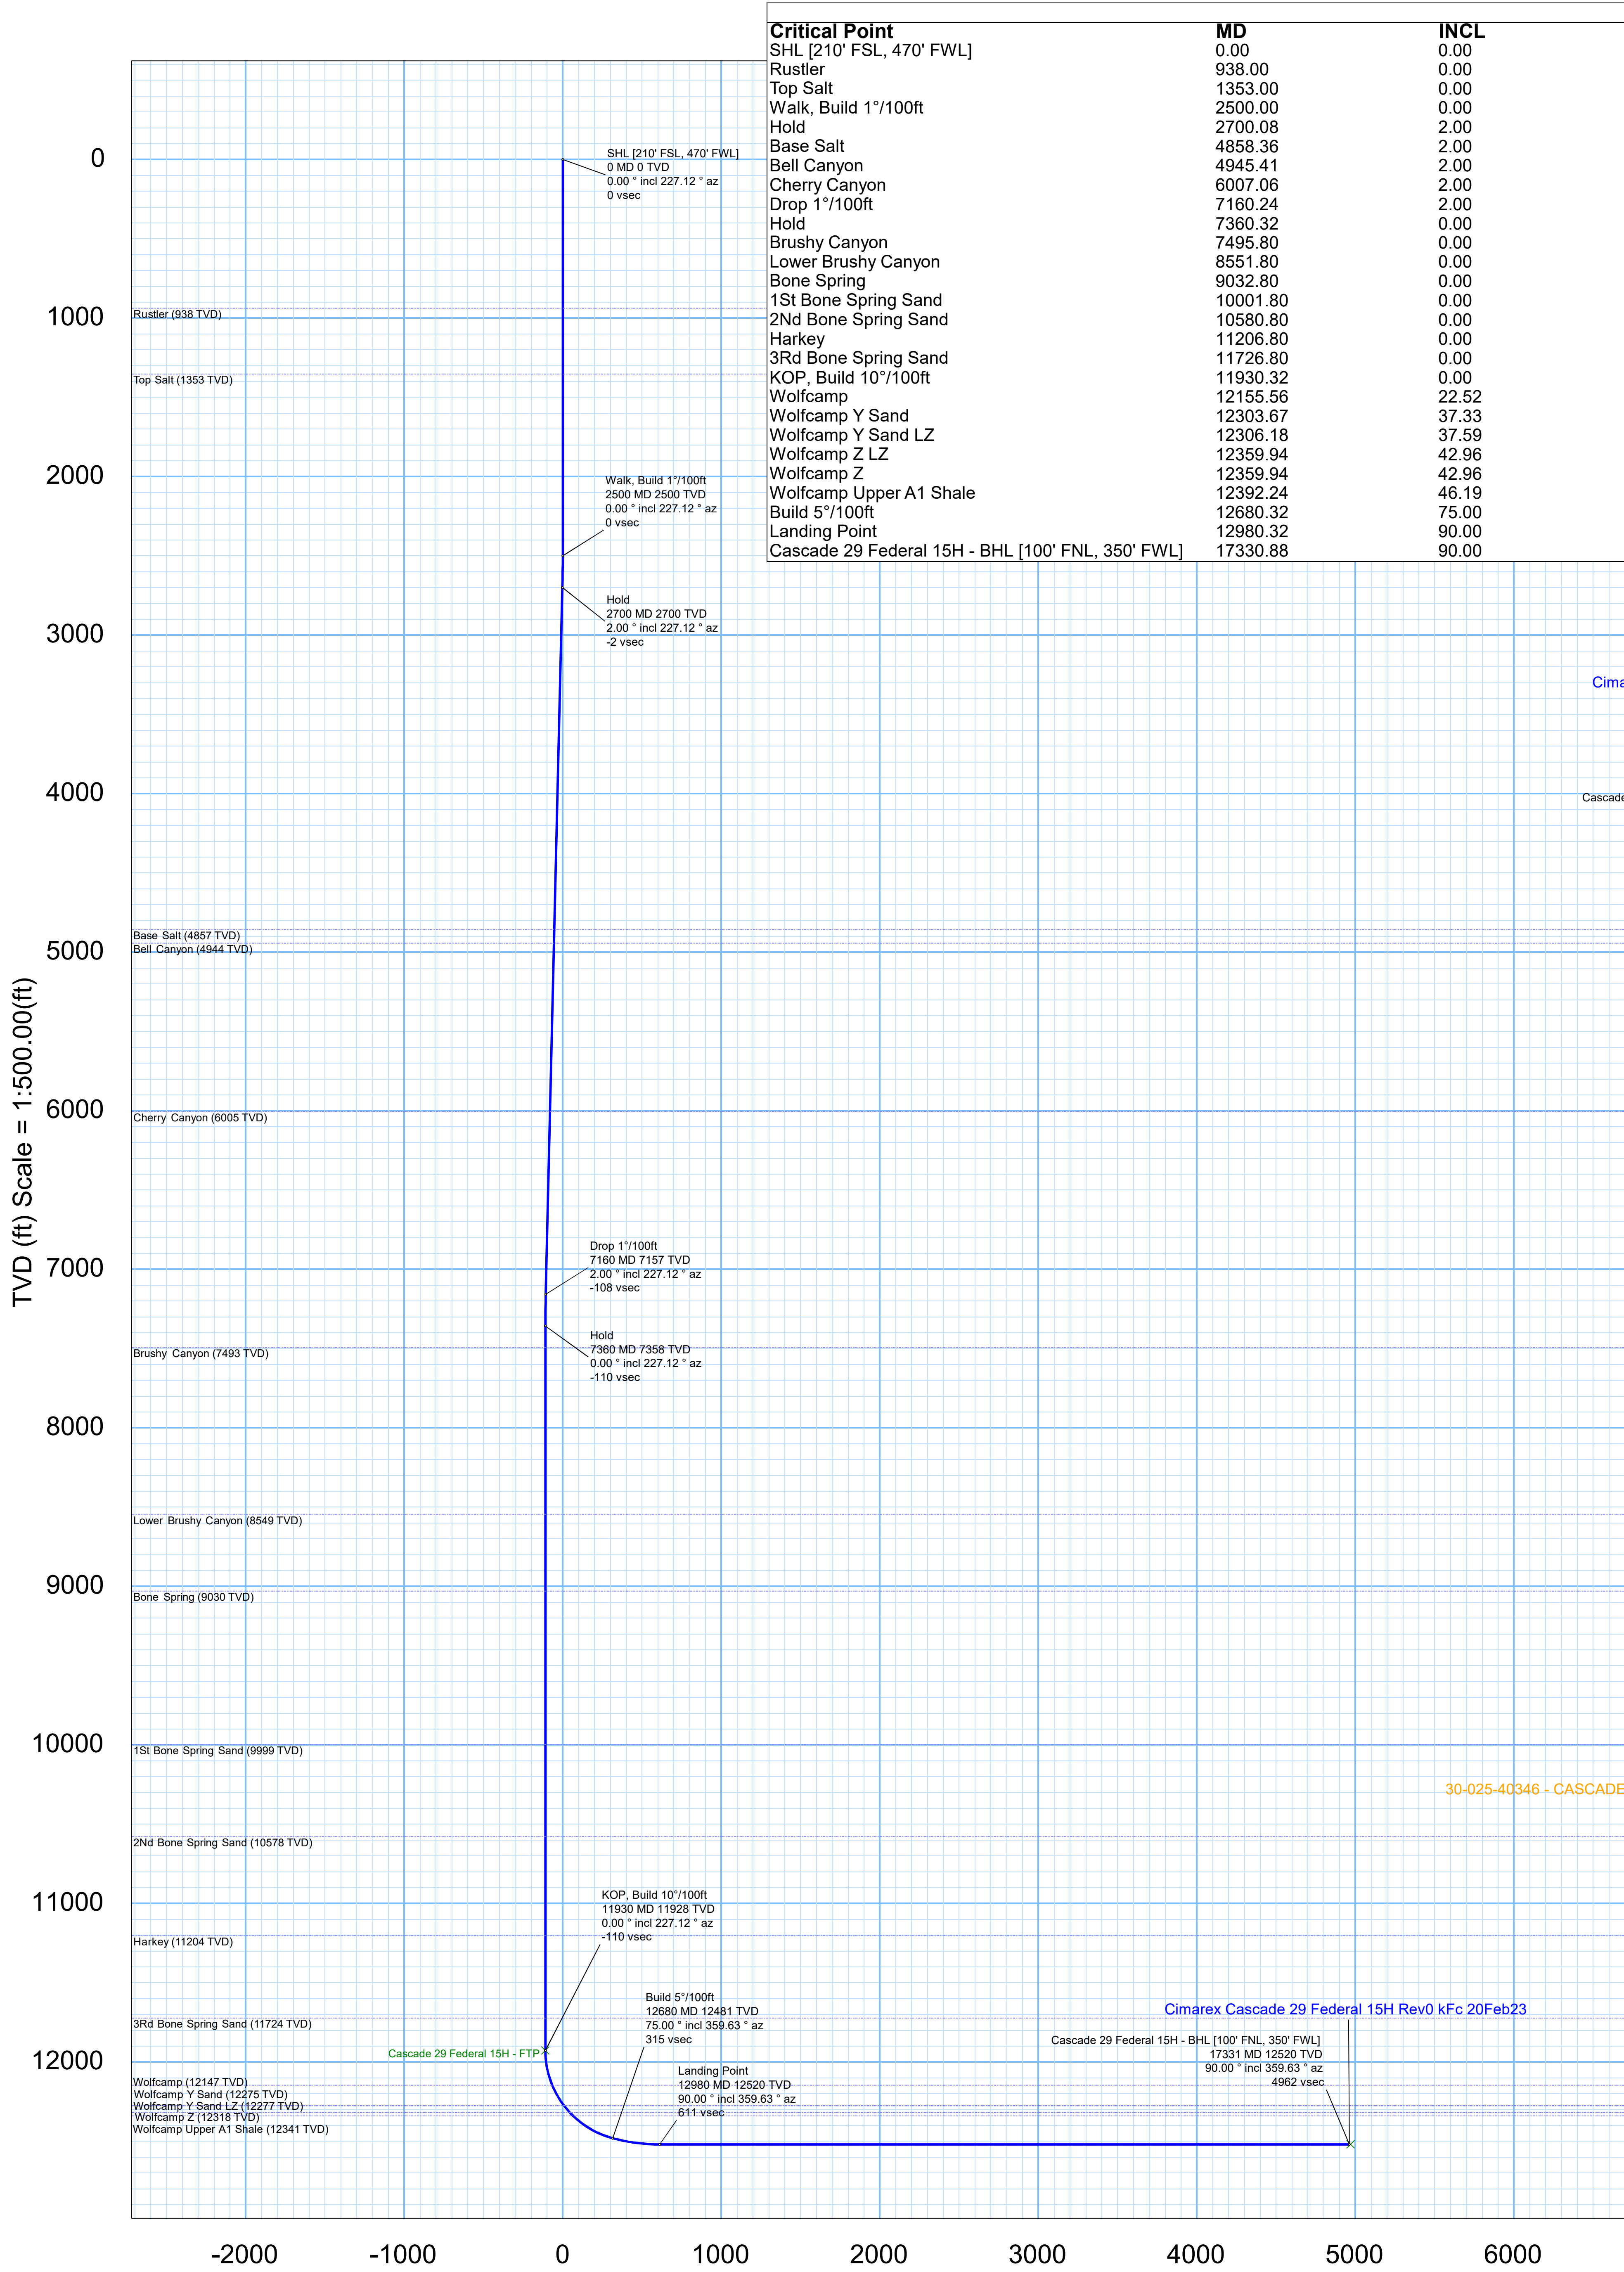



**District I**  
1625 N. French Dr., Hobbs, NM 88240  
Phone:(575) 393-6161 Fax:(575) 393-0720  
**District II**  
811 S. First St., Artesia, NM 88210  
Phone:(575) 748-1283 Fax:(575) 748-9720  
**District III**  
1000 Rio Brazos Rd., Aztec, NM 87410  
Phone:(505) 334-6178 Fax:(505) 334-6170  
**District IV**  
1220 S. St Francis Dr., Santa Fe, NM 87505  
Phone:(505) 476-3470 Fax:(505) 476-3462

State of New Mexico  
Energy, Minerals and Natural Resources  
Oil Conservation Division  
1220 S. St Francis Dr.  
Santa Fe, NM 87505

CONDITIONS  
  
Action 220114

CONDITIONS

Operator: CIMAREX ENERGY CO. 6001 Deauville Blvd Midland, TX 79706	OGRID: 215099
	Action Number: 220114
	Action Type: [C-103] NOI Change of Plans (C-103A)

CONDITIONS

Created By	Condition	Condition Date
pkautz	None	6/5/2023